

C:\Projects\2405\2405constructiondocuments\2405model\24.pln

FICPA
TENANT BUILD OUT
RENOVATION

ALLIANCE CENTER
UNIT 123, 119 SOUTH MONROE ST.
TALLAHASSEE, FLORIDA

RAYMOND C FINGER
ARCHITECTS, LLC
ARCHITECTURE, LANDSCAPE ARCHITECTURE
& PLANNING

1203 E Clay St, Thomasville, GA, 31792
Telephone: 229.551.9846

OliverSperry
RENOVATION

CONSULTANTS:

Raymond C. Finger, State of Florida, Architect,
License No. AR91713. This item has been digitally
signed and sealed by Raymond C. Finger on the date
indicated here. Printed copies of this document are
not considered signed and sealed and the signature
must be verified on any electronic copies.

PROJECT:

FICPA
TENANT BUILD OUT
RENOVATION

Alliance Center
Unit 123, 119 South Monroe St.
Tallahassee, Florida

No.	Date	Issue Description

DATE: MAY 3, 2024
RCFA PROJECT NO: 2405
COPYRIGHT:
2024 Raymond C. Finger Architects, All Rights Reserved
SHEET TITLE:

Cover Sheet

A-001

RELEASED FOR CONSTRUCTION

FLORIDA BUILDING CODE (FBC), 8TH EDITION (2023)

FLORIDA ACCESSIBILITY CODE (FAC), 8TH EDITION (2023)

FLORIDA EXISTING BUILDING CODE (FBC-EB), 8TH EDITION (2023)

FLORIDA FUEL GAS CODE (FBC-FG), 8TH EDITION (2023)

FLORIDA MECHANICAL CODE (FBC-M), 8TH EDITION (2023)

FLORIDA PLUMBING CODE (FBC-P), 8TH EDITION (2023)

FLORIDA FIRE PREVENTION CODE (FFPC), 8TH EDITION (2023)

NATIONAL ELECTRICAL CODE (NEC)(PER FBC), 2020 EDITION (PER 8TH EDITION, FBC-B)

STRUCTURAL WIND LOAD CRITERIA, ASCE STANDARD 7-10, (PER 8TH EDITION, FBC-B)

2010 ADA STANDARDS FOR ACCESSIBLE DESIGN DOJ 9/15/2010

GENERAL NOTE
The General Contractor shall make available to the building inspector all documentation necessary to verify that all components requiring product approval per FS 553.842 are in compliance with product approval installation requirements.
ENTIRE BUILDING
CONSTRUCTION TYPE: TYPE-IIA, SPRINKLERED
TOTAL BUILDING AREA INCLUDING PARKING: 89,425 GSF
BUILDING STORIES: 5 STORIES

SUBMIT THE FOLLOWING ITEMS UNDER SEPARATE PERMIT APPLICATIONS:

EXTERIOR SIGNAGE: BUILDING SIGNAGE SHALL BE SUBMITTED UNDER SEPARATE PERMIT.

FIRE ALARM SYSTEM: THE FIRE ALARM SYSTEM SHALL BE SUBMITTED UNDER SEPARATE PERMIT.

VICINITY MAP

SITE PLAN
SCALE: NTS

WORK AREA

GENERAL DRAWINGS

G-001	COVER
G-002	INDEX

ARCHITECTURAL DRAWINGS

EX-101	FIRST FLOOR PLAN - EXISTING
D-101	FIRST FLOOR PLAN - DEMO
A-101	FIRST FLOOR PLAN - PROPOSED
A-201	FIRST FLOOR PLAN - RCP
A-501	ENLARGED PLANS
A-601	DOOR SCHEDULE AND DETAILS
A-602	WINDOW ELEVATIONS AND DETAILS
A-603	CASEWORK
A-701	WALL PARTITIONS
A-702	FINISH SCHEDULE
LS-101	LIFE SAFETY PLAN

MECHANICAL DRAWINGS

M-1.0	MECHANICAL NOTES
M-2.0	MECHANICAL PLAN

ELECTRICAL DRAWINGS

E-0.1	ELECTRICAL LEGEND & NOTES
E-1.1	POWER & SYSTEMS
E-1.2	LIGHTING

PLUMBING DRAWINGS

P-1.0	PLUMBING NOTES
P-2.0	PLUMBING PLAN

BUILDING KEY PLAN
SCALE: NTS

119 SOUTH MONROE STREET


NEW TENANT SPACE BUILD OUT - SUITE 123			
OCCUPANCY CLASSIFICATION: GROUP B - BUSINESS			
TYPE OF CONSTRUCTION: TYPE-IIA, SPRINKLERED			
UNIT AREA: FIRST FLOOR		TOTAL = 2,287 GSF	
OCCUPANCY LOAD - BUSINESS BUSINESS: 2,287/150 PERSON PER SQFT = (15.24) 16 PERSONS			
PLUMBING FIXTURE COUNT (16 PERSONS) 8 MEN & 8 WOMEN			
MEN'S 8		WOMEN'S 8	
TOILET	WATER CLOSET	TOILET	WATER CLOSET
1 PER 25	1 PER 40	1 PER 25	1 PER 40
8/25= 32	8/40= 2	8/25= 32	8/40= 2
1 REQUIRED	1 REQUIRED	1 REQUIRED	1 REQUIRED
FOUNTAIN		UTILITY SINK	
1 PER 100		1 REQUIRED	
16/100=16			
1 REQUIRED			
EXIT REQUIREMENTS, AT GRADE, SPRINKLERED BUILDING			
	REQUIRED		PROVIDED
TOTAL NUMBER OF EXITS	1		1
MAX TRAVEL DISTANCE	100'		75'-0"

FIRE RESISTANCE RATINGS:		II-B
STRUCTURAL FRAME COLUMNS, GIRDERS, TRUSSES		1 HR
BEARING WALL EXTERIOR		2 HR
INTERIOR		1 HR
NON BEARING WALL EXTERIOR		0
INTERIOR		0
FLOOR CONSTRUCTION BEAMS, JOIST		1 HR
ROOF CONSTRUCTION BEAMS AND JOIST		1 HR
FLOOR ASSEMBLY ABOVE PARKING		2 HR
<u>EXISTING OCCUPANCY SEPARATIONS:</u>		
BUSINESS / RESIDENTIAL:		1 HR
GROUND FLR/PARKING GARAGE:		2 HR
TENANT SEPARATION:		1 HR
<u>LIFE SAFETY SYSTEMS:</u>		
1. FIRE ALARM SYSTEM		
2. EMERGENCY LIGHTS		
3. EXIST SIGNS		
4. SMOKE DETECTORS		
5. PANIC HARDWARE AT EGRESS DOORS		
6. FIRE SPRINKLER SYSTEM		
MON PATH OF TRAVEL (UNKLERLED BUILDING)	100 FT. MAX	
REL DISTANCE	250 FT. MAX	
END CORRIDOR	20 FT. MAX	

SECTION MARKER		COLUMN LINE		STRUCTURAL MTL FRAMING		MATERIAL SYMBOLS		NOTATION ABBREVIATIONS			
DETAIL NUMBER PAGE NUMBER VIEW DIRECTION	LETTER OR NUMBER DESIGNATING A COLUMN LINE	STEEL BEAM OR COLUMN IN PLAN OR SECTION VIEW OPEN WEB BAR JOIST IN SECTION VIEW	BRICK	@ AC. AC. ADJ. A.F.F. ALT. ALUM. ARCH. BAL BD. BLDG. BLK. B.O. B.O.S. BOTT. BTWN. BTUM. C. CAB. C.J. CLG. CMU C.O. COL. CONC. CPT CT CTR. DBL. DIM. DN. D.S. DWG E. EA. EX. E.I.F.S. EL. ELEV. EQ. EQUIP. EXIST. EXT	AT AIR CONDITIONED ACOUSTICAL PANEL ADJACENT ABOVE FINISHED FLOOR ALTERNATE ALUMINUM ARCHITECT BALANCE BOARD BUILDING BLOCK BY OTHERS BOTTOM OF STEEL BOTTOM BETWEEN BRITISH THERMAL UNITS CONDUIT CABINET CONTROL JOINT CEILING CONCRETE MASONRY UNIT CLEAN OUT COLUMN CONCRETE CARPET CERAMIC TILE CENTER DOUBLE DETAIL DIFFUSER MIN. DOWN DOWNSPOUT DRAWINGS EAST EACH EXHAUST FAN EXISTING EXTERIOR	FD. FEC FIN. FLR. FT. FTG. FVC. GALV. GAUGE G.C. GL GND GYP. BD. HB. HANDICAP HD. HDWE HGT. H.M. HORIZ. HYD. IN INCAD INSUL. INT. JB JMB. JT. MANT. MANUF. MAX. MIN. M.O. MTL MTG. N NA. N.I.C. NO. N.T.S. O.C. OH. PC. PLAM PLWD	FLOOR DRAIN FIRE EXTINGUISHER & CABINET FINISH FLOOR FOOT FOOTING FIRE VALVE CABINET GALVANIZED GENERAL CONTRACTOR GLASS FROUND GYPSON BOARD HOSE BIBB HANDICAP HEAD HARDWARE HEIGHT HOLLOW METAL HORIZONTAL HYDRANT INCH INCADESENT INSULATION INTERIOR JUNCTION BOX JAMB JOINT MAINTANCE MANUFACTURER MAXIMUM MINIMUM MASONRY OPENING METAL MOUNTING NORTH NOT APPLICABLE NOT IN CONTRACT NUMBER NOT TO SCALE ON CENTER OVER HEAD PRECAST PLASTIC LAMINATE PLYWOOD	POLY. PSF PSI QUAN. R RA RCP RD RAD RECIRC. REQ. RM R.O. S S.A.T. SECT. SERV. SHT. SIM. SQ. STAINLESS STEEL STRUC. T TEMP. THK T.O. TOILET TOL T.O.S. TYP. U.N.O. UR V VCT VENT. VERT. V.I.F. V.T.R. W W W W.C. W.C.O. WD WP WATER WWM	POLYETHELENE POUNDS/SQUARE FOOT POUNDS/SQUARE INCH QUANTITY RADIUS RETURN AIR REFLECTED CEILING PLAN ROOF DRAIN RADIUS RECIRCULATING REQUIRED ROOM ROUGH OPENING SOUTH SUSPENDED ACOUSTICAL TILE SECTION SERVICE SHEET SIMILAR SQUARE STAINLESS STEEL STRUCTURAL TOP TEMPERATURE THICK TOP OF TOILET TOP OF STEEL TYPICAL UNLESS NOTED OTHERWISE URNAL VOL VINYL COMPOSITION TILE VENTILATION VERTICAL VERIFY IN FIELD VENT THROUGH ROOF WATT WITH WATER CLOSET WASTE CLEAN OUT WOOD WATERPROOF WATER WELDED WIRE MESH		
DETAIL NUMBER PAGE NUMBER VIEW DIRECTION	ELEVATION FROM SEA LEVEL OR BENCH MARK	CONCRETE MASONRY UNIT IN SECTION VIEW STACKED MULTI COURSE BRICK UNITS IN SECTION VIEW	EARTH	WOOD	STEEL	CONCRETE	SAND	SYNTHETIC STUCCO	PLYWOOD	RIGID INSULATION	BATT INSULATION OR SOUND BATT
DETAIL NUMBER PAGE NUMBER	CONTINUOUS WOOD MEMBER NON-CONTINUOUS WOOD MEMBER	DIRECTION OF PLAN VIEW INDICATING NORTH	BRICK	WOOD	STEEL	CONCRETE	SAND	SYNTHETIC STUCCO	PLYWOOD	RIGID INSULATION	BATT INSULATION OR SOUND BATT
DETAIL NUMBER PAGE NUMBER DESIGNATES DETAILED AREA	LVL OR PARALAM BEAM IN SECTION VIEW	DIRECTION OF PLAN VIEW INDICATING NORTH	BRICK	WOOD	STEEL	CONCRETE	SAND	SYNTHETIC STUCCO	PLYWOOD	RIGID INSULATION	BATT INSULATION OR SOUND BATT
DETAIL NUMBER PAGE NUMBER DESIGNATES DETAILED AREA	LVL OR PARALAM BEAM IN SECTION VIEW	DIRECTION OF PLAN VIEW INDICATING NORTH	BRICK	WOOD	STEEL	CONCRETE	SAND	SYNTHETIC STUCCO	PLYWOOD	RIGID INSULATION	BATT INSULATION OR SOUND BATT
DETAIL NUMBER PAGE NUMBER DESIGNATES DETAILED AREA	LVL OR PARALAM BEAM IN SECTION VIEW	DIRECTION OF PLAN VIEW INDICATING NORTH	BRICK	WOOD	STEEL	CONCRETE	SAND	SYNTHETIC STUCCO	PLYWOOD	RIGID INSULATION	

RAYMOND C FINGER
ARCHITECTS, LLC

ARCHITECTURE, LANDSCAPE ARCHITECTURE
& PLANNING



1203 E Clay St, Thomasville, GA, 31792
Telephone: 229.551.9846



CONSULTANTS:

Raymond C. Finger, State of Florida, Architect,
License No. AR91713. This item has been digitally
signed and sealed by Raymond C. Finger on the date
indicated here. Printed copies of this document are
not considered signed and sealed and the signature
must be verified on any electronic copies.

PROJECT:

**FICPA
TENANT BUILD OUT
RENOVATION**

Alliance Center
Unit 123, 119 South Monroe St.
Tallahassee, Florida

[illegible]

DATE: MAY 3, 2024

CFA PROJECT NO: 240


© 2024 Raymond C. Finger Architects, All Rights Reserved

SHEET TITLE:

INDEX

A-002

RELEASED FOR CONSTRUCTION

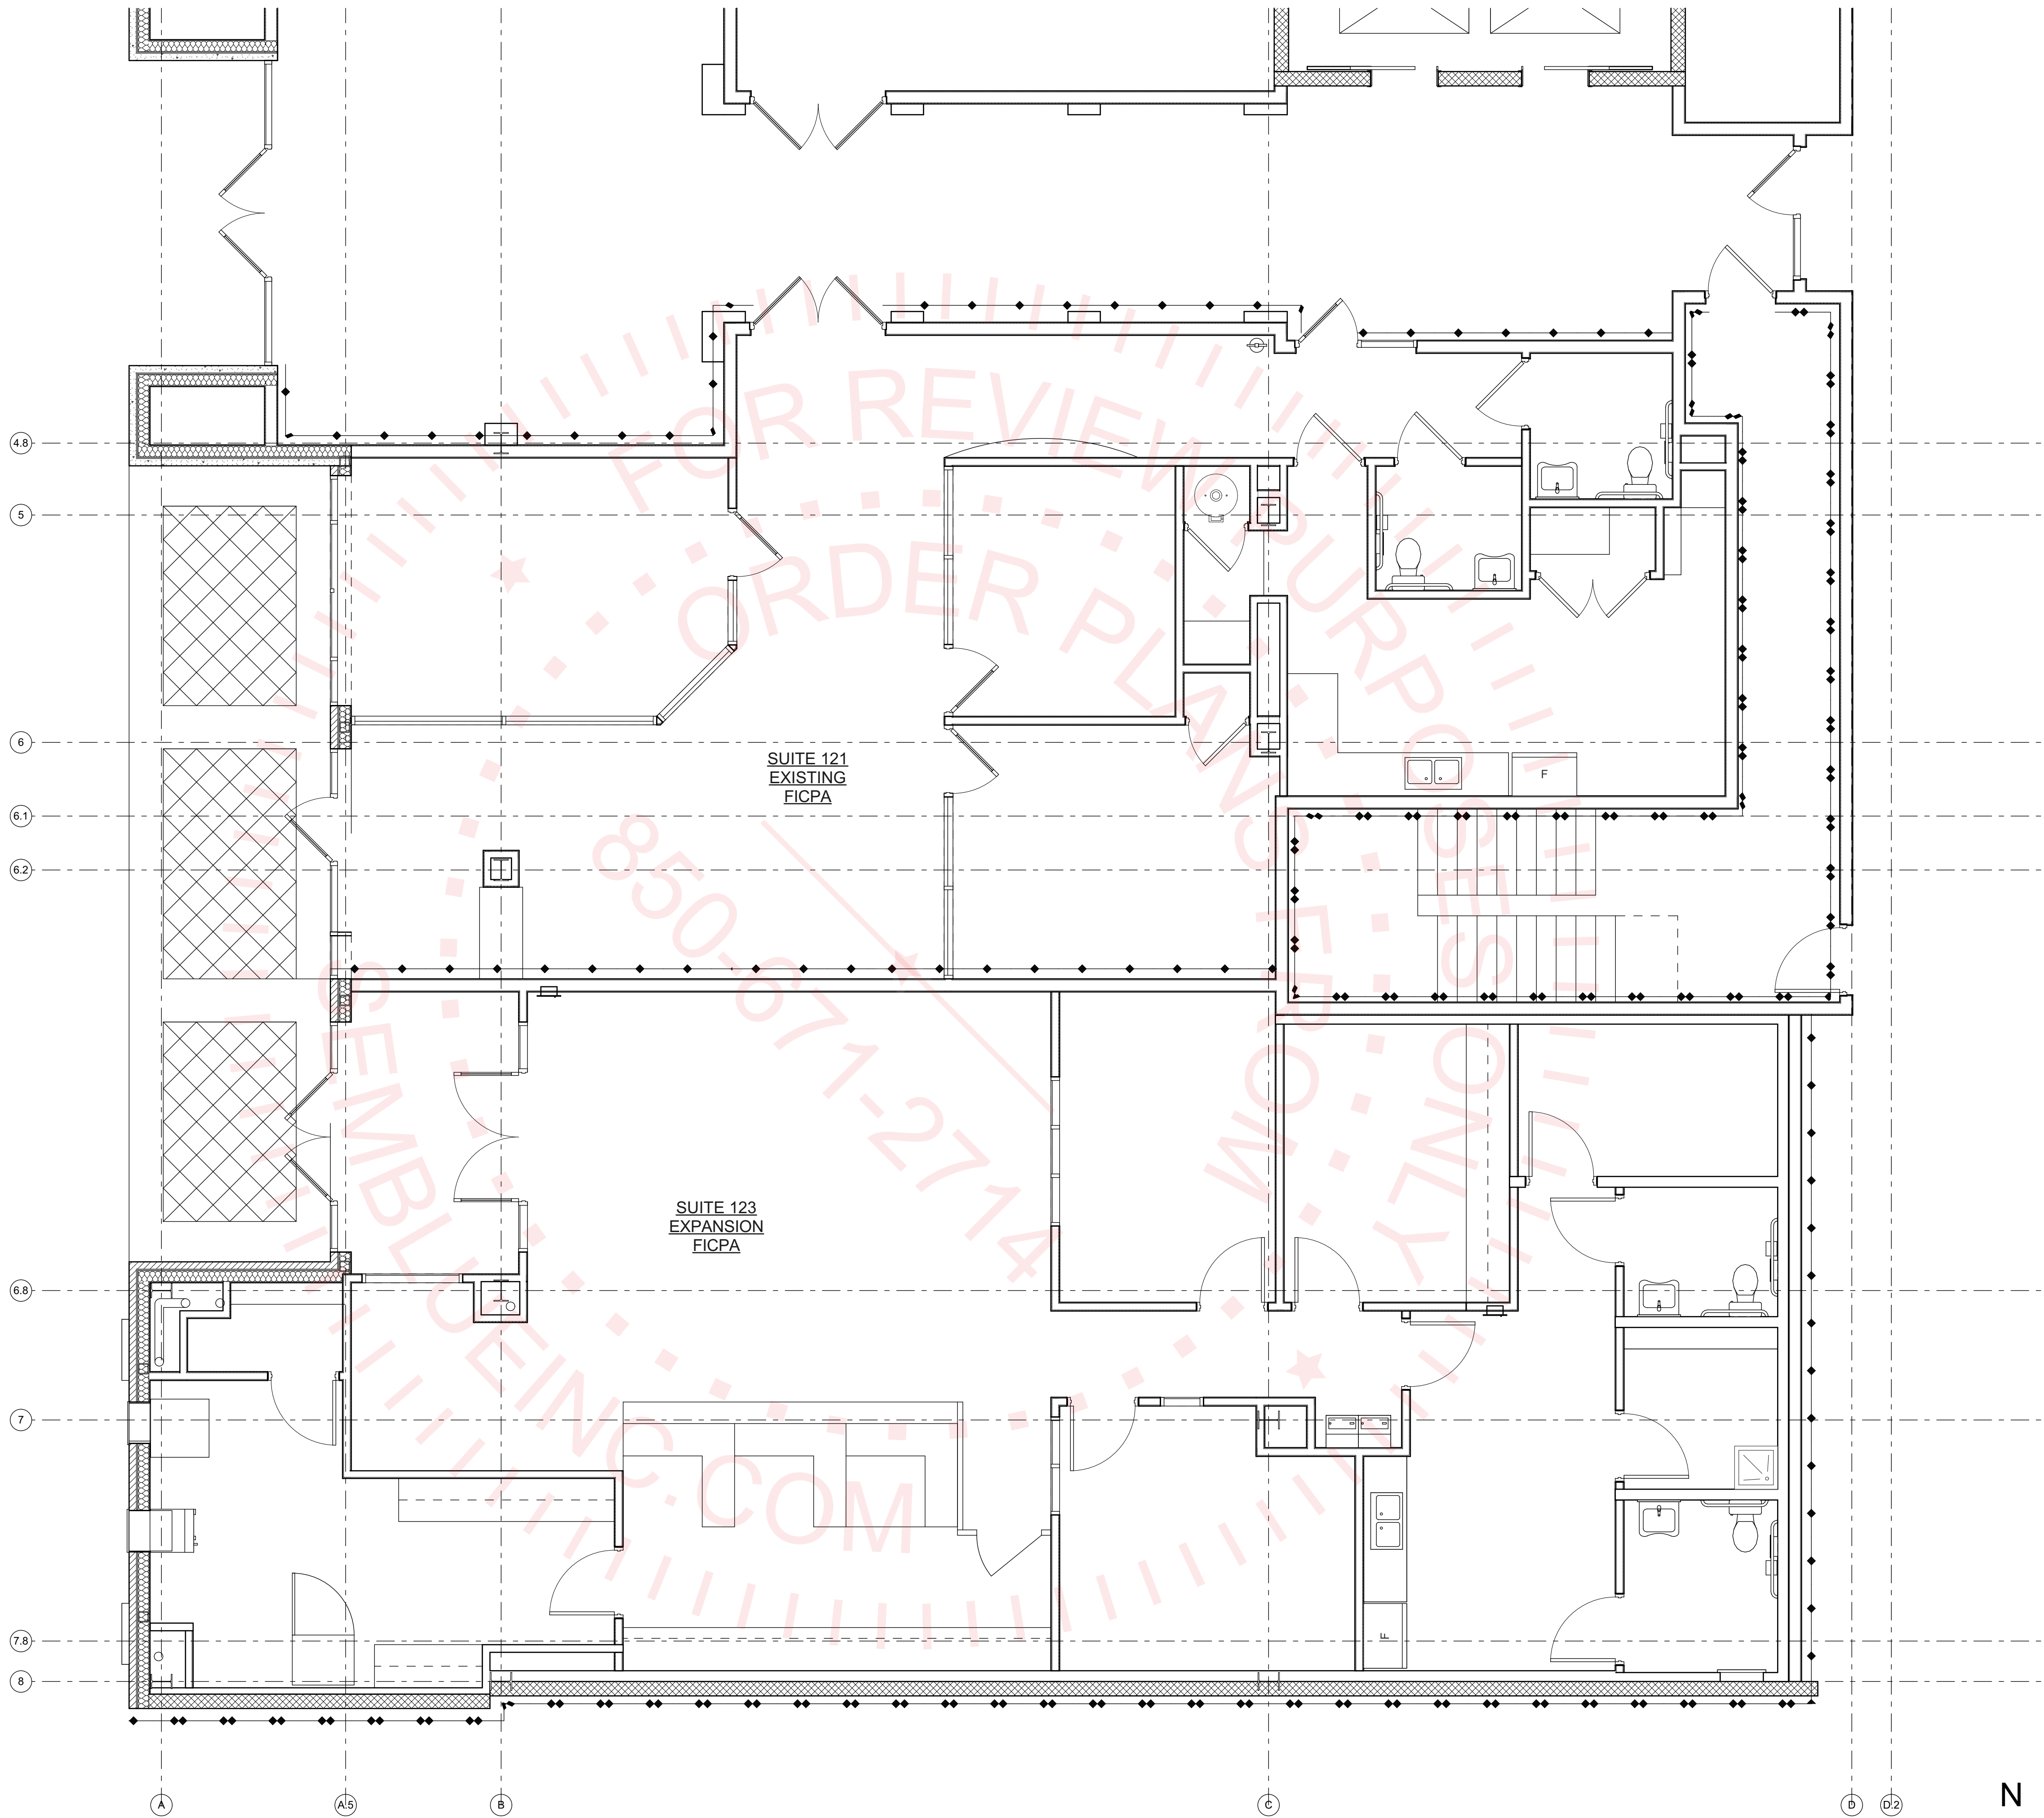

RAYMOND C FINGER
ARCHITECTS, LLC
ARCHITECTURE, LANDSCAPE ARCHITECTURE
& PLANNING
1203 E Clay St, Thomasville, GA, 31792
Telephone: 229.551.9846



CONSULTANTS:

Raymond C. Finger, State of Florida, Architect,
License No. AR91713. This item has been digitally
signed and sealed by Raymond C. Finger on the date
indicated here. Printed copies of this document are
not considered signed and sealed and the signature
must be verified on any electronic copies.

PROJECT:

FICPA
TENANT BUILD OUT
RENOVATION

Alliance Center
Unit 123, 119 South Monroe St.
Tallahassee, Florida

No.	Date	Issue Description

DATE: MAY 3, 2024
RCFA PROJECT NO: 2405
COPYRIGHT:
2024 Raymond C. Finger Architects, All Rights Reserved

SHEET TITLE:

First Floor Plan - Existing

EX-101


RELEASED FOR CONSTRUCTION

C:\Projects\2405\2405constructiondocuments\2405model\24.pln

1
D-101

First Floor Demolition Plan

SCALE: 1/4" = 1'-0"

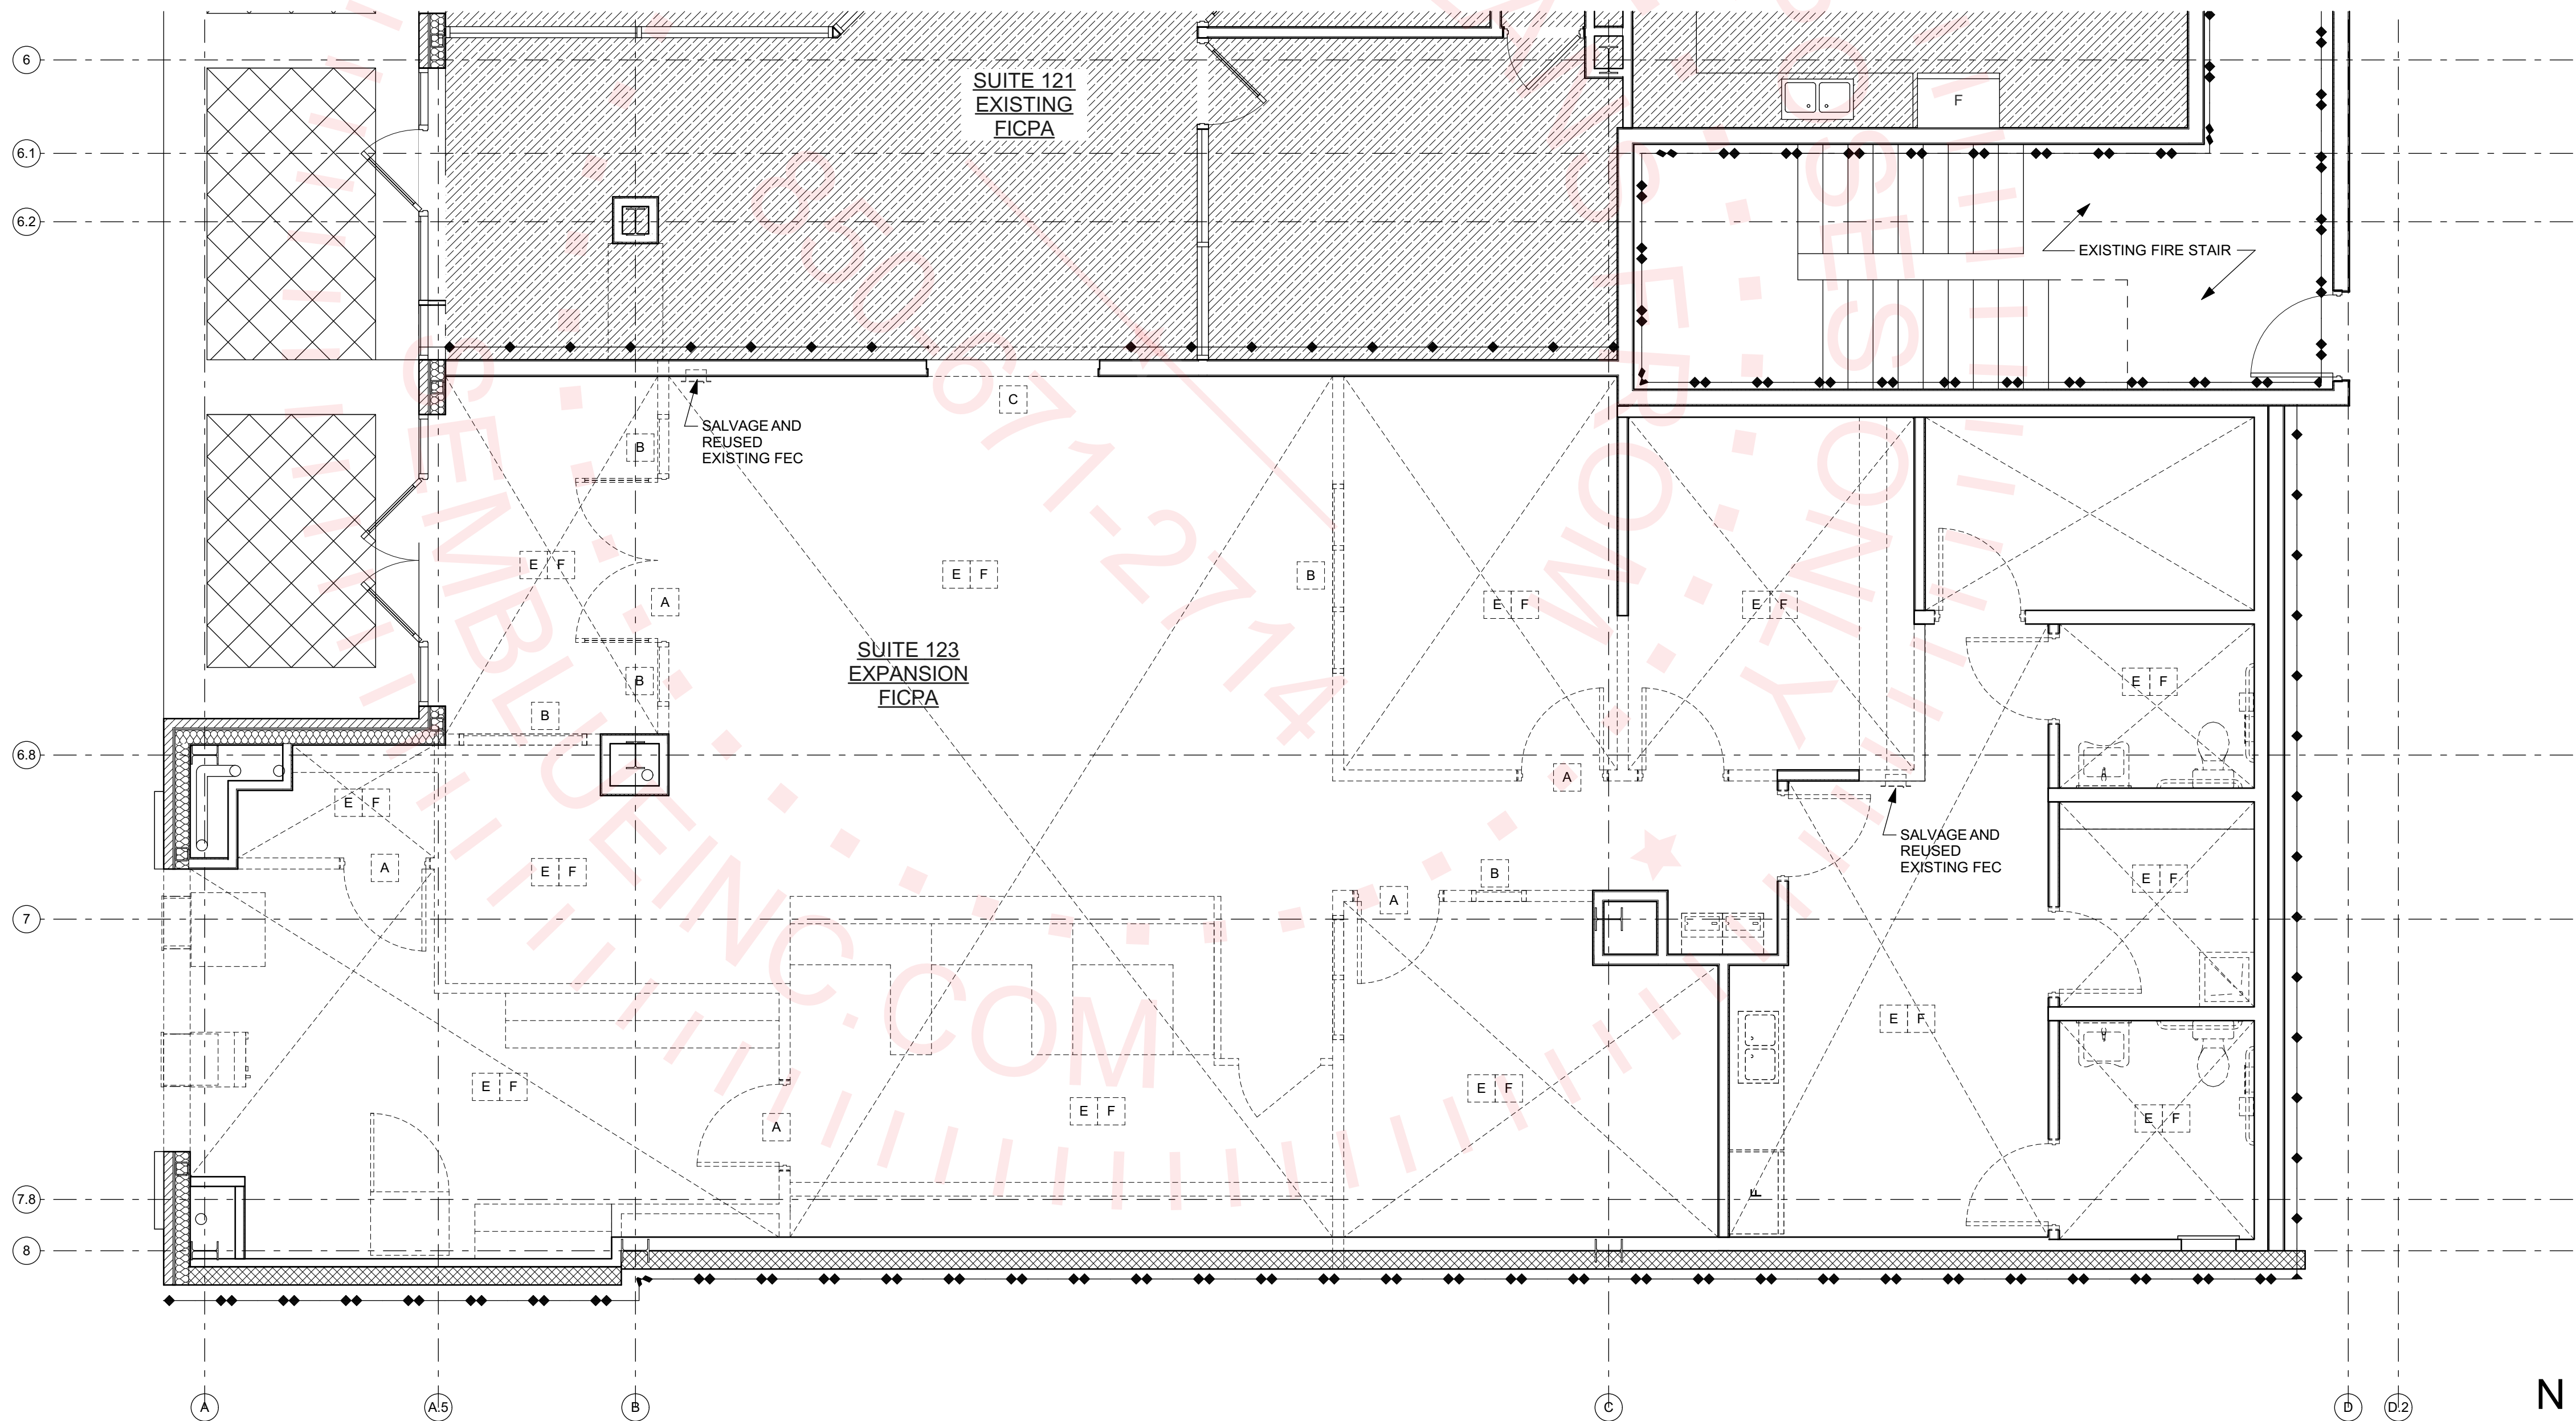

DEMO NOTES

NOTE:

1. VERIFY IN FIELD EXISTING CONDITIONS BEFORE STARTING DEMOLITION WORK. NOTIFY THE ARCHITECT OF ANY DISCREPANCIES THAT MIGHT AFFECT DEMOLITION WORK OR PROPOSED WORK.
2. REMOVE DEMOLISHED MATERIALS IN A SAFE AND LEGAL MANNER.
3. REPORT TO THE OWNER AND THE ARCHITECT OF ANY NEWLY DISCOVERED HAZARDOUS MATERIALS.
4. PREVENT THE SPREAD OF DUST AND DEBRIS FROM ENTERING OTHER AREAS OF THE BUILDING THAT ARE NOT PART OF THE WORK.
5. REMOVE AS REQUIRED ANY ELECTRICAL, PLUMBING AND MECHANICAL ITEMS THAT ARE NOT REQUIRED FOR THE PROPOSED WORK.
6. PREPARE AS REQUIRED ALL SURFACES FOR ACCEPTANCE OF PROPOSED WORK
7. G.C. SHALL PROVIDE A ROLL-OFF TRASH CONTAINER FOR REMOVAL OF DEBRIS.
8. G.C. SHALL CAP OFF ALL WATER SUPPLY AND SANITARY SEWER PIPES.
9. G.C. SHALL IDENTIFY ALL LOAD BEARING WALLS AND LOAD BEARING CONSTRUCTION. G.C. SHALL NOT REMOVE ANY LOAD BEARING WALLS OR LOAD BEARING CONSTRUCTION THAT WILL COMPROMISE THE INTEGRITY OF THE STRUCTURE. THE G.C. SHALL NOTIFY THE ARCHITECT IN WRITING OF ANY STRUCTURAL BUILDING ITEM, COMPONENT OR ASSEMBLY IN QUESTION.
10. REMOVE ALL ABANDONED EQUIPMENT.
11. SALVAGE AND REUSE, IF APPLICABLE, EXISTING SERVICES I.E., CABLE AND INTERNET LINES, PHONE AND BLOCKING AND INTERNAL DATALINES.
12. G.C. SHALL PROVIDE PORTABLE FIRE EXTINGUISHERS AS REQUIRED. ONE OR MORE FIRE EXTINGUISHERS, RATED NOT LESS THAN 2A, SHALL BE PROVIDED WITHIN 75 FOOT TRAVEL DISTANCE TO ALL AREAS OF THE WORK.

DEMOLITION KEY

GENERAL

- A DEMO EXISTING DOOR AND FRAME AS INDICATED
- B DEMO EXISTING WINDOW AS INDICATED
- C DEMO EXISTING WALL FOR PROPOSED DOOR / STOREFRONT AS INDICATED
- D DEMO EXISTING WALL PARTITION AS INDICATED

FLOOR

- E REMOVE ALL EXISTING FLOOR MATERIALS AND MASTICS AS REQUIRED. PREPARE FLOOR LEVEL AND SMOOTH FOR NEW FLOORING MATERIAL.

CEILING

- F REMOVE ALL LAY-IN CEILING TILES, SUSPENDED GRID, LIGHT FIXTURES, AND DIFFUSERS.

GRAPHIC KEY

- EXISTING WALL TO REMAIN
- DEMO WALL OR FIXTURE
- ADJACENT SUITE LIMITED WORK

RAYMOND C FINGER
ARCHITECTS, LLC

ARCHITECTURE, LANDSCAPE ARCHITECTURE
& PLANNING



1203 E Clay St, Thomasville, GA, 31792
Telephone: 229.551.9846

OliverSperry
RENOVATION

CONSULTANTS:

Raymond C. Finger, State of Florida, Architect,
License No. AR91713. This item has been digitally
signed and sealed by Raymond C. Finger on the date
indicated here. Printed copies of this document are
not considered signed and sealed and the signature
must be verified on any electronic copies.

PROJECT:

FICPA
TENANT BUILD OUT
RENOVATION

Alliance Center
Unit 123, 119 South Monroe St.
Tallahassee, Florida

No. Date Issue Description

DATE: MAY 3, 2024

RCFA PROJECT NO: 2405

COPYRIGHT:
2024 Raymond C. Finger Architects, All Rights Reserved

SHEET TITLE:

First Floor Plan - Demolition

D-101

RELEASED FOR CONSTRUCTION

Raymond C. Finger, State of Florida, Architect,
License No. AR91713. This item has been digitally
signed and sealed by Raymond C. Finger on the date
indicated here. Printed copies of this document are
not considered signed and sealed and the signature
must be verified on any electronic copies.

PROJECT:

**FICPA
TENANT BUILD OUT
RENOVATION**

Alliance Center
Unit 123, 119 South Monroe St.
Tallahassee, Florida

[illegible]

DATE: MAY 3, 2024

RCFA PROJECT NO:	2405
------------------	------

COPYRIGHT:



2024 Raymond C. Finger Architects, All Rights Reserved

SHEET TITLE:

First Floor Plan - Proposed

A-101

RELEASED FOR CONSTRUCTION

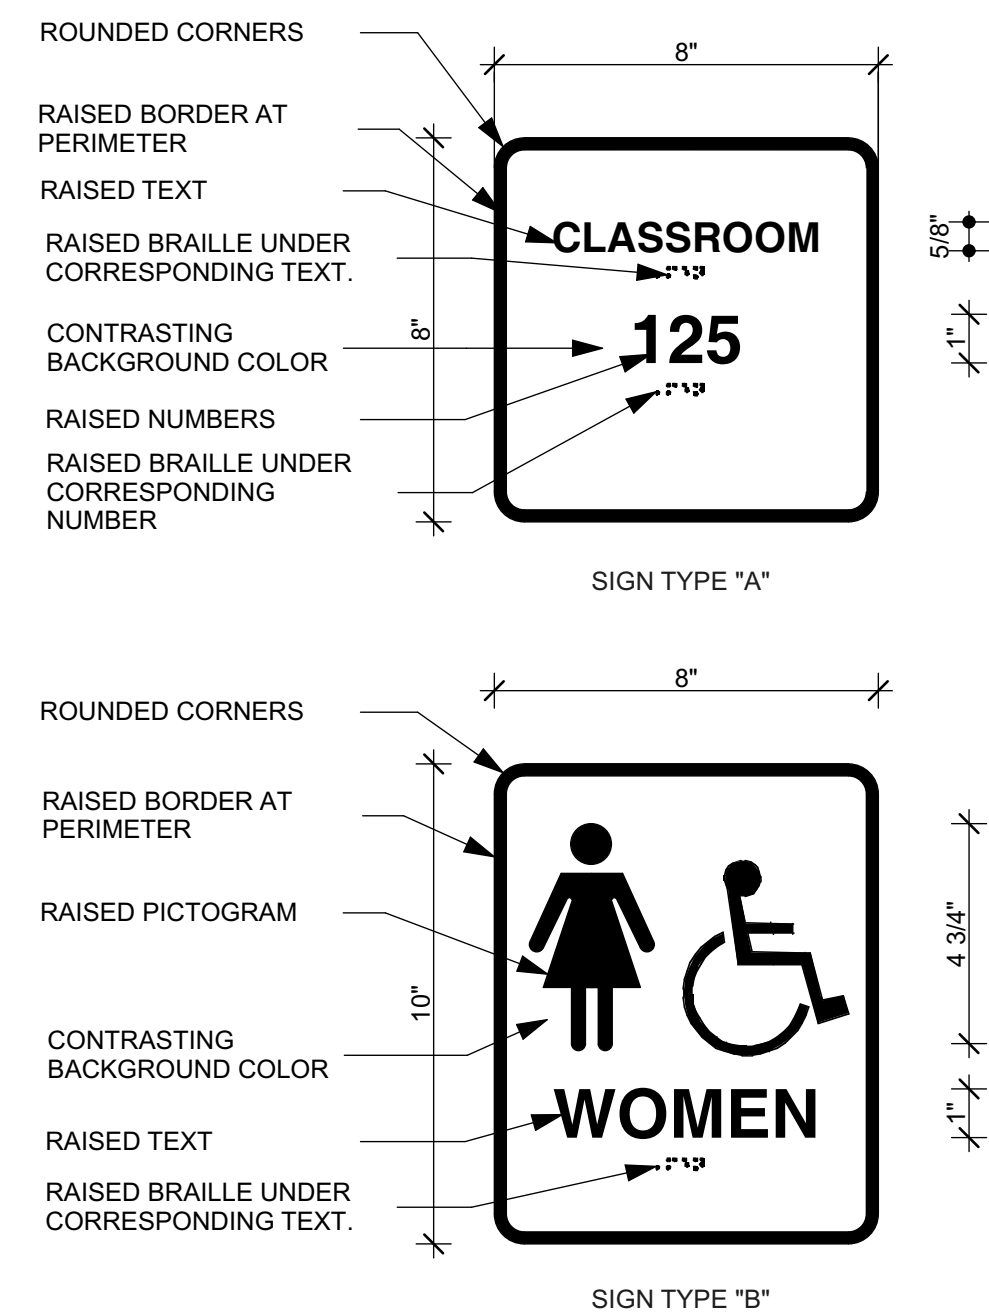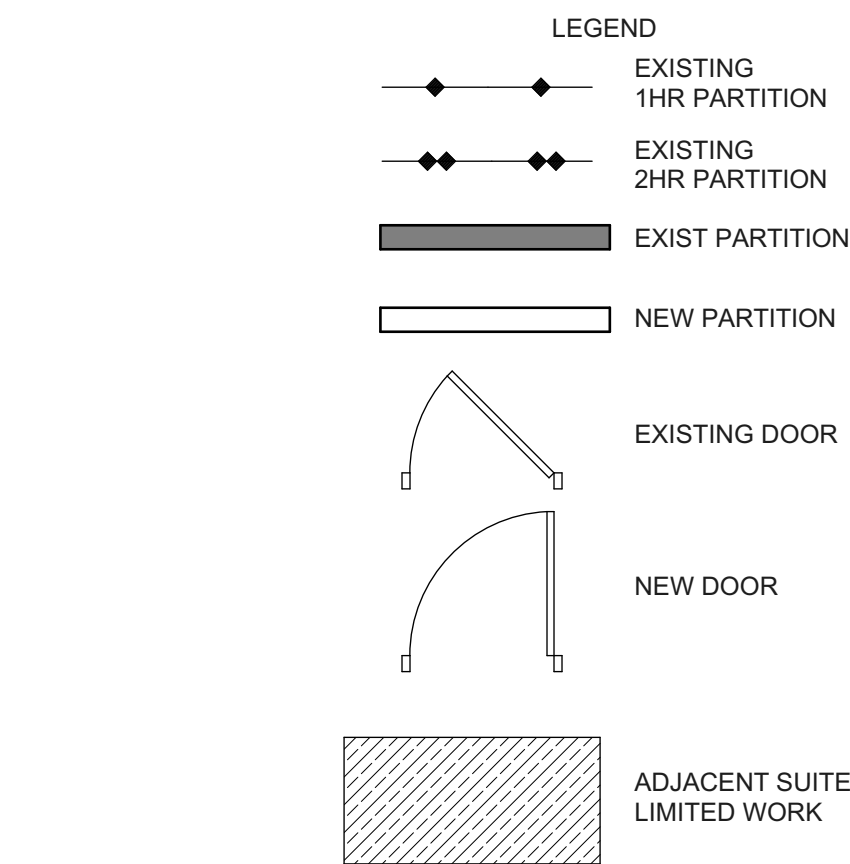

NOTE:

1. MOUNT SIGN 60 INCHES FROM FINISH FLOOR MEASURED FROM CENTERLINE OF SIGN TO FLOOR. MOUNT SIGN ON THE LATCH SIDE OF DOOR.
2. SIGN SHALL COMPLY WITH ALL FEDERAL, STATE AND LOCAL ADA REQUIREMENTS.
3. TEXT SHALL BE HELVETICA
4. PROVIDE SHOP DRAWINGS TO ARCHITECT FOR APPROVAL BEFORE STARTING FABRICATION.


2
A-101

ADA SIGNAGE

SCALE: 3" = 1'-0"


SCALE: 3" = 1'-0"

- | | |
|---|---|
| A | OWNER PROVIDE TV AND TV MOUNTING BRACKET. INSTALLATION OF TV AND TV MOUNTING BRACKET BY OWNER'S VENDOR AND WORK COORDINATED WITH GENERAL CONTRACTOR. (MOUNTING HEIGHT MATCH EXISTING) |
| B | UNLESS NOTED OTHERWISE, DESKS, CHAIRS, TABLES AND FILE CABINETS PROVIDED, ASSEMBLED AND INSTALL BY OWNER'S FURNITURE VENDOR. WORK COORDINATED WITH GENERAL CONTRACTOR |
| B | UNLESS NOTED OTHERWISE ALL APPLIANCES PROVIDE BY OWNER AND INSTALLED BY OWNER'S VENDOR. WORK COORDINATED WITH GENERAL CONTRACTOR |

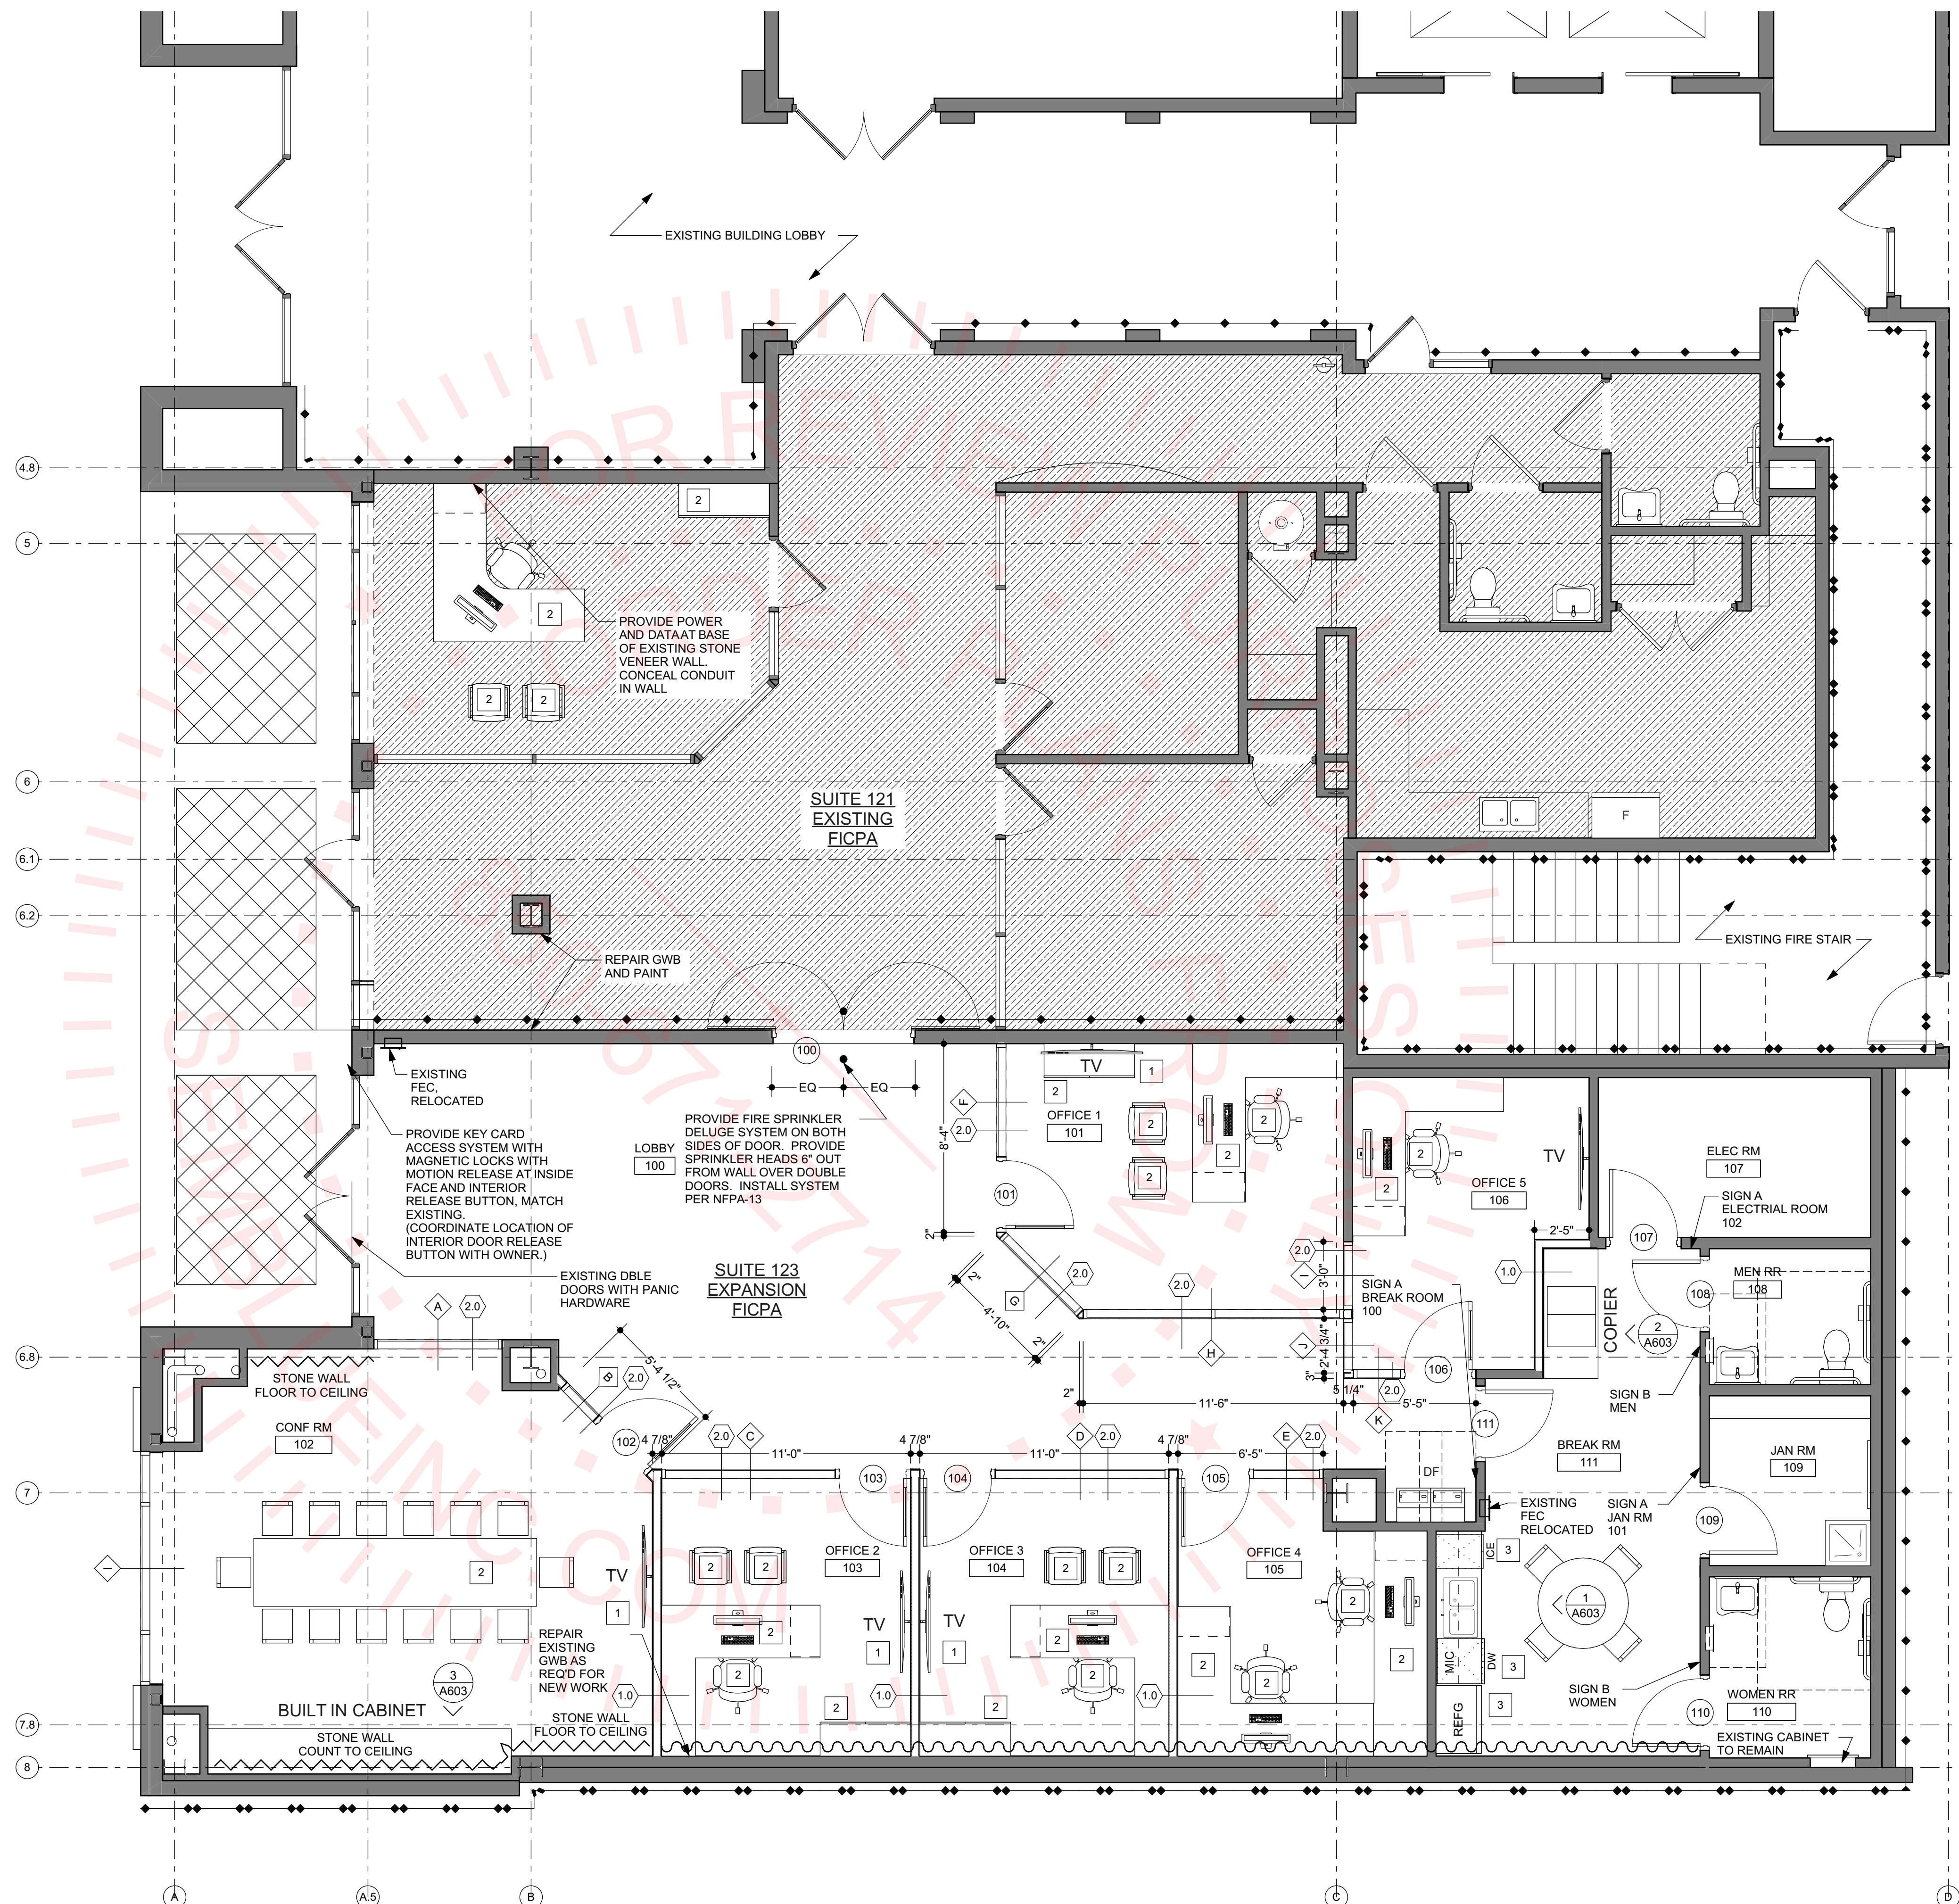

1 First Floor Plan - Proposed


SCALE: 1/4" = 1'-0"

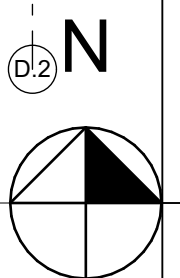


C:\Projects\2405\2405constructiondocuments\2405model\24.pln

NOTE:
WHERE CEILING HEIGHTS ARE INCREASED FROM
EXISTING THE CONTRACTOR SHALL RAISE ALL
EXISTING CONDUIT, JUNCTION BOXES, WATER
LINES, SANITARY SEPTIC LINES, DRAIN LINES,
MECHANICAL DUCT WORK AND MISC UTILITIES TO
ABOVE PROPOSED FINISH CEILING.

LIGHTING LEGEND



24 X 24 LAY-IN LIGHT
FIXTURE, LED
(MATCH EXISTING)




24 X 48 LAY-IN LIGHT
FIXTURE, LED
(MATCH EXISTING)




6 INCH CAN LIGHT, LED




EMERGENCY EXIT SIGN
(MATCH EXISTING)

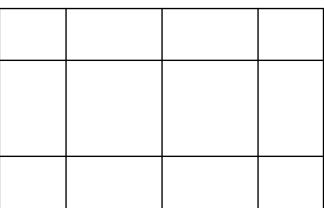

ACOUSTICAL CEILING TILE AND
GRID, (MATCH EXISTING)

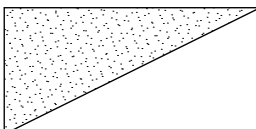

SUSPENDED 5/8" GYPSUM
BOARD

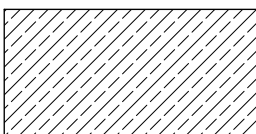

ADJACENT SUITE LIMITED
WORK

RAYMOND C FINGER
ARCHITECTS, LLC

ARCHITECTURE, LANDSCAPE ARCHITECTURE
& PLANNING



1203 E Clay St, Thomasville, GA, 31792
Telephone: 229.551.9846

OliverSperry
RENOVATION

CONSULTANTS:

Raymond C. Finger, State of Florida, Architect,
License No. AR91713. This item has been digitally
signed and sealed by Raymond C. Finger on the date
indicated here. Printed copies of this document are
not considered signed and sealed and the signature
must be verified on any electronic copies.

PROJECT:

FICPA
TENANT BUILD OUT
RENOVATION

Alliance Center
Unit 123, 119 South Monroe St.
Tallahassee, Florida

No.	Date	Issue Description
-----	------	-------------------

DATE: MAY 3, 2024

RCFA PROJECT NO: 2405

COPYRIGHT:
2024 Raymond C. Finger Architects, All Rights Reserved


SHEET TITLE:

First Floor Plan - RCP

A-201

RELEASED FOR CONSTRUCTION

1
A-201
First Floor RCP
SCALE: 1/4" = 1'-0"

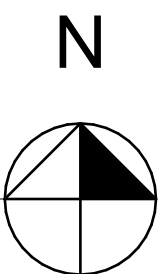

C:\Projects\2405\2405construction\documents\2405model\24.pln

CONSULTANTS:

Raymond C. Finger, State of Florida, Architect,
License No. AR91713. This item has been digitally
signed and sealed by Raymond C. Finger on the date
indicated here. Printed copies of this document are
not considered signed and sealed and the signature
must be verified on any electronic copies.

PROJECT:

FICPA
TENANT BUILD OUT
RENOVATION

Alliance Center
Unit 123, 119 South Monroe St.
Tallahassee, Florida

No. Date Issue Description

DATE: MAY 3, 2024

RCFA PROJECT NO: 2405


COPYRIGHT:
2024 Raymond C. Finger Architects, All Rights Reserved

SHEET TITLE:


Door Schedule and Details

A-601


RELEASED FOR CONSTRUCTION

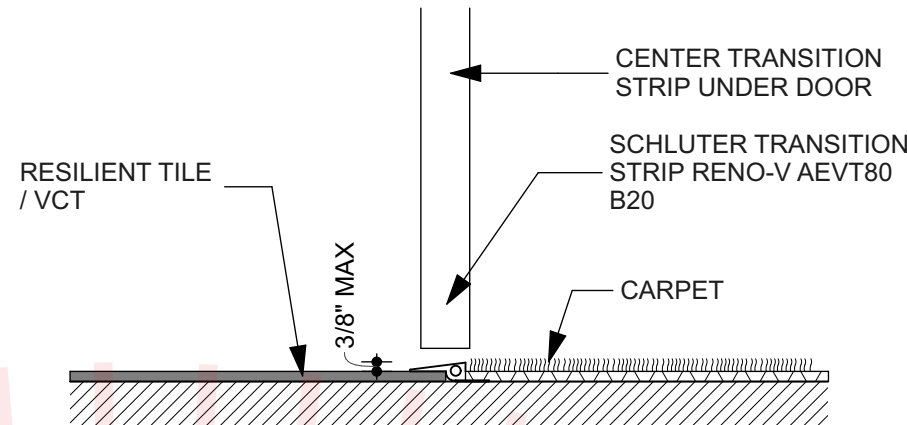

5
A-601
RESILIENT TILE / VCT TO CARPET
SCALE: 3" = 1'-0"

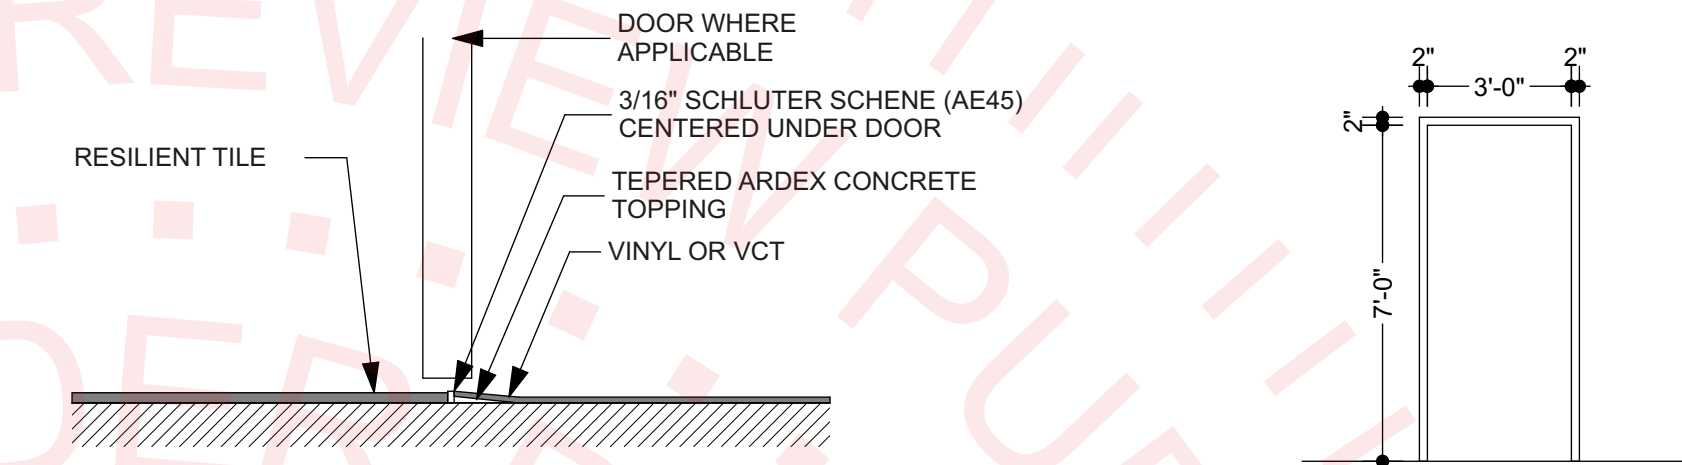

4
A-601
RESILIENT TILE TO VINYL / VCT
SCALE: 3" = 1'-0"

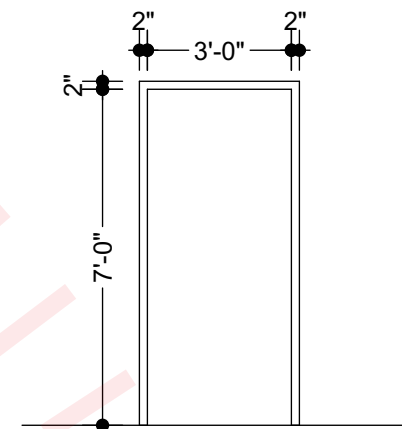

3
A-601
Door Frames
SCALE: 1/4" = 1'-0"

BASIS OF DESIGN DORMA TYPE II, BEST REMOVABLE
CORES

HW-1 (DOUBLE GLASS DOOR)
2 CONCEALED CLOSER
2 TOP PIN HING
2 PULL HARDWARE (MATCH EXISTING)
2 PUSH HARDWARE PLATES (MATCH EXISTING)
2 MAGNETIC WALL HOLD OPEN HARDWARE
CONNECTED TO FIRE ALARM SYSTEM
1 MAGNETIC LOCK SYSTEM IN CLOSED POSITION
WITH CARD KEY ACCESS CONTROL AT BOTH
SIDES.

HW-2 (OFFICE AND CONF RM DOORS)
6 HINGES
1 LEVER HARDWARE W/ KEY LOCK AND
THUMB LOCK AT INSIDE FACE
1 GASKETING AT SIDES AND HEAD
1 FLOOR STOP

HW-3 (PASSAGE TO BREAK RM)
3 HINGES
1 LEVER HARDWARE - PASSAGE
1 CLOSER
3 SILENCERS
1 FLOOR STOP


HW-4 (ELEC RM/ JAN RM)
3 HINGES
1 LEVER HARDWARE W/ KEY LOCK BOTH SIDES
3 SILENCERS
1 FLOOR STOP

HW-5 (BATHROOMS)
3 HINGES
1 LEVER HARDWARE - PASSAGE
1 DEADBOLT WITH THUMB LEVER @ INSIDE FACE
(OCCUPANCY SIGN OUTSIDE FACE)
3 SILENCERS
1 FLOOR STOP


- 1T 3/8" CLEAR TEMPERED GLAZING
2T 3/8" FROSTED TEMPERED GLAZING
3T 3/4" CLEAR TEMPERED GLAZING
4T 1" TEMPERED INSULATED GLAZING
(MATCH EXISTING EXTERIOR WINDOW TINT)

DOOR LEGEND			
Model	D-A	D-B	D-C
DOOR FINISH	FF	FF	STAIN
VIEW			
DIMENSIONS	6'-0"×8'-0"	3'-0"×7'-0"	3'-0"×7'-0"
Leaf/Sash Material	ALUM	ALUM	WOOD
Fire Resistance Rating	Non-Rated	Non-Rated	Non-Rated
Quantity	1	6	5
NOTES	INTERIOR STOREFRONT, HERCULIATE DOUBLE DOORS (MATCH EXISTING)	INTERIOR STOREFRONT (MATCH EXISTING)	INTERIOR, MARSHFIELD DOOR (MATCH EXISTING)


2
A-601
Door Legend
SCALE: 1' = 1'-0"

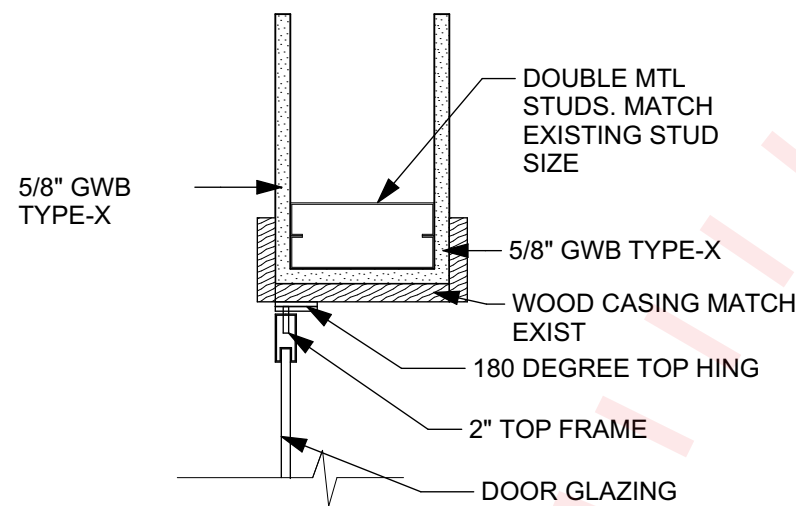


9
A-603
DOOR HEAD
SCALE: 1 1/2" = 1'-0"

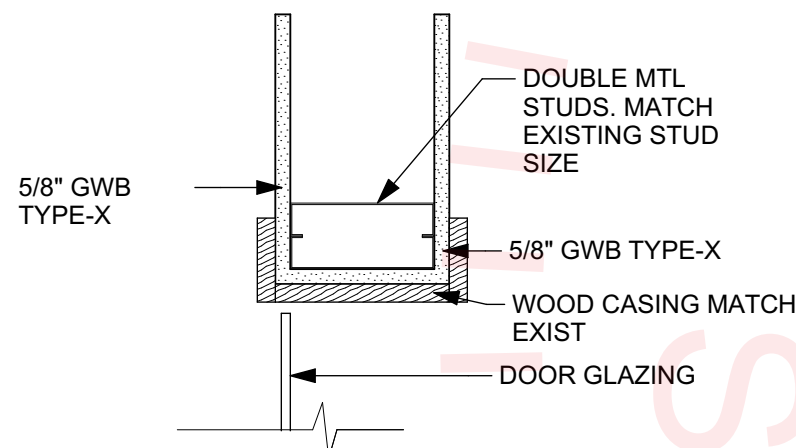


8
A-603
DOOR JAMB
SCALE: 1 1/2" = 1'-0"

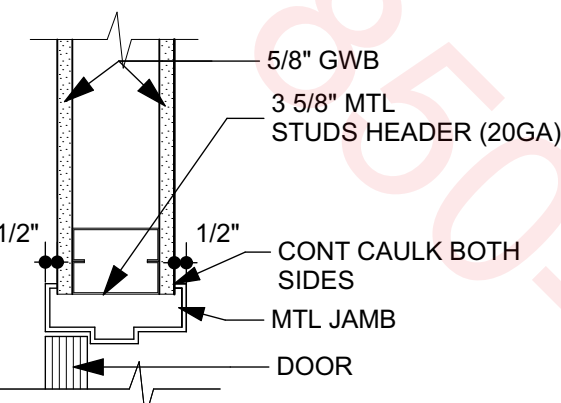


6
A-601
DOOR HEAD
SCALE: 1 1/2" = 1'-0"

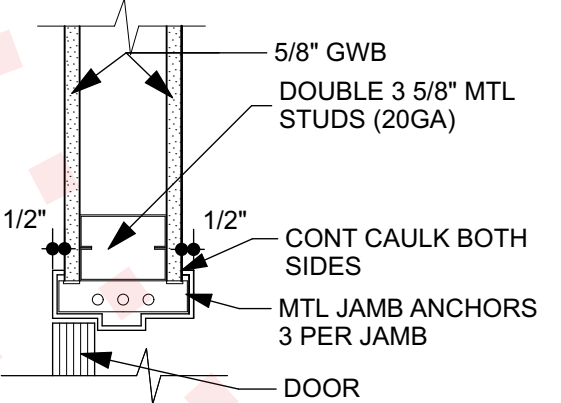


5
A-601
DOOR JAMB
SCALE: 1 1/2" = 1'-0"

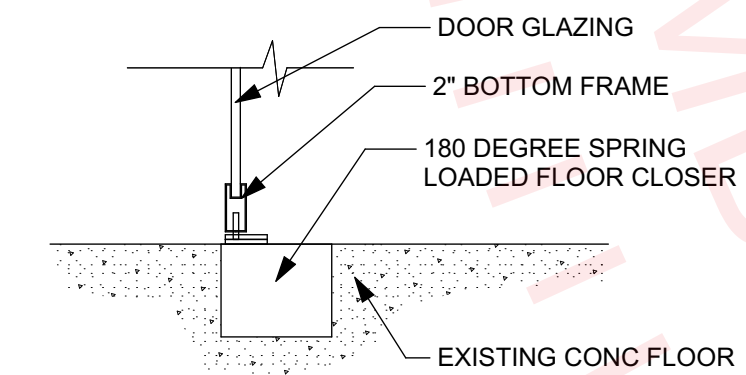


7
A-603
DOOR SILL
SCALE: 1 1/2" = 1'-0"

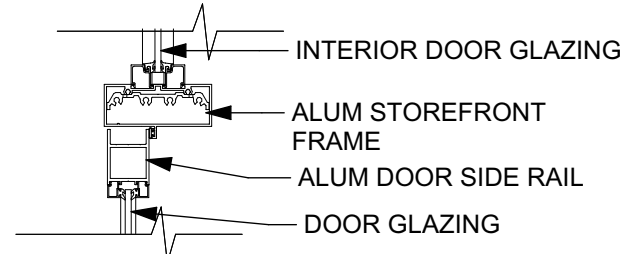

12
A-601
DOOR HEAD
SCALE: 1 1/2" = 1'-0"

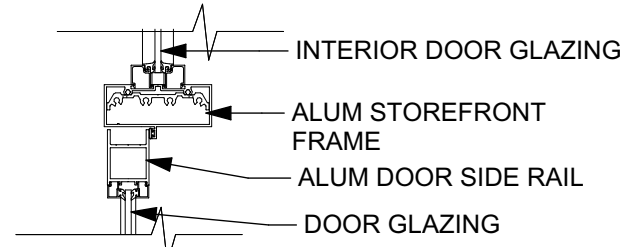

11
A-601
DOOR JAMB
SCALE: 1 1/2" = 1'-0"

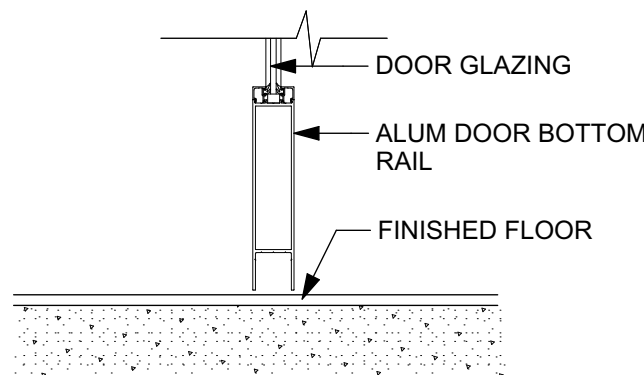


10
A-601
DOOR SILL
SCALE: 1 1/2" = 1'-0"


DOOR SCHEDULE															
ID	TYPE	DOOR LEAF					FRAME			DETAIL			RATING	HW SET	REMARKS
		WIDTH	HEIGHT	LEAF THICKNESS	MATERIAL	FINISH	TYPE	MATERIAL	FINISH	HEAD	JAMB	SILL			
100	D-A	6'-0"	8'-0"	1 3/4"	ALUM	FF	-	-	-	9/A-601	8/A-601	7/A-601	Non-Rated	1	INTERIOR STOREFRONT, HERCULIATE DOUBLE DOORS (MATCH EXISTING)
101	D-B	3'-0"	7'-0"	1 3/4"	ALUM	FF	F	ALUM	FF	12/A-601	11/A-601	10-A-601	Non-Rated	2	INTERIOR STOREFRONT (MATCH EXISTING)
102	D-B	3'-0"	7'-0"	1 3/4"	ALUM	FF	B	ALUM	FF	12/A-601	11/A-601	-	Non-Rated	2	INTERIOR STOREFRONT (MATCH EXISTING)
103	D-B	3'-0"	7'-0"	1 3/4"	ALUM	FF	C	ALUM	FF	12/A-601	11/A-601	-	Non-Rated	2	INTERIOR STOREFRONT (MATCH EXISTING)
104	D-B	3'-0"	7'-0"	1 3/4"	ALUM	FF	D	ALUM	FF	12/A-601	11/A-601	-	Non-Rated	2	INTERIOR STOREFRONT (MATCH EXISTING)
105	D-B	3'-0"	7'-0"	1 3/4"	ALUM	FF	E	ALUM	FF	12/A-601	11/A-601	-	Non-Rated	2	INTERIOR STOREFRONT (MATCH EXISTING)
106	D-B	3'-0"	7'-0"	1 3/4"	ALUM	FF	K	ALUM	FF	12/A-601	11/A-601	-	Non-Rated	2	INTERIOR STOREFRONT (MATCH EXISTING)
107	D-C	3'-0"	7'-0"	1 3/4"	WOOD	STAIN	L	HM	PAINT	6/A-601	5/A-601	-	Non-Rated	4	INTERIOR, MARSHFIELD DOOR (MATCH EXISTING)
108	D-C	3'-0"	7'-0"	1 3/4"	WOOD	STAIN	L	HM	PAINT	6/A-601	5/A-601	4/A-601	Non-Rated	5	INTERIOR, MARSHFIELD DOOR (MATCH EXISTING)
109	D-C	3'-0"	7'-0"	1 3/4"	WOOD	STAIN	L	HM	PAINT	6/A-601	5/A-601	4/A-601	Non-Rated	4	INTERIOR, MARSHFIELD DOOR (MATCH EXISTING)
110	D-C	3'-0"	7'-0"	1 3/4"	WOOD	STAIN	L	HM	PAINT	6/A-601	5/A-601	4/A-601	Non-Rated	5	INTERIOR, MARSHFIELD DOOR (MATCH EXISTING)
111	D-C	3'-0"	7'-0"	1 3/4"	WOOD	STAIN		HM	PAINT	6/A-601	5/A-601	5/A-601	Non-Rated	3	INTERIOR, MARSHFIELD DOOR (MATCH EXISTING)

1
A-601
Door Schedule
SCALE: 1' = 1'-0"


C:\Projects\2405\2405constructiondocuments\2405model\24.pln

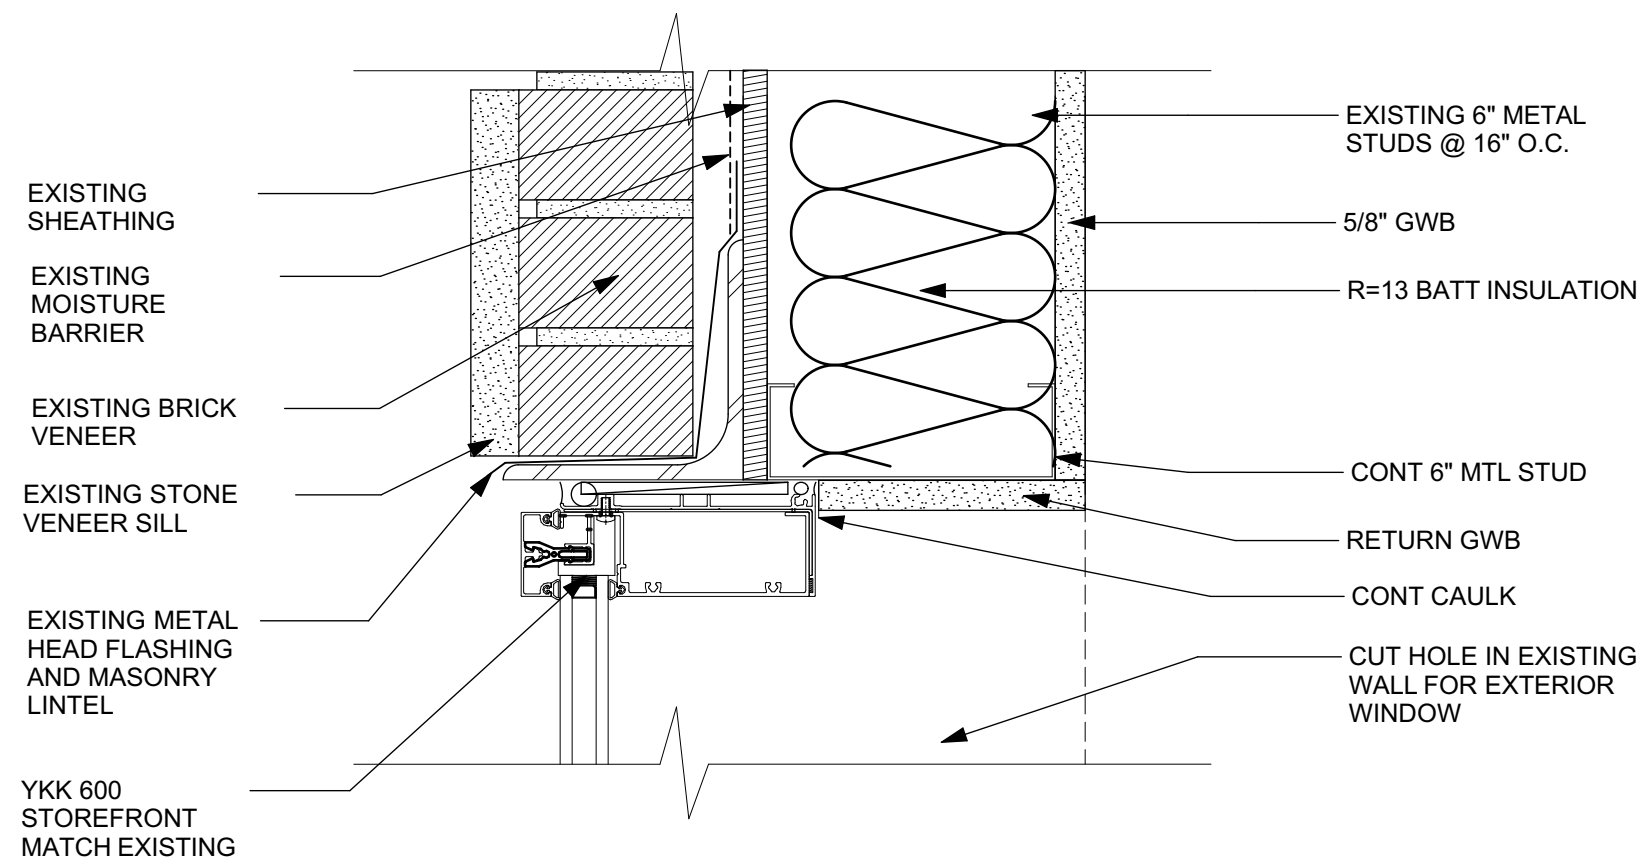


7
A-602
EXTERIOR WINDOW HEAD
SCALE: 3" = 1'-0"

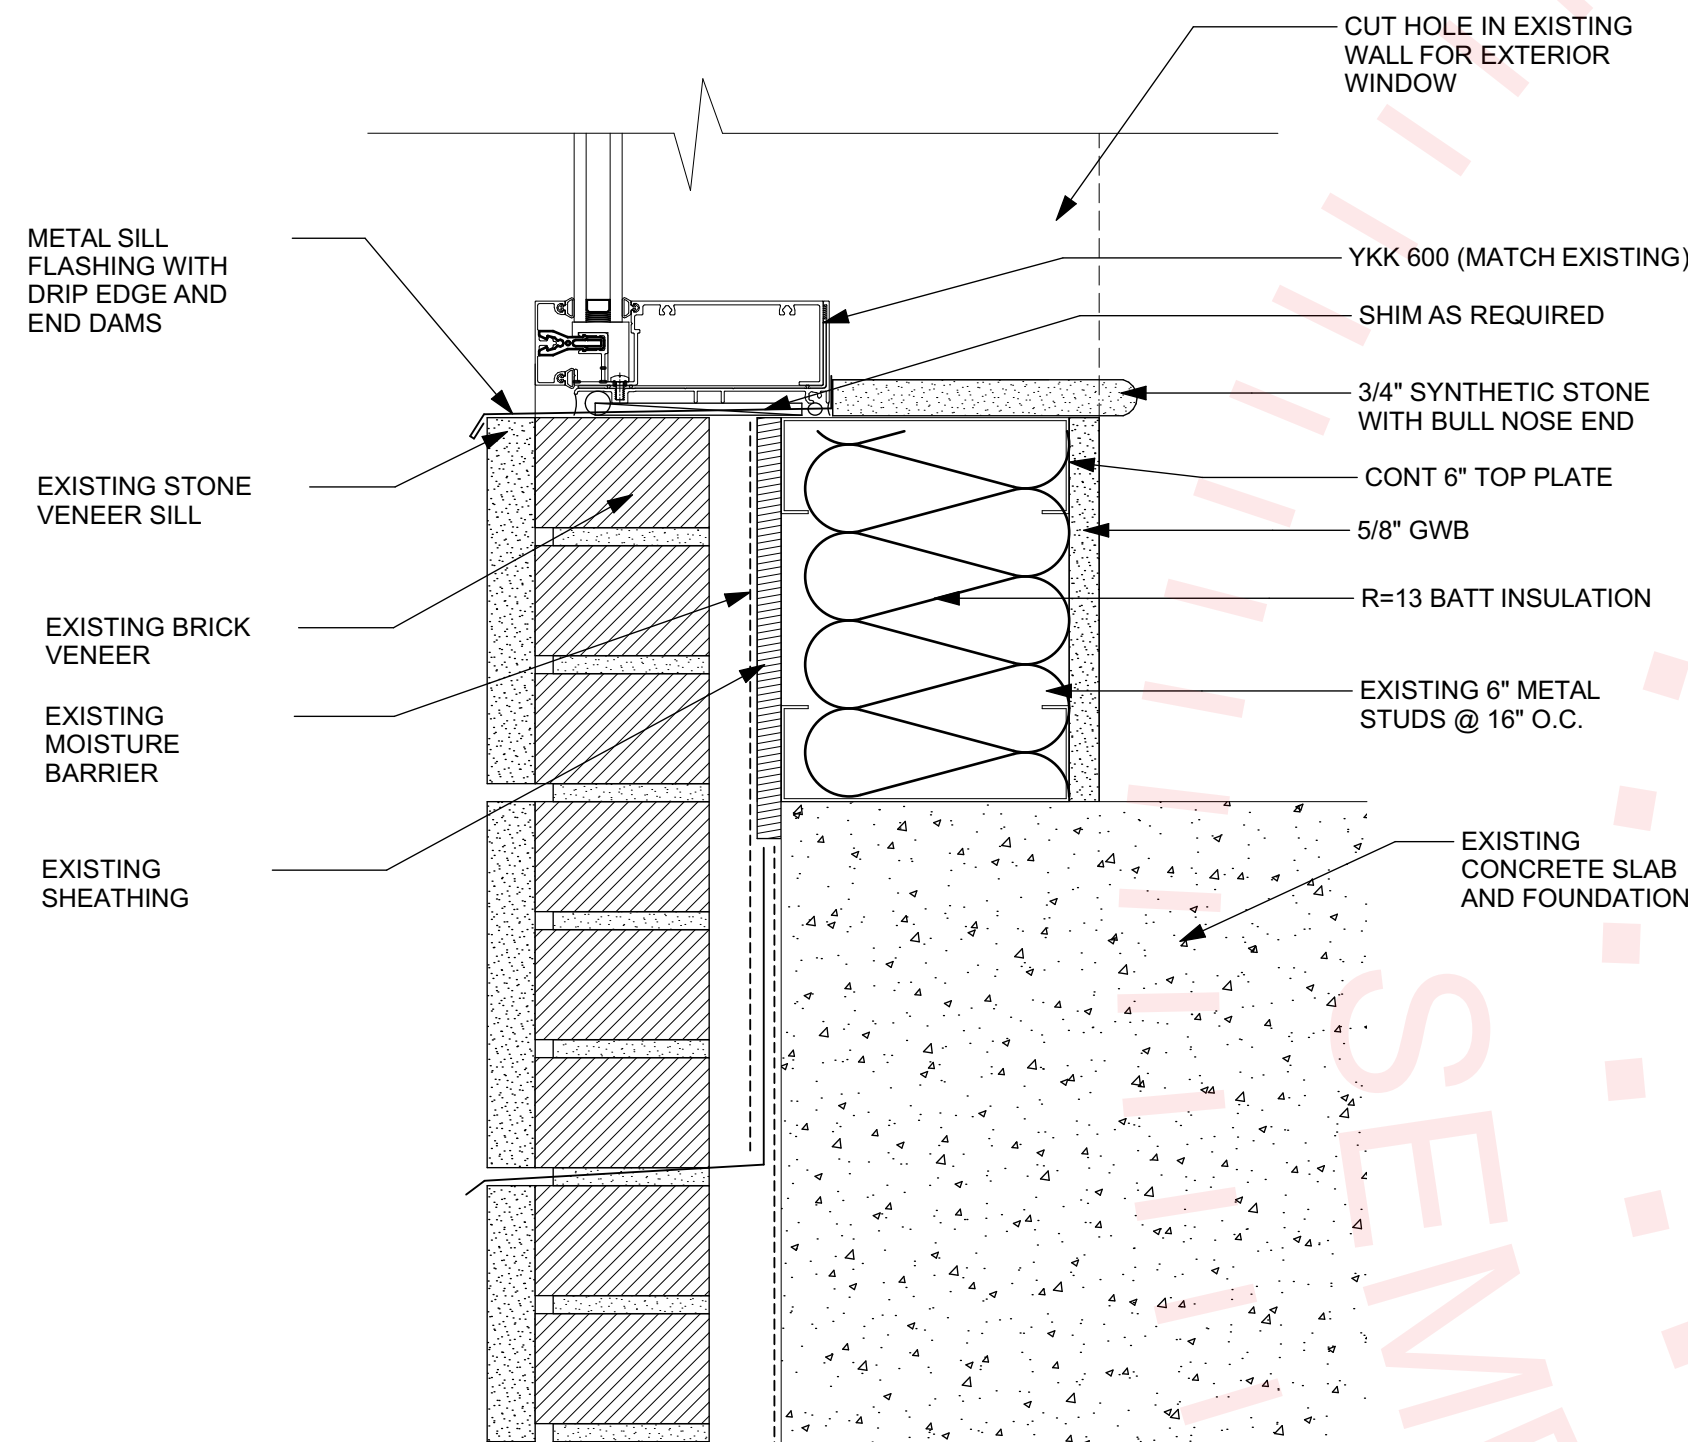


6
A-602
EXTERIOR WINDOW SILL
SCALE: 3" = 1'-0"

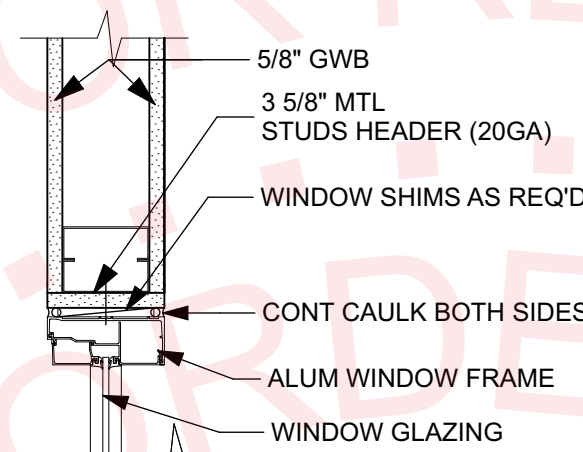


5
A-602
DOOR HEAD
SCALE: 1 1/2" = 1'-0"

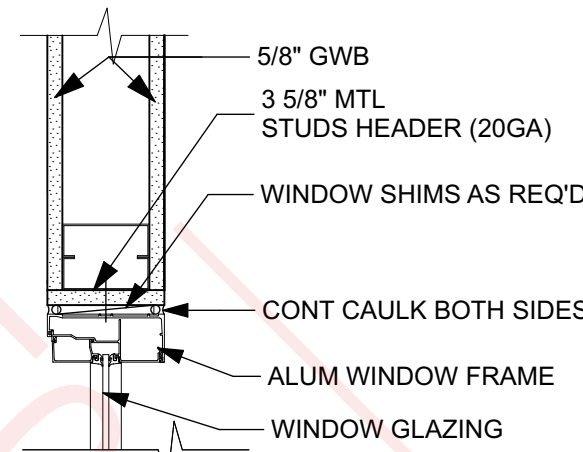


4
A-602
DOOR JAMB
SCALE: 1 1/2" = 1'-0"

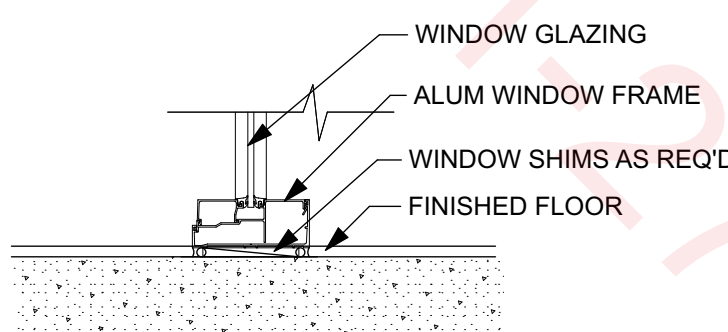

3
A-602
DOOR SILL
SCALE: 1 1/2" = 1'-0"

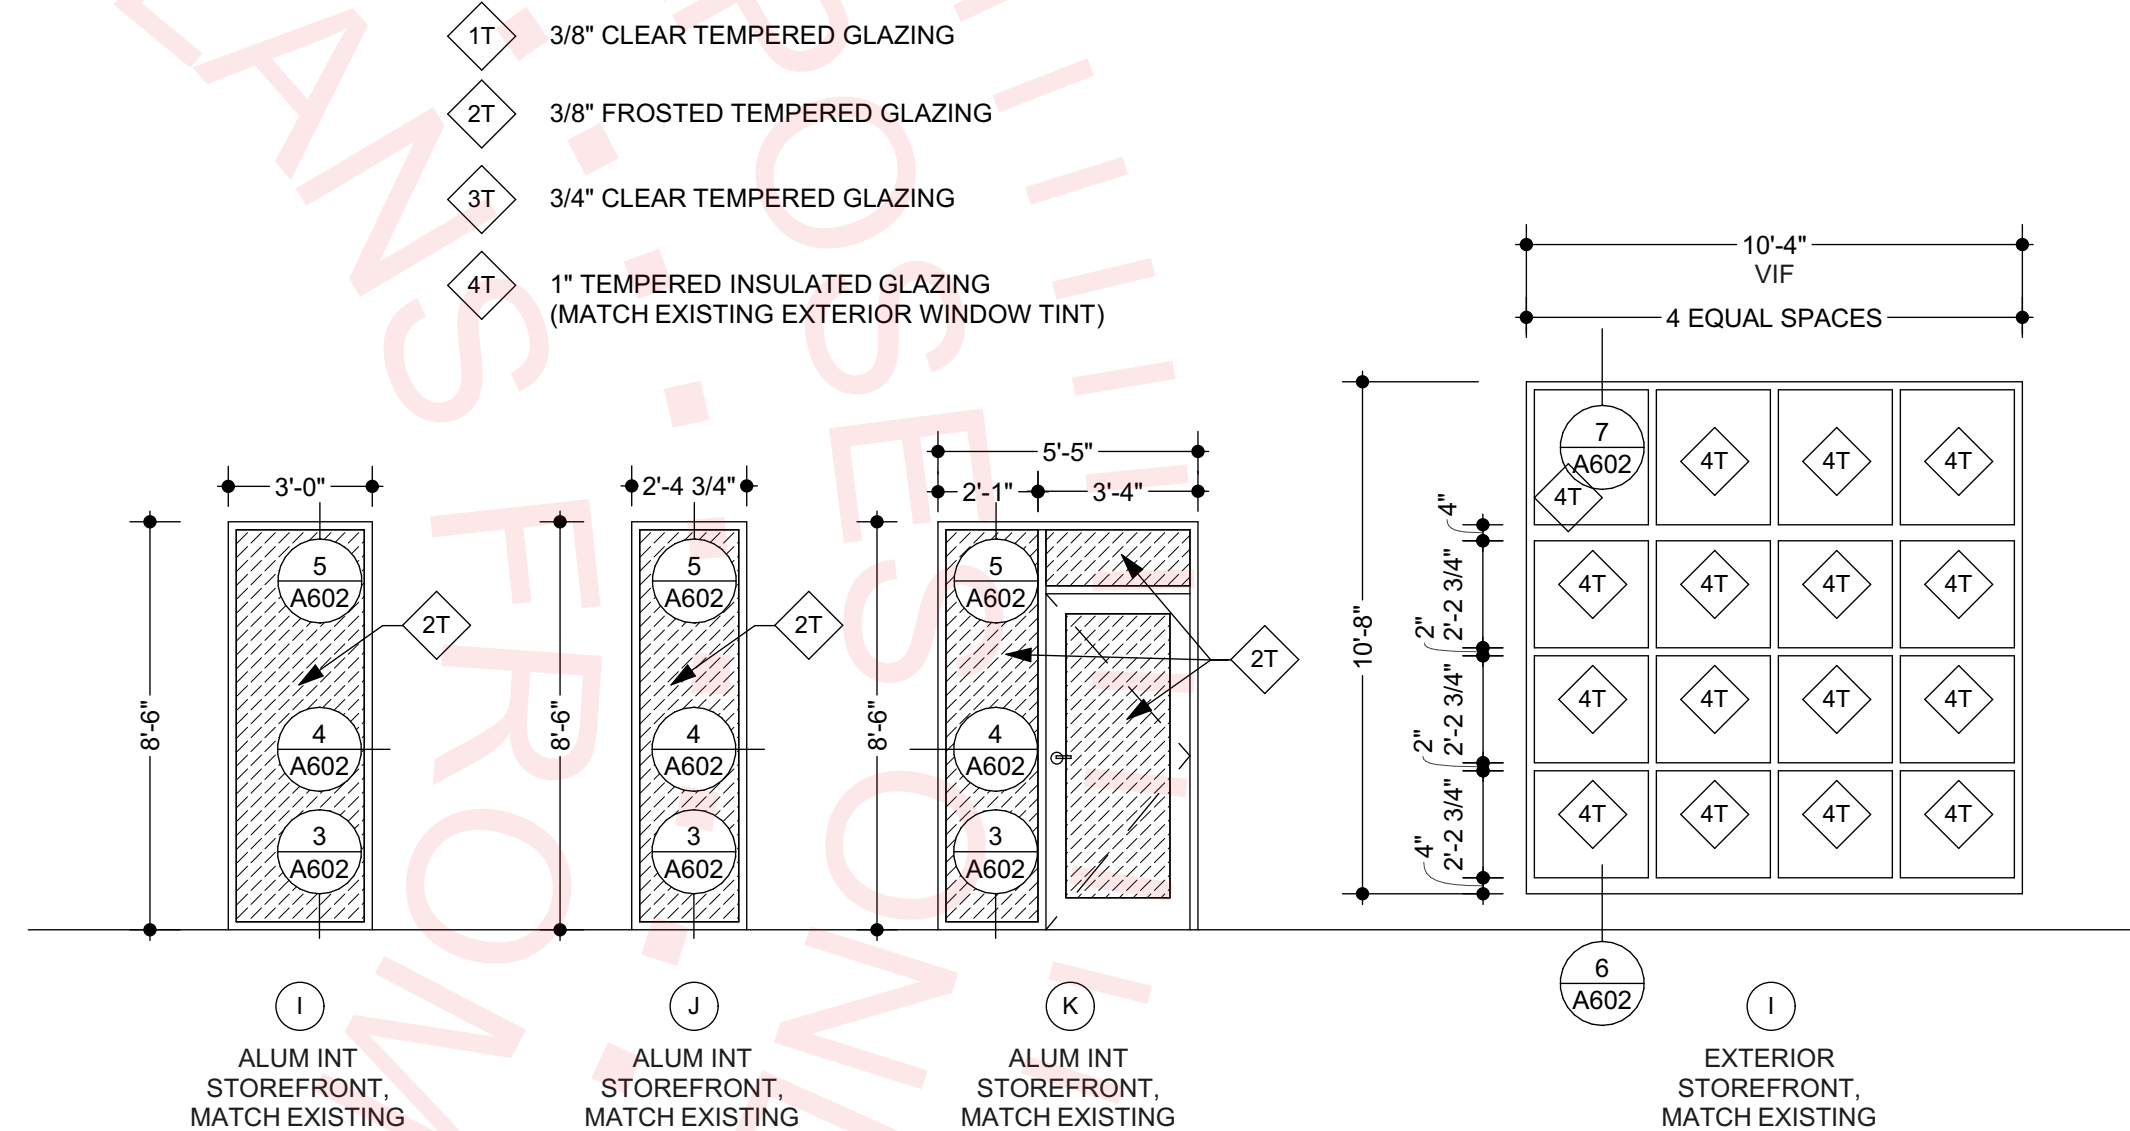

2
A-602
Window Elevations
SCALE: 1/4" = 1'-0"

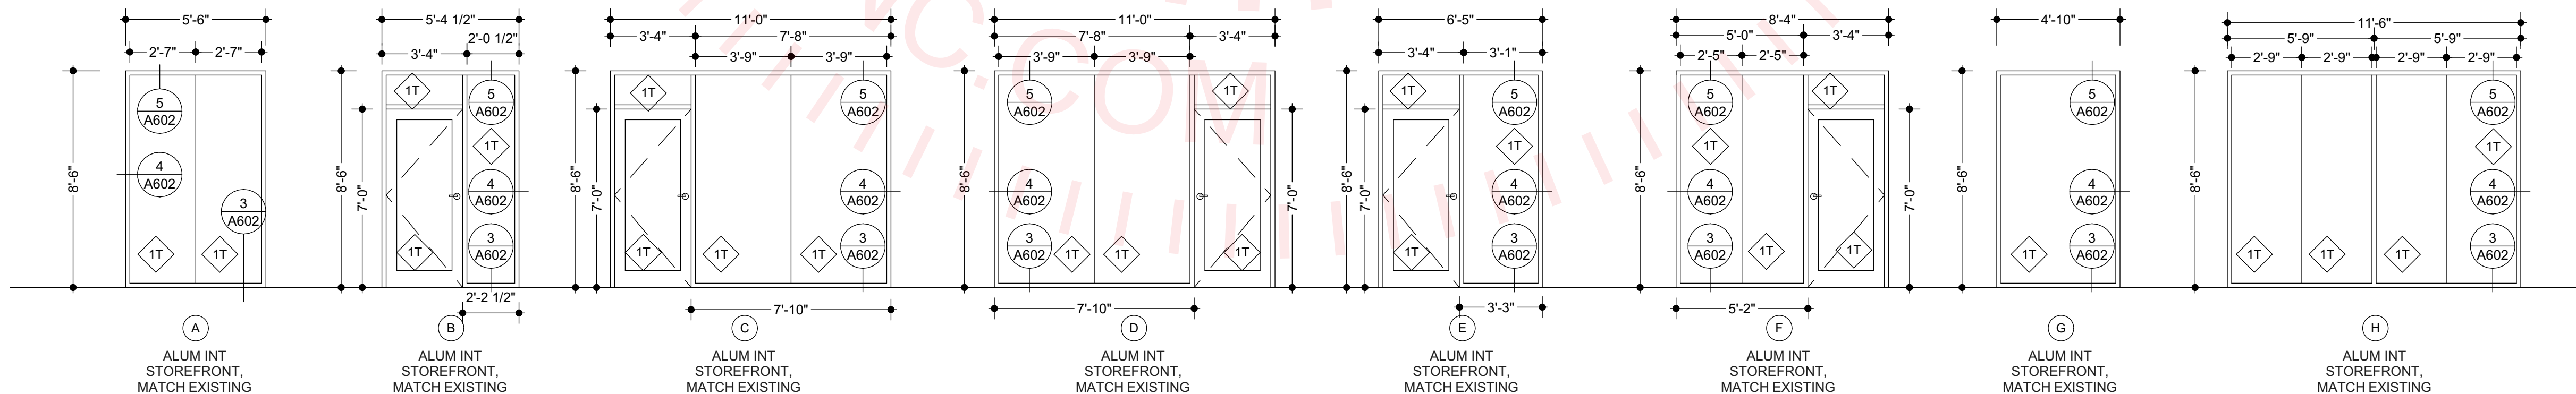

1
A-602
Window Elevations
SCALE: 1/4" = 1'-0"

RAYMOND C FINGER
ARCHITECTS, LLC

ARCHITECTURE, LANDSCAPE ARCHITECTURE
& PLANNING



1203 E Clay St, Thomasville, GA, 31792
Telephone: 229.551.9846

OliverSperry
RENOVATION

CONSULTANTS:

Raymond C. Finger, State of Florida, Architect,
License No. AR91713. This item has been digitally
signed and sealed by Raymond C. Finger on the date
indicated here. Printed copies of this document are
not considered signed and sealed and the signature
must be verified on any electronic copies.

PROJECT:

**FICPA
TENANT BUILD OUT
RENOVATION**

Alliance Center
Unit 123, 119 South Monroe St.
Tallahassee, Florida

No. Date Issue Description

DATE: MAY 3, 2024

RCFA PROJECT NO: 2405

COPYRIGHT:
2024 Raymond C. Finger Architects, All Rights Reserved

SHEET TITLE:

Window Elevations and Details

A-602

RELEASED FOR CONSTRUCTION

C:\Projects\2405\2405construction\documents\2405model\24.pln

CONSULTANTS:

Raymond C. Finger, State of Florida, Architect,
License No. AR91713. This item has been digitally
signed and sealed by Raymond C. Finger on the date
indicated here. Printed copies of this document are
not considered signed and sealed and the signature
must be verified on any electronic copies.

PROJECT:

FICPA
TENANT BUILD OUT
RENOVATION

Alliance Center
Unit 123, 119 South Monroe St.
Tallahassee, Florida

No.	Date	Issue Description


DATE: MAY 3, 2024
RCFA PROJECT NO: 2405
COPYRIGHT:
2024 Raymond C. Finger Architects, All Rights Reserved

SHEET TITLE:

Partition Schedule

A-701


RELEASED FOR CONSTRUCTION

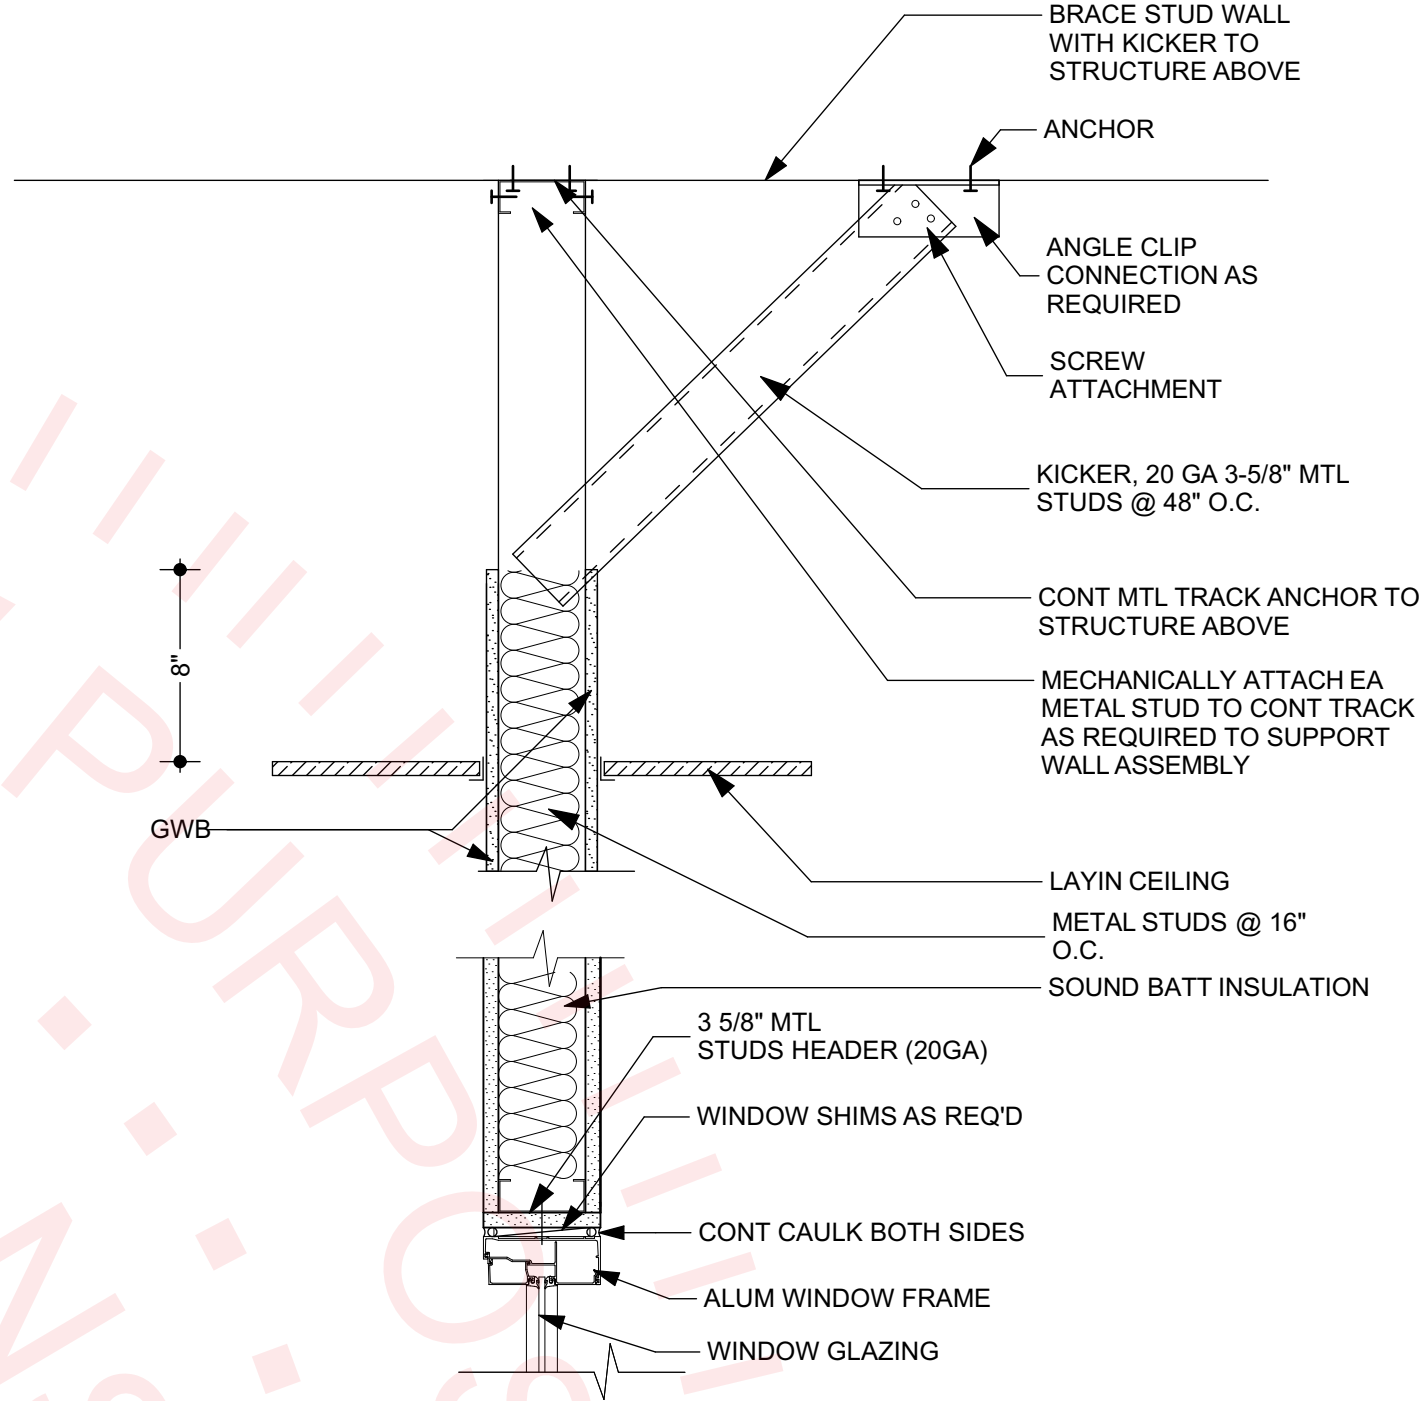

2
A-701

MTL STUD SUPPORT

SCALE: 1 1/2\"/>

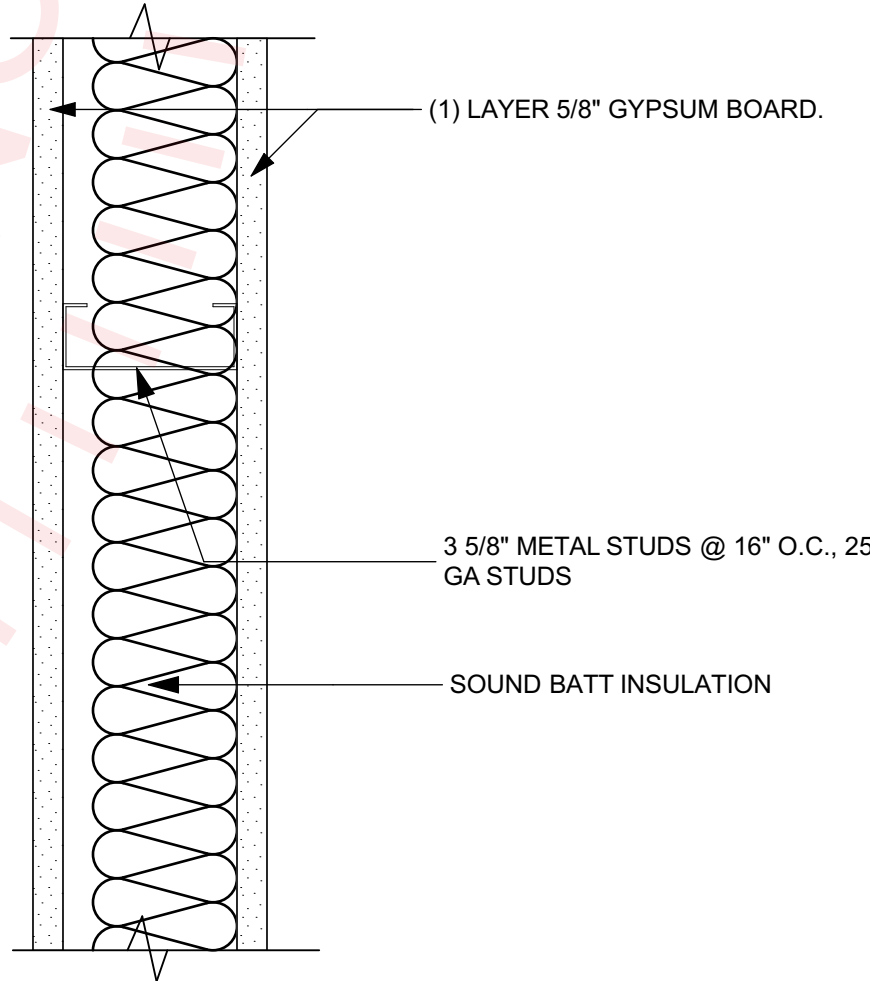

TAG	RATING	REMARKS
1.0	NOT RATED	1. EXTEND WALL ASSEMBLY FROM FLOOR TO UNDERSIDE OF FLOOR ABOVE
2.0	NOT RATED	1. SUSPENDED WALL ASSEMBLY FROM TOP OF WINDOW TO UNDERSIDE OF FLOOR ABOVE. SEE DETAIL 2/A701

1
A701

PARTITION DETAIL

SCALE 3\"/>

C:\Projects\2405\2405constructiondocuments\2405model\24.pln

CONSULTANTS:

Raymond C. Finger, State of Florida, Architect,
License No. AR91713. This item has been digitally
signed and sealed by Raymond C. Finger on the date
indicated here. Printed copies of this document are
not considered signed and sealed and the signature
must be verified on any electronic copies.

PROJECT:

FICPA
TENANT BUILD OUT
RENOVATION

Alliance Center
Unit 123, 119 South Monroe St.
Tallahassee, Florida

No. Date Issue Description

DATE: MAY 3, 2024
RCFA PROJECT NO: 2405
COPYRIGHT:
2024 Raymond C. Finger Architects, All Rights Reserved

SHEET TITLE:





Finish Schedule

A-702

RELEASED FOR CONSTRUCTION

FINISH SCHEDULE

ROOM		FLOOR	TRIM					WALL FINISH				CEILING		COMMENTS
NO.	NAME	FINISH	BASE	WAINSCOT	CHAIR RAIL	CROWN	TRIM FINISH	NORTH	EAST	SOUTH	WEST	MAT./FINISH	HEIGHT	
FIRST FLOOR														
100	LOBBY	CPT-1	VB-1	-	-	-	-	PT-1	PT-1	PT-1	PT-1	ACT-1	-	-
101	OFFICE 1	CPT-1	VB-1	-	-	-	-	PT-1	PT-1	PT-1	PT-1	ACT-1	-	-
102	CONFERENCE ROOM	CPT-1	VB-1	-	-	-	-	STN-1	PT-1	STN-1	PT-1	ACT-1	-	-
103	OFFICE 2	CPT-1	VB-1	-	-	-	-	PT-1	PT-1	PT-2	PT-1	ACT-1	-	-
104	OFFICE 3	CPT-1	VB-1	-	-	-	-	PT-1	PT-1	PT-2	PT-1	ACT-1	-	-
105	OFFICE 4	CPT-1	VB-1	-	-	-	-	PT-1	PT-1	PT-2	PT-1	ACT-1	-	-
106	OFFICE 5	CPT-1	VB-1	-	-	-	-	PT-1	PT-1	PT-1	PT-1	ACT-1	-	-
107	ELECTRICAL ROOM	LVT-1	VB-1	-	-	-	-	PT-1	PT-1	PT-1	PT-1	ACT-1	-	-
108	MEN REST ROOM	T-1	TB-1	-	-	-	-	PT-1	PT-1	PT-1	PT-1	ACT-1	-	-
109	JANITOR ROOM	T-1	TB-1	-	-	-	-	PT-1	PT-1	PT-1	PT-1	ACT-1	-	-
110	WOMEN REST ROOM	T-1	TB-1	-	-	-	-	PT-1	PT-1	PT-1	PT-1	ACT-1	-	-
111	BREAK ROOM	LVT-1	VB-1	-	-	-	-	PT-1	PT-1	PT-2	PT-1	ACT-1	-	-

FINISH LEGEND	
	CARPET
	LVT
	TILE
	ACCENT PAINT WALL SIDE LOCATION
	ACCENT STONE WALL SIDE LOCATION FLOOR TO CEILING OR COUNTERTOP TO CEILING

FLOOR FINISH SCHEDULE			
TAG	DESCRIPTION	FLAME SPREAD / SMOKE DEVELOPMENT	NOTES
T-1	MATCH EXISTING TOILET ROOM FLOOR TILE	-	
LVT-1	SHAW, STYLE STRAND (0516V), CHALK (16515)	CLASS A	
CPT-1	MATCH EXISTING CARPET	-	

WALL BASE			
TAG	DESCRIPTION	FLAME SPREAD / SMOKE DEVELOPMENT	NOTES
RB-1	4 INCH HIGH RUBBER BASE, SHAW, COVE BASE (148VS), GREIGE (00560)	CLASS A	
TB-1	MATCH EXISTING TOILET ROOM TILE BASE	-	

WALL FINISH			
TAG	DESCRIPTION	FLAME SPREAD / SMOKE DEVELOPMENT	NOTES
PT-1	PAINT "SHERWIN WILLIAMS", DORIAN GRAY (SW 7017)	CLASS A	FIELD PAINT
PT-2	PAINT "SHERWIN WILLIAMS", INKY BLUE (SW 9149)	CLASS A	ACCENT PAINT
STN-1	SYNTHETIC STONE VENEER, MATCH EXISTING CONF. STONE	-	

CEILING FINISH			
TAG	DESCRIPTION	FLAME SPREAD / SMOKE DEVELOPMENT	NOTES
ACT-1	SUSPENDED CEILING WITH ACOUSTICAL LAY-IN CEILING TILE. CEILING TILE, MATCH EXISTING (2'X2'X3/4") GRID, MATCH EXISTING MTL GRID	CLASS A	

PAINT (INTERIOR) MANUFACTURER SHERWIN WILLIAMS


INTERIOR PREP FOR PAINTING:

SURFACE PREP: SURFACE SHALL BE CLEAN, DRY AND DULL BEFORE PAINTING
FIRST COAT: SW PREPRITE 200 INTERIOR LATEX WALL PRIMER
SECOND COAT: SW PROMAR 200 INTERIOR LATEX EGGSHELL
THIRD COAT: SW PROMAR 200 INTERIOR LATEX EGGSHELL
NOTE 1: A FULL COAT OF PRIMER IS REQUIRED ON BARE SUBSTRATES ONLY


NOTE 2:

THRESHOLDS:

CONTRACTOR SHALL PROVIDE THRESHOLDS BETWEEN EACH CHANGE IN FLOOR MATERIAL. OWNER TO APPROVE THRESHOLD MATERIAL AND SIZE.

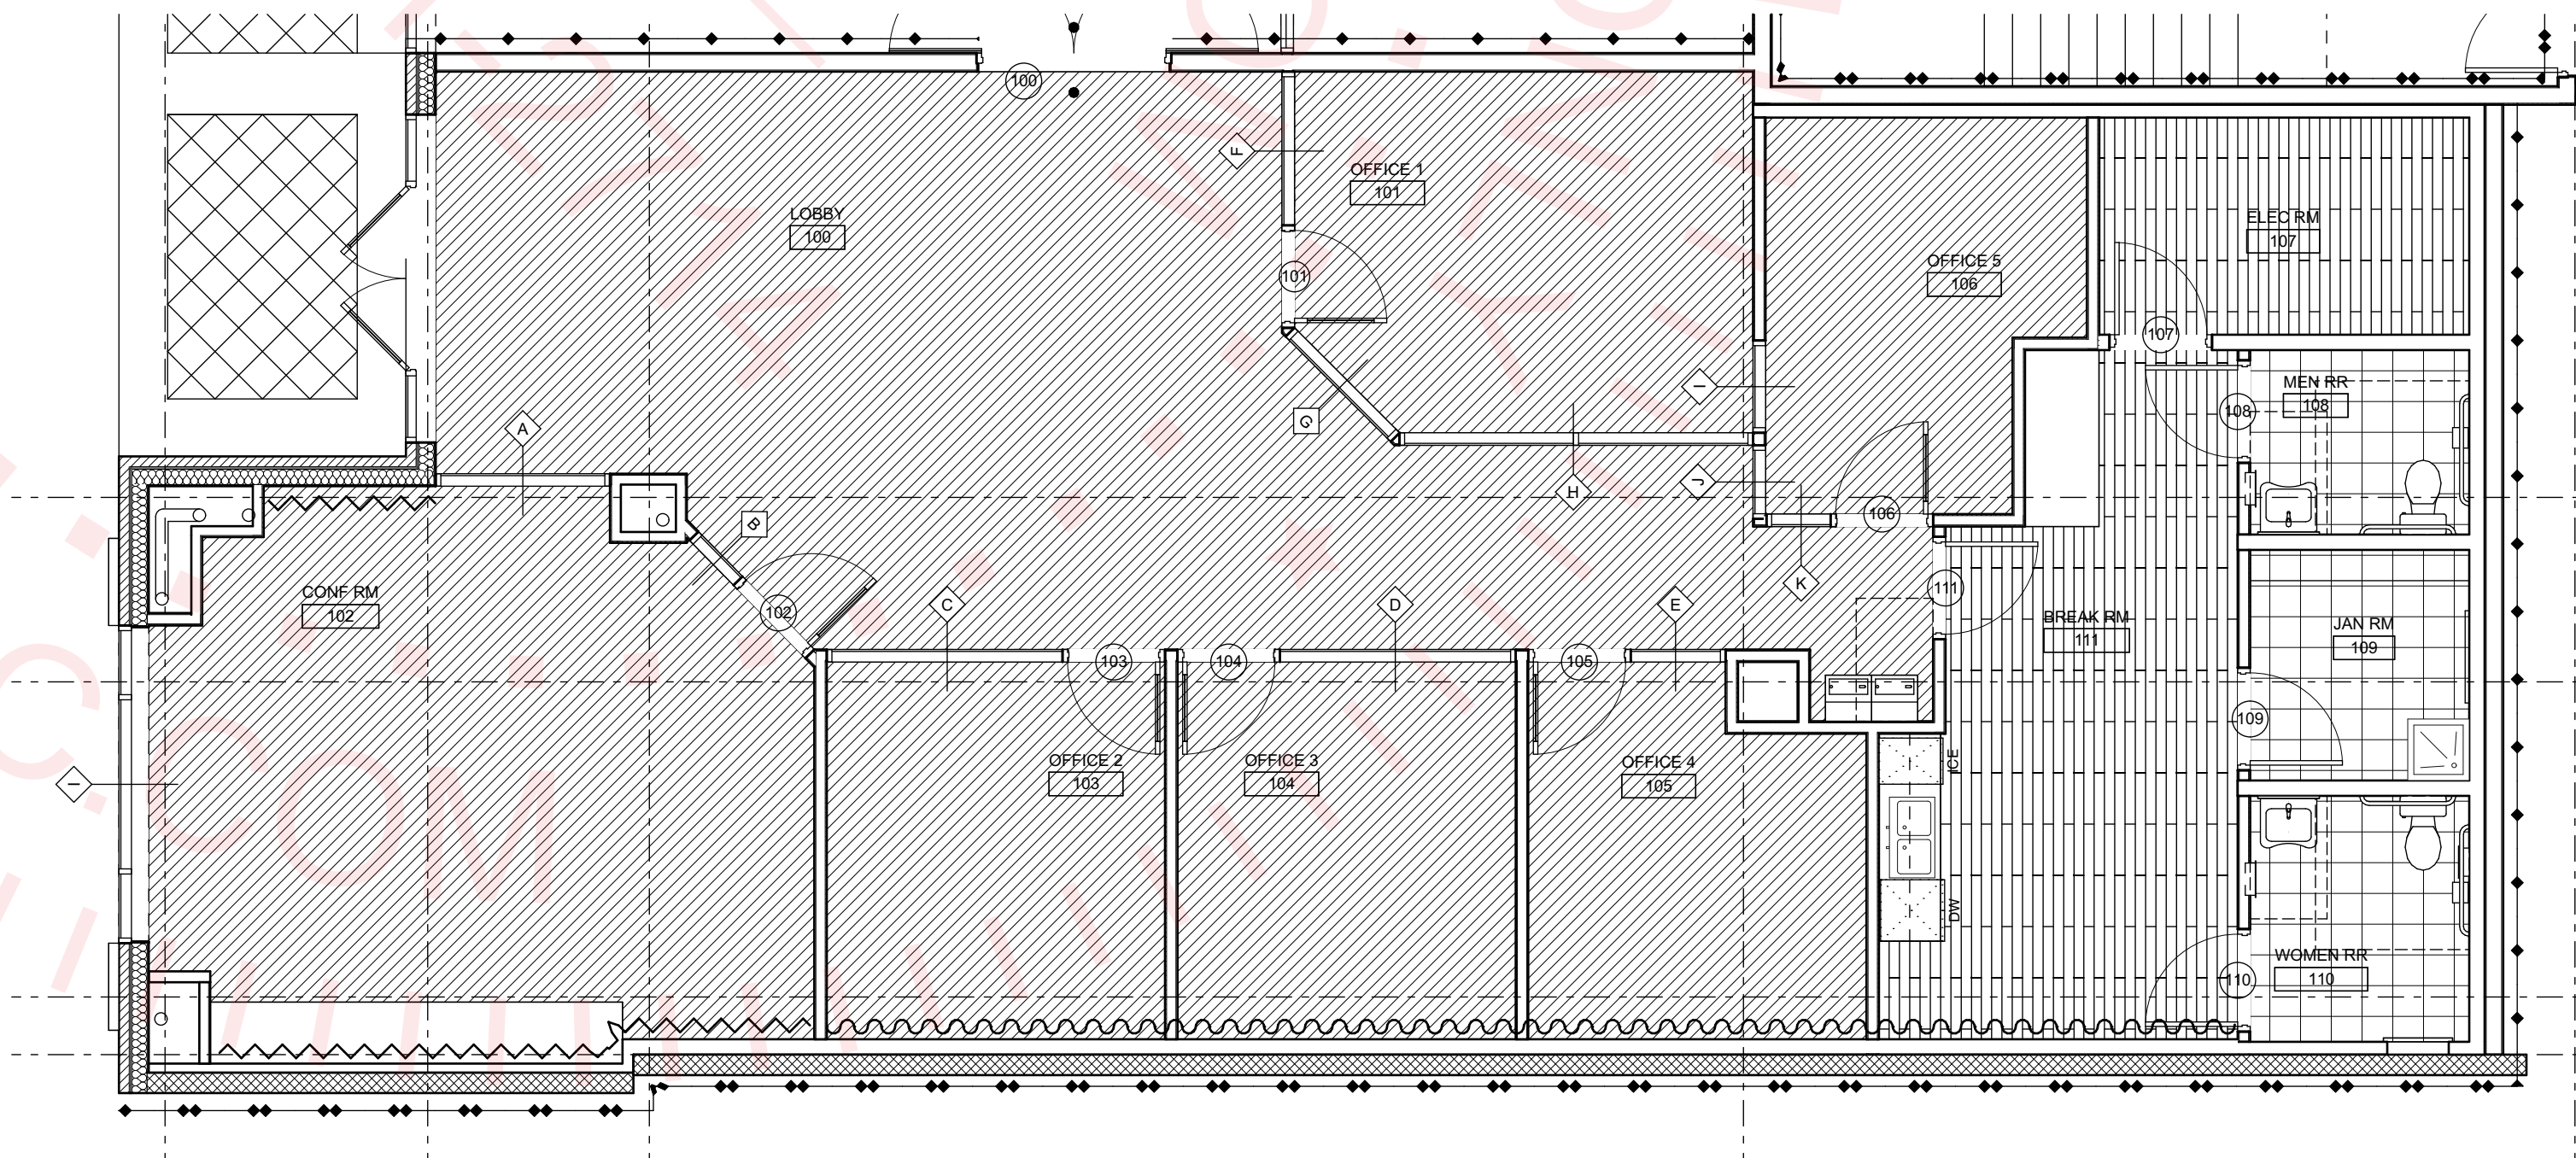

N



2

A-702

Finishes

SCALE: 1/4" = 1'-0"

1

A-702

First Floor

SCALE: 3/16" = 1'-0"

C:\Projects\2405\2405constructiondocuments\2405model\24.pln

GENERAL NOTE

The General Contractor shall make available to the building inspector all documentation necessary to verify that all components requiring product approval per FS 553.842 are in compliance with product approval installation requirements.

ENTIRE BUILDING

CONSTRUCTION TYPE:
TYPE-IIA, SPRINKLERED

TOTAL BUILDING AREA INCLUDING PARKING:
89,425 GSF

BUILDING STORIES:
5 STORIES

SUBMIT THE FOLLOWING ITEMS UNDER SEPARATE PERMIT APPLICATIONS:
EXTERIOR SIGNAGE: BUILDING SIGNAGE SHALL BE SUBMITTED UNDER SEPARATE PERMIT.
FIRE ALARM SYSTEM: THE FIRE ALARM SYSTEM SHALL BE SUBMITTED UNDER SEPARATE PERMIT.

CODE SUMMARY

NEW TENANT SPACE BUILD OUT - SUITE 123

OCCUPANCY CLASSIFICATION:
GROUP B - BUSINESS

TYPE OF CONSTRUCTION:
TYPE-IIA, SPRINKLERED

UNIT AREA:	TOTAL
FIRST FLOOR	= 2,287 GSF

OCCUPANCY LOAD - BUSINESS

BUSINESS: 2,287/150 PERSON PER SQFT = (15.24) 16 PERSONS

PLUMBING FIXTURE COUNT (16 PERSONS) 8 MEN & 8 WOMEN

MEN'S 8		WOMEN'S 8	
TOILET	WATER CLOSET	TOILET	WATER CLOSET
1 PER 25	1 PER 40	1 PER 25	1 PER 40
8/25= .32	8/40= .2	8/25= .32	8/40= .2
1 REQUIRED	1 REQUIRED	1 REQUIRED	1 REQUIRED

FOUNTAIN	UTILITY SINK
1 PER 100	1 REQUIRED
16/100= .16	
1 REQUIRED	


EXIT REQUIREMENTS, AT GRADE, SPRINKLERED BUILDING

	REQUIRED	PROVIDED
TOTAL NUMBER OF EXISTS	1	1
MAX TRAVEL DISTANCE	100'	75'-0"

FIRE RESISTANCE RATINGS: II-B

STRUCTURAL FRAME COLUMNS, GIRDERS, TRUSSES	1 HR
BEARING WALL EXTERIOR INTERIOR	2 HR 1 HR
NON BEARING WALL EXTERIOR INTERIOR	0 0
FLOOR CONSTRUCTION BEAMS, JOIST	1 HR
ROOF CONSTRUCTION BEAMS AND JOIST	1 HR
FLOOR ASSEMBLY ABOVE PARKING	2 HR
EXISTING OCCUPANY SEPARATIONS:	
BUSINESS / RESIDENTIAL:	1 HR
GROUND FLR/PARKING GARAGE:	2 HR
TENANT SEPARATION:	1 HR
LIFE SAFETY SYSTEMS:	
1. FIRE ALARM SYSTEM	
2. EMERGENCY LIGHTS	
3. EXIST SIGNS	
4. SMOKE DETECTORS	
5. PANIC HARDWARE AT EGRESS DOORS	
6. FIRE SPRINKLER SYSTEM	

COMMON PATH OF TRAVEL (SPRINKLERED BUILDING)	100 FT. MAX
TRAVEL DISTANCE	250 FT. MAX
DEAD END CORRIDOR	20 FT. MAX

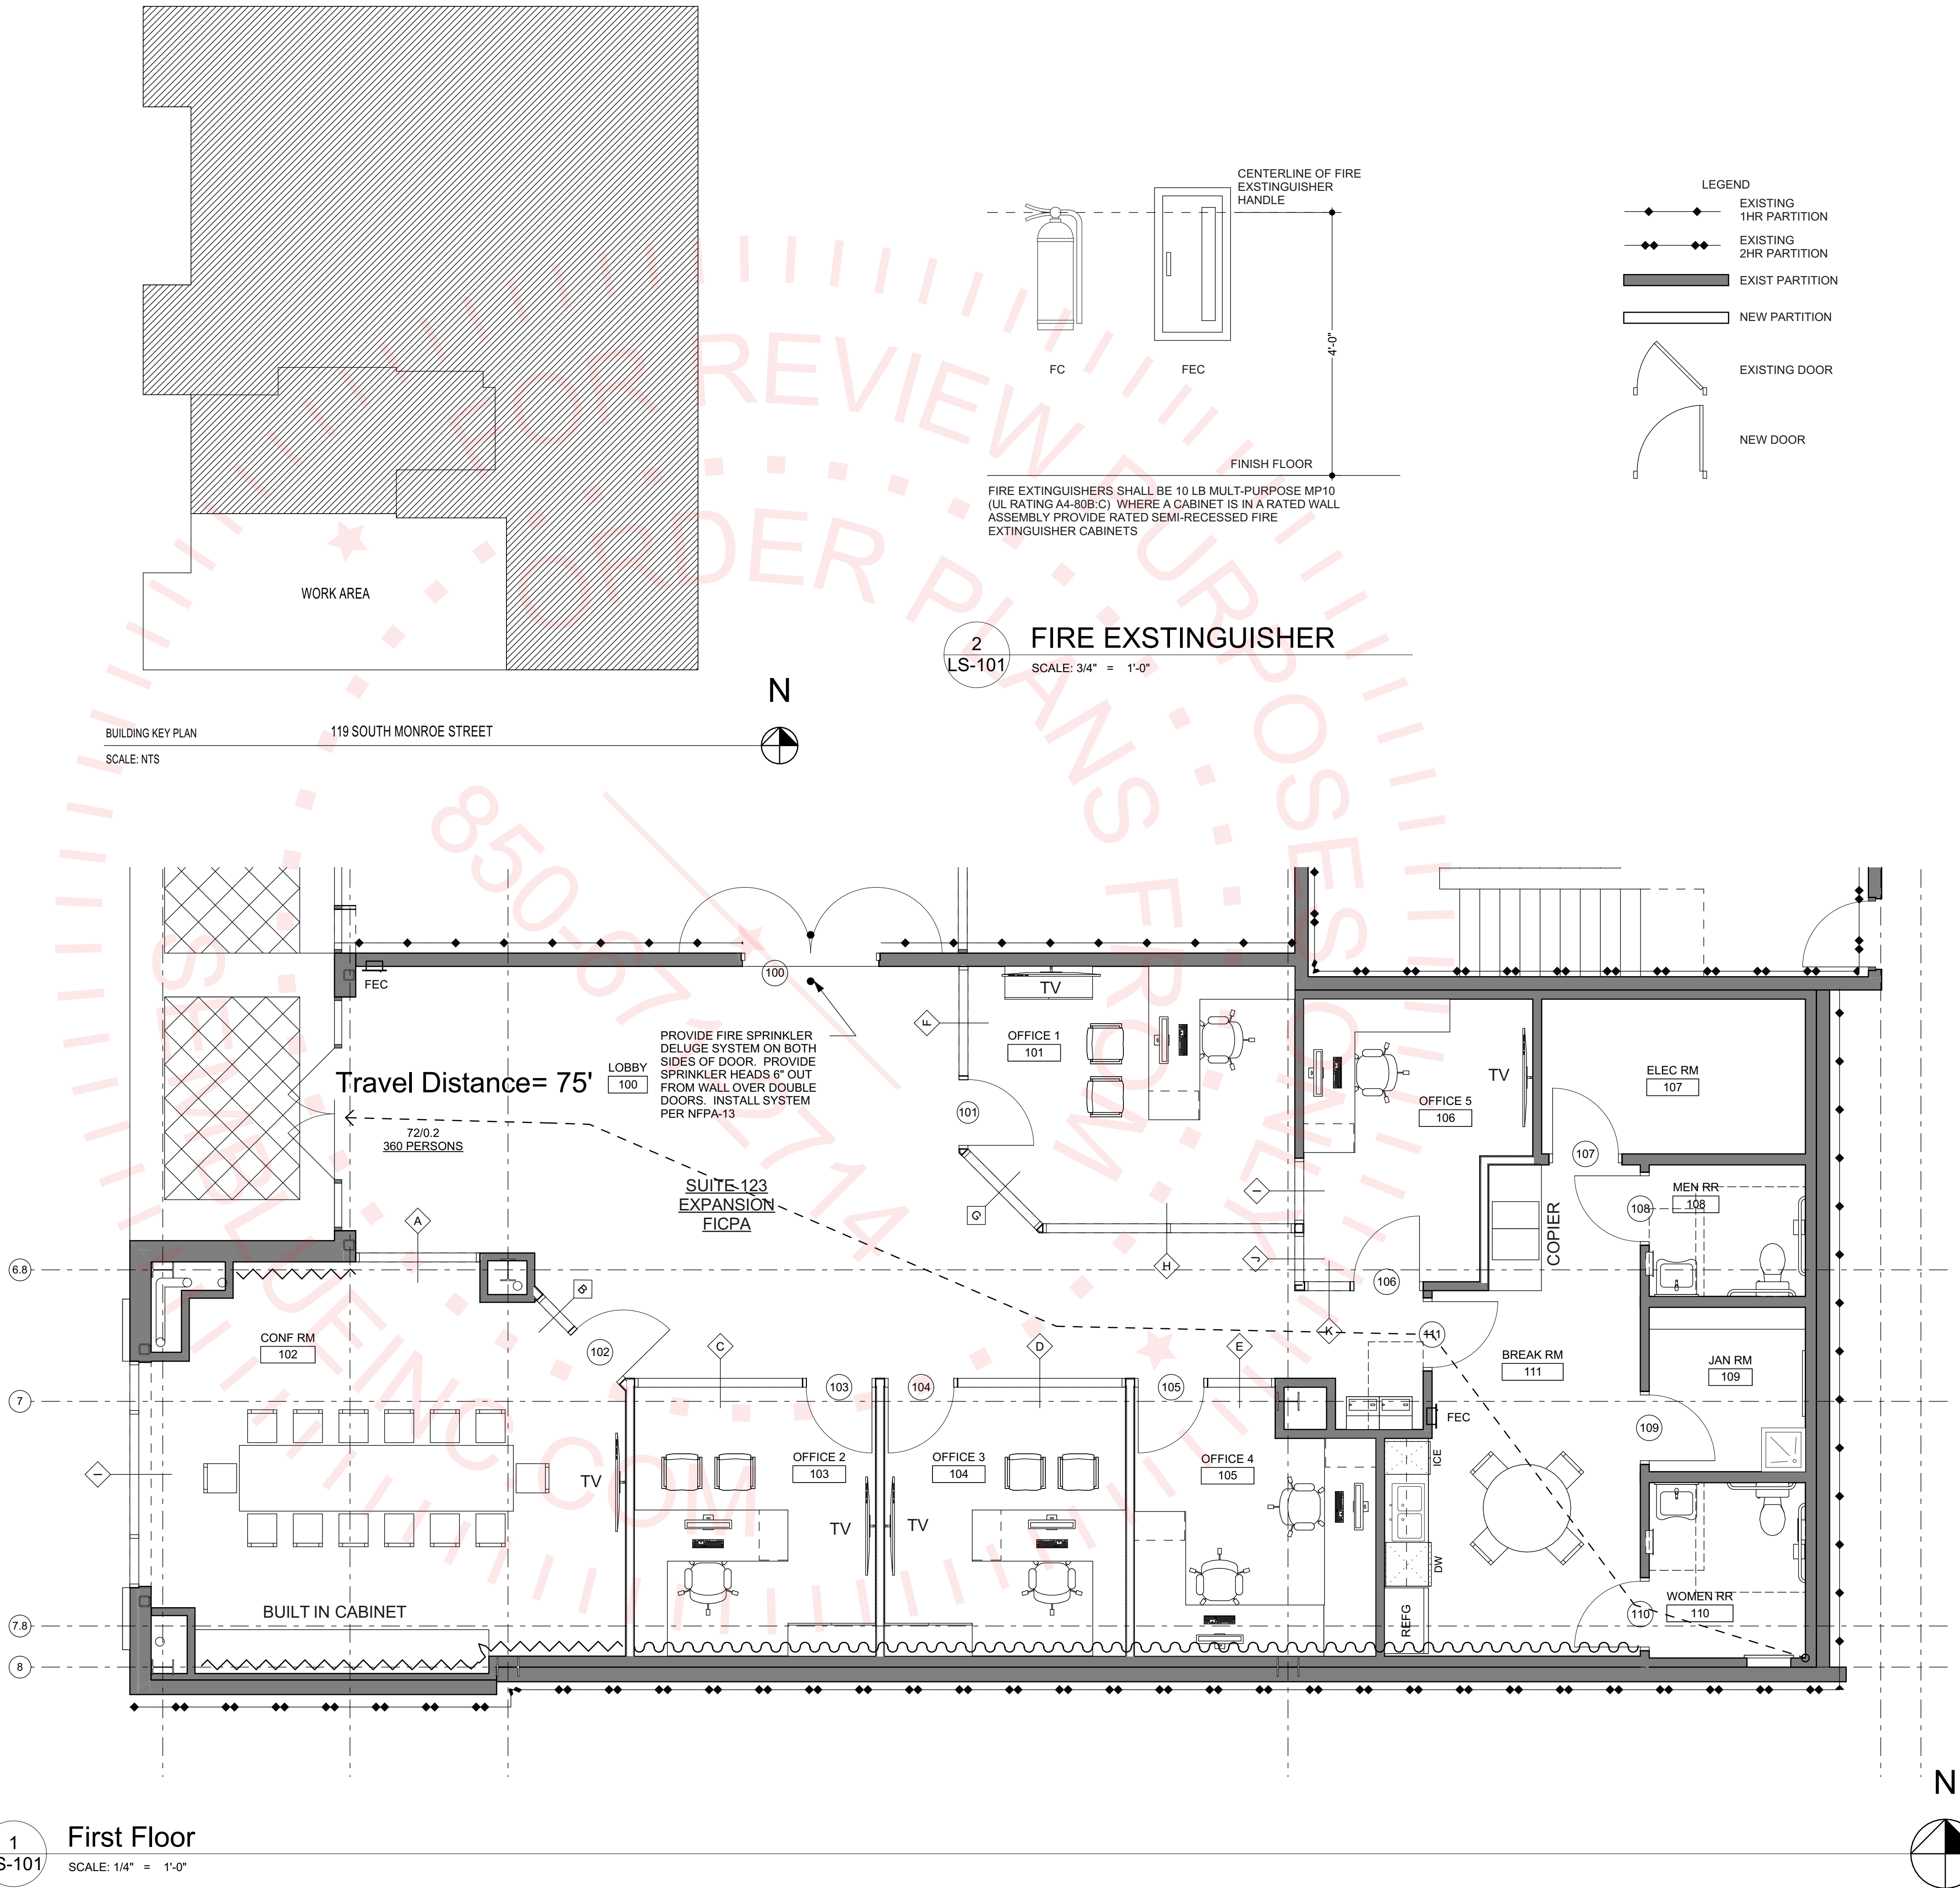

RAYMOND C FINGER
ARCHITECTS, LLC

ARCHITECTURE, LANDSCAPE ARCHITECTURE
& PLANNING



1203 E Clay St, Thomasville, GA, 31792
Telephone: 229.551.9846

OliverSperry
RENOVATION

CONSULTANTS:

Raymond C. Finger, State of Florida, Architect,
License No. AR91713. This item has been digitally
signed and sealed by Raymond C. Finger on the date
indicated here. Printed copies of this document are
not considered signed and sealed and the signature
must be verified on any electronic copies.

PROJECT:

**FICPA
TENANT BUILD OUT
RENOVATION**

Alliance Center
Unit 123, 119 South Monroe St.
Tallahassee, Florida

No. Date Issue Description

DATE: MAY 3, 2024

RCFA PROJECT NO: 2405

COPYRIGHT:

2024 Raymond C. Finger Architects, All Rights Reserved


SHEET TITLE:

Life Safety Plan

LS-101

RELEASED FOR CONSTRUCTION

C:\Projects\2405\2405constructiondocuments\2405model24.pln

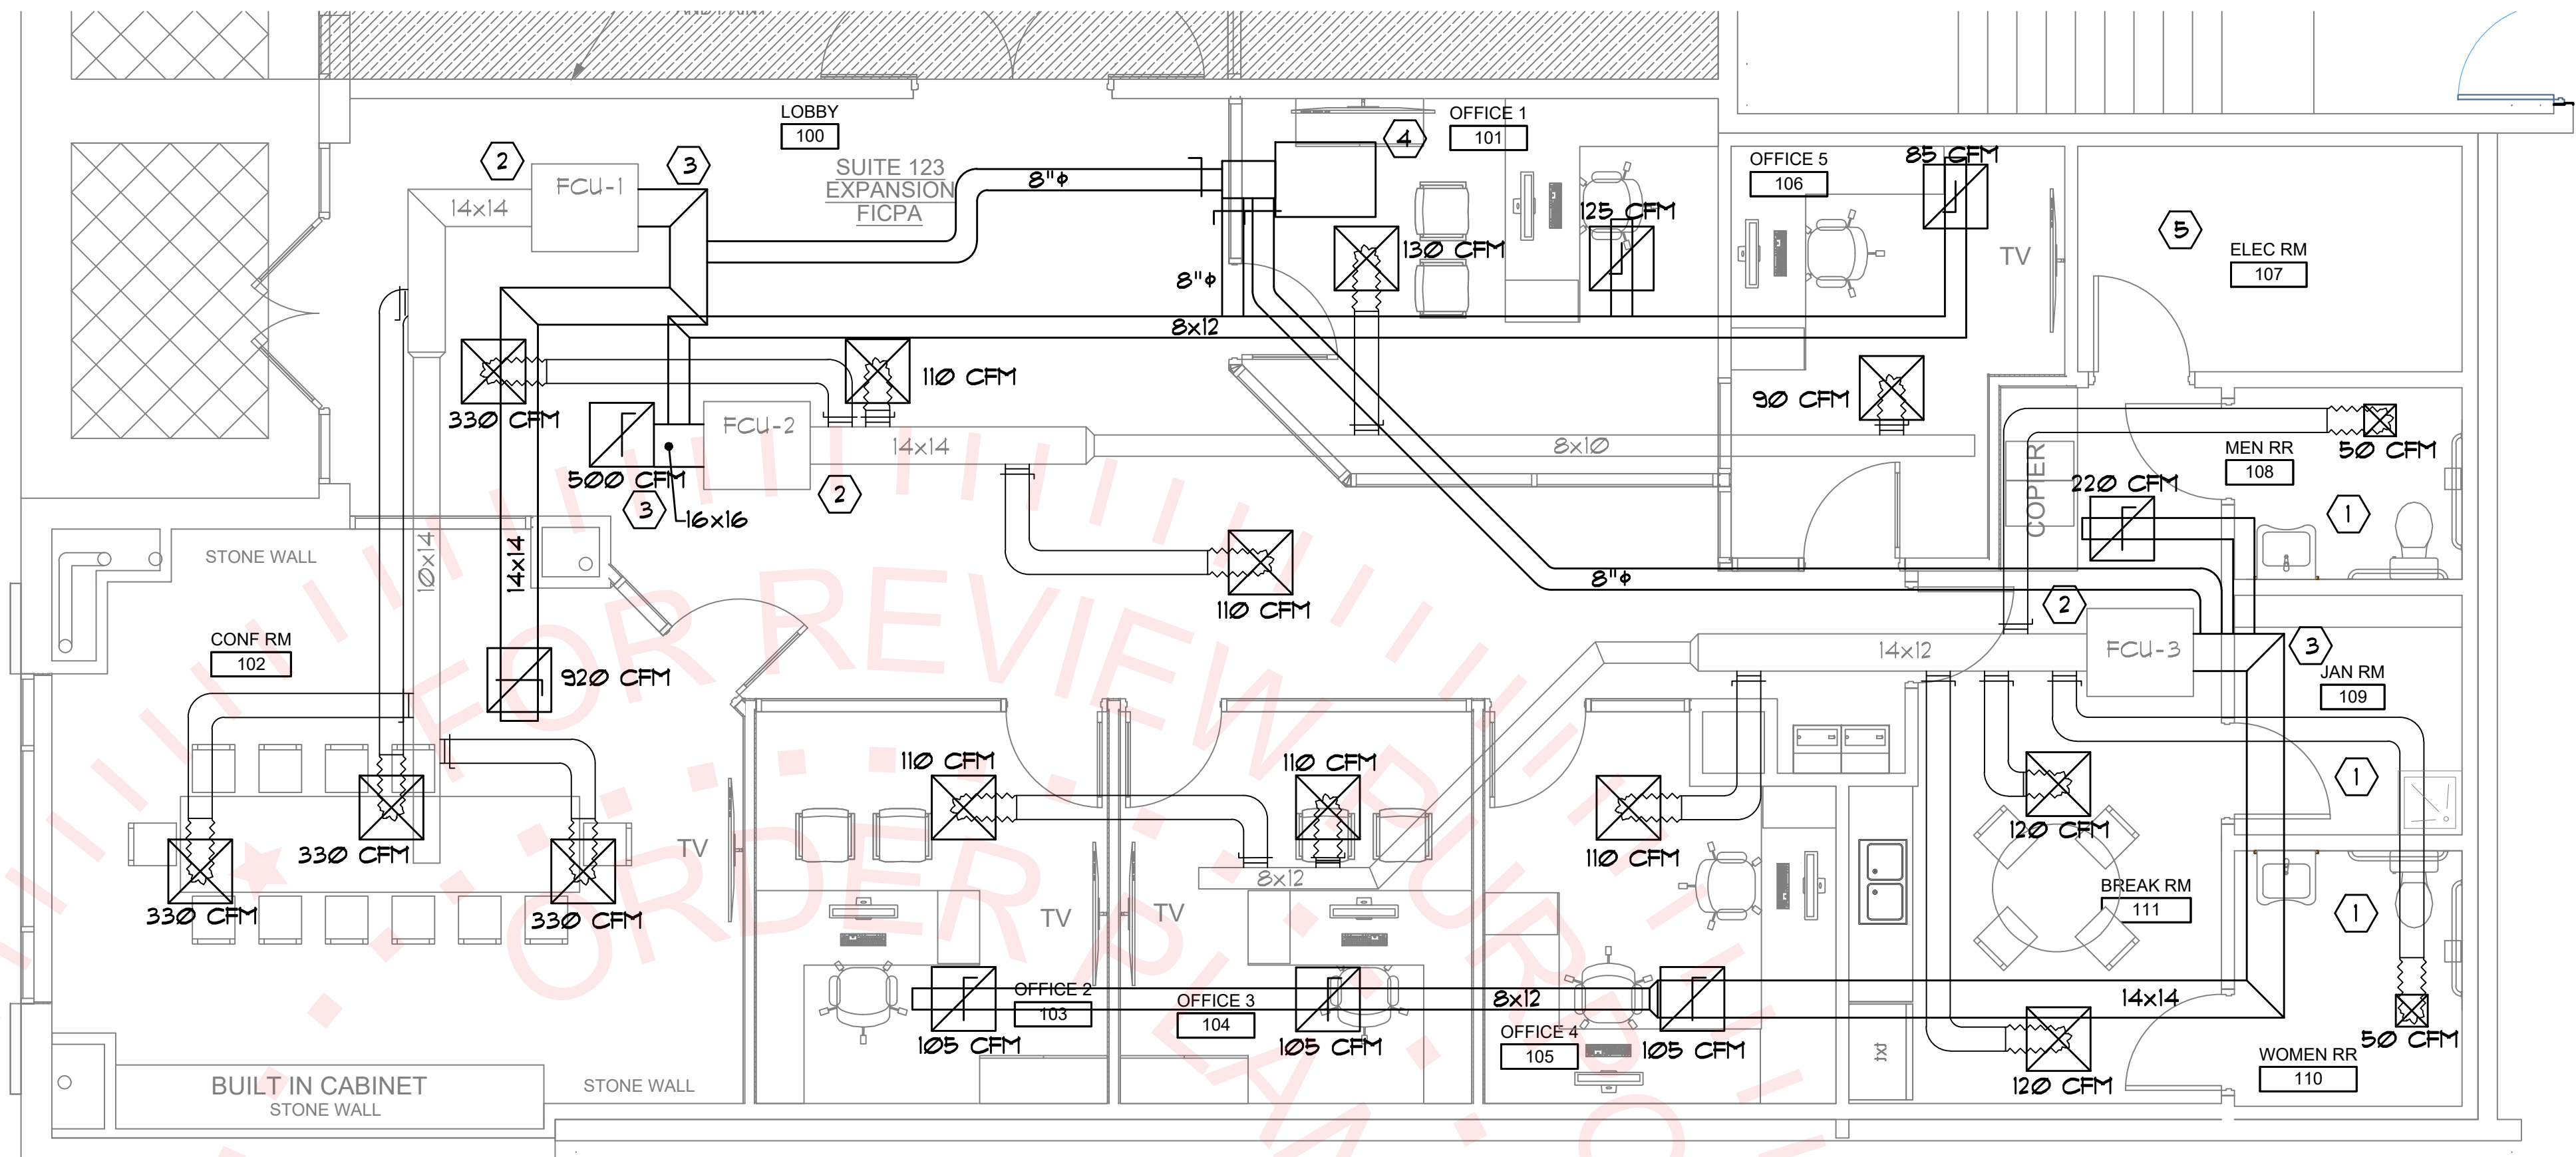

MECHANICAL PLAN

SCALE: 1/4" = 1'-0"

GENERAL NOTES:

CLEAN FCU'S COIL AND PROVIDE NEW FILTERS AFTER CONSTRUCTION.

BALANCE OUTSIDE AIR TO EACH UNIT AT A RATE OF 80 CFM EACH FOR A TOTAL OF 240 CFM OF OUTSIDE AIR.


BALANCE EACH RESTROOM AND JANITORS CLOSE TO 10 CFM EACH.

RE-BALANCE CHILLED WATER FLOW TO ORIGINAL SPECS OF:


FCU-1 4.05 GPM
FCU-2 7.53 GPM
FCU-3 4.05 GPM

KEYNOTES:

- REUSE EXISTING EXHAUST DUCTS FOR RESTROOM EXHAUST. PROVIDE NEW FAN, RE-CONNECT TO EXISTING.
- EXISTING FCU AND SUPPLY DUCTWORK TO REMAIN, CLEAN FCU'S
- PROVIDE NEW RETURN DUCTWORK, SO AREA ABOVE CEILING IS NOT PLENUM RATED.
- EXISTING CONSTANT VOLUME TERMINAL UNIT SUPPLYING OUTSIDE AIR, BALANCE TO AIR FLOWS SHOWN. COORDINATE WITH BUILDING OWNER FOR REPROGRAMMING OF CV BOX.
- REUSE EXISTING EXHAUST FAN IN ELECTRIC ROOM PLACE IN NEW CEILING GRID.

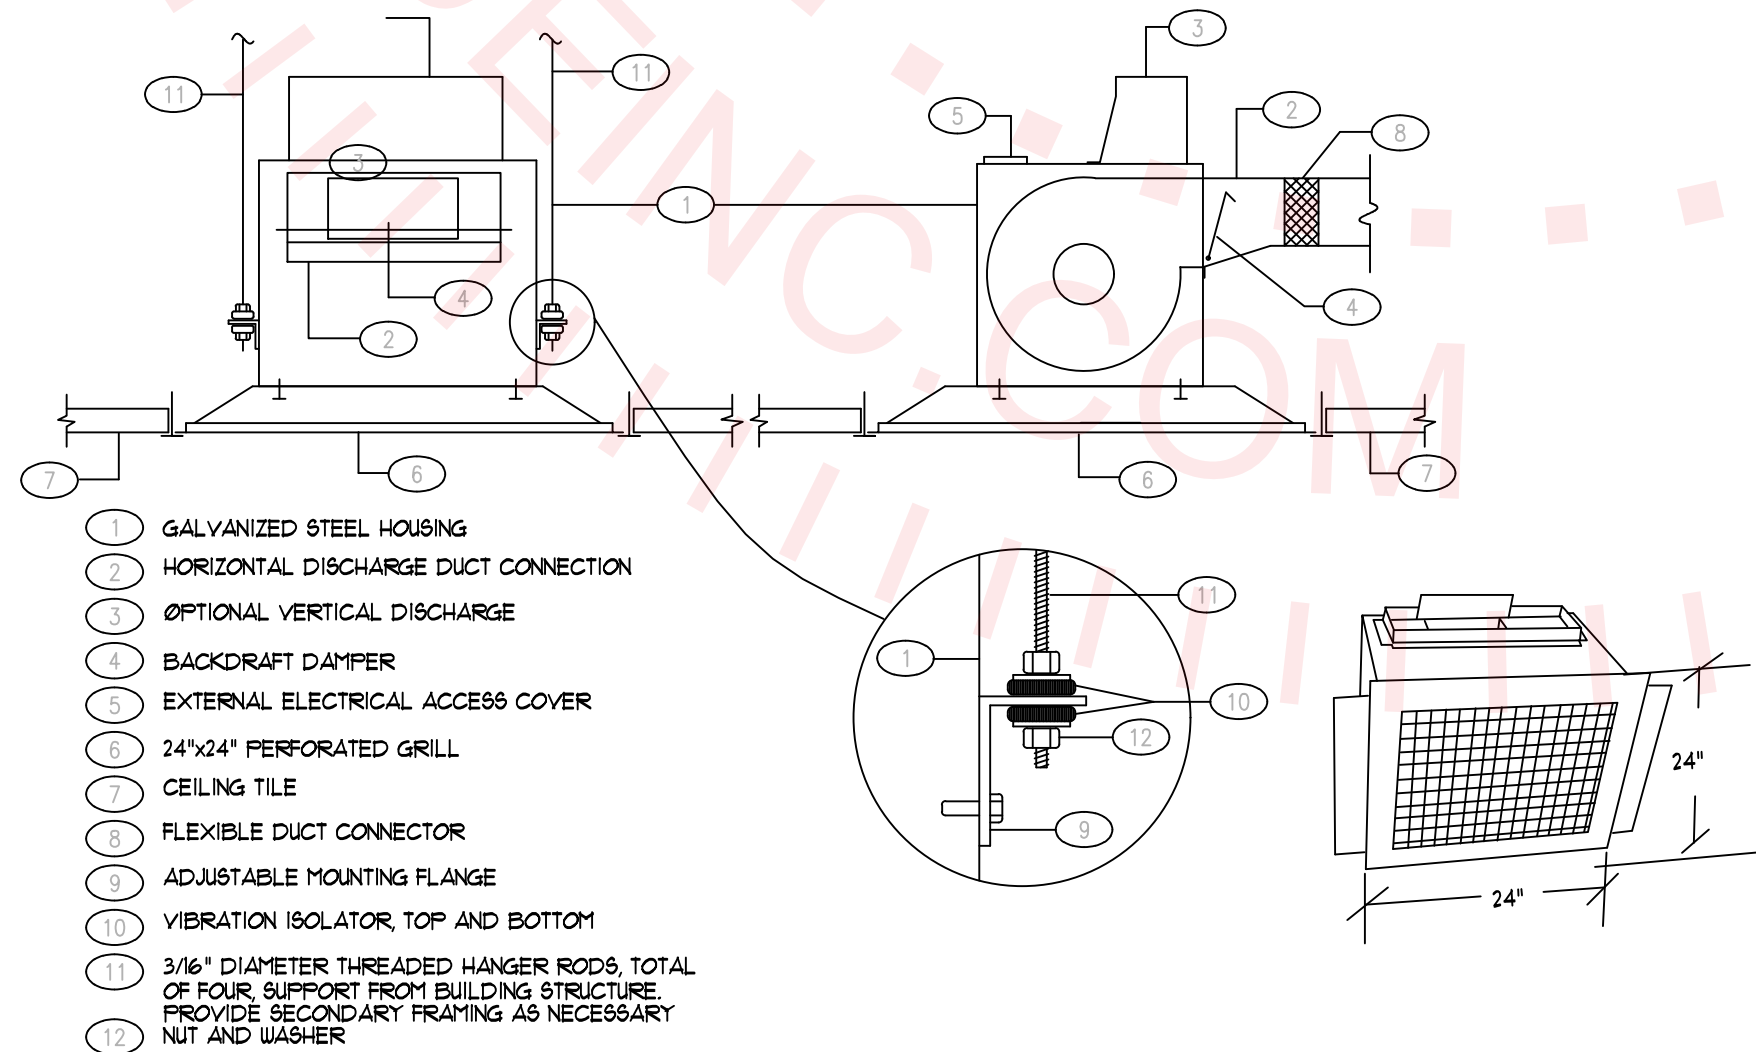

CEILING EXHAUST FAN DETAIL
NOT TO SCALE

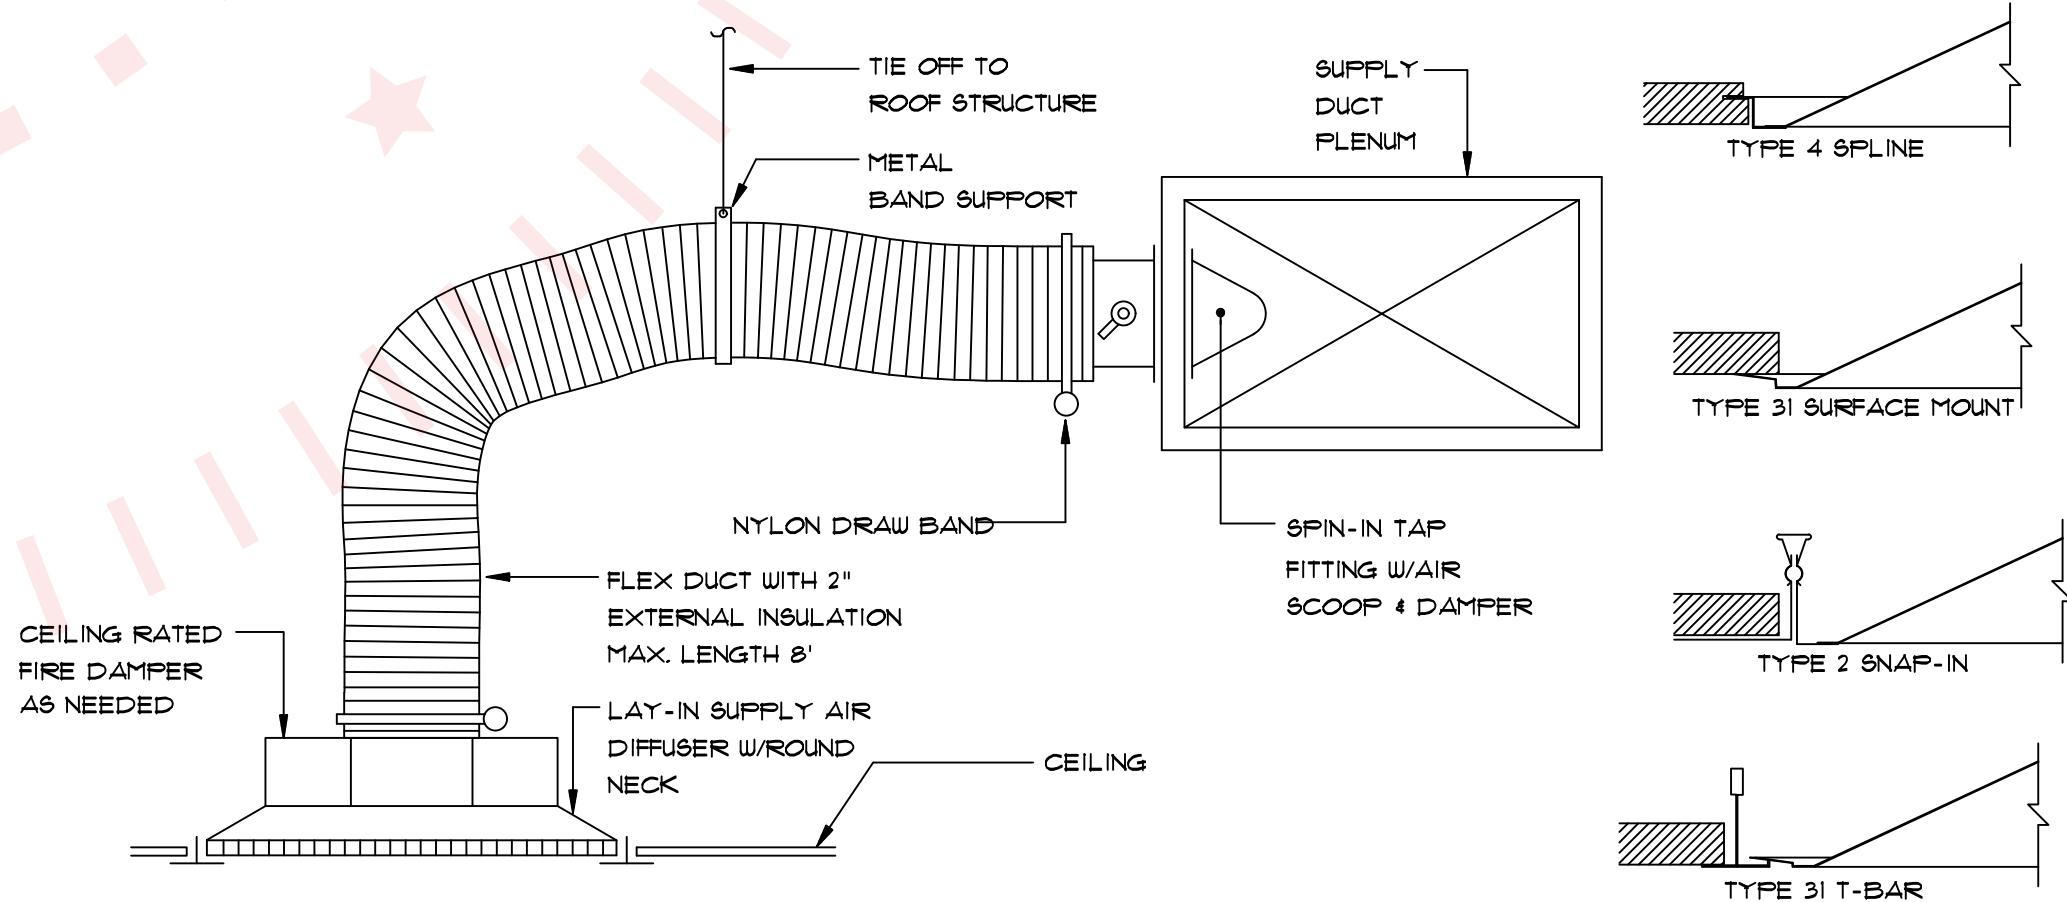

NOTE:
FOR EXACT CEILING CONNECTION REFER TO CEILING TYPE DETAIL.

SUPPLY AIR DIFFUSER DETAIL
N.T.S.

RAYMOND C FINGER
ARCHITECTS, LLC

ARCHITECTURE, LANDSCAPE ARCHITECTURE
& PLANNING



1203 E Clay St, Thomasville, GA, 31792
Telephone: 229.551.9846

Oliver Sperry
RENOVATION

CONSULTANTS:

PROJECT:

**FICPA
TENANT BUILD OUT
RENOVATION**

Alliance Center
Unit 123, 119 South Monroe St.
Tallahassee, Florida

No.	Date	Issue Description
-----	------	-------------------

1	-	-

DATE: MAY 3, 2024
RCFA PROJECT NO: 2405

COPYRIGHT:
2024 Raymond C. Finger Architects, All Rights Reserved

SHEET TITLE:

MECHANICAL PLAN

M2.0

RELEASED FOR CONSTRUCTION

BASIC ELECTRICAL MATERIALS AND METHODS

1. ELECTRICAL COMPONENTS, DEVICES, AND ACCESSORIES: LISTED AND LABELED AS DEFINED IN NFPA 70, ARTICLE 100, BY A TESTING AGENCY ACCEPTABLE TO AUTHORITIES HAVING JURISDICTION, AND MARKED FOR INTENDED USE.
2. IDENTIFICATION TAGS: USE THOSE PRESCRIBED BY ANSI A13.1, NFPA 70, AND THESE SPECIFICATIONS.
3. COLORED ADHESIVE MARKING TAPE FOR RACEWAYS, WIRES, AND CABLES: SELF-ADHESIVE VINYL TAPE, NOT LESS THAN 1 INCH WIDE BY 3 MILS THICK (25 MM WIDE BY 0.08 MM THICK).
4. LABELERS FOR CONDUCTORS: VINYL OR VINYL-CLOTH, SELF-ADHESIVE, WRAPAROUND TYPE WITH PRINTED NUMBERS AND LETTERS.
5. ENGRAVED-PLASTIC LABELS, SIGNS, AND INSTRUCTION PLATES: ENGRAVING STOCK, MELAMINE PLASTIC LAMINATE PUNCHED OR DRILLED FOR MECHANICAL FASTENERS 1/16-INCH (1.6-MM) MINIMUM THICKNESS FOR SIGNS UP TO 20 SQ. IN. (129 SQ. CM) AND 1/8-INCH (3.2-MM) MINIMUM THICKNESS FOR LARGER SIGNS. ENGRAVED LEGEND IN BLACK LETTERS ON WHITE BACKGROUND.
6. PULL RINGS: PROVIDE PULL STRINGS IN ALL SPARE OR EMERGENCY CONDUTS AND RACEWAYS.
7. COORDINATE NAMES, ABBREVIATIONS, COLORS, AND OTHER DESIGNATIONS USED FOR THE CONTRACT IDENTIFICATION WITH CORRESPONDING DESIGNATIONS INDICATED IN THE ELECTRICAL DOCUMENTS OR REQUIRED BY CODES AND STANDARDS. USE THE FOLLOWING DESIGNATIONS:
8. CUT, CHANNEL, CHASE, AND DRILL WALLS, PARTITIONS, CEILINGS, AND OTHER SURFACES REQUIRED TO PERMIT ELECTRICAL INSTALLATIONS. PERFORM CUTTING BY SKILLED MECHANICS OF TRADES INVOLVED.
9. REPAIR, REFINISH AND TOUCH UP DISTURBED FINISH MATERIALS AND OTHER SURFACES TO MATCH EXISTING SURFACES. PROVIDE UL-APPROVED PENETRATIONS OF FIRE WALLS, TO MAINTAIN THE RATING OF THE ASSEMBLY.
10. ALL WORK SHALL COMPLY WITH ALL CODES & STANDARDS LISTED ON THE PLANS.

1. ELECTRICAL COMPONENTS, DEVICES, AND ACCESSORIES: LISTED AND LABELED UNDER UL 467 AS DEFINED IN NFPA 70, ARTICLE 100, BY A TESTING AGENCY ACCEPTABLE TO AUTHORITIES HAVING JURISDICTION, AND MARKED FOR INTENDED USE.
2. EQUIPMENT GROUNDING CONDUCTORS: COMPLY WITH NFPA 70, ARTICLE 250, FOR TYPES, SIZES, AND QUANTITIES OF EQUIPMENT GROUNDING CONDUCTORS, UNLESS SPECIFIC TYPES, LARGER SIZES, OR MORE CONDUCTORS THAN REQUIRED BY NFPA 70 ARE LOCATED.
3. INSTALL INSULATED EQUIPMENT GROUNDING CONDUCTORS IN ALL FEEDERS AND BRANCHED CIRCUITS.
4. ALL GROUNDING CONDUCTORS SHALL BE COPPER.
5. COMPLY WITH DIVISION 16 SECTION "CONDUCTORS AND CABLES" AND ASTM B, AS APPLICABLE.
6. EQUIPMENT GROUNDING CONDUCTORS: INSULATED WITH GREEN-COLORED INSULATION.

1. CONDUCTOR MATERIAL: COPPER COMPLYING WITH NEMA WC 5 OR 7; SOLID CONDUCTOR FOR NO. 10 AWG AND SMALLER, STRANDED FOR NO. 8 AWG AND LARGER.
2. CONDUCTOR INSULATION TYPES: TYPE THHN-THWN COMPLYING WITH NEMA WC 5 OR WC 7.
3. TYPE NM CABLE: NOT PERMITTED.
4. TYPE MC CABLE: PERMITTED IN CONCEALED LOCATIONS, WHERE ALLOWED BY CODE.
5. FEEDERS: TYPE THHN-THWN, SINGLE CONDUCTORS IN RACEWAY.
6. BRANCH CIRCUITS: TYPE THHN-THWN, SINGLE CONDUCTORS IN RACEWAY; MC CABLE.
7. CONCEAL CABLES AND RACEWAYS IN FINISHED WALLS, CEILINGS, AND FLOORS.
8. USE MANUFACTURER-APPROVED PULLING COMPOUND OR LUBRICANT WHERE NECESSARY; COMPOUND USED MUST NOT DEGRADATE CONDUCTOR OR INSULATION. DO NOT EXCEED MANUFACTURER'S RECOMMENDED MAXIMUM PULLING TENSIONS AND SIDEWALL PRESSURE VALUES.
9. INSTALL EXPOSED CABLES PARALLEL AND PERPENDICULAR TO SURFACES OF EXISTING STRUCTURAL MEMBERS, AND FOLLOW SURFACE CONTOURS WHERE POSSIBLE.
10. MAKE SPLICES AND TAPS THAT ARE COMPATIBLE WITH CONDUCTOR MATERIAL AND THAT POSSESS EQUIVALENT OR BETTER MECHANICAL STRENGTH AND INSULATION RATINGS THAN UNSPLICED CONDUCTORS.
11. EXPOSED OUTLETS: INSTALL CONDUCTOR AT EACH OUTLET, WITH AT LEAST 6 INCHES (150 MM) OF SLACK.
12. LOW-VOLTAGE WIRING SHALL BE PLENUM RATED.

1. ELECTRICAL COMPONENTS, DEVICES, AND ACCESSORIES: LISTED AND LABELED AS DEFINED IN NFPA 70, ARTICLE 100, BY A TESTING AGENCY ACCEPTABLE TO AUTHORITIES HAVING JURISDICTION, AND MARKED FOR INTENDED USE.
2. UNLESS OTHERWISE NOTED, PROVIDE NEMA 1 ENCLLOSURES IN INDOOR LOCATIONS, NEMA 3R ENCLLOSURES IN OUTDOOR LOCATIONS.
3. MINIMUM RACEWAY SIZE: 1/2" TRADE SIZE.
4. KEEP RACEWAYS AT LEAST 6 INCHES (150 MM) AWAY FROM PARALLEL RUNS OF HOT-WATER PIPES. INSTALL HORIZONTAL RACEWAY RUNS ABOVE WATER PIPING.
5. PROTECT STUB-UPS FROM DAMAGE WHERE CONDUITS RISE THROUGH FLOOR SLABS. ARRANGE SO CURVED PORTIONS OF BENDS ARE NOT VISIBLE ABOVE FINISHED SLAB.
6. MAKE BENDS AND OFFSETS SO ID IS NOT REDUCED. KEEP LEGS OF BENDS IN STRAIGHT LINE AND KEEP STRAIGHT LEGS OF OFFSETS PARALLEL, UNLESS OTHERWISE INDICATED.
7. CONCEAL CONDUIT AND EMT WITHIN FINISHED WALLS AND CEILINGS.
8. INSTALL EXPOSED RACEWAYS PARALLEL OR AT RIGHT ANGLES TO NEARBY SURFACES OR STRUCTURAL MEMBERS AND FOLLOW SURFACE CONTOURS AS MUCH AS POSSIBLE.
9. FLEXIBLE CONNECTIONS: USE MAXIMUM OF 72 INCHES (1830 MM) OF FLEXIBLE CONDUIT FOR RECESSED AND SEMIRECESSED LIGHTING FIXTURES, FOR EQUIPMENT SENSITIVE TO VIBRATION, OR FOR CONDUITS TO OR MOVEMENT OF ALL MOTORS. USE LFMC IN DAMP OR WET LOCATIONS. INSTALL SEPARATE GROUND CONDUCTOR ABOVE FLEXIBLE CONNECTIONS.

1. STRAIGHT-BLADE-TYPE RECEPTACLES: COMPLY WITH NEMA WD 1, NEMA WD 6, DSCC W-C-5086, AND UL 498. STRAIGHT-BLADE AND LOCKING RECEPTACLES: HEAVY-DUTY GRADE.
2. GFCI RECEPTACLES: STRAIGHT BLADE, HEAVY-DUTY GRADE, WITH INTEGRAL NEMA WD 6, CONFIGURATION 5-20R DUPLEX RECEPTAGE; COMPLYING WITH UL 498 AND UL 943. DESIGN UNITS FOR INSTALLATION IN A 2-3/4-INCH- (70-MM-) DEEP OUTLET BOX WITHOUT AN ADAPTER.
3. SINGLE- AND DOUBLE-POLE SWITCHES: COMPLY WITH DSCC W-C-896F AND UL 40.
4. SNAP SWITCHES: HEAVY-DUTY GRADE, QUIET TYPE.
5. FINISHES: MATCH EXISTING DEVICES TO REMAIN, UNLESS OTHERWISE INDICATED OR REQUIRED BY NFA 702.
6. INSTALL DEVICES AND ASSEMBLIES LEVEL, PLUMB, AND SQUARE WITH BUILDING LINES.
7. ARRANGEMENT OF DEVICES: UNLESS OTHERWISE INDICATED, MOUNT PLUMB, WITH LONG DIMENSION VERTICAL. GROUP ADJACENT SWITCHES UNDER SINGLE, MULTICLAMP WALL PLATES.
8. REMOVE PLATES AND PROTECT DEVICES AND ASSEMBLIES DURING PAINTING. ADJUST LOCATIONS OF FLOOR SERVICE OUTLETS AND SERVICE POLES TO SUIT ARRANGEMENT OF PARTITIONS AND FURNISHINGS.
9. AFTER INSTALLING WRING DEVICES AND AFTER ELECTRICAL CIRCUITRY HAS BEEN DEREGULATED, TEST FOR PROPER POLARITY, GROUND CONTINUITY, AND COMPLIANCE WITH REQUIREMENTS.
10. TEST GFCI OPERATION WITH BOTH LOCAL AND REMOTE FAULT SIMULATIONS ACCORDING TO MANUFACTURER'S WRITTEN INSTRUCTIONS.

1. LIGHTING FIXTURES: PER LIGHTING FIXTURE SCHEDULE.
2. WHERE EXIT SIGNS ARE USED, THEY SHALL BE LED-TYPE.
3. FIXTURES: SET LEVEL, PLUMB, AND SQUARE WITH CEILINGS AND WALLS. INSTALL LAMPS IN EACH FIXTURE.
4. FOR EMERGENCY LIGHTING, PROVIDE EMERGENCY TRANSFER DEVICE WITH SWITCHED AND UNSWITCHED NORMAL POWER CONDUCTORS, AS WELL AS CONNECTION TO EXISTING EMERGENCY LIGHTING CIRCUIT SERVING THIS AREA.
5. PROVIDE LOW-VOLTAGE WIRING AS REQUIRED FOR DIMMING AND CONTROLS.

1. THE CONTRACTOR SHALL FURNISH ALL LABOR AND EQUIPMENT FOR THE MODIFICATION OF THE FIRE ALARM SYSTEM AND SHALL POSSESS THE APPROPRIATE CO. OR LICENSE TO INSTALL THE STATE OF FLORIDA EXISTING FIRE ALARM CONTROL PANEL IS SIMPLEX.
2. THE FIRE ALARM SYSTEM SHALL BE INSTALLED, INSPECTED, TESTED AND CERTIFIED PER APPROPRIATE NFPA 12, 12A, 70, 72, 72E, 90A AND 101. ANY OTHER AUDIBLE CODE SHALL MEET THE STATE OF FLORIDA AND FIRE MARSHAL REQUIREMENTS. THE EQUIPMENT SHALL BE APPROVED BY UNDERWRITERS LABORATORIES, INC., SHALL COMPLY WITH NFPA CODES AND REGULATIONS AND MEET REQUIREMENTS OF THE AMERICANS WITH DISABILITIES ACT.
3. IN ADDITION TO DEVICES SHOWN ON THE PLAN, THE CONTRACTOR SHALL PROVIDE ADDITIONAL DEVICES, MODULES, RE-APPLY SUPPLIES, CABLES, AND OTHER EQUIPMENT AS MAY BE NECESSARY TO EXTEND THE SYSTEM TO THE NEW DEVICES SHOWN TO BE ADDED.
4. THE FIRE ALARM SYSTEM CONTRACTOR SHALL BE RESPONSIBLE FOR A PERIOD OF ONE YEAR FOR EQUIPMENT, MATERIALS AND WORKMANSHIP OF THE MODIFICATIONS OF THE SYSTEM, AS WELL AS THE MAINTENANCE OF THE SYSTEM.
5. PROTECT EXISTING DEVICES TO REMAIN DURING CONSTRUCTION.
6. NEW NOTIFICATION DEVICES SHALL MATCH AUDIBLE/VISUAL CHARACTERISTICS OF EXISTING DEVICES TO REMAIN IN THE BUILDING; MOUNTING HEIGHT PER ADA CODE.
7. CONTRACTOR SHALL RETEST AND RECERTIFY SYSTEM PRIOR TO COMPLETION OF THE PROJECT.
8. THE FIRE ALARM CONTRACTOR SHALL APPLY FOR, AND OBTAIN, A SEPARATE PERMIT FOR ALL FIRE ALARM WORK.
9. ALL NEW DEVICES AND EQUIPMENT SHALL BE COMPATIBLE WITH EXISTING FIRE ALARM SYSTEM.
10. TESTING OF DEVICES AND FINAL INSPECTION SHALL BE COORDINATED WITH THE LANDLORD TO PREVENT DISRUPTION OF OPERATIONS.

	120V/20A DUPLEX RECEPTACLE, MOUNTED 18" A.F.F. UNLESS NOTED OTHERWISE.
	120V/20A DUPLEX RECEPTACLE, MOUNTED 44" A.F.F. UNLESS NOTED OTHERWISE.
	120V/20A DUPLEX GFI RECEPTACLE, MOUNTED 18" A.F.F. UNLESS NOTED OTHERWISE.
	120V/20A DUPLEX GFI RECEPTACLE, MOUNTED 44" A.F.F. UNLESS NOTED OTHERWISE.
	120V/20A QUAD RECEPTACLE, MOUNTED 18" A.F.F. UNLESS NOTED OTHERWISE.
	COMMUNICATIONS OUTLET. FOR NEW OUTLETS, PROVIDE DEVICE BOX, WITH 3/4" C. STUBBED INTO ACCESSIBLE CEILING SPACE.
	COMMUNICATIONS OUTLET, AS ABOVE, MOUNTED 44", OR AS INDICATED.
	DUAL-SERVICE RECESSED FLOORBOX, WITH DUPLEX RECEPTACLE AND COMMUNICATIONS OUTLET. PROVIDE 1-1/4" C. FROM COMMS OUTLET TO ACCESSIBLE CEILING.
	NEW SINGLE-POLE 120V/20A QUIET-TYPE SNAP SWITCH. MOUNT 44" A.F.F. "3" INDICATES 3-WAY DEVICE.
	ROOM OCCUPANCY SENSOR (LOW-VOLTAGE). UNLESS NOTED OTHERWISE CEILING MOUNTED WATTSTOPPER #DT-300, OR APPROVED EQUAL. PROVIDE ROOM CONTROLLER(S) (#BZ-250) AS REQUIRED.
	WALL-SWITCH WITH OCCUPANCY SENSOR; MOUNT 48" A.F.F. TO TOP, UNLESS NOTED OTHERWISE. WATTSTOPPER #PW-100 SERIES, OR APPROVED EQUAL.
	WALL-SWITCH WITH OCCUPANCY SENSOR WITH INTEGRAL DIMMING; MOUNT 48" A.F.F. TO TOP, UNLESS NOTED OTHERWISE. WATTSTOPPER #W-311 SERIES, OR APPROVED EQUAL.
	WALLBOX DIMMER WITH PRESET. COORDINATE RATING AND CONTROL CHARACTERISTICS (E.G., ELV, 0-10V, ETC.) WITH LOAD SERVED.
	ELECTRICAL PANEL.
	LED EXIT SIGN WITH INTEGRAL BATTERY & INVERTER. CONNECT TO UNSWITCHED ROOM LIGHTING CIRCUIT WITH 2 #12, #12 GND.
	2X2 LIGHTING FIXTURE
	2X4 LIGHTING FIXTURE
	DOWNLIGHT LIGHTING FIXTURE
	HATCH INDICATES FIXTURE TO BE BACKED BY EMERGENCY POWER SYSTEM; PROVIDE GENERATOR TRANSFER DEVICE (EQUAL TO WATTSTOPPER #ELCU-200) AND CONNECTION TO EMERGENCY CIRCUIT SERVING AREA.
	FIRE ALARM AUDIBLE/STROBE DEVICE.
	FIRE ALARM STROBE DEVICE.
	FIRE ALARM SYSTEM PULL STATION.
	BRANCH CIRCUIT WIRE IN CONDUIT. MINIMUM WIRE SIZE #12 AWG, THWN/THHN INSULATION WITH #12 EQUIPMENT GROUND, IN 1/2" MINIMUM E.M.T. ALL WIRING SHALL BE CONCEALED IN WALLS, FLOOR OR CEILING. PROVIDE FLEX (6 FT MAX) CONNECTION TO LIGHTING FIXTURES. MC CABLE ALLOWED IN LIEU OF CONDUCTORS IN RACEWAY WHERE ALLOWED BY CODE.
	INDICATES NEW TV MONITOR; PROVIDE DUPLEX RECEPTACLE AND COMMS OUTLET MOUNTED AT 72" A.F.F.
	INDICATES EXISTING DEVICE, FIXTURE, OR EQUIPMENT, TO REMAIN.

1. SEE ARCHITECTURAL PLANS & REFLECTED CEILING PLAN FOR EXTENT OF DEMOLITION.
2. WHERE EQUIPMENT OR FIXTURES ARE TO BE REMOVED, REMOVE ALL ASSOCIATED DISCONNECTS, WIRING, RACEWAY BACK TO NEXT DEVICE TO REMAIN.
3. WHERE REQUIRED FOR EXISTING DEVICES/FIXTURES/EQUIPMENT TO REMAIN, PROVIDE JUNCTION BOX TO EXTEND THE EXISTING CIRCUIT TO MAINTAIN CONTINUITY.
4. CONTRACTOR SHALL DISPOSE OF MATERIAL REMOVED AND NOT REUSED AT THE DISCRETION OF THE OWNER.
5. CONTRACTOR MAY REUSE EXISTING CONDUITS WHERE POSSIBLE, REFER TO SHEETS E1.1 & E1.2 FOR CIRCUIT INTENT.
6. WHERE CEILINGS ARE TO BE REPLACED, REMOVE ALL EXISTING UNUSED RACEWAY, CABLING, BOXES, DEVICES, AND FIXTURES LOCATED ABOVE THE NEW CEILING.
7. WHERE EXISTING RACEWAY OR CABLING IS SUPPORTED FROM LAY-IN CEILING, RE-SUPPORT AS REQUIRED BY NEC 300.11.
8. DURING RENOVATION, PROTECT EXISTING FEEDERS AND BRANCH CIRCUITS INTENDED TO REMAIN.

NFPA 70 NATIONAL ELECTRICAL CODE (NEC), 2020 ED.
NFPA 72 NATIONAL FIRE ALARM CODE, 2019 ED.
FLORIDA FIRE PREVENTION CODE, EIGHTH EDITION.
FLORIDA BUILDING CODE, EIGHTH EDITION.

RELEASED FOR CONSTRUCTION

RAYMOND C FINGER
ARCHITECTS, LLC

ARCHITECTURE, LANDSCAPE ARCHITECTURE
& PLANNING



1203 E Clay St, Thomasville, GA, 31792
Telephone: 229.551.9846



CONSULTANTS:

APPLIED RESEARCH AND DESIGN, INC.

2623 S. BLAIR STONE ROAD
TALLAHASSEE, FL 32301
FL CA#8948
JAMES M. LAMB, PE#52688
Tel: (850) 668-6324 -- E-mail: jflamb@ard-eng.com

James M. Lamb, State of Florida, Professional Engineer,
License No. 52688. This item has been digitally signed and
sealed by James M. Lamb on the date indicated here.
Printed copies of this document are not considered signed
and sealed and the signature must be verified on any
electronic copies.

PROJECT:

FICPA
TENANT BUILD OUT
RENOVATION

Alliance Center
Unit 123, 119 South Monroe St.
Tallahassee, Florida

No. Date Issue Description

DATE: MAY 3, 2024

RCFA PROJECT NO: 2405


COPYRIGHT:
2024 Raymond C. Finger Architects, All Rights Reserved

SHEET TITLE:

POWER & SYSTEMS

E1.1

RELEASED FOR CONSTRUCTION

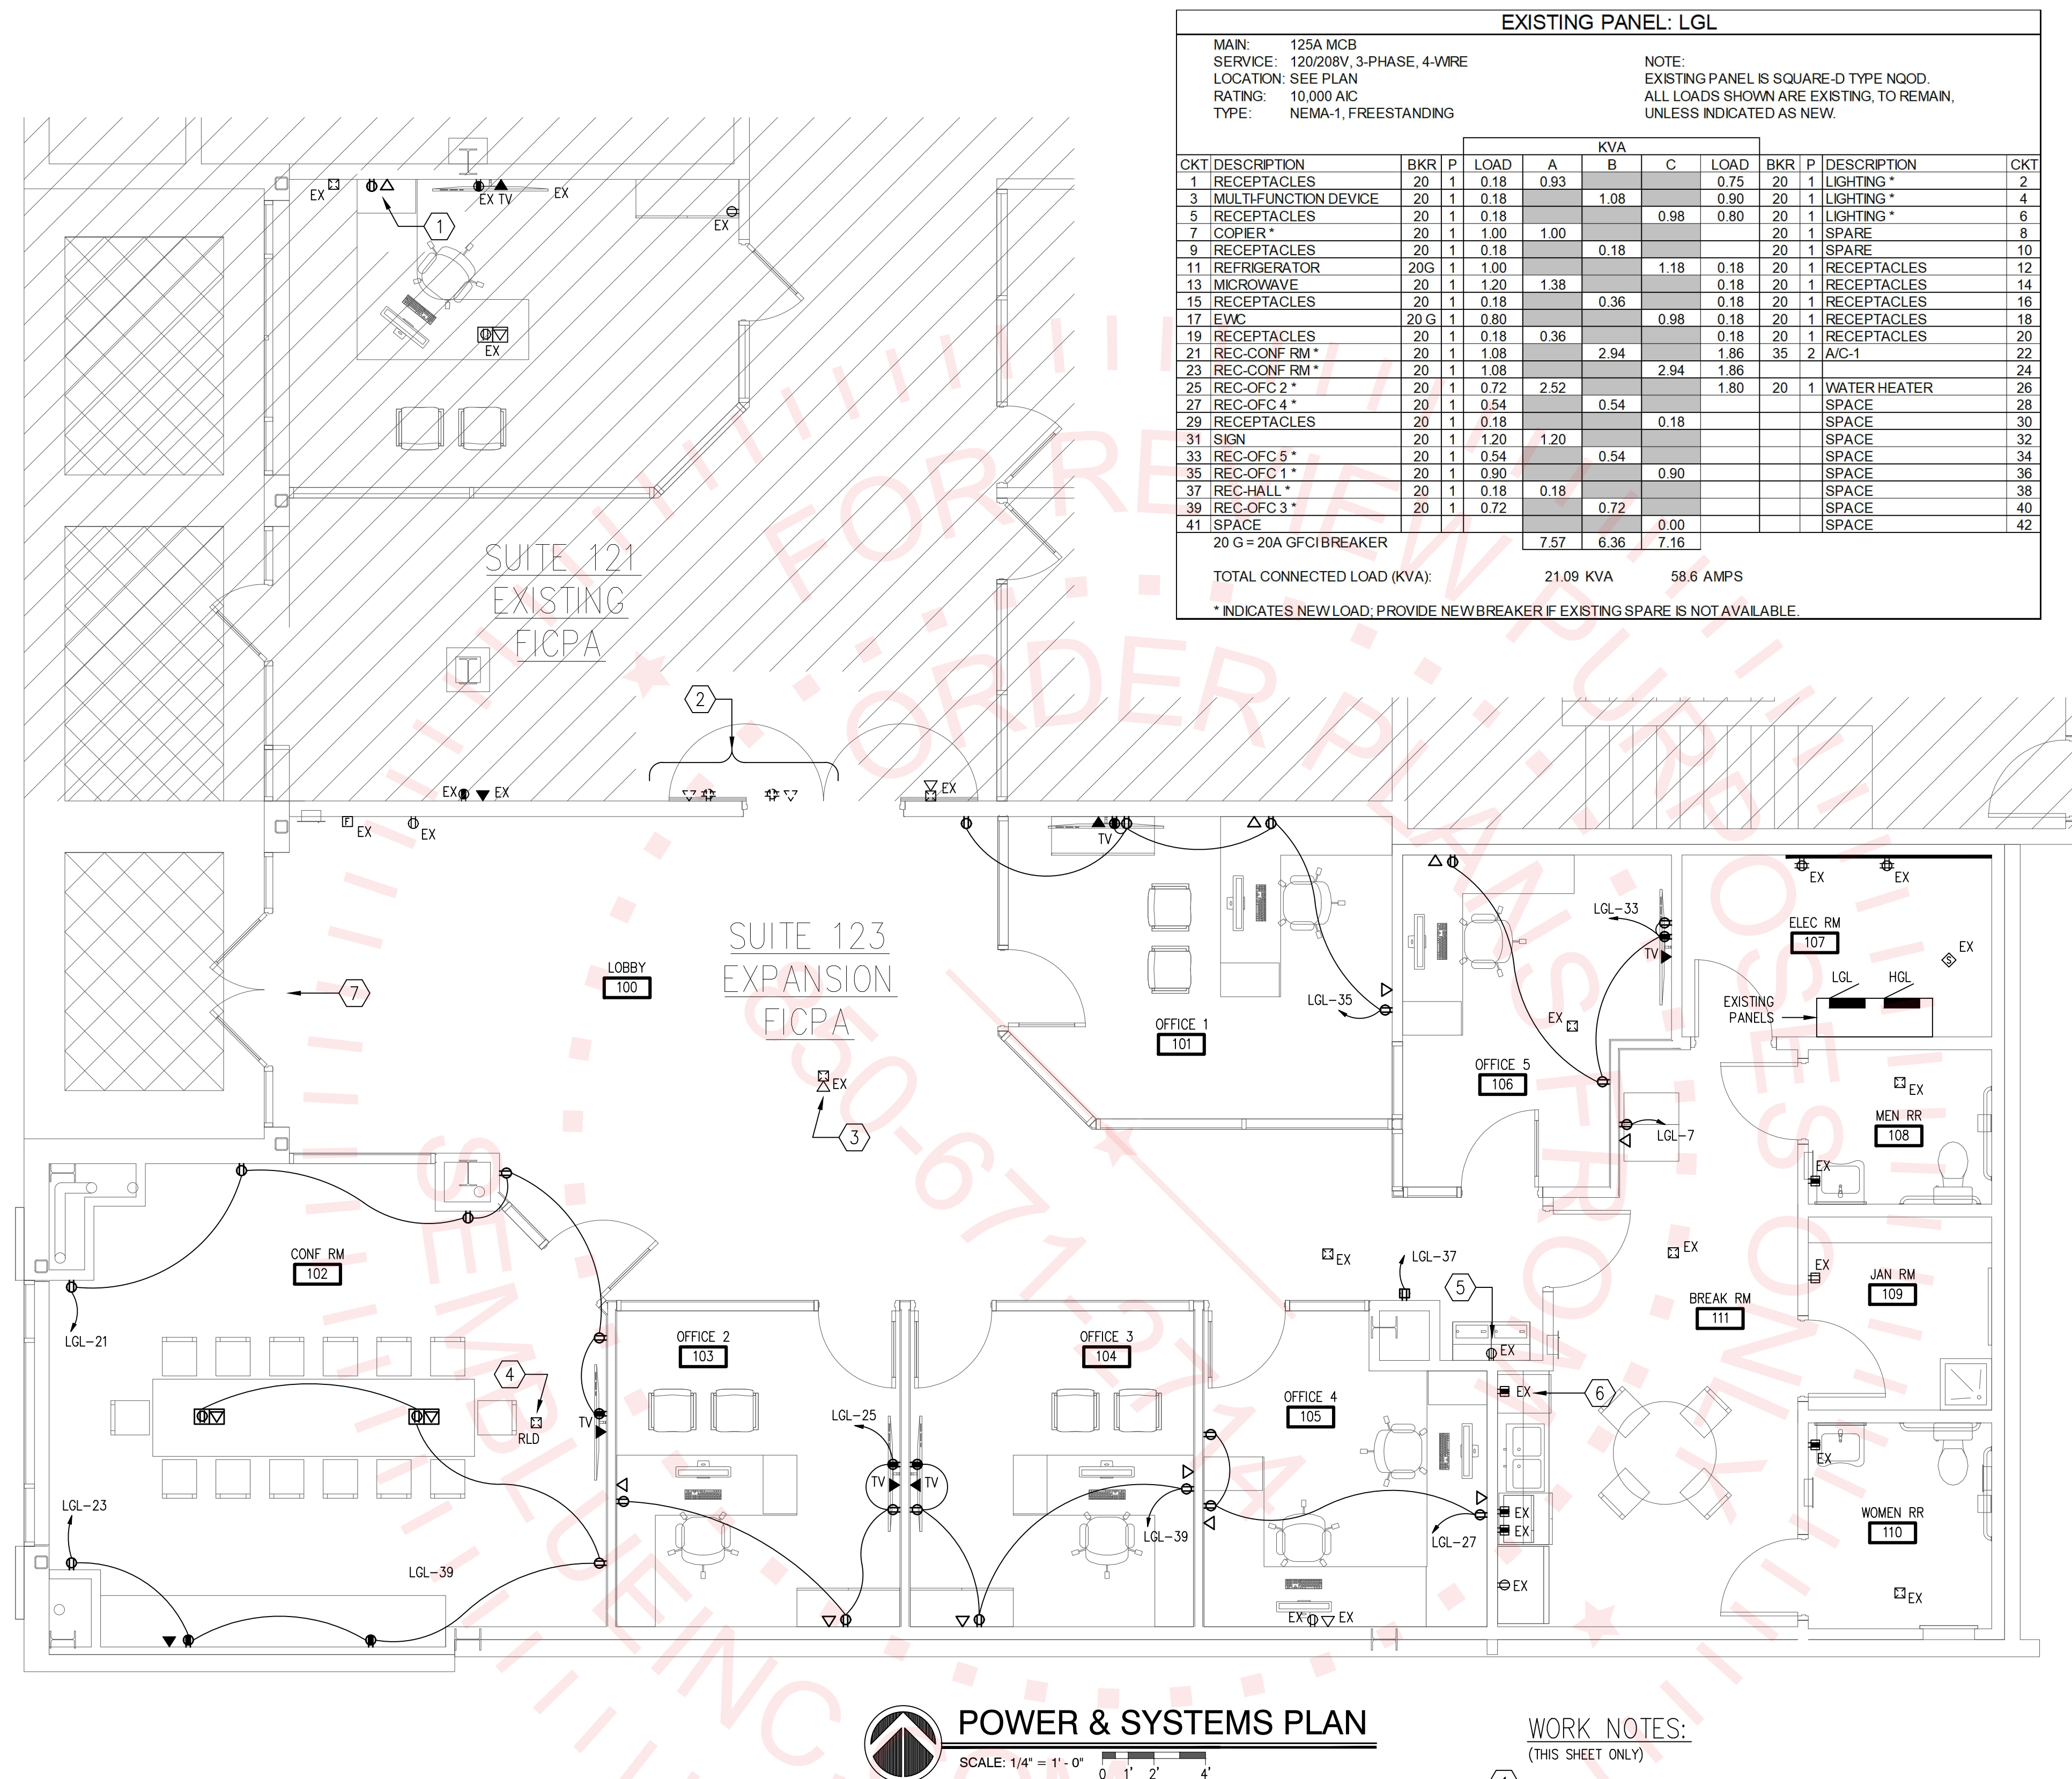

POWER & SYSTEMS PLAN

SCALE: 1/4" = 1'-0"

0 1' 2' 4'


GENERAL NOTES:

- CONTRACTOR SHALL FIELD-VERIFY EXISTING CONDITIONS AND VERIFY ALL EXISTING EQUIPMENT, DEVICES, AND FIXTURES PRIOR TO PLACING A BID.
- COORDINATE LOW VOLTAGE (VOICE, DATA, SECURITY, CCTV, ACCESS CONTROL, ETC.) REQUIREMENTS WITH TENANT PRIOR TO ROUGH-IN. ALL LOW-VOLTAGE CABLING MUST BE INSTALLED PRIOR TO ABOVE-CEILING INSPECTION.
- EXISTING HVAC EQUIPMENT AND WATER HEATER (NOT SHOWN) ARE TO REMAIN.
- CIRCUIT ASSIGNMENTS SHOWN ARE BASED ON SPACE ANTICIPATED TO BE MADE SPARE IN DEMOLITION; CONTRACTOR SHALL VERIFY ACTUAL SPACE AVAILABLE IN THE PANELS AFTER DEMOLITION, ADJUST CIRCUIT ASSIGNMENTS AS NECESSARY, AND PROVIDE UPDATED CIRCUIT DIRECTORIES FOR ALL PANELS AFFECTED BY THIS PROJECT.

WORK NOTES:

(THIS SHEET ONLY)

- PROVIDE NEW RECEPTACLE AND COMMS OUTLET. CONNECT NEW RECEPTACLE TO EXISTING ROOM RECEPTACLE CIRCUIT WITH 2 #12, #12 GND.
- NEW DOOR TO BE INSTALLED; REMOVE EXISTING DEVICES INDICATED; RE-CIRCUIT EXISTING CIRCUITS, AS REQUIRED, TO MAINTAIN CONTINUITY.
- EXISTING FIRE ALARM CEILING DEVICES TO REMAIN, UNLESS INDICATED OTHERWISE; PROTECT DURING CONSTRUCTION, RE-INSTALL IN NEW CEILING AS REQUIRED. (TYPICAL)
- RELOCATE EXISTING CEILING-MOUNTED FIRE ALARM STROBE FROM EXISTING "TELLER" AREA TO NEW CONFERENCE ROOM.
- EXISTING WATER COOLER TO BE REPLACED; COORDINATE WITH PLUMBER. ADJUST RECEPTACLE LOCATION AS REQUIRED. PROVIDE GFCI BREAKER AT PANEL.
- WHERE EXISTING DEVICES ARE SHOWN, REPLACE EXISTING DEVICE AND COVERPLATE. (TYPICAL)
- SECURITY MAG-LOCK TO BE INSTALLED AT EXISTING EXTERIOR DOORS. COORDINATE ROUGH-IN REQUIREMENTS WITH SECURITY VENDOR; DOORS TO RELEASE UPON ACTIVATION OF FIRE ALARM.

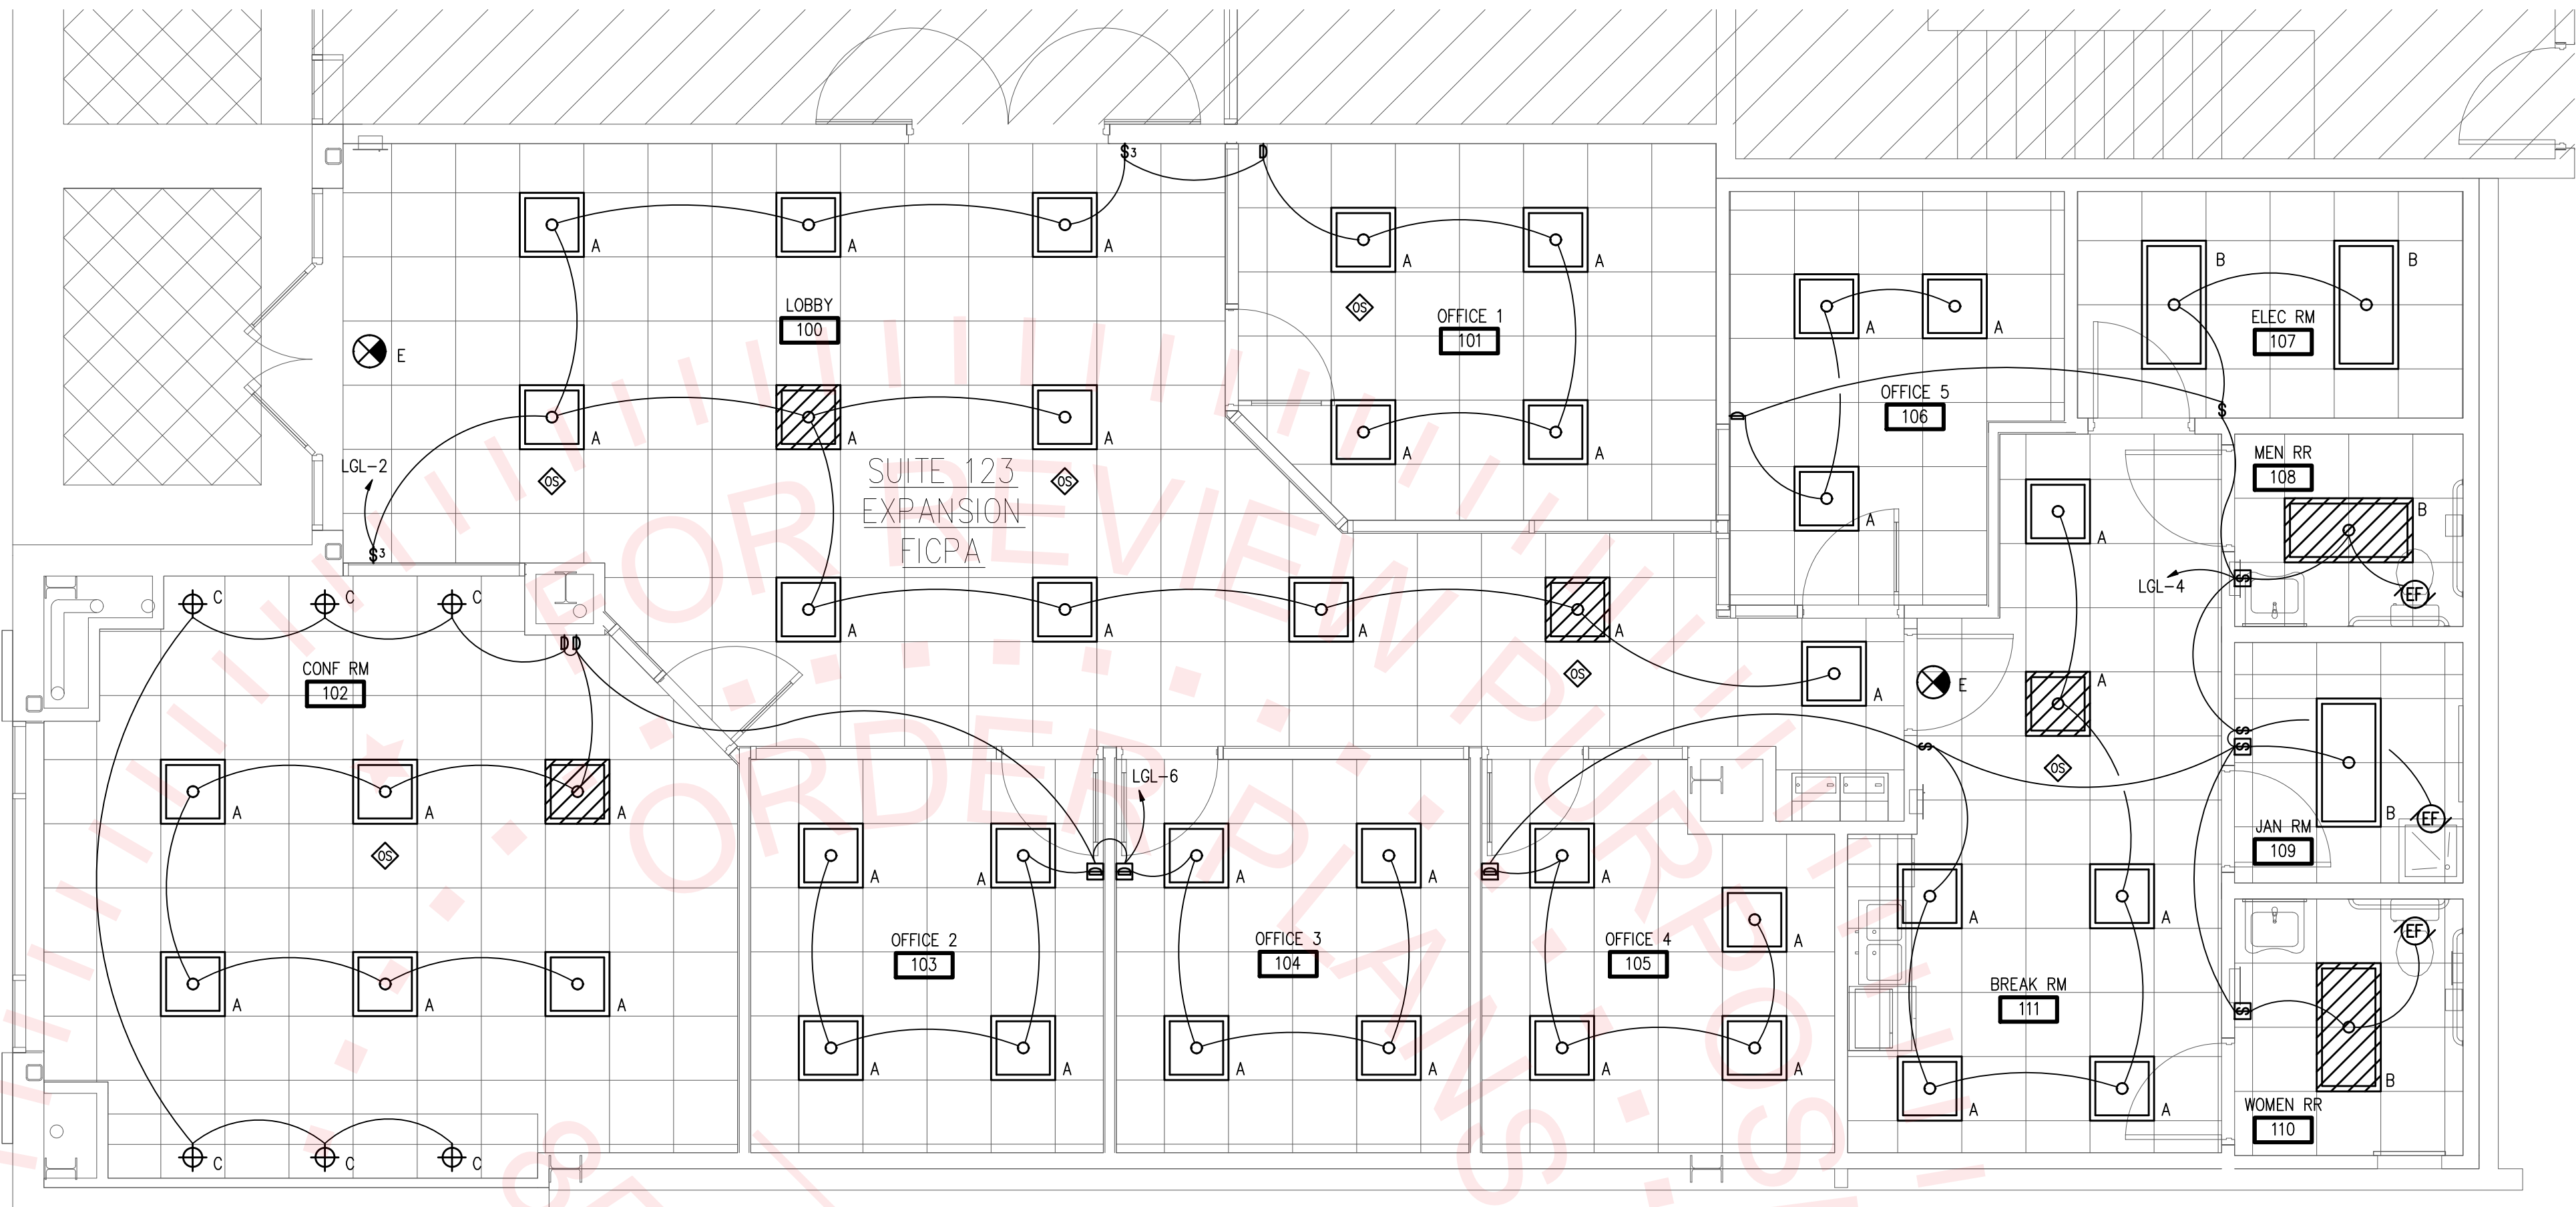

LIGHTING PLAN

SCALE: 1/4" = 1' - 0"

0 1' 2' 4'

ENERGY CONSERVATION REQUIREMENTS:

1. WITHIN 30 DAYS OF SUBSTANTIAL COMPLETION, CONTRACTOR SHALL PROVIDE RECORD DRAWINGS, OPERATING MANUAL, AND MAINTENANCE MANUALS TO THE BUILDING OWNER.
2. RECORD DRAWINGS SHALL INCLUDE: A SINGLE-LINE DIAGRAM OF THE BUILDING ELECTRICAL DISTRIBUTION SYSTEM; AND FLOOR PLANS INDICATING LOCATION AND AREA SERVED FOR ALL DISTRIBUTION.
3. CONTRACTOR SHALL PROVIDE OPERATION MANUALS AND MAINTENANCE MANUALS TO THE OWNER FOR EACH PIECE OF EQUIPMENT REQUIRING MAINTENANCE; REQUIRED ROUTINE MAINTENANCE ACTIONS SHALL BE CLEARLY IDENTIFIED.
4. CONTRACTOR SHALL PROVIDE TO THE OWNER NAMES AND ADDRESSES OF AT LEAST ONE QUALIFIED SERVICE AGENCY.
5. CONTRACTOR SHALL CONFIRM THAT THE PLACEMENT, SENSITIVITY AND TIME-OUT ADJUSTMENTS FOR ALL OCCUPANCY SENSORS YIELD ACCEPTABLE RESULTS.
6. CONTRACTOR SHALL CONFIRM THAT TIME SWITCHES AND PROGRAMMABLE SCHEDULE CONTROLS ARE PROGRAMMED TO TURN THE LIGHTS OFF.
7. WHERE DAYLIGHT HARVESTING IS USED, CONTRACTOR SHALL CONFIRM THAT THE PLACEMENT AND SENSITIVITY ADJUSTMENTS FOR PHOTOSENSOR CONTROLS REDUCE ELECTRIC LIGHT BASED ON THE AMOUNT OF USABLE DAYLIGHT IN THE SPACE AS SPECIFIED.
8. CONTRACTOR SHALL PROGRAM AND ADJUST ALL CONTROLS AS NEEDED TO ACHIEVE PERFORMANCE THAT IS SATISFACTORY TO THE OWNER.
9. CONTRACTOR SHALL TEST ALL LIGHTING CONTROL SYSTEMS TO ENSURE THAT CONTROL HARDWARE AND SOFTWARE ARE CALIBRATED, ADJUSTED, PROGRAMMED AND IN PROPER WORKING CONDITION IN ACCORDANCE WITH THE CONSTRUCTION DOCUMENTS AND MANUFACTURER'S INSTRUCTIONS.
10. FUNCTIONAL TESTING SHALL BE IN ACCORDANCE WITH FLORIDA BUILDING CODE ENERGY CONSERVATION SECTIONS C408.3.1.1 AND C408.3.1.2 FOR THE APPLICABLE CONTROL TYPE, AND CONTRACTOR SHALL DOCUMENT TESTING AS FOLLOWS: FOR EACH ITEM LISTED IN SECTION C408.3.1.1 AND C408.3.1.2, CONTRACTOR SHALL LIST THE TEST REQUIREMENT, INDICATE THAT THE TEST WAS "PASSED" OR WAS "NOT APPLICABLE" TO THE PROJECT; DOCUMENT SHALL BE SIGNED AND DATED BY THE TECHNICIAN PERFORMING THE TEST, AND ELECTRONIC COPY SHALL BE PROVIDED TO THE ENGINEER FOR REVIEW AND APPROVAL PRIOR TO SUBSTANTIAL COMPLETION.
11. DOCUMENTS CERTIFYING THAT THE INSTALLED LIGHTING CONTROLS MEET DOCUMENTED PERFORMANCE CRITERIA OF FLORIDA BUILDING CODE ENERGY CONSERVATION SECTION C405 ARE TO BE PROVIDED TO THE BUILDING OWNER WITHIN 90 DAYS FROM THE DATE OF RECEIPT OF THE CERTIFICATE OF OCCUPANCY.

Lighting Fixture Schedule

TYPE	DESCRIPTION	MNFR/SUPPLIER	MODEL #	LAMPS	NOTES
A	2 X 2 ARCHITECTURAL RECESSED LED FIXTURE	H.E. WILLIAMS	LT-22-L39/835-AF-DIM-UNV	33W LED	
B	2 X 4 ARCHITECTURAL RECESSED LED FIXTURE	H.E. WILLIAMS	LT-24-L52/835 - AF - DIM-UNV	37W LED	
C	DOWNLIGHT	LIGHTOLIER	4RN / 24RDL 15 935 W O WH Z10 U	14W LED	
E	EXIT SIGN	CHLORIDE	VERWEM	LED	
---	---	---	---	---	

NOTES:

1. VERIFY ALL CEILING FINISHES, FIXTURE TRIMS, AND VOLTAGES PRIOR TO ORDERING.
2. SUBSTITUTION OF FIXTURES EQUAL TO THE BASIS OF DESIGN, WILL BE CONSIDERED.
3. PROVIDE ALL FRAMES, TRIMS, BACKBOXES, BLOCKING, STEMS, HARDWARE, LAMPS AND BALLASTS AS REQUIRED FOR INSTALLATION.
4. ALL LAMPS SHALL BE 3500K, CRI OF 80 OR GREATER UNLESS NOTED OTHERWISE.

GENERAL NOTES:

(THIS SHEET ONLY)

1. ALL WALL MOUNTED OCCUPANCY SENSORS ARE MANUAL ON/AUTOMATIC OFF.
2. PROVIDE ALL LOW VOLTAGE CONTROL CABLING FOR LIGHTING, PLENUM RATED.
3. PROVIDE SEPARATE NEUTRAL FOR EACH 120V/277V BRANCH CIRCUIT.
4. ALL RACEWAYS AND CABLING ABOVE LAY-IN CEILING SHALL BE ADEQUATELY SUPPORTED INDEPENDENT FROM CEILING GRID SYSTEM.
5. EXISTING CONDUITS MAYBE RE-USED WHERE POSSIBLE.

RAYMOND C FINGER
ARCHITECTS, LLC

ARCHITECTURE, LANDSCAPE ARCHITECTURE
& PLANNING



1203 E Clay St, Thomasville, GA, 31792
Telephone: 229.551.9846

OliverSperry
RENOVATION

CONSULTANTS:

APPLIED RESEARCH AND DESIGN, INC.

2623 S. BLAIR STONE ROAD
TALLAHASSEE, FL 32301
FL CA#8948
JAMES M. LAMB, PE#52688
Tel: (850) 668-6324 -- E-mail: jlmbl@ard-eng.com

James M. Lamb, State of Florida, Professional Engineer,
License No. 52688. This item has been digitally signed and
sealed by James M. Lamb on the date indicated here.
Printed copies of this document are not considered signed
and sealed and the signature must be verified on any
electronic copies.

PROJECT:

FICPA
TENANT BUILD OUT
RENOVATION

Alliance Center
Unit 123, 119 South Monroe St.
Tallahassee, Florida

No. Date Issue Description

DATE: MAY 3, 2024

RCFA PROJECT NO: 2405

COPYRIGHT:
2024 Raymond C. Finger Architects, All Rights Reserved

SHEET TITLE:

LIGHTING

E1.2

RELEASED FOR CONSTRUCTION

PLUMBING RENOVATION LIMITED TO PROVIDING
NEW FIXTURES PER-SCHEDULE AND ARCHITECTS
APPROVAL.

PROVIDE BFP FOR ICE MACHINE AND REFRIGERATOR.

The floor plan for Suite 123 Expansion FICPA includes the following areas:

- LOBBY 100**: Entrance area with a stone wall.
- SUITE 123 EXPANSION FICPA**: Main suite designation.
- OFFICE 1 101**, **OFFICE 2 103**, **OFFICE 3 104**, **OFFICE 4 105**, **OFFICE 5 106**: Individual offices with desks and chairs.
- CONF RM 102**: Large conference room with a long table and chairs.
- BREAK RM 111**: Break room with a round table and chairs.
- ELEC RM 107**: Electrical room.
- JAN RM 109**: Janitor's room.
- MEN RR 108** and **P-2**: Men's restroom.
- WOMEN RR 110** and **P-1**: Women's restroom.
- COPYER**: Copying station.
- TV**: Multiple television sets located in the lobby, conference room, and offices.
- STONE WALL**: Architectural feature in the lobby and near the conference room.
- BUILT IN CABINET STONE WALL**: Storage area near the conference room.
- DF**: Dining facility or similar area.
- BFP**: Breakroom facilities.
- P-3**: Private restrooms.

SCALE: $1/4" = 1'0"$

FIXTURE NO.	FIXTURE	DESCRIPTION	C.W.	H.W.	FCW	FHW	BFP TYPE/ MODEL	WASTE	VENT	TRAP	MOUNTING	RIM HEIGHT	SUPPLY BY	INSTALL BY
P-1	TANK TYPE WATER CLOSET	PROFLO PFJRC310RWH TWO PIECE ELONGATED TOILET. PROVIDE SEAT	1/2"					3"					P.C.	P.C.
P-2	ADA WALL HUNG SINK	ZURN Z5340 WAL HUNG LAV WITH A KOHLER K-23472-4K FAUCET MATT BLACK PROVIDE WALL HANGER KOHLER K-2032 PROVIDE AND INSTALL UNIVERSAL THERMOSTATIC MIXING VAVLE SET AT 110 DEGREE F OR PER LOCAL CODE.	1/2"	1/2"				2"			WALL WITH HANGER		PC	P.C.
P-3	DOUBLE BOWL SINK	KOHLER VERSE K-5267-3 33" TOP MOUNT DOUBLE BOWL KITCHEN SINK, FAUCET TO BE KOHLER 25981K-4 PULL DOWN KITCHEN FAUCET. SINK TO COME WITH CHROME SUPPLIES STOPS AND P-TRAP. INSTALL UNIVERSAL THERMOSTATIC MIXING VALVE, SET TEMPERATURE TO 110F.	1/2"	1/2"				1 1/2"			UNDER COUNTER		PC	P.C.
DF	DRINKING FOUNTAIN	ELKAY EZH20 LZSTL8WSSP BOTTLE FILLING STATION WITH BILEVEL ADA COMPLIANT FOUNTAINS. ANTIMICROBIAL, GREEN TICKER™, HANDS FREE, ELKAY CANE APRON LAMINAR FLOW, REAL DRAIN. 115/1, 370 WATTS, 4.2 FLA, 170 LBS, ADA COMPLIANCE	1/2"					2"			WALL		PC	EXTG
MS	MOP SINK	ZURN Z1996-24 MOP SERVICE BASIN 24 X 24 X 10 MOLDED HIGH DENSITY COMPOSITE BASIN. PVC DRAIN BODY, STAINLESS STEEL STRAINER AND 3" GASKETED OUTLET CONNECTION. CERTIFICATIONS: MEETS ANSI Z124.6, CSA LISTED, AND IAPMO LISTED UNDER FILE # 3561. POLISHED CHROME-PLATED CAST BRASS 8" SINK FAUCET WITH QUARTER TURN CERAMIC DISC CARTRIDGES, 3/8" SHORT SWIVEL INLETS PROVIDING ADJUSTABLE CENTERS FROM 7-1/4" TO 8-3/4", INTEGRAL SERVICE STOPS AND A 6" CENTERLINE CAST BRASS SPOUT WITH CHEMICAL RESISTANT ATMOSPHERIC VACUUM BREAKER, 3/4" HOSE THREADED OUTLET, PAIL HOOK AND ADJUSTABLE WALL BRACE.	3/4"	3/4"							PIPE		PC	P.C.
HA	WATER HAMMER ARRESTOR	SIOUX CHIEF MINIRESTER, COPPER, 250 PSI WORKING PRESSURE NSF LISTED	3/4"	3/4"							PIPE		PC	P.C.
BFP	BACKFLOW PREVENTER	BACKFLOW PREVENTER(S) WATTS SD-3-MF AT CARB. BEVERAGE MACHINE. WATTS SD-3-MF AT ICE MACHINE, OR AS APPROVED BY LOCAL CODE.											P.C.	P.C.
TP	TRAP PRIMER	LEAD FREE PRIME PRO PRO1-500 TRAP PRIMER OR EQUAL. INCORPORATE A BUILT IN VACUUM BREAKER AND INTERNAL BACKFLOW.	1/2"										P.C.	P.C.
VB	VACUUM BREAKER	WATTS N9 3/8" FEM. x 3/8" FEM. AT SPRAY RINSE ASSEMBLY											P.C.	P.C.
RPZ	REDUCED PRESSURE ZONE DEVICE	WATTS 009M3QT REDUCED PRESSURE ZONE ASSEMBLY. CONTAINMENT AT THE SERVICE LINE ENTRANCE.											P.C.	P.C.
FCO	FLOOR CLEAN OUT	PROVIDE IF/AS REQUIRED: J. R. SMITH FIG. 4151 C.I. CLEANOUT WITH GASKET SEAL THREADED PLUG FOR EASY REMOVAL. ADJUSTABLE ROUND NICKEL BRONZE TOP RECESSED FOR TILE WITH SECURING SCREW. SPEEDI-SET OUTLET CONNECTION. CLEANOUTS MUST BE ACCESSIBLE FROM THE SPACE.						3"			FLOOR		P.C.	P.C.
WCO	WALL CLEAN OUT							3"			WALL		P.C.	P.C.

RELEASED FOR CONSTRUCTION