

Project Description

THIS PROJECT INCLUDES THE RESTROOM RENOVATIONS FOR THE TCC ENGLISH BUILDING TO UPGRADE FOR ADA COMPLIANCE AND PROVIDE NEW FINISHES. A SMALL MECHANICAL ROOM WITH NEW HVAC FOR THE SPACE IS INCLUDED. THE AREA OF WORK IS APPROXIMATELY 550 SF.


Applicable Codes:

THE SUBJECT PROJECT IS TO COMPLY WITH THE FOLLOWING COMPONENTS OF THE FLORIDA BUILDING CODE (FBC), SEVENTH (2020) EDITION (UNLESS NOTED OTHERWISE).

- FL BLDG CODE, BUILDING (FBC-B)
- FL BLDG CODE, EXISTING BUILDING (FBC-EB)
- FL BLDG CODE, ACCESSIBILITY (FBC-A)
- FL BLDG CODE, ENERGY CONSERVATION (FBC- EC)
- FL BLDG CODE, MECHANICAL (FBC-M)
- FL BLDG CODE, FUEL GAS (FBC-FG)
- FL BLDG CODE, PLUMBING (FBC-P)
- FL FIRE PREVENTION CODE (FFPC), SEVENTH EDITION
- NATIONAL ELECTRICAL CODE (NEC 70), 2017 EDITION

General Notes:

- THE CONTRACTOR SHALL MAKE AVAILABLE TO THE BUILDING INSPECTOR ANY DOCUMENTATION NECESSARY TO VERIFY THAT ALL PRODUCTS REQUIRING APPROVAL PER FS 553.842 ARE IN COMPLIANCE.
- CONTRACTOR TO FIELD VERIFY ALL DIMENSIONS AND FIELD CONDITIONS AT THE SITE PRIOR TO START OF CONSTRUCTION. IF NEEDED, NOTIFY ARCHITECT IN WRITING OF ANY DISCREPANCIES OR DISCOVERED PROBLEMS. WRITTEN DIMENSIONS SHALL TAKE PRECEDENCE OVER SCALED DIMENSIONS.
- THE CONTRACTOR SHALL BE RESPONSIBLE FOR FINAL APPROVAL OF ALL FINISH MATERIAL SELECTIONS PER THE OWNER'S REQUEST.
- THE CONTRACTOR ASSUMES ALL RESPONSIBILITY FOR THE MATERIALS AND METHODS OF CONSTRUCTION USED FOR THIS PROJECT.
- ANY DEVIATION FROM THE CONSTRUCTION DOCUMENTS SHALL BE APPROVED BY THE ARCHITECT PRIOR TO CONSTRUCTION.
- ALL MATERIALS, SYSTEMS AND CONSTRUCTION COMPONENTS ARE TO BE INSTALLED PER THE MANUFACTURER'S SPECIFICATIONS.
- ALL WORK IS TO BE IN STRICT COMPLIANCE WITH ALL STATE AND LOCAL LAWS AND CODES WHICH APPLY TO THIS USE AND TO GENERALLY ACCEPTED CONSTRUCTION TRADE PRACTICES.
- THE CONTRACTOR SHALL REMOVE FROM THE SITE AND DISPOSE OF ALL TRASH, DEBRIS AND CONSTRUCTION MATERIALS DUE TO CONSTRUCTION PRIOR TO COMPLETION OF THE WORK. THE CONTRACTOR SHALL LEAVE THE SITE IN A CONDITION EQUAL TO OR BETTER THAN IT WAS BEFORE COMMENCEMENT OF THE WORK ON THIS CONTRACT. THE CONTRACTOR SHALL ALSO INSURE THAT ALL PROPER SAFETY MEASURES ARE TAKEN DURING THE TIME OF CONSTRUCTION.
- BEFORE SUBMITTING FOR THE WORK, EACH BIDDER WILL BE RESPONSIBLE TO EXAMINE THE PREMISES AND SATISFY HIMSELF AS TO THE EXISTING CONDITIONS UNDER WHICH HE WILL BE OBLIGATED TO OPERATE AND COMPLETE THE WORK UNDER THIS CONTRACT. NO ALLOWANCE WILL SUBSEQUENTLY BE MADE IN THIS CONNECTION ON BEHALF OF THE CONTRACTOR FOR ANY ERROR OR OMISSION ON HIS PART.
- THE CONTRACTOR SHALL PAY FOR INSPECTION PERMITS, CERTIFICATES, CONNECTION FEES, SYSTEM DEMAND CHARGES AND LICENSE FEES IN CONNECTION WITH HIS WORK.
- CONSTRUCTION MANAGER SHALL BE RESPONSIBLE FOR COORDINATING WORK OF SUBCONTRACTORS TO AVOID INTERFERENCES.
- ERECT AND MAINTAIN REASONABLE PRECAUTIONS FOR SAFETY AND HEALTH INCLUDING POSTING DANGER SIGNS AND OTHER WARNINGS AGAINST HAZARDS INCLUDING PROMULGATING SAFETY REGULATIONS. PROVIDE SAFETY PRECAUTIONS AND BARRICADES FOR PEDESTRIANS AT CONSTRUCTION VEHICLE ACCESS AND EGRESS LOCATIONS.
- COORDINATE AND SEQUENCE DEMOLITION, CLEANING AND CONSTRUCTION WORK. SUBMIT A COMPLETELY DETAILED CONSTRUCTION SCHEDULE PRIOR TO PRE-CONSTRUCTION CONFERENCE.
- THE CONTRACTOR SHALL STRICTLY BE HELD TO THE PROJECT SCHEDULE. HE SHALL PROVIDE SUFFICIENT MANPOWER AND EQUIPMENT TO FULLY MOBILIZE, PROCEED WITH AND COMPLETE THE WORK.
- THE CONTRACTOR SHALL BE RESTRICTED TO AREAS SPECIFIED BY THE OWNER FOR ON-SITE STORAGE OF CONSTRUCTION MATERIALS. THE CONTRACTOR IS RESPONSIBLE FOR THE PROTECTION AND SECURITY OF EQUIPMENT AND MATERIALS.
- THE CONTRACTOR SHALL MAINTAIN A CLEAN WORK ENVIRONMENT AT ALL TIMES AND SHALL CLEAN CONSTRUCTION SITE OF DEBRIS AT COMPLETION OF THE JOB AND BEFORE FINAL PAYMENT IS MADE.
- CONTRACTOR'S USE OF AN APPROVAL STAMP ON DOCUMENTS SUBMITTED AS SHOP DRAWINGS, PRODUCT DATA, SAMPLES AND SIMILAR SUBMITTALS CERTIFIES THAT THE CONTRACTOR HAS COMPLIED WITH THE CONTRACT DOCUMENT REQUIREMENTS RELATED TO "SHOP DRAWINGS, PRODUCT DATA AND SAMPLES".
- THE CONTRACTOR SHALL NOT BE RELIEVED OF RESPONSIBILITY FOR DEVIATIONS FROM REQUIREMENTS OF THE CONTRACT DOCUMENTS BY THE APPROVAL OF SHOP DRAWINGS, PRODUCT DATA, SAMPLES OR SIMILAR SUBMITTALS UNLESS THE CONTRACTOR HAS SPECIFICALLY INFORMED THE ARCHITECT IN WRITING OF SUCH DEVIATION AT THE TIME OF SUBMITTAL AND THE ARCHITECT HAS GIVEN WRITTEN APPROVAL TO THE SPECIFIC DEVIATION. THE CONTRACTOR SHALL NOT BE RELIEVED OF RESPONSIBILITY FOR ERRORS OR OMISSIONS IN SHOP DRAWINGS, PRODUCT DATA, SAMPLES OR SIMILAR SUBMITTALS BY THE ARCHITECT'S APPROVAL THEREOF.
- CONTRACTOR SHALL GUARANTEE THE WORK AND MATERIALS FOR A PERIOD OF ONE YEAR FROM DATE OF FINAL ACCEPTANCE. THIS GUARANTEE SHALL BE IN ADDITION TO THE WARRANTIES PROVIDED BY MATERIAL SUPPLIERS AND MANUFACTURERS.

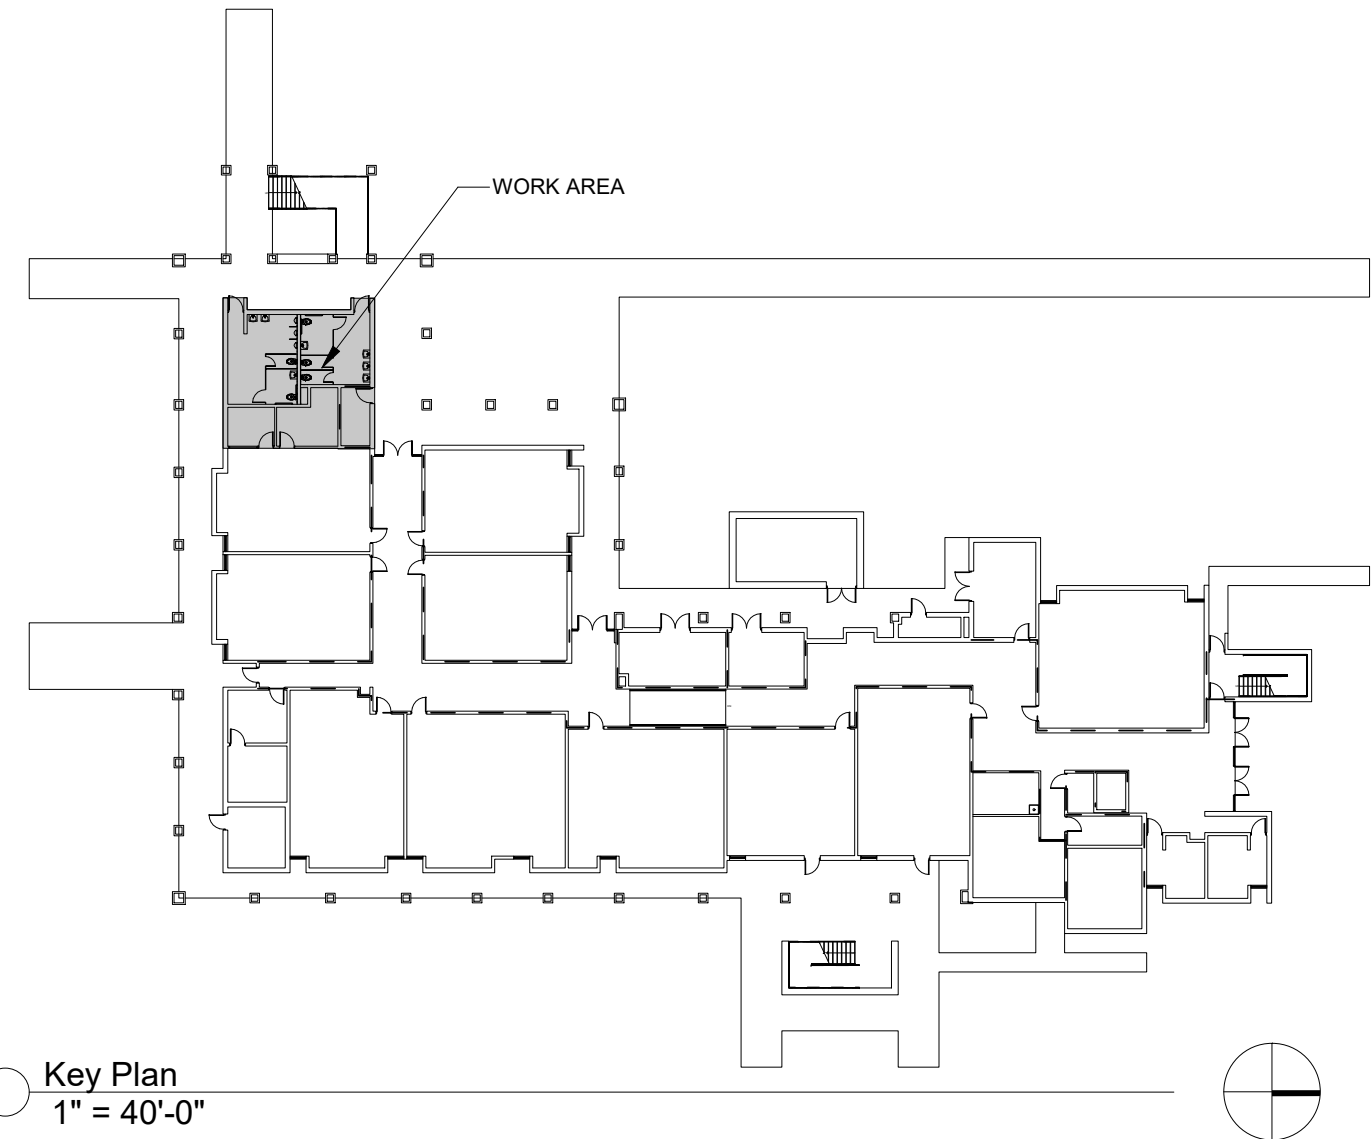

Key Plan
1" = 40'-0"

TCC English Building Restroom Renovations

FOR

Tallahassee Community College

444 Appleyard Dr Ste 239, Tallahassee, FL 32304



100% CONSTRUCTION DOCUMENTS



Architect:

Dan Capoot, AIA
BKJ, Inc. Architecture

1621 Physicians Drive
Tallahassee, FL 32308

850.778.8007
dcapoot@bkjarchitecture.com




Mechanical and Plumbing Engineer:

Mark P. Poindexter, P.E
H2 Engineering, Inc.

114 East 5th Avenue
Tallahassee, FL 32308

850.224.7922
mpoindexter@h2engineering.com

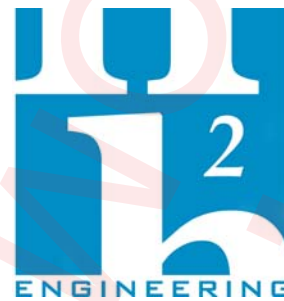

Electrical Engineer:


Daniel R. Haberfeld, P.E
H2 Engineering, Inc.

114 East 5th Avenue
Tallahassee, FL 32308


850.224.7922
dhaberfeld@h2engineering.com

Drawing Index:

CS	COVER SHEET
A0.1	ANNOTATIONS, SYMBOLS AND PARTITION TYPES
A0.2	SPECIFICATIONS I
A0.3	SPECIFICATIONS II
AD1.0	DEMOLITION PLAN & DEMOLITION RCP
A1.0	FLOOR PLAN & RCP, NOTES AND LEGENDS
A4.0	FINISH AND ACCESSIBILITY PLAN, ELEVATIONS, & ACCESSORIES
A6.0	SCHEDULES AND DETAILS
P0.1	GENERAL NOTES, LEGENDS & SCHEDULES
P0.2	SCHEDULES
P1.0	FLOOR PLANS
P5.1	DETAILS
M0.1	GENERAL NOTES, LEGENDS, SCHEDULES & DETAILS
M0.2	SCHEDULES
M1.0	FLOOR PLANS
M5.1	DETAILS
IC0.1	GENERAL NOTES & LEGENDS
IC0.2	SCHEDULES & DETAILS
IC1.0	FLOOR PLANS
IC2.1	CONTROLS
E0.1	GENERAL NOTES, LEGENDS & SCHEDULES
E1.0	FLOOR PLANS

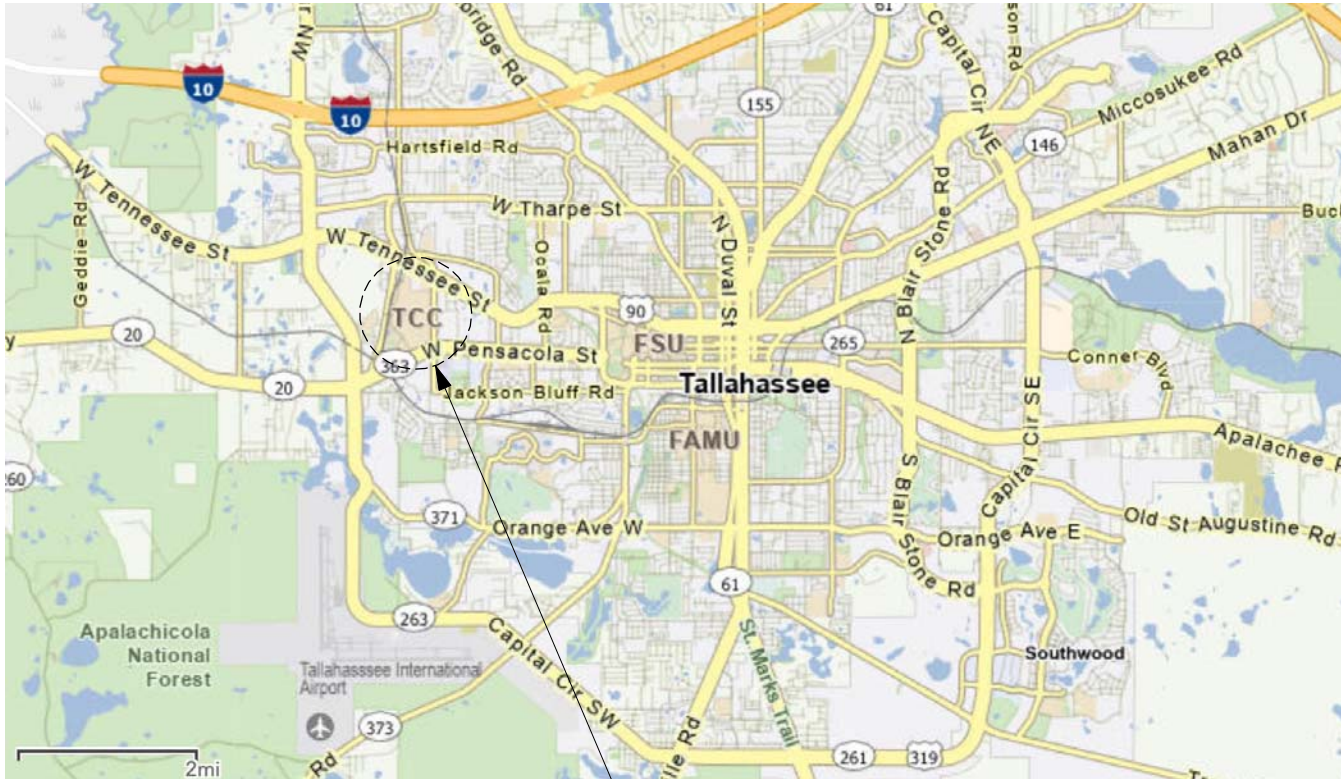

AREA MAP:

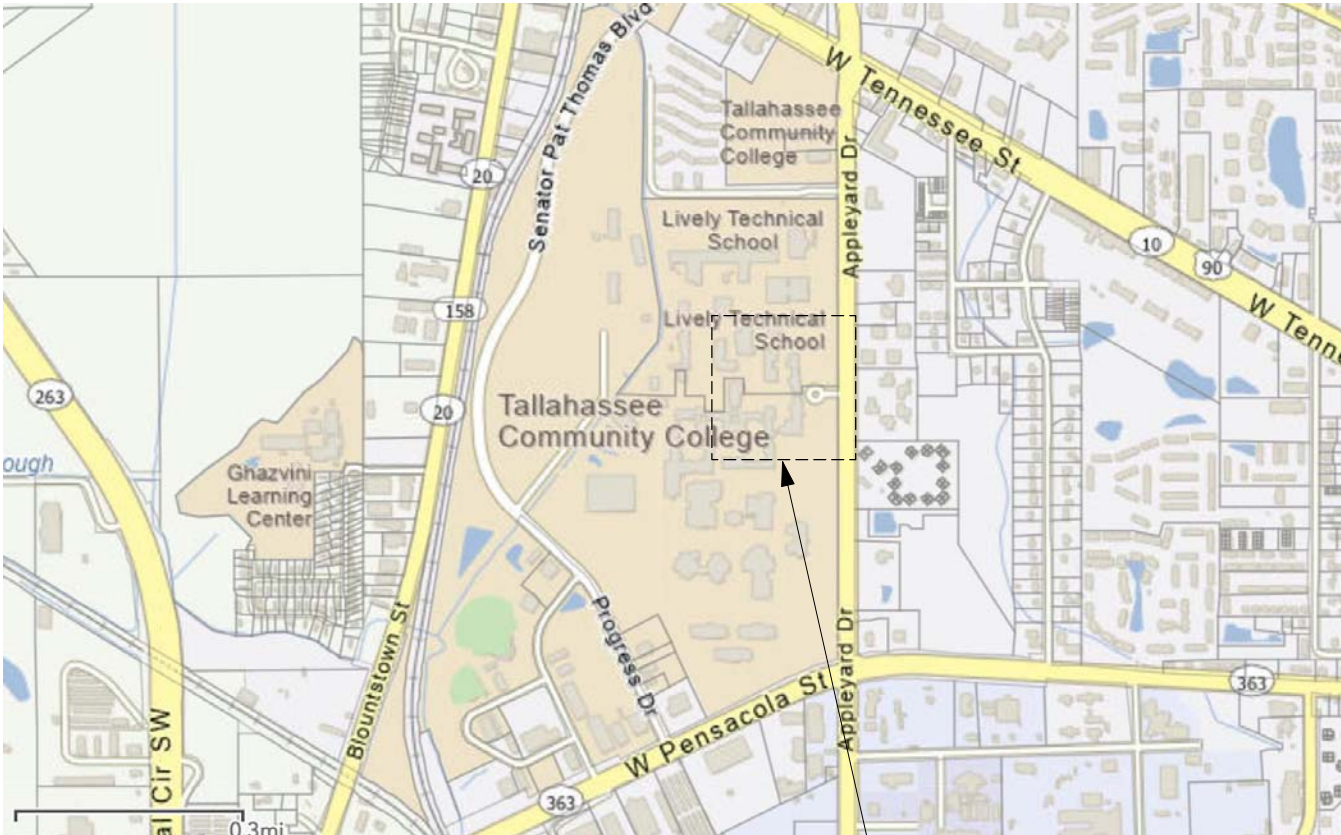

LOCATION MAP:



SEAL:

PROJECT TITLE:

TCC English Building
Restroom Renovations
444 Appleyard Dr., Tallahassee, FL 32304

JOB NO.: 23.121

DESIGNED: DC

DRAWN: JR/MP/DC

CHECKED: DC

THIS DRAWING AND ANY REPRODUCTIONS ARE THE PROPERTY AND COPYRIGHT OF BKJ, INC. AND MAY NOT BE REPRODUCED, PUBLISHED, OR USED IN ANY MANNER WITHOUT WRITTEN PERMISSION OF THE ARCHITECT

REVISIONS:

DRAWING PHASE:
100% Construction Documents

DRAWING TITLE:

Cover Sheet

SHEET NO.:

CS

DATE:

August 25, 2023

Code Review Summary:

THIS PROJECT INCLUDES RENOVATION TO EXISTING RESTROOMS IN ORDER TO BRING INTO COMPLIANCE WITH THE FLORIDA ACCESSIBILITY CODE. THERE ARE NO CHANGES TO THE OCCUPANCY, OCCUPANT LOAD, OR EGRESS ROUTES IN THE BUILDING AS A RESULT OF THESE RENOVATIONS.

THE FIRST FLOOR OCCUPANCY WAS CALCULATED TO VERIFY THE OCCUPANT LOAD AND REQUIRED MINIMUM FIXTURE COUNT IS PROVIDED IN THE NEW DESIGN.

BUILDING OCCUPANCY: (B) BUSINESS

OCCUPANT LOAD:

- STORAGE / UTILITY = 1,362 SF @ 300 SF / OCCUPANT = 5 OCCUPANTS (INCIDENTAL USE)
- ASSEMBLY = 84 SF @ 15 SF / OCCUPANT = 6 OCCUPANTS (INCIDENTAL USE)
- BUSINESS = 3,752 SF @ 150 SF / OCCUPANT = 26 OCCUPANTS
- CLASSROOMS = 7,922 SF @ 20 SF / OCCUPANT = 397 OCCUPANTS

TOTAL OCCUPANTS = 434

REQUIRED PLUMBING FIXTURE COUNT: FBC-BUILDING, TABLE 2902.2
(B) BUSINESS + INCIDENTAL USE AREAS = 5,198 SF AND 37 OCCUPANTS

- 19 MALE / 19 FEMALE
- 1 WATER CLOSET PER 25 OCCUPANTS
- 1 LAVATORY PER 40 OCCUPANTS
- MALE = 1 WATER CLOSET / 1 LAVATORY
- FEMALE = 1 WATER CLOSET / 1 LAVATORY
- CLASSROOMS = 7,922 SF AND 397 OCCUPANTS
- 198 MALE / 199 FEMALE
- 1 WATER CLOSET PER 50 OCCUPANTS
- 1 LAVATORY PER 40 OCCUPANTS
- MALE = 4 WATER CLOSETS / 4 LAVATORIES
- FEMALE = 4 WATER CLOSETS / 4 LAVATORIES

TOTAL REQUIRED FIXTURE COUNT:

MALE = 5 WATER CLOSETS
MALE = 5 LAVATORIES
FEMALE = 5 WATER CLOSETS
FEMALE = 5 LAVATORIES

TOTAL EXISTING + PROVIDED:

MALE = 4 WATER CLOSETS AND 5 URINALS (9 TOTAL)
MALE = 5 LAVATORIES
FEMALE = 6 WATER CLOSETS
FEMALE = 6 LAVATORIES

Abbreviations:

NUMBER
@ AND
& AND
+ AND
AB ANCHOR BOLT
A/C AIR CONDITIONING / AIR
CONDIONER
ABV ABOVE
ACI AMERICAN CONCRETE INSTITUTE
ACT ACOUSTICAL CEILING TILE
ADA AMERICANS WITH DISABILITIES ACT
ADDL ADDITIONAL
ADJ ADJACENT / ADJUST
AFF ABOVE FINISH FLOOR
AFG ABOVE FINISH GRADE
AG ABOVE GRADE
ALT ALTERNATE
ALUM ALUMINUM
ANOD ANODIZED
AOR ARCHITECT OF RECORD
ARCH ARCHITECT / ARCHITECTURAL
ASPH ASPHALT
ASTM AMERICAN SOCIETY OF TESTING AND MATERIALS

BD BOARD
BL BUILDING LINE
BLDG BUILDING
BM BEAM
BO BOTTOM OF
BOF BOTTOM OF FOOTING
BOW BOTTOM OF WALL
BSMT BASEMENT
BTM BOTTOM
BRG BEARING
BYND BEYOND

C/C CENTER TO CENTER
CL CENTERLINE
CL CENTERLINE
CAB CABINET / CABINETS
CB CATCH BASIN
CEM CEMENT
CF CUBIC FEET
CFM CUBIC FEET PER MINUTE
CH CHANNEL
CIP CAST-IN-PLACE
CIR CIRCLE, CIRCULAR
CJ CONTROL JOINT
CLG CEILING
CL CLOSET
CLR CLEARANCE / CLEAR
CMU CONCRETE MASONRY UNIT
CNTR COUNTER
CO CLEAN OUT / CASED OPENING
COL COLUMN
COMP COMPRESSOR / COMPOSITE
COMPR COMPRESSIBLE
CONC CONCRETE
CONSTR CONSTRUCTION
CONT CONTINUOUS
CONTR CONTRACTOR
CORR CORRUGATED
CPT CARPET
CS COUNTERSINK / COUNTERSUNK
CT CERAMIC TILE
CTR CENTER
CTYD COURTYARD
CUYD CUBIC YARDS
CW COLD WATER

d PENNY
dB DECIBAL
DBL DOUBLE
DEG DEGREES
DEMO DEMOLISH / DEMOLITION
DF DRINKING FOUNTAIN
DIA DIAMETER
DIM DIMENSION
DL DEAD LOAD
DN DOWN
DS DOWNSPOUT
DTL DETAIL
DWG DRAWING
DWGS DRAWINGS

EA EACH
EF EXHAUST FAN
EJ EXPANSION JOINT
ELEC ELECTRIC / ELECTRICAL
ELEV ELEVATOR / ELEVATION
ENCL ENCLOSURE
EPDM ETHYLENE PROYLENE DIENE M-CLASS
EQ EQUAL
EQUIP EQUIPMENT
EW EACH WAY
EWC ELECTRICAL WATER COOLER
EX EXISTING / EXHAUST
EXH EXHAUST
EXIST EXISTING
EXT EXTERIOR

FA FIRE ALARM
FAP FIRE ALARM PANEL
FAS FIRE ALARM STROBE / HORN
FD FLOOR DRAIN / FIRE DEPARTMENT
FE FIRE EXTINGUISHER
FEB FIRE EXTINGUISHER WITH BRACKET
FEC FIRE EXTINGUISHER IN CABINET
FF FINISH FLOOR
FHC FIRE HOSE CABINET
FIN FINISH
FIXT FIXTURE
FLG FLASHING
FL FLOOR
FLR FLOOR
FLUOR FLUORESCENT
FND FOUNDATION
FO FACE OF
FOS FACE OF STUD
FRP FIBERGLASS REINFORCED PANEL
FT FOOT / FEET
FTG FOOTING
FV FIELD VERIFY

GA GAUGE
GALV GALVANIZED
GC GENERAL CONTRACTOR
GEN GENERAL
GFI GROUND FAULT CIRCUIT INTERRUPT
GFI GROUND FAULT INTERRUPT
GND GROUND
GWB GYPSUM WALLBOARD
GYP GYPSUM

H/C HANDICAPPED ACCESSIBLE
HB HOSE BIBB
HC HOLLOW CORE
HDR HEADER
HDRL HANDRAIL
HM HOLLOW METAL
HORZ HORIZONTAL
HR HOUR
HGT HEIGHT
HT HEIGHT
HTR HEATER
HVAC HEATING, VENTILATION, AND AIR CONDITIONING
HW HOT WATER / HARDWARE

ICF INSULATED CONCRETE FORM
ID INSIDE DIAMETER
IN INCHES
INCL INCLUDES / INCLUDING
INSUL INSULATION
INT INTERIOR
INV INVERT
IR IMPACT RESISTANT
IRGWB IMPACT RESISTANT GYPSUM WALLBOARD

JAN JANITOR
JJB JAMB
JBOX JUNCTION BOX
JCT JUNCTION
JST JOIST
JT JOINT

K KIPS
KD KILN DRIED
KDAT KILN DRIED AFTER TREATMENT

L STEEL ANGLE, LENGTH
LAM LAMINATED
LAV LAVATORY
LBS POUNDS
LF LINEAR FEET
LH LEFT HAND
LINO LINEOLEUM
LIVE LOAD
LLH LONG LEG HORIZONTAL
LLV LONG LEG VERTICAL
LT LIGHT
LTG LIGHTING
LINTL LINTEL
LTWT LIGHTWEIGHT
LVR LOUVER

M METER
MAR MARBLE
MAS MASONRY
MATL MATERIAL
MAX MAXIMUM
MC MEDICINE CABINET
MECH MECHANICAL
MED MEDIUM
MEMBR MEMBRANE
MEZZ MEZZANINE
MFR MANUFACTURER
MIN MINIMUM
MISC MISCELLANEOUS
MK MARK
MO MASONRY OPENING
MOD MODULAR
MRGWB MOISTURE RESISTANT GYPSUM WALLBOARD
MTD MOUNTED
MTL METAL
MULL MULLION

N NORTH
N/A NOT APPLICABLE
NIC NOT IN CONTRACT
NO NUMBER
NOM NOMINAL
NS NON SHRINK
NTS NOT TO SCALE

O/ OVER
OA OVERALL
OC ON CENTER
OCCS OCCUPANTS
OD OUTSIDE DIAMETER / OVERFLOW DRAIN
OH OVERHEAD / OPPOSITE HAND
OHD OVERHEAD DOOR
OPP OPPOSITE
OPPH OPPOSITE HAND
OPNG OPENING
OZ OUNCE

PART PARTITION
PCC PRE-CAST CONCRETE
PCF POUNDS PER CUBIC FOOT
PERF PERFORATED
PKG PARKING
PL PLATE / PLASTER / PROPERTY LINE
PLM PLASTIC LAMINATE
PLUMB PLUMBING
PLYWD PLYWOOD
PNL PANEL
PR PAIR
PREFAB PREFABRICATED
PREP PREPARE / PREPARATION
PSF POUNDS PER SQUARE FOOT
PSI POUNDS PER SQUARE INCH
PT PRESSURED TREATED / PAINT / POINT
PVC POLYVINYL CHLORIDE
PVMT PAVEMENT
PWR POWER

QC QUALITY CONTROL
QT QUARRY TILE
QTY QUANTITY

RA RETURN AIR
RAD RADIUS
RBR RUBBER
RCP REFLECTED CEILING PLAN
RD ROOF DRAIN
REF REFERENCE
REINF REINFORCED / REINFORCEMENT
RET RETURN
REQD REQUIRED
REV REVISION
RH RIGHT HAND
RM ROOM
RMV REMOVE
RO ROUGH OPENING
ROW RIGHT OF WAY

SA SUPPLY AIR
SAN SANITARY
SC SOLID CORE
SCHED SCHEDULE / SCHEDULED
SD SMOKE DETECTOR
SECT SECTION
SEWER SEWER
SF SQUARE FEET
SGL SIGNAL / SINGLE
SHT SHEET
SIM SIMILAR
SJ SAWED JOINT
SPECS SPECIFICATIONS
SPKLR SPRINKLER
SQ SQUARE
SS SANITARY SEWER
STAINL STAINLESS STEEL
STD SOUND TRANSMISSION COEFFICIENT
STC STANDARD
STL STEEL
STOR STORAGE
STRUCT STRUCTURE / STRUCTURAL
SUSP SUSPENDED
SW STORMWATER
SYD SQUARE YARD
SYS SYSTEM

T&G TONGUE AND GROOVE
T/D TELEPHONE / DATA
TBD TO BE DETERMINED
TEL TELEPHONE
TEMP TEMPORARY / TEMPERATURE
THK THICK
THR THRESHOLD / THREADED
TJ TOOLED JOINT
TME TO MATCH EXISTING
TO TOP OF
TOB TOP OF BEAM
TOC TOP OF CONCRETE
TOF TOP OF FOOTING
TOS TOP OF STEEL
TOW TOP OF WALL
TS STRUCTURAL TUBE STEEL
TV TELEVISION
TYP TYPICAL

U/S UNDERSIDE
UNF UNFINISHED
UNO UNLESS NOTED OTHERWISE
UON UNLESS OTHERWISE NOTED
UR URINAL

VB VAPOR BARRIER
VCT VINYL COMPOSITE TILE
VERT VERTICAL
VEST VESTIBULE
VIF VERIFY IN FIELD
VIF VERIFY
VOL VOLUME
VP VISION PANEL
VT VINYL TILE
VTR VENT THROUGH ROOF

W/ WITH
W/O WITHOUT
WC WATER CLOSET
WCT WAINSCOT
WD WOOD
WP WATERPROOF, WATERPROOFING
WT WATER TABLE
WWF WELDED WIRE FABRIC

Legend of Architectural Symbols:

1 View Name
1/8" = 1'-0"

DRAWING TITLE




PROJECT NORTH



TRUE NORTH




DETAIL NUMBER



EXTERIOR ELEVATION MARKER



SHEET NUMBER



INTERIOR ELEVATION MARKER



SECTION MARKER



COLUMN GRID



MATCHLINE

101

DOOR TAG




ELEVATION MARKER




WALL TAG




STOREFRONT TAG




CEILING TAG




ROOM TAG



KEYNOTE




ACCESSORY / EQUIPMENT TAG



SLOPE MARKER




LEVEL MARKER




DETAIL REFERENCE



REVISION CLOUD & MARKER



DOOR / WINDOW / STOREFRONT
DETAIL REFERENCE

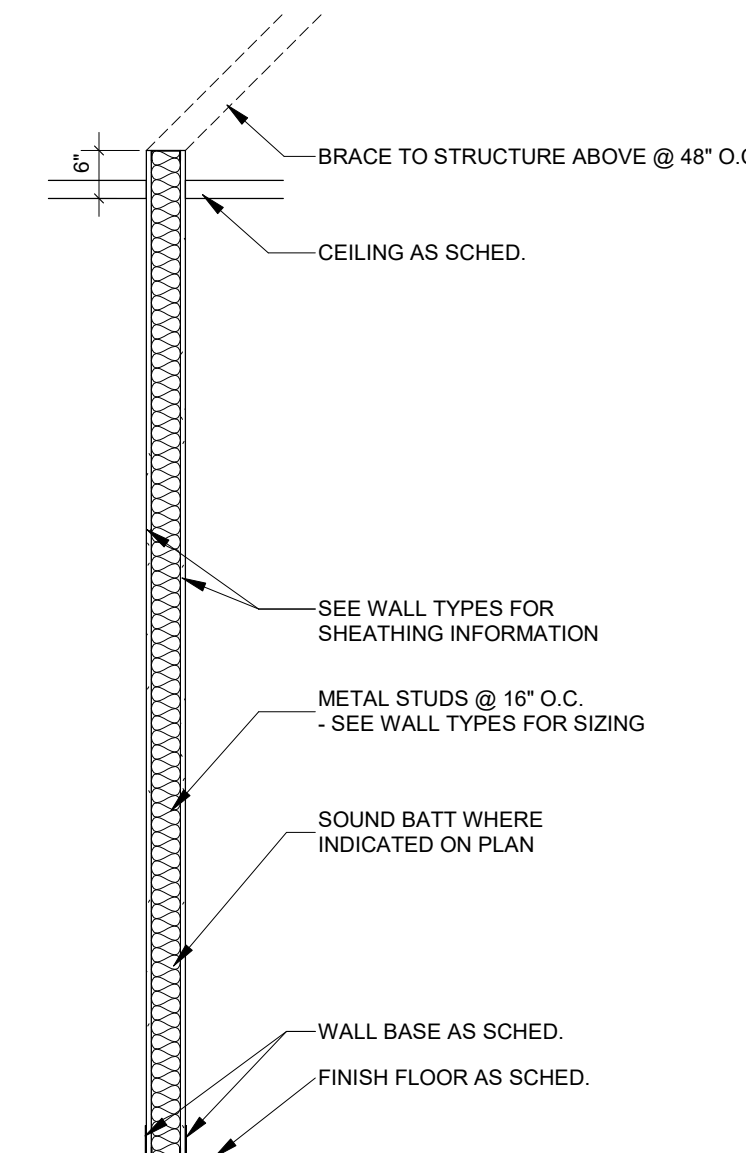

1 Typical Wall Section
1/2" = 1'-0"

SEAL:

PROJECT TITLE:

TCC English Building
Restroom Renovations
444 Appleyard Dr., Tallahassee, FL 32304

JOB NO.: 23.121

DESIGNED: DC

DRAWN: JR/MP/DC

CHECKED: DC

THIS DRAWING AND ANY REPRODUCTIONS ARE THE PROPERTY AND COPYRIGHT OF BKJ, INC. AND MAY NOT BE REPRODUCED, PUBLISHED, OR USED IN ANY MANNER WITHOUT WRITTEN PERMISSION OF THE ARCHITECT

REVISIONS:	NO.	DESCRIPTION	DATE
	1		
	2		
	3		
	4		
	5		
	6		
	7		
	8		
	9		
	10		

DRAWING PHASE:

100% Construction Documents

DRAWING TITLE:

Annotations, Symbols, & Partition Types

SHEET NO.:

A0.1

DATE:

August 25, 2023

Project Specifications:

- Division 0 – TCC Procurement & Contracting Requirements
- See Project Specifications Manual

- Division 1 – TCC General Requirements
- See Project Specifications Manual

Division 2 – Existing Conditions

- Section 024119 – Selective Demolition
 - Includes selective demolition excluding removal of hazardous materials and toxic substances.
 - Reference Standards:
 - 29 CFR 1926 - U.S. Occupational Safety and Health Standards; current edition.
 - NFPA 241 - Standard for Safeguarding Construction, Alteration, and Demolition Operations; 2013.
 - Comply with applicable codes and regulations for demolition operations and safety of adjacent structures and the public.
 - Obtain required permits.
 - Take precautions to prevent catastrophic or uncontrolled collapse of structures to be removed; do not allow worker or public access within range of potential collapse of unstable structures.
 - Provide, erect, and maintain temporary barriers and security devices.
 - Conduct operations to minimize obstruction of public and private entrances and exits; do not obstruct required exits at any time; protect persons using entrances and exits from removal operations.
 - Do not begin removal until receipt of notification to proceed from Owner.
 - Protect existing structures and other elements that are not to be removed.
 - Provide bracing and shoring.
 - Stop work immediately if adjacent structures appear to be in danger.
 - If hazardous materials are discovered during removal operations, stop work and notify Architect and Owner; hazardous materials include regulated asbestos containing materials, lead, PCB's, and mercury.
 - Drawings showing existing construction and utilities are based on casual field observation and existing record documents only.
 - Verify that construction and utility arrangements are as shown.
 - Report discrepancies to Architect before disturbing existing installation.
 - Beginning of demolition work constitutes acceptance of existing conditions that would be apparent upon examination prior to starting demolition.
 - Separate areas in which demolition is being conducted from other areas that are still occupied.
 - Remove existing work as indicated and as required to accomplish new work.
 - Services (including but not limited to HVAC, Plumbing, Fire Protection, Electrical, and Telecommunications): Remove existing systems and equipment as indicated.
 - Maintain existing active systems that are to remain in operation; maintain access to equipment and operational components.
 - Remove abandoned pipe, ducts, conduits, and equipment, including those above accessible ceilings; remove back to source of supply where possible, otherwise cap stub.

Division 3 – Concrete

- Section 033000 – Cast-In-Place Concrete
 - General:
 - Assume all responsibility for the work, design and engineering of the formwork and the safe support of property adjacent to the work.
 - Work shall be done by one qualified to install the concrete work in accordance with the drawings and specifications.
 - Submittals:
 - Design and submit mix design series along with test data from laboratory or field experience corresponding to the same mix design.
 - Normal and lightweight Concretes shall have 28-day compressive strength as indicated on the drawings.
 - Test reports shall show requirements of ASTM Specifications.
 - Materials:
 - Reinforcement: As indicated in drawings.
 - Portland Cement: A domestic brand approved by Architect for color and conforming to requirements of ASTM C150, low alkali, Type I or Type III.
 - Fine Aggregate: Conform to ASTM C33 except that the fineness modules shall be not less than 2.1 nor more than 3.1 and the gradation shall be as specified herein below:

Sieve No	3/8	#4	#8	#16	#30	#50	#100
Total % Passing	100	95-100	80-100	50-85	25-60	10-30	2-10

(by weight)
 - Coarse Aggregate Normal Weight: Crushed stone or gravel and shall conform to ASTM C33. Size of coarse aggregate shall be as specified herein below:
 - Size #67 (3/4 inch to #4) for Sections 4" thick and greater.
 - Size #7 (1/2 inch to #4) for Sections less than 4" thick.
 - Coarse Aggregate Light Weight: Crushed stone or gravel and shall conform to ASTM C33. Size of coarse aggregate shall be as specified herein above: Maximum in-place weight of light weight concrete shall be 120 PCF.
 - Water used in mixing concrete shall be clean and fit to drink.
 - Admixtures: Submit certification for approval.
 - High, early strength accelerating, water-reducing admixture: Contains no chloride, shall be free of organic acids, shall be compatible with air-entraining admixture to be used, and shall conform to the requirements of ASTM C494, Type C or F.
 - Waterproof Curing Paper: Conform to ASTM C171.
 - Curing Compound: Contain no wax or varnish. Conform to ASTM C309, Type I.
 - Expansion Joint Material in the Building: Non-extruding and resilient non-bituminous type conforming to ASTM D1752, Type II.
 - Batching and Mixing
 - Measure cement by weight on a scale separate from those used for other materials. Cement may be measured in bags of standard weight of 94 pounds; however, no fraction of a bag shall be used in any batch.
 - Measure aggregates by weight. Batch weights shall be based on saturated surface dry materials corrected for the actual moisture condition of the aggregate.
 - Measure water by volume or by weight by devices not subject to variation due to variable pressure in the water supply line.
 - Devices for measuring quantities of cement, aggregates, water and admixtures shall be accurate within 1% under operating condition.
 - Ready-mixed concrete shall be produced and delivered in accordance with ASTM C94.
 - Placing Concrete
 - Give the Architect 48 hours advance notice before placing concrete to permit inspection of the forms and reinforcement. Embedded items of whatever nature shall be in place prior to inspection.
 - Remove water and debris from forms before depositing concrete.
 - Clean reinforcement and forms coated with foreign material or with concrete from previous placing operations before depositing concrete.
 - Place concrete not later than 1-1/2 hours after mixing. Mix temperature shall not exceed 90F at time of placing.
 - Place no concrete when atmospheric temperature is below 35F.
 - Repair of Defects
 - Inspection by the Architect shall determine whether or not work is acceptable; and, if repairable, the method of repair to be used. Defects in materials and workmanship shall be subject to the above inspection at all times during the progress of the work regardless of previous inspections.
 - Condemned work shall consist of any concrete work which cannot be repaired. Condemned work shall be removed and replaced, at the Contractor's expense, with work that will conform to the contract documents.
 - Slabs
 - As a minimum, maintain the concrete thicknesses shown on the drawings.
 - Ensure that termite treatment shall have been completed before installing vapor barrier. Install vapor barrier with 6" laps sealed with the manufacturer's recommended sealing compound.

Division 4 - Masonry

- Section 042000 – Concrete Unit Masonry
 - General:
 - Concrete masonry materials and construction shall conform with ACI 530.
 - Compressive strength of the masonry shall be determined by the unit strength method as set forth in ACI 530.1. The net area compressive strength of masonry (F'm) shall be 1,500 PSI at 28 days.
 - Use 50% solid concrete masonry units conforming to ASTM C90 with a minimum net area compressive strength of 1,900 PSI at 28 days.
 - Use Type S mortar in accordance with ASTM C270 except use Type M Mortar below grade. Head and bed joints shall be 3/8-inch for the thickness of the face shell. Webs are to be fully mortared in all courses of piers, columns, and pilasters, in the starting course and where an adjacent cell is to be grouted. Remove mortar protrusions extending ½-inch or more into cells to be grouted.
 - Use fine or coarse grout conforming to ASTM C476, with a minimum compressive strength of 2,500 PSI in 28 days. Aggregate shall conform to ASTM C404 for grout selected, with slump of 8 inches to 11 inches.
 - All reinforced cells and cells with expansion bolts, embed plates, or other anchors and all cells below grade shall be grouted solid in accordance with ACI 530.1. Allow mortar to cure 24 hours prior to grouting.
 - Lay-up units in running bond unless otherwise noted. Saw cut units which are not in multiples of 8 inches with all units being at least 8 inches long. Band corners by lapping ends 8 inch in successive vertical courses.
 - Use standard (9 gage) horizontal joint reinforcing conforming to ASTM A-82 in every other course. Overlap discontinuous ends 6". Use prefabricated corners and tees. Use truss type, except use ladder type in walls with vertical reinforcing. Extend joint reinforcing a minimum of 4" into tie columns.
 - Grout lift shall not exceed 5 ft deep.

Division 6 – Wood, Plastics and Composites

- Section 061000 – Rough Carpentry
 - Wood blocking shall be plywood or southern yellow pine.
 - Provide pressure treated blocking where indicated in the drawings or where required.

- Electrical backboards shall be ¾" DOC PS 1, Exposure 1, C-D plugged coated with fire retardant paint.

Division 7 – Moisture and Thermal Products

- Section 079200 – Joint Sealants
 - Action Submittals:
 - Product Data: For each type of joint sealant product specified.
 - Joint Sealant Schedule: Indicate joint sealant location, joint sealant type, manufacturer and product name, and color, for each application.
 - Samples for Color Selection: For each joint sealant type.
 - General: Colors of Exposed Joint Sealants: As selected by Architect from manufacturer's full range.
 - VOC Content for Interior Applications:
 - Architectural Sealants: 250 g/L
 - Sealant Primers for Nonporous Substrates: 250 g/L
 - Sealant Primers for Porous Substrates: 775 g/L
 - Provide joint sealants and accessory materials that are compatible with one another, and with adjacent materials, as demonstrated by sealant manufacturer using ASTM C 1087.
 - Acrylic Latex: Acrylic latex or siliconized acrylic latex, ASTM C 834, Type OP, Grade NF.
 - Products: Subject to compliance with requirements, provide one of the following:
 - Pecora Corporation; AC-20
 - Tremco Incorporated; Tremflex 834.
 - Mildew-Resistant Joint Sealants:
 - Formulated for prolonged exposure to humidity with fungicide to prevent mold and mildew growth.
 - Silicone, Mildew Resistant, Acid Curing, S, NS, 25, NT: Mildew-resistant, single-component, non-sag, plus 25 percent and minus 25 percent movement capability, nontraffic use, acid-curing silicone joint sealant; ASTM C 920, Type S, Grade NS, Class 25, Use NT.
 - Manufacturers: Subject to compliance with requirements, including but not limited to:
 - Dow Corning Corporation
 - GE Construction Sealants: Momentive Performance Materials Inc.
 - May National Associates, Inc.; a subsidiary of Sika Corporation.
 - Tremco, Inc.

Division 8 – Openings

- Section 081113 – Hollow Metal Doors and Frames
 - General
 - Obtain hollow metal doors and frames through one source from a single manufacturer wherever possible.
 - Standard Hollow Metal Frames comply with ANSI / SDI A250.8.
 - Field verify actual dimensions before fabrication.
 - Interior Hollow-Metal Frames
 - Frames:
 - Materials: cold-rolled steel sheet, 16-gauge thickness
 - Frames shall be galvanized where indicated on the Door Schedule.
 - Construction: Full profile welded.
 - Finish: Factory primed.
 - Fabrication
 - Hollow-Metal Frames:
 - Provide countersunk, flat- or oval-head exposed screws and bolts for exposed fasteners unless otherwise indicated.
 - Grout Guards: Weld guards to frame at back of hardware mortises in frames to be grouted.
 - Floor Anchors: Weld anchors to bottoms of jambs with at least four spot welds per anchor; however, for slip-on drywall frames, provide anchor clips or countersunk holes at bottoms of jambs.
- Section 081407 – Commercial Wood Doors
 - Field Conditions: Do not deliver or install doors until spaces are enclosed and weather tight, wet work in spaces is complete and dry, and HVAC system is operating and maintaining temperature between 60 and 90 deg F and relative humidity at occupancy levels during remainder of construction period.

- Standard Manufacturer Warranties:
 - Failures include, but are not limited to the following:
 - Warping (bow, cup, or twist) more than ¼ inch in 42-by-84-inch section.
 - Telegraphing of core construction in face veneers exceeding 0.01 inch in 3-inch span.
 - Solid Core Doors: Limited lifetime warranty.
- Manufacturing Standard
 - Interior Wood Doors: Window & Door Manufacturers Association publication ANSI/WDMA I.S.1A "Industry Standard for Interior Architectural Wood Flush Doors"
- Interior Solid Core Standard Painted Flush Wood Doors
 - Solid Core Standard Painted Flush Doors
 - WDMA Performance Level: Extra Heavy Duty
 - Faces: Paint grade birch
 - Core: Wood-based particleboard conforming to ANSI A208. LD-1 28lb. density core.
 - Construction: Five plies.
 - Thickness: 1-3/4-inch
- Fabrication:
 - Factory Fitting: Fit to frame openings with clearances with clearances specified in WDMA I.S. 1A.
 - Undercut: Maximum 3/8 inch above thresholds.
 - Factory Machining: Machine doors for hardware that is not surface applied.
 - Verify dimensions for hardware mortises in metal frames before machining.
 - Door Frames:
 - Supply frames with temporary spreader bars at base.
- Finishes:
 - Factory-Primed: Primed (all six sides).
 - Factory-Painted: N/A, doors to be field painted.
 - Color: As indicated on drawings
- Execution
 - Verify that door frames are plumb, square, and accurate size.
 - Inspect each door before installation for damage and defects per WDMA Section F-6.
 - Align doors with uniform vertical and top edge clearance.
 - Repair of damage or defects is subject to Architect's acceptance, including removal of soiling.
 - Provide new replacement doors for doors that cannot be satisfactorily repaired.

- Section 087100 – Door Hardware
 - Door Hardware
 - Requirements:
 - All locks shall be lever type as required to meet requirements of A.D.A.
 - All other hardware shall conform to the requirements of A.D.A.
 - Contractor to coordinate keying schedule with owner.
 - Mounting heights: mount door hardware units at heights required to comply with governing regulations.
 - Install each door hardware item to comply with manufacturer's written instructions.
 - Thresholds: set thresholds for exterior and acoustical doors in full bed of sealant.
 - Adjustment: Adjust and check each operating item of door hardware and each door to ensure proper operation or function of every unit. Replace units that cannot be adjusted to operate as intended. Adjust door control devices to compensate for final operation of heating and ventilating equipment and to comply with referenced accessibility requirements.
 - Warranty:
 - Closers: Ten years.
 - Exit Devices: Five Years.
 - Locksets & Cylinders: Three years.
 - All other Hardware: Two years.
 - Basis of Design (provide basis of design product or approved equal):
 - Hinges – Stanley (ST)
 - Locksets – Corbin Russwin (CR)
 - Door Stops – Trimco (TR)
 - Threshold – National Guard Products (NA)
 - Finish: Satin chromium plated
 - Hardware Sets – as delineated in the drawings

Division 9 – Finishes

- Section 092216 – Non-Structural Metal Framing
 - Non-load bearing steel framing systems for interior gypsum board assemblies and suspension systems for interior gypsum ceilings and soffits.
 - Performance Requirements:
 - For Fire-Test Response Characteristics and STC-Rated Assemblies, provide materials and construction identical to those tested.
 - Framing Systems:
 - Steel Studs and Runners: ASTM C 645. Use either steel studs and runners or dimpled steel studs and runners of equivalent minimum base-metal thickness.
 - Minimum Base-Metal Thickness: 20 gauge (0.036 inches)
 - Depth: As indicted on Drawings.
 - Slip-Type Head Joints: Where indicated, provide one of the following in thickness not less than indicated for studs and in width to accommodate depth of studs.
 - Manufacturers: Subject to compliance with requirements, including but not limited to:
 - Blazeframe Industries.
 - ClarkDietrich building Systems
 - Fire Trak Corp.
 - Marino/Ware
 - MBA Building Supplies
 - Metal-Lite
 - Steel Network, Inc.
 - Suspension Systems:
 - Tie Wire: ASTM A 641/A 641M, Class 1 zinc coating, soft temper, 0.062-inch diameter wire, or double strand of 0.048-inch diameter wire.
 - Wire Hangers: ASTM A 641/A 641M, Class 1 zinc coating, soft temper, 0.16 inch in diameter.
 - Carrying Channels: Cold-rolled, commercial-steel sheet with a base-metal thickness of 0.053 inch and minimum ½ inch wide flanges. Depth is 1-1/2 inches.
 - Auxiliary Materials:
 - Fasteners for metal framing of type, material, size, corrosion resistance, holding power, and other properties required to fasten steel members to substrates.
 - Isolation Strip at Exterior Walls: Provide foam gasket.
- Section 092900 – Gypsum Board
 - Gypsum Wall Assemblies
 - Provide galvanized metal framing as noted on the drawings or required by work.
 - The design and construction of all non-load bearing interior light gauge metal framing shall be the responsibility of the contractor. At minimum, this framing shall be constructed of 20-gauge (30 mil – 33 KSI) or 20-gauge eq (18 mil – 70 KSI) metal studs and track. Studs shall have a maximum spacing of 16" O.C. with double studs at door and window jambs. Provide a minimum of two #10 self-tapping screws at all connections.
 - Provide completed assemblies complying with ASTM C840 and GA-216.
 - Gypsum Wallboard: Paper-faced gypsum panels as defined in ASTM C1396/C1396M; sizes to minimize joints in place; ends square cut.
 - Provide thicknesses and types of gypsum board panels as designated in the drawings.
 - Provide a Level 4 Gypsum finish for all visible gypsum board surfaces.
 - Provide 5/8-inch Type X gypsum board panels at rated assemblies as noted in the drawings.
 - Tile Backer: Manufactured to meet ASTM C1178 Fiberglass Mat Water-Resistant Gypsum Backing Panel.
 - Provide 5/8-inch tile backer panels as noted on the drawings.
 - Provide 5/8-inch Type X tile backer panels at rated assemblies as noted in the drawings.
 - Basis of Design: Georgia Pacific DensShield
 - DensShield Tile Backer is composed of a water-resistant treated core that is covered front and back with fiberglass mats. The mats are permanently integrated with the core during manufacturing. On the tile side, DensShield Tile Backer's heat-cured acrylic coating stops surface water and retards moisture transmission, protecting the wall cavity.
 - OR approved equal. Subject to requirements.
 - Fiberglass-Mat Faced Gypsum Sheathing: ASTM C1177



SEAL:

PROJECT TITLE:

TCC English Building
Restroom Renovations
444 Appleyard Dr., Tallahassee, FL 32304

JOB NO.: 23.121

DESIGNED: Designer

DRAWN: Author

CHECKED: Checker

THIS DRAWING AND ANY REPRODUCTIONS ARE THE PROPERTY AND COPYRIGHT OF BKJ, INC. AND MAY NOT BE REPRODUCED, PUBLISHED, OR USED IN ANY MANNER WITHOUT WRITTEN PERMISSION OF THE ARCHITECT

REVISIONS:

DRAWING PHASE:

100% Construction Documents

DRAWING TITLE:

Specifications I

SHEET NO.:

A0.2

DATE:

August 25, 2023

- Provide ¼-inch fiberglass-mat faced gypsum sheathing as noted on the drawings.
- Basis of Design: Georgia Pacific DensGlass
 - DensGlass Fiberglass-Mat faced gypsum sheathing.
 - OR approved equal. Subject to requirements.
- Acoustic Sealant: Non-hardening, non-skinning, for use in conjunction with gypsum board.
- Joint Materials: ASTM C475 and as recommended by gypsum board manufacturer for project conditions.
- Screws for Attachment to Steel Members Less Than 0.03 inch in Thickness, to Wood Members, and to Gypsum Board. ASTM C1002, self-piercing tapping type, cadmium-plated for exterior locations.
- Screws for Attachment to Steel Members From 0.033 to 0.112 inch in Thickness: ASTM C954; steel drill screws for application of gypsum board to loadbearing steel studs.
- Verify that project conditions are appropriate for work of this section to commence.
- Comply with ASTM C 840, GA-216, and manufacturer's instructions. Install to minimize butt end joints, especially in highly visible locations.
- Corner Beads: Install at external corners, using longest practical lengths.
- Edge Trim: Install at locations where gypsum board abuts dissimilar materials.
- Tolerances: Maximum Variation of Finished Gypsum Board Surface from True Flatness: 1/8 inch in 10 feet in any direction.
- Auxiliary Materials:
 - Sound-Attenuation Blankets
 - Manufacturer: Owens-Corning or approved equal. Subject to compliance.
 - Type: Unfaced glass fiber acoustical insulation ASTM C 665 Type I
 - Surface Burning Characteristics ASTM E 84
 - Max flame spread: 10
 - Max smoke developed: 10
 - Combustion Characteristics: Passes ASTM E 136

- Section 093000 – Tiling
 - General:
 - Provide tile that complies with ANSI A137.1 for types, compositions, and other characteristics indicated. Comply with Standard grade requirements.
 - Factory Blending: For tile exhibiting color variations within ranges, blend tile in factory and package so tile units taken from one package show same range in colors as those taken from other packages and match approved Samples.
 - Tile Products
 - Products as indicated on drawings. See Interior Finish Schedule Legend.
 - Attic Stock – Provide 5% but not less than one carton.
 - Trims
 - Provide edge protection profile at vertical and horizontal outside corners.
 - Basis of Design: Schluter Systems, as indicated on drawings
 - Crack Isolation Membrane
 - Fabric-Reinforced, Modified-Bituminous Sheet: Modified-bituminous sheet with fabric reinforcement facing, 0.040-inch (1-mm) nominal thickness. (Lobby, Restrooms).
 - Manufacturers: Subject to compliance with requirements, provide products by the following: NAC Products ECB Membrane
 - General: Manufacturer's standard product that complies with ANSI A118.12 for standard performance and is recommended by the manufacturer for the application indicated. Include reinforcement and accessories recommended by manufacturer.
 - Setting Materials
 - Standard Dry-Set Mortar (Thinset): ANSI A118.1.
 - Grout Materials
 - Mapei: ANSI A118.6 and A118.7, Ultra Color Plus, Color as indicated on drawings.
- Section 095123 – Acoustic Tile Ceilings
 - C1 – Square Lay-In, Acoustic Ceiling Tile
 - Basis of Design: Armstrong Ultima 1912, Beveled Tegular 9/16" (Design intent is to match the existing ceiling tile and grid in the Lobby; notify architect if specified products do not match existing ceiling tile and grid).
 - Size: 24x24x3/4-inch
 - Surface: Smooth Textured
 - Color: White

- Fire Performance: Class A
- Attic Stock – Provide 5% but not less than one carton
- Suspension System: Armstrong Suprafine, 9/16 Exposed Tee System

- Section 099000 – Painting and Coating
 - Reference Standards:
 - 40 CFR 59, Subpart D - National Volatile Organic Compound Emission Standards for Architectural Coatings; U.S. Environmental Protection Agency; current edition.
 - ASTM D16 - Standard Terminology for Paint, Related Coatings, Materials, and Applications, 2012.
 - ASTM D4442 - Standard Test Methods for Direct Moisture Content Measurement of Wood and Wood-Base Materials; 2007.
 - Provide submittal listing all paint systems and related products for review and approval.
 - Provide commercial quality paint and coatings as noted herein.
 - Provide all paint and coating products used in any individual system from the same manufacturer; no exceptions.
 - Paints and Coatings: Ready mixed, unless intended to be a field-catalyzed coating.
 - Provide paints and coatings of a soft paste consistency, capable of being readily and uniformly dispersed to a homogeneous coating, with good flow and brushing properties, and capable of drying or curing free of streaks or sags.
 - Supply each coating material in quantity required to complete entire project's work from a single production run.
 - Do not reduce, thin, or dilute coatings or add materials to coatings unless such procedure is specifically described in manufacturer's product instructions.
 - Primers: Where the manufacturer offers options on primers for a particular substrate, use primer categorized as "best" by the manufacturer.
 - Flammability: Comply with applicable code for surface burning characteristics.
 - Sheens: Provide the sheens specified; where sheen is not specified, sheen will be selected later by Architect from the manufacturer's full line.
 - Colors: As indicated on drawings.
 - In finished areas, finish pipes, ducts, conduit, and equipment the same color as the wall/ceiling they are mounted on/under.
 - Prepare surfaces to be painted in accordance with paint manufacturers recommendations.
 - Install 2 finish coats over recommended primer to all paint systems noted below. If surface has been previously painted, primer is not required.
 - Steel and iron items exposed to weather shall have a minimum of six mils dry film measurement.
 - Interior steel and iron items shall have a minimum of four mils dry film measurement.
 - Provide latex based paint for interior and an oil based paint for exterior applications and interior metal applications susceptible to contact and wear. Interior paint shall be no or low VOC to promote indoor air quality.

◦ EXTERIOR PAINT SYSTEMS

- METAL – (Doors and Frames):
 - Alkyd Systems (Water based):
 - Semi-Gloss Finish
 - 1st Coat: S-W Pro Industrial Pro-Cryl Universal Primer, B66-1310 Series.
 - 5 mils wet, 2 mils dry per coat.
 - 2nd and 3rd Coat: S-W Pro Industrial Water Based Alkyd Urethane Enamel Semi-Gloss, B53-1150 Series.
 - 4 to 5 mils wet, 1.4 to 1.7 mils dry per coat.

◦ INTERIOR PAINT SYSTEMS

- Wood – (Doors):
 - Alkyd Systems (Water based):
 - Semi-Gloss Finish:
 - 1st Coat: S-W Premium Wall and Wood Primer, B28W8111
 - 4 mils wet, 1.8 mils dry per coat.

- 2nd and 3rd Coat: S-W Pro Industrial Water Based Alkyd Urethane Enamel Semi-Gloss, B53-1150 Series.
 - 4 to 5 mils wet, 1.4 to 1.7 mils dry per coat.
- Masonry – (CMU):
 - Alkyd Systems (Water based):
 - 1st Coat: S-W PrepRite Block Filler, B25W25
 - 75 to 125 sq ft/gal (1.8 to 3.1 sq mL).
 - 2nd and 3rd Coat: S-W Pro Industrial Water Based Alkyd Urethane Enamel Semi-Gloss, B53-1150 Series.
 - 4 mils wet, 1.8 mils dry per coat.
 - Drywall (Walls):
 - Latex Systems:
 - Eg-Shel Finish
 - 1st Coat: S-W ProMar 200 Zero VOC Interior Latex Primer, B28W2600
 - 4 mils wet, 1.5 mils dry per coat.
 - 2nd and 3rd Coat: S-W Promar 200 Zero VOC Eg-Shel, B20-2600 Series.
 - 4 mils wet, 1.7 mils dry per coat.

Division 10 – Specialties

- Section 101400 – Signage
 - Provide commercial quality ADA signage including raised letters and Braille at the following locations:
 - Restrooms – provide signage with ADA accessible pictogram
 - Color: As selected by Architect from full manufacturer's standard range.

- Section 102113 – Toilet Compartments
 - Shop drawings
 - Include overall product dimensions, floor plan, elevations, sections, details, and attachments to other work
 - Samples for verification
 - Furnish physical sample of material in selected color
 - 2' x 2' minimum size
 - Source limitations
 - Obtain toilet compartment components and accessories from a single manufacturer.
 - Basis-of-Design Manufacturer: Hiney Hiders Toilet Partitions by Scranton Products. 1-800-445-5148. www.scrantonproducts.com
 - Or approved equal. Subject to requirements.
 - Materials:
 - Doors and Pilasters shall be constructed of 1-inch solid HDPE.
 - Panels shall be constructed of 1-inch solid HDPE.
 - Panel color as indicated on drawings.
 - Hardware:
 - All exposed hardware shall be: Stainless-steel hardware with continuous stainless-steel hinge.
 - Panel and pilaster brackets shall be: Continuous heavy-duty stainless-steel wall brackets.
 - Pilaster shoes shall be stainless-steel 3" high with #4 satin finish.
 - Headrail shall be made of heavy-duty anodized extruded aluminum.
 - Headrail brackets shall be made from die cast aluminum alloy.
 - Solid Plastic toilet compartment partitions for the following applications:
 - Toilet Compartment Enclosure
 - Basis of Design: Scranton Products: Floor Mounted Overhead Braced
 - Color: As indicated on Drawings
 - Compartment Depth and Width: As scheduled and indicated on Drawings
 - Door Width: 24 inches (610 mm), minimum; at ADA accessible compartments 36 inches (915 mm) minimum.
 - Height Above Floor: 12 inches
 - Door/Panel Height: 66 inches
 - Pilaster Height: 82 inches
- Urinal Privacy Screen
 - Basis of Design: Scranton Products: Wall Hung
 - Color: As indicated on Drawings

- Screen Panel Width: As scheduled and indicated on Drawings
- Screen Panel Height: 55 inches
- Height Above Floor: 14 inches

- Section 102813 – Toilet Accessories
 - Provide the toilet accessories as noted in the drawings. Provide solid blocking in wall for support of all accessories. Submit shop drawings and coordination drawings for use by other trades.

Division 22 – Plumbing

- See Project Specifications Manual

Division 23 – Heating, Ventilating & Air Conditioning (HVAC)

- See Project Specifications Manual

Division 26 – Electrical

- See Project Specifications Manual



BKJ, Inc., Architecture
1621 Physicians Dr.
Tallahassee, Florida 32308
(P) 850.778.8007 | (F) 850.546.6150
www.bkjarchitecture.com
FL Architecture Corporation AAS0002280

SEAL:

PROJECT TITLE:

**TCC English Building
Restroom Renovations**
444 Appleyard Dr., Tallahassee, FL 32304

JOB NO.: 23.121

DESIGNED: Designer

DRAWN: Author

CHECKED: Checker

THIS DRAWING AND ANY REPRODUCTIONS ARE THE PROPERTY AND COPYRIGHT OF BKJ, INC. AND MAY NOT BE REPRODUCED, PUBLISHED, OR USED IN ANY MANNER WITHOUT WRITTEN PERMISSION OF THE ARCHITECT

REVISIONS:

DRAWING PHASE:

100% Construction Documents

DRAWING TITLE:


Specifications II

SHEET NO.:


A0.3

DATE:

August 25, 2023

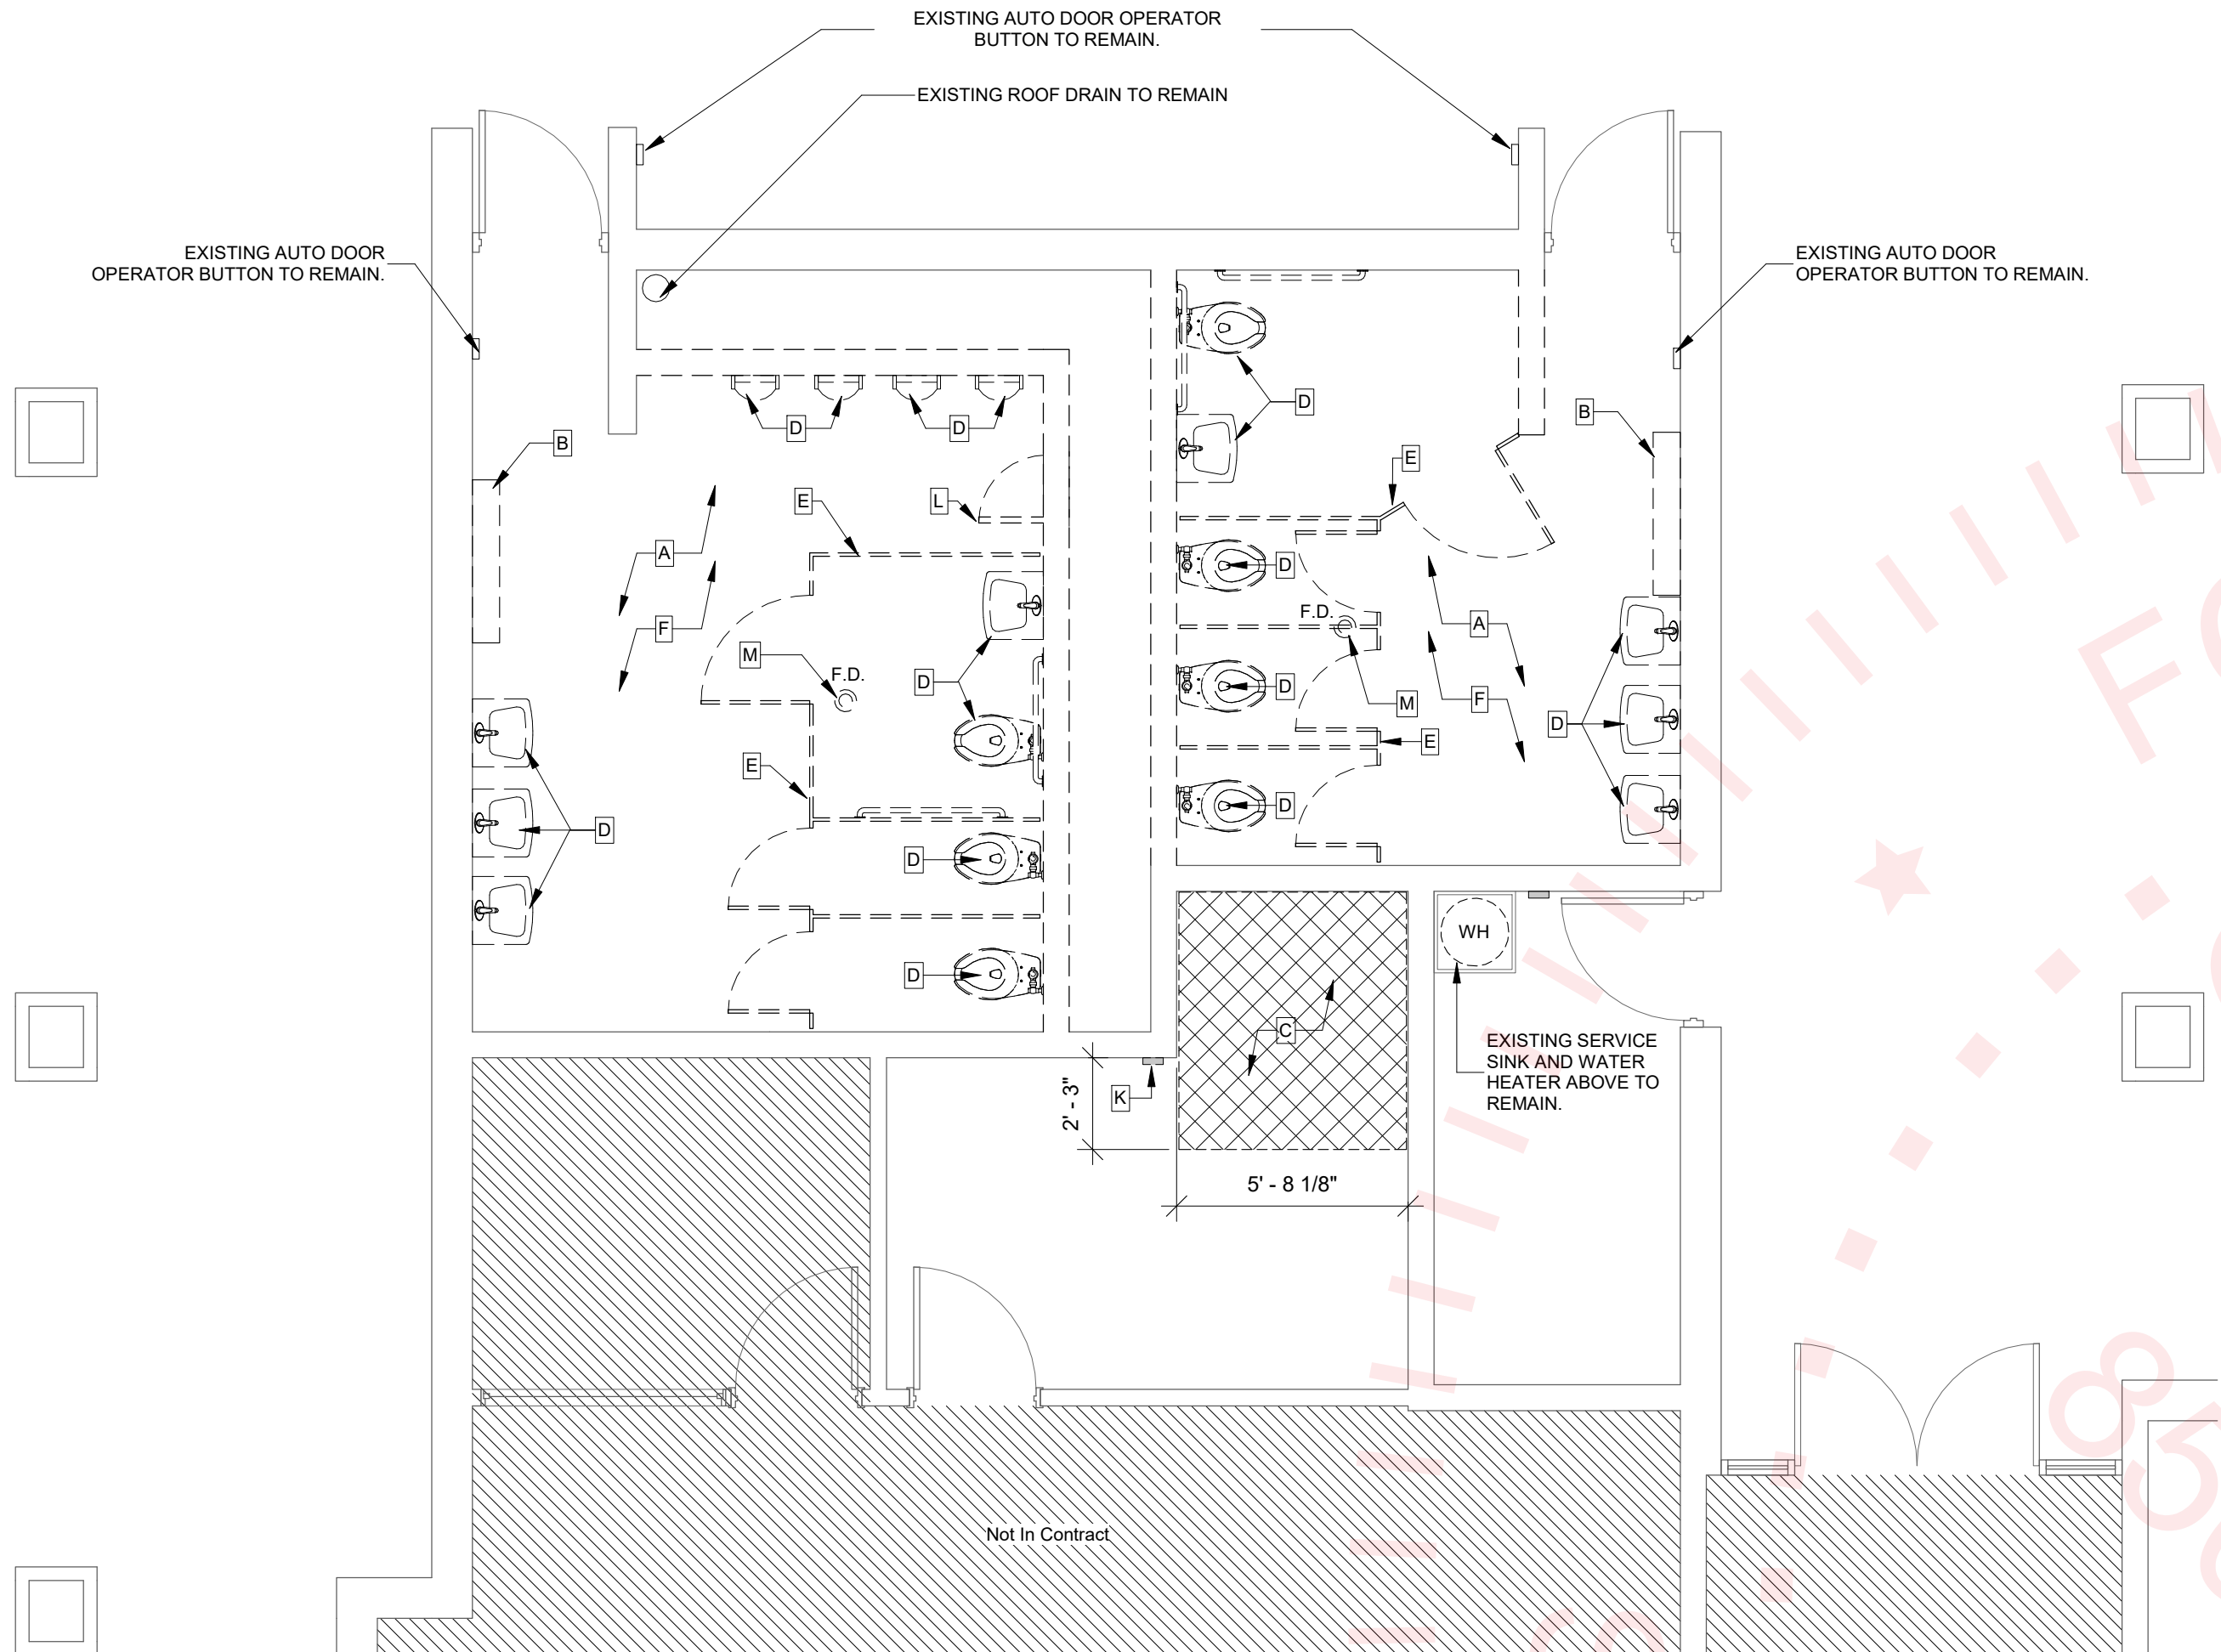

1 Floor Plan - Demolition
1/4" = 1'-0"

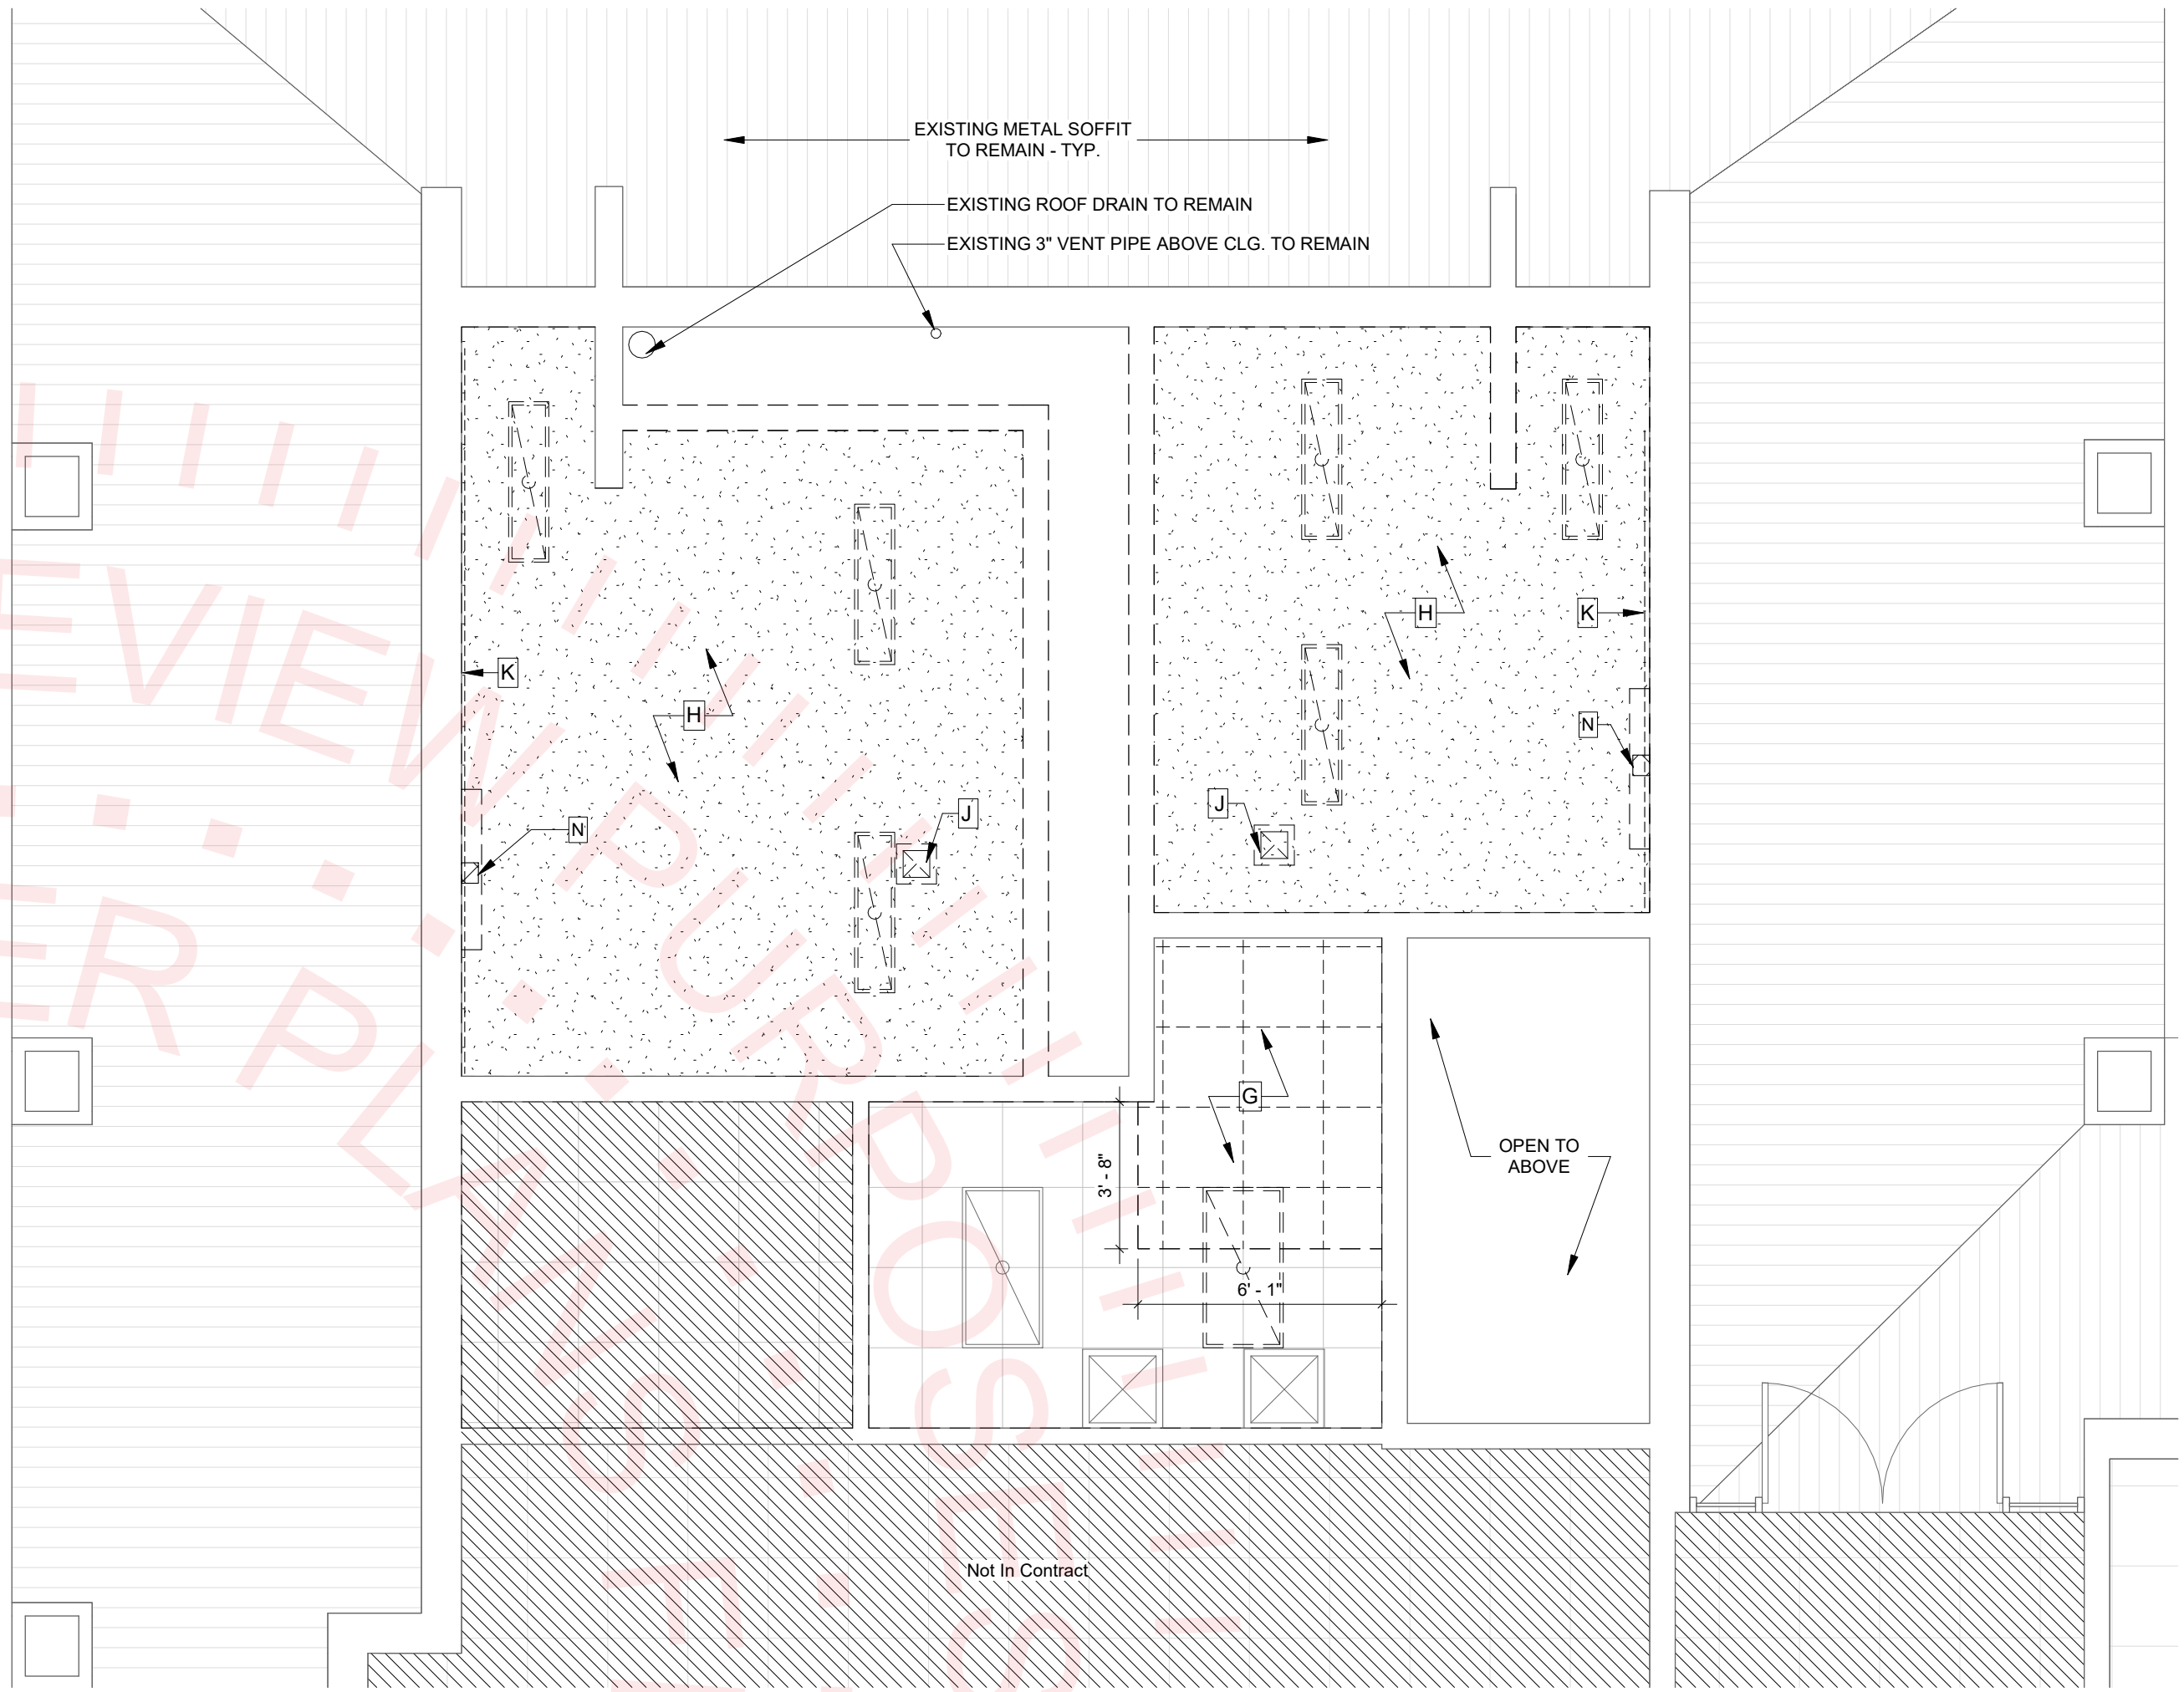

2 RCP - Demolition
1/4" = 1'-0"

General Demolition Notes:

1. ALL DASHED WALLS ARE TO BE REMOVED AS INDICATED PER LEGEND. DOORS WITHIN WALLS TO BE REMOVED SHALL BE REMOVED INCLUDING ALL ASSOCIATED TRIMS AND HARDWARE UNLESS SPECIFICALLY INDICATED TO BE SALVAGED.
2. "SAFE-OFF" M.P.E. SYSTEMS BY QUALIFIED MECHANICAL, PLUMBING, AND ELECTRICAL CONTRACTOR, AS REQUIRED.
3. ALL DAMAGE TO FINISH SURFACES AND ALL THROUGH-SLAB OR WALL PENETRATIONS THAT REMAIN FOLLOWING THE DEMOLITION OF EXISTING WALLS SHALL BE NOTED BY CONTRACTOR FOR REPAIR AND SEALING DURING RENOVATION.
4. ALL DOORS AND HARDWARE ARE TO REMAIN IN PLACE AND PROTECTED UNLESS OTHERWISE INDICATED.
5. REMOVE MISCELLANEOUS WALL-MOUNTED ITEMS WITHIN THE WORK AREA, INCLUDING TACK BOARDS, WHITE BOARDS, CLOCKS. COORDINATE STORAGE AND REINSTALLATION W/ OWNER, UNLESS OTHERWISE NOTED.
6. REMOVE PORTIONS OF EXISTING CONCRETE SLAB AS REQUIRED FOR BELOW SLAB PLUMBING WORK SCOPE - SEE PLUMBING DWGS.
7. REMOVE EXISTING CEILINGS AS REQUIRED FOR MECHANICAL MODIFICATIONS. RE-INSTALL CEILINGS AND GRID AFTER WORK IS COMPLETE.

Demolition Keynotes:

- | | |
|---|--|
| A | REMOVE EXISTING FLOOR TILE AND BASE THROUGHOUT ROOM. |
| B | REMOVE EXISTING MECHANICAL EQUIPMENT - SEE MECH. DWGS. |
| C | REMOVE EXISTING CARPET AND VINYL WALL BASE AS INDICATED. |
| D | REMOVE EXISTING PLUMBING FIXTURE - SEE PLUMBING DWG. |
| E | REMOVE EXISTING TOILET PARTITION AND ASSOCIATED HARDWARE |
| F | REMOVE ALL TOILET ACCESSORIES THROUGHOUT ROOM. |
| G | REMOVE EXISTING ACT OF GRID AS INDICATED. |
| H | REMOVE EXISTING GYPSUM BOARD CEILING AND ASSOCIATED FRAMING. |
| J | REMOVE EXISTING EXHAUST PAN - SEE MECHANICAL DWG. |
| K | REMOVE EXISTING WALL MOUNTED CONDUIT - SEE ELECTRICAL DWG. |
| L | REMOVE EXISTING WALL HATCH |
| M | EXISTING FLOOR DRAIN TO BE REMOVED - SEE PLUMBING DWGS. |
| N | EXISTING FIRE ALARM STROBE TO BE REMOVED - SEE ELEC. DWGS. |

Demolition Plan & RCP Legend:

	EXISTING WALLS
	EXISTING ELEMENTS
	EXISTING FLOOR DRAIN
	WALLS TO BE DEMOLISHED
	ELEMENTS TO BE DEMOLISHED
	DELINEATION OF DEMO CARPET
	NOT IN CONTRACT

SEAL:

PROJECT TITLE:

**TCC English Building
Restroom Renovations**
444 Appleyard Dr., Tallahassee, FL 32304

JOB NO.: 23.121

DESIGNED: DC

DRAWN: JR/MP/DC

CHECKED: DC

THIS DRAWING AND ANY REPRODUCTIONS ARE THE PROPERTY AND COPYRIGHT OF BKI, INC. AND MAY NOT BE REPRODUCED, PUBLISHED, OR USED IN ANY MANNER WITHOUT WRITTEN PERMISSION OF THE ARCHITECT

REVISIONS:

DRAWING PHASE:
100% Construction Documents

DRAWING TITLE:


Demolition Plan and Demolition RCP

SHEET NO.:

AD1.0

DATE:


August 25, 2023

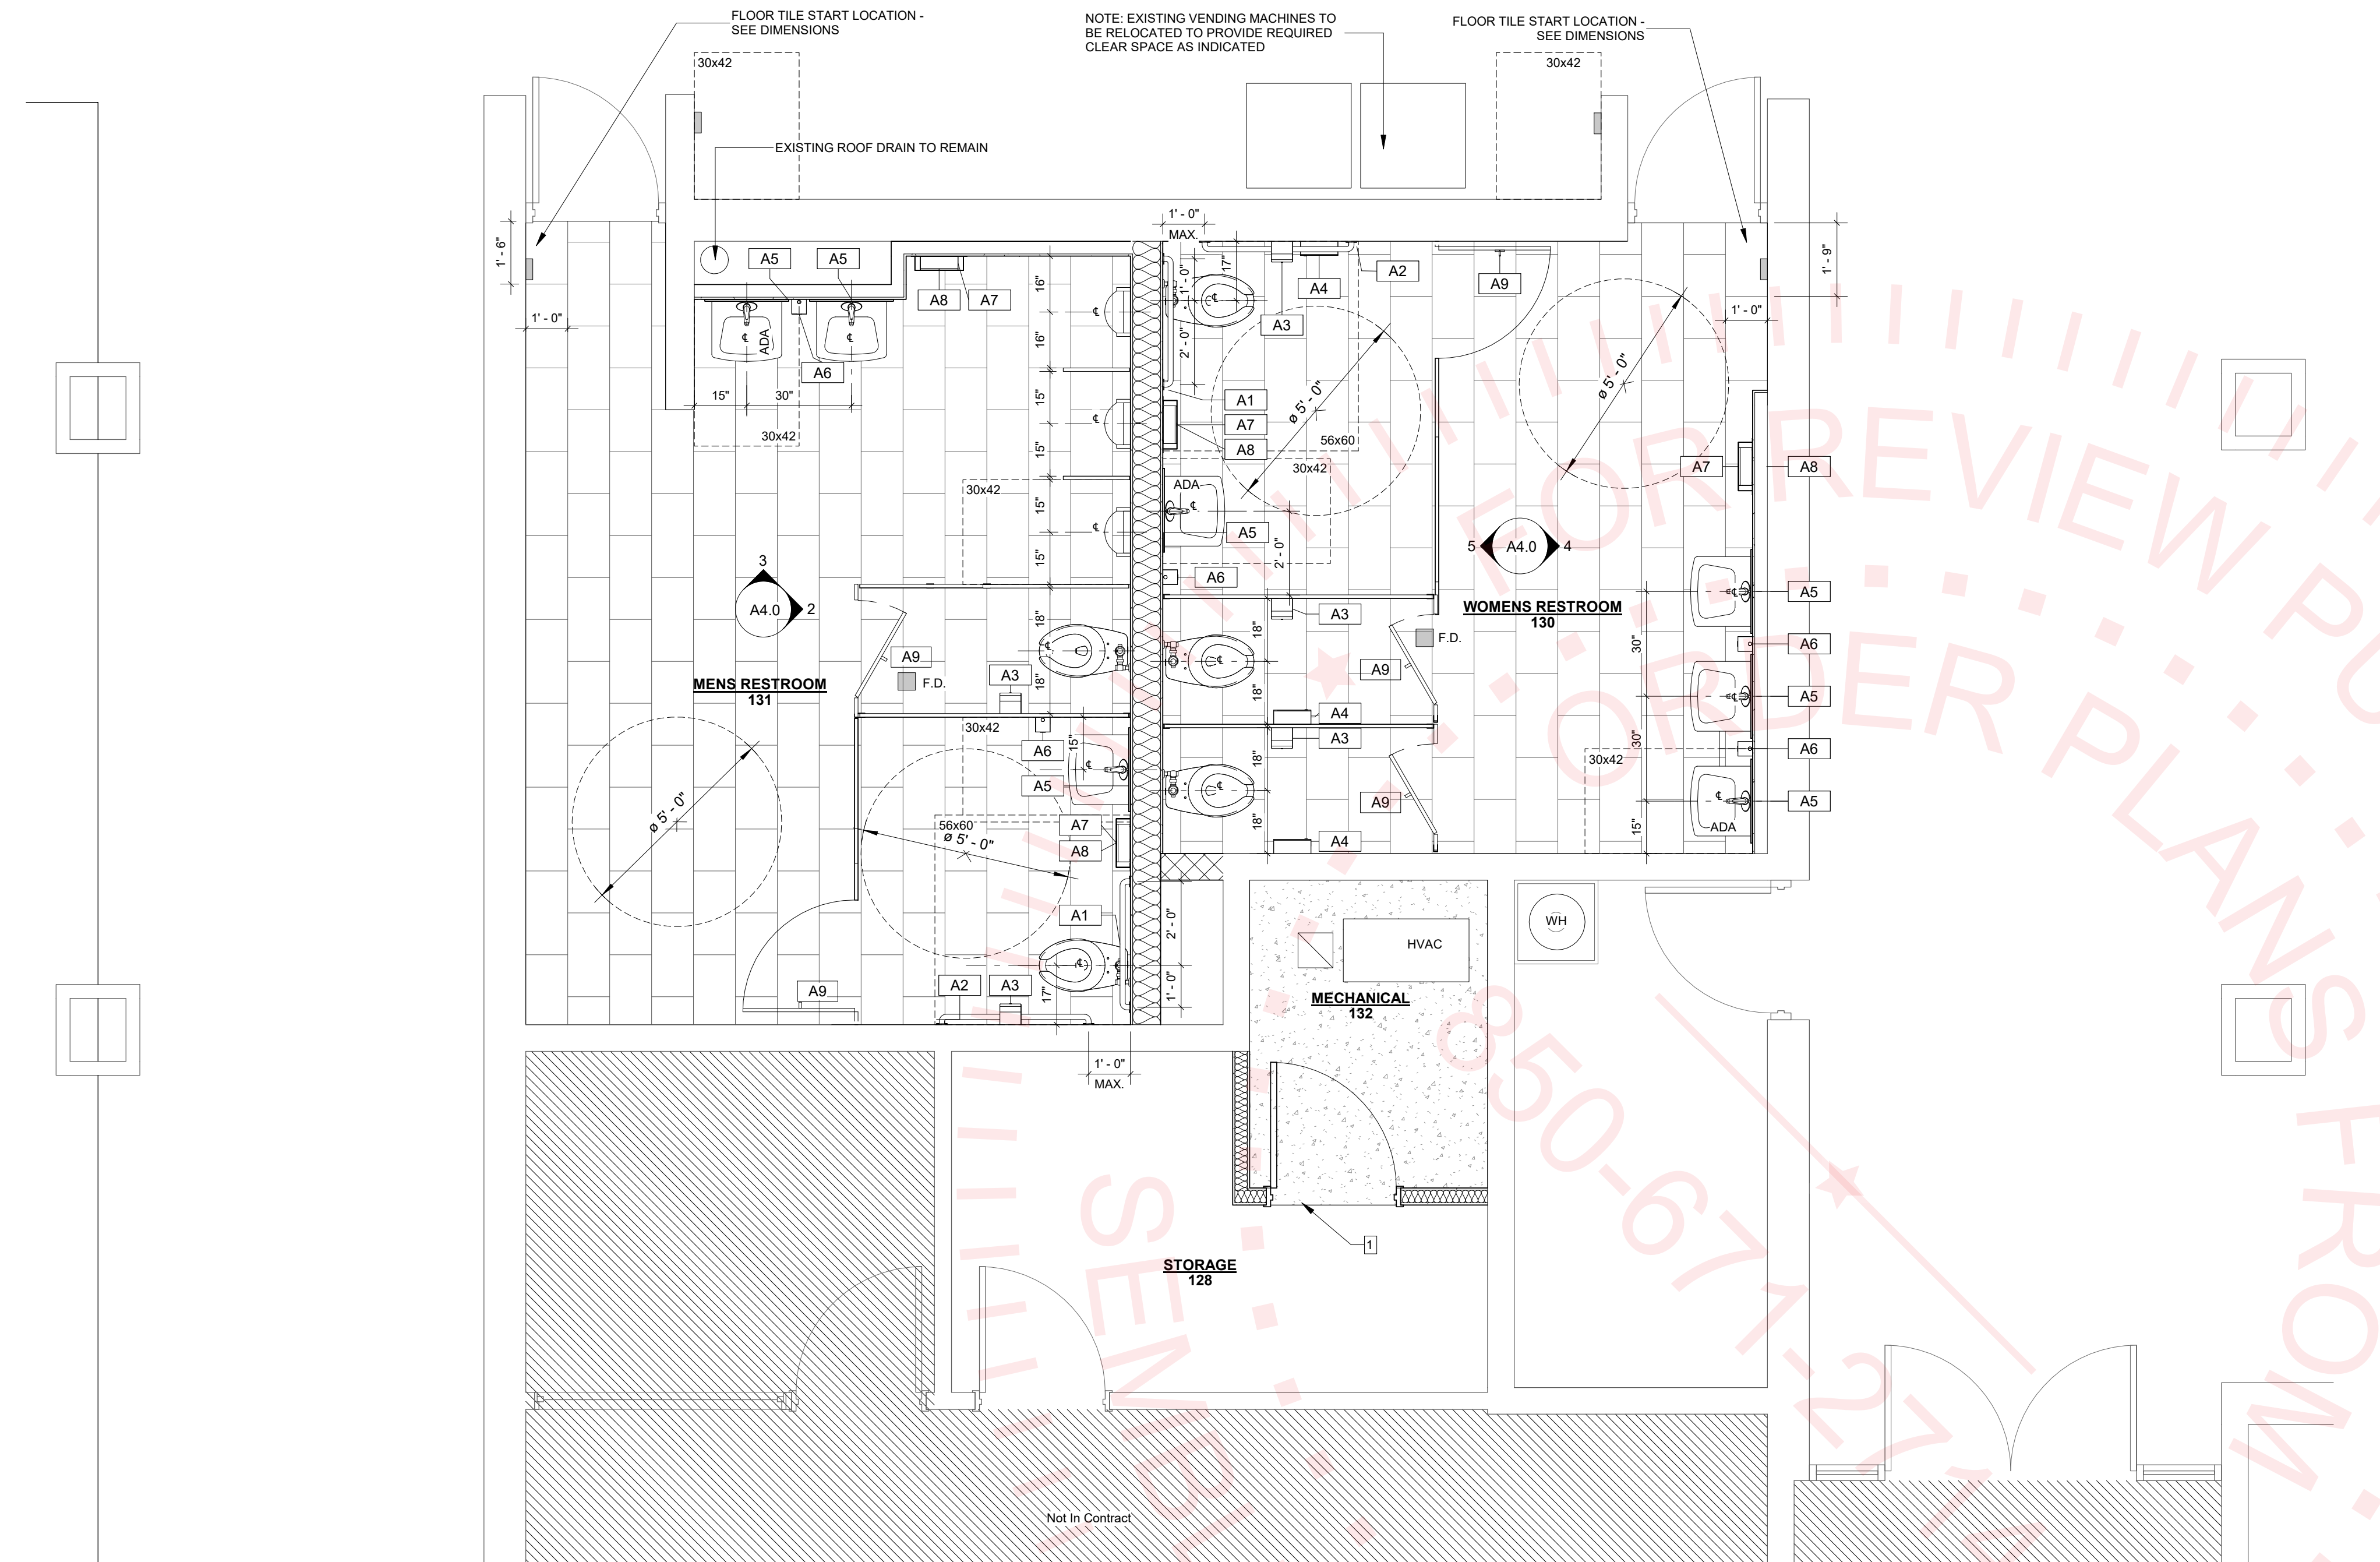

Finish Plan Keynotes:

- 1 ALUMINUM CARPET EDGE - NATIONAL GUARD PRODUCTS - #417 - 3/8" X 2-1/2" - MILL FINISH OR APPROVED EQUAL


Finish Plan Legend:

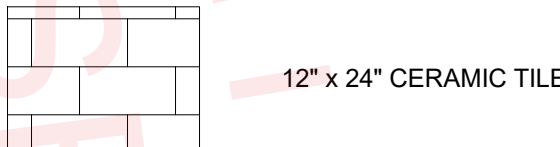

Accessory Schedule:


- A1- 36" GRAB BAR - 1 1/4" DIA. - BOBRICK B-5806X36
A2- 42" GRAB BAR - 1 1/4" DIA. - BOBRICK B-5806X42
A3- TOILET TISSUE DISPENSER - OWNER PROVIDED
A4- SANITARY NAPKIN RECEPTACLE - BOBRICK B-254
A5- 24"x48" MIRROR - BOBRICK B-165 2448
A6- SOAP DISPENSER - OWNER PROVIDED
A7- PAPER TOWEL DISPENSER - OWNER PROVIDED
A8- RECESSED WASTE RECEPTACLE - B-3644
A9- CLOTHES HOOK - BOBRICK B-211

NOTE: OWNER PROVIDED ACCESSORIES SHALL BE INSTALLED BY THE CONTRACTOR

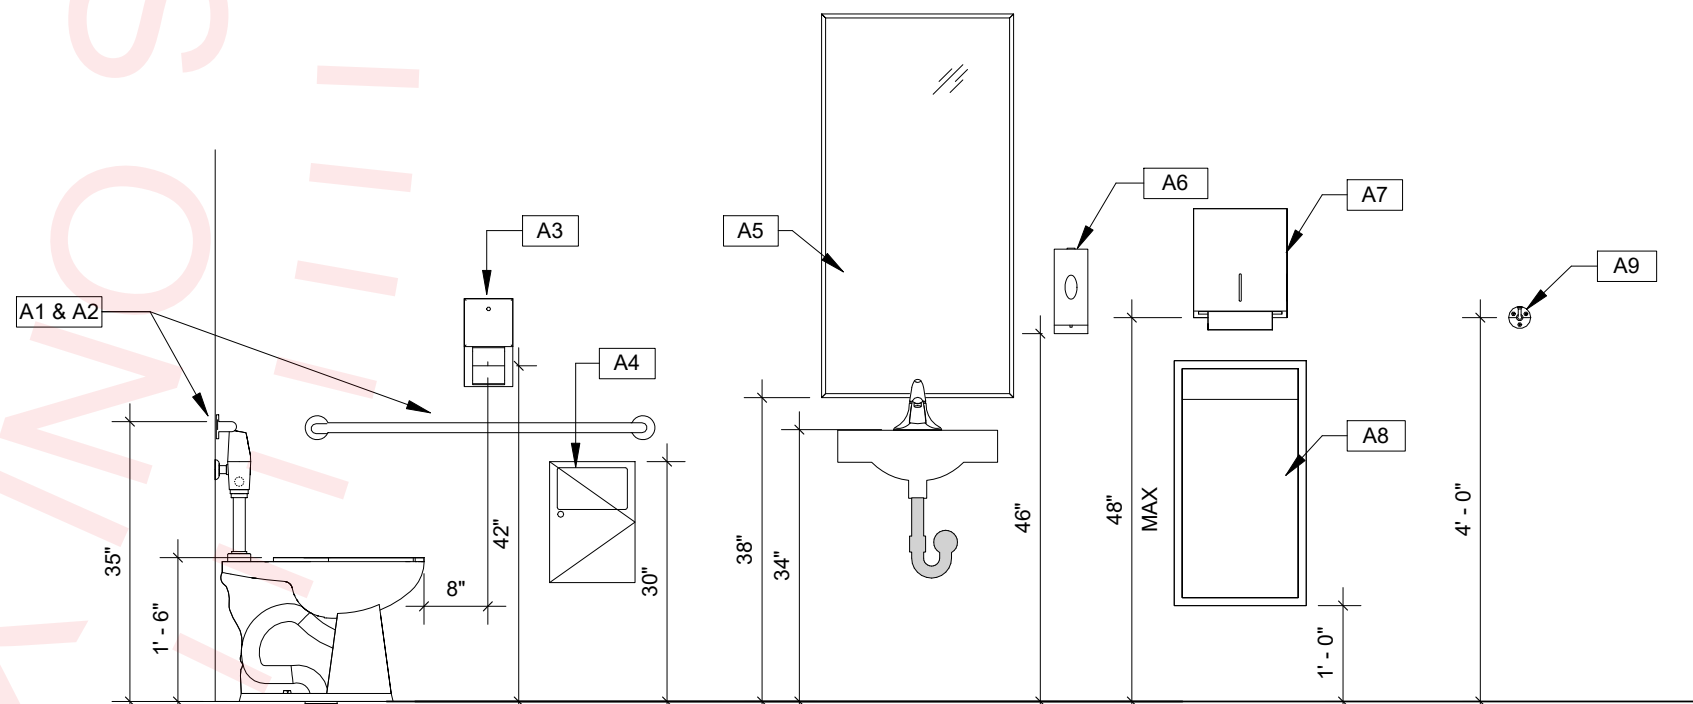


Accessory Mounting Height
1/2" = 1'-0"


1 Finish and Accessibility Plan
3/8" = 1'-0"

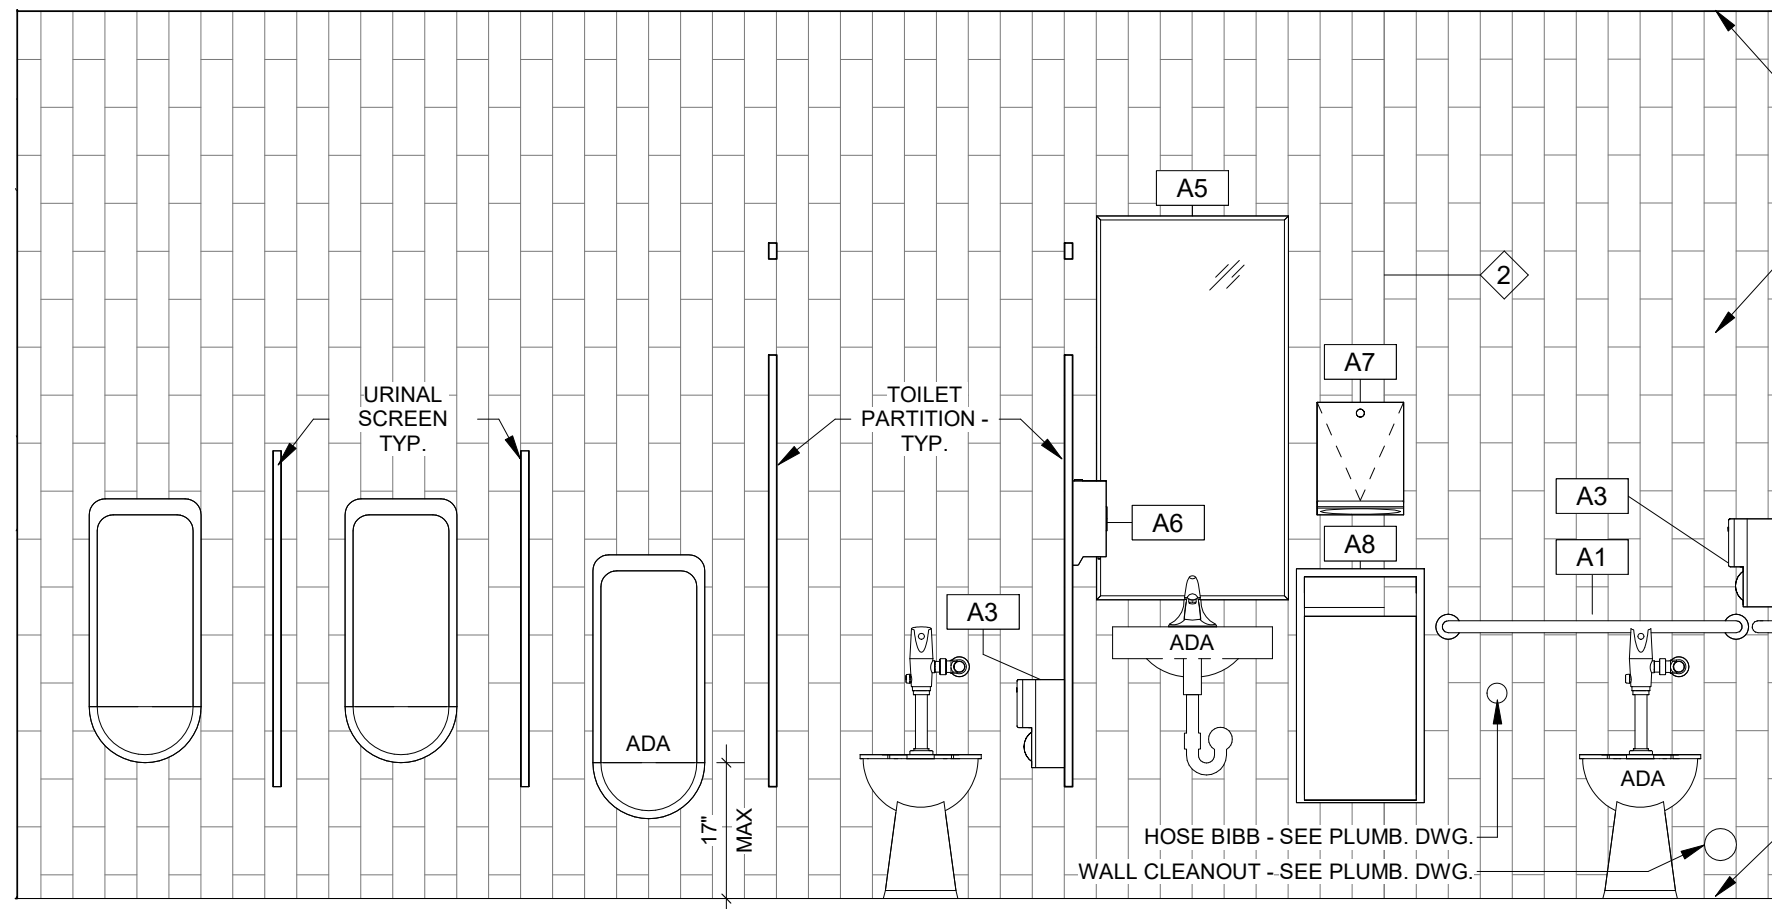


2 Interior Elevation - Men's RR - North
1/2" = 1'-0"

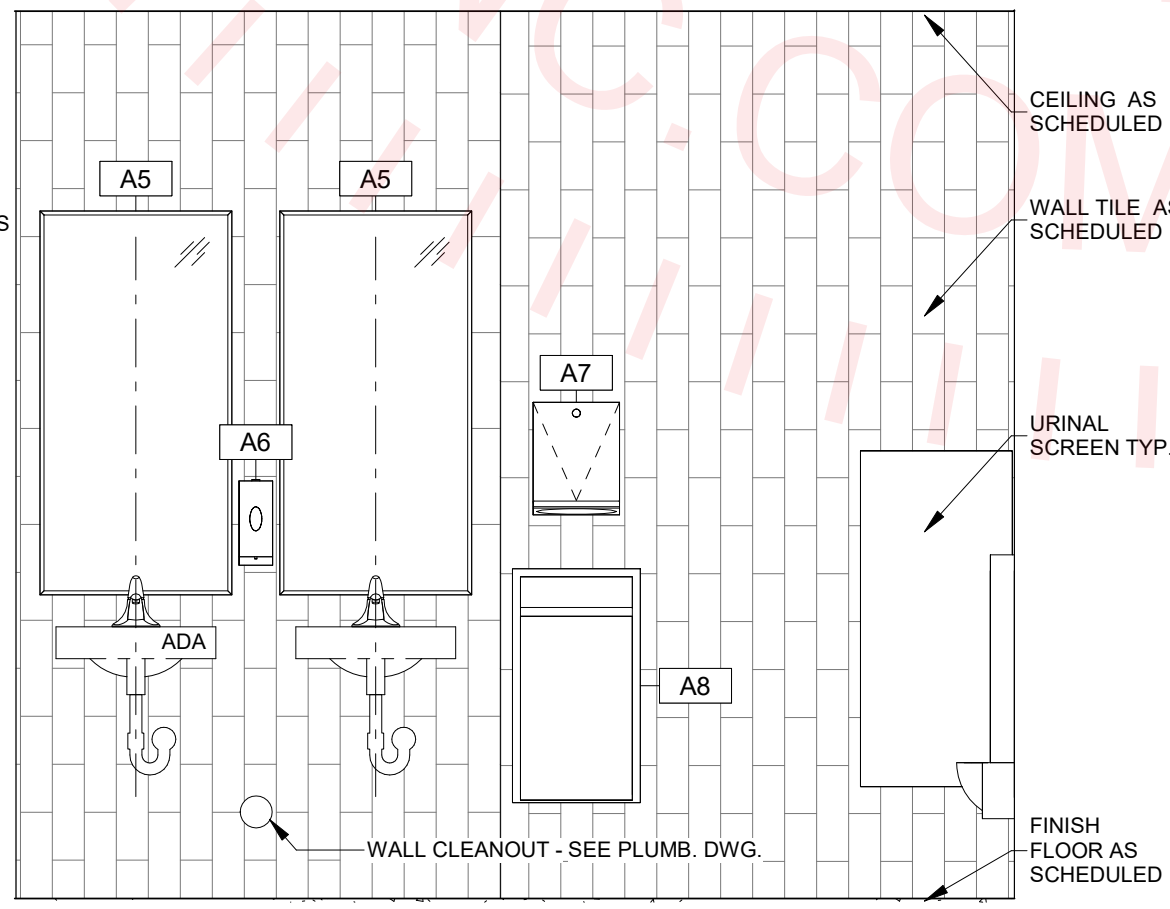

3 Interior Elevation - Men's RR - West
1/2" = 1'-0"

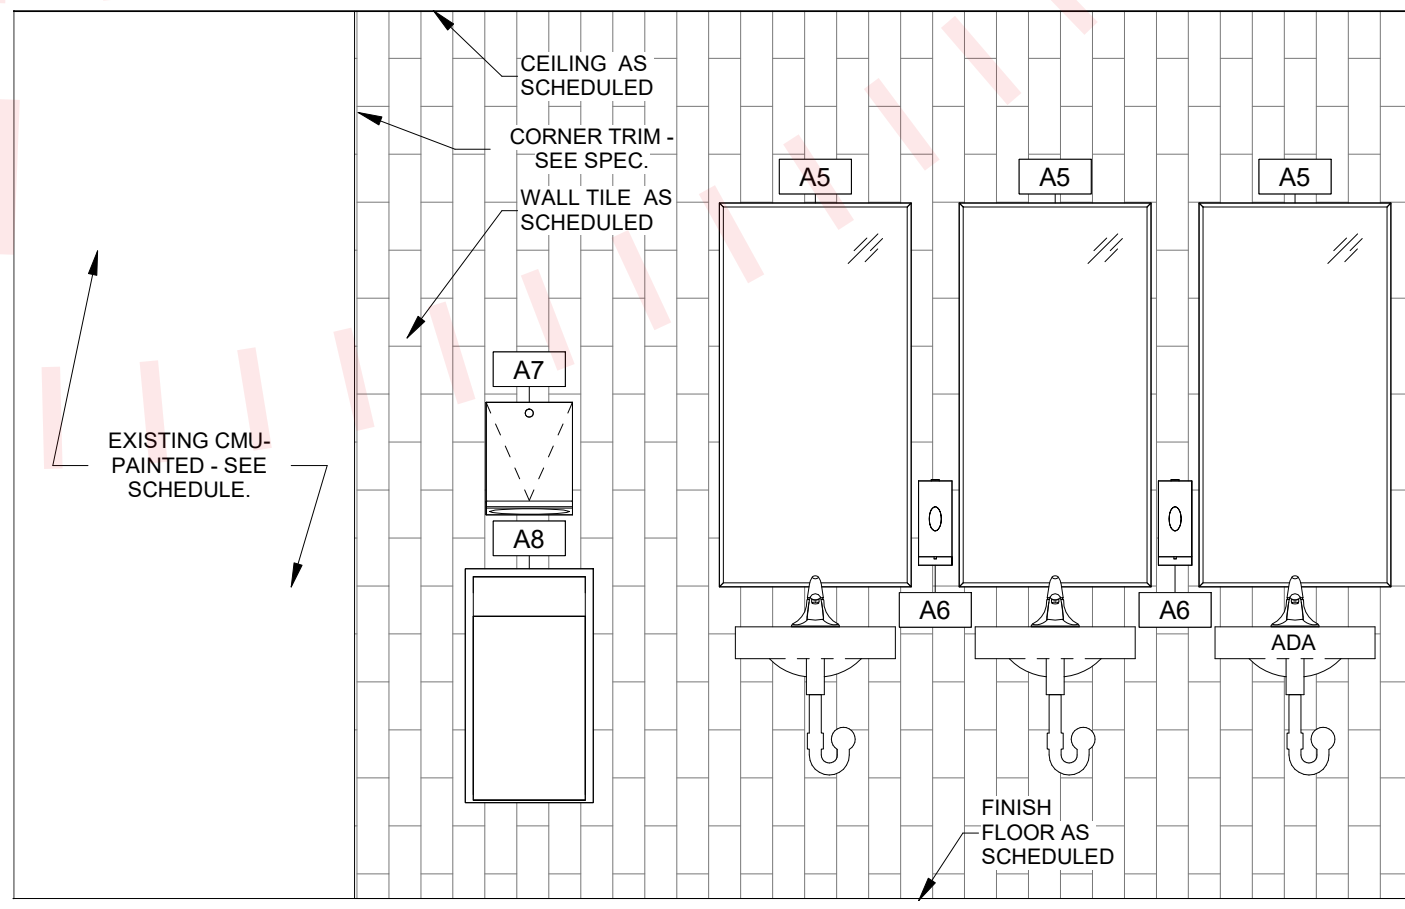

4 Interior Elevation - Women's RR - North
1/2" = 1'-0"

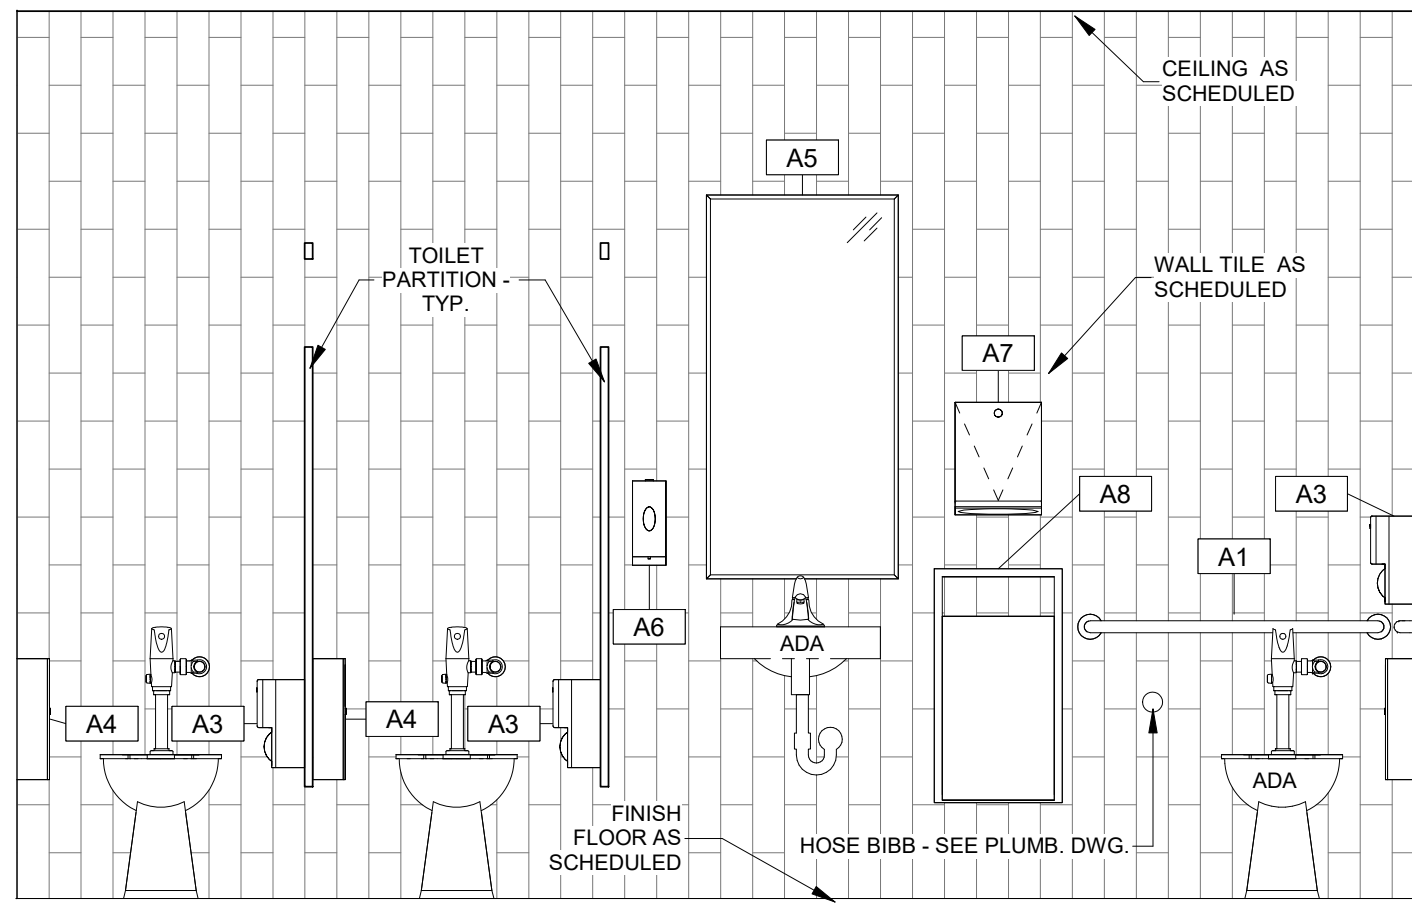

5 Interior Elevation - Women's RR - South
1/2" = 1'-0"

SEAL:

PROJECT TITLE:

**TCC English Building
Restroom Renovations**
444 Appleyard Dr., Tallahassee, FL 32304

JOB NO.: 23.121

DESIGNED: DC

DRAWN: JR/MP/DC

CHECKED: DC

THIS DRAWING AND ANY REPRODUCTIONS
ARE THE PROPERTY AND COPYRIGHT
OF BKJ, INC. AND MAY NOT BE
REPRODUCED, PUBLISHED, OR USED IN ANY
MANNER WITHOUT WRITTEN
PERMISSION OF THE ARCHITECT

REVISIONS:

DRAWING PHASE:
**100% Construction
Documents**

DRAWING TITLE:


**Finish and
Accessibility Plan,
Elevations &
Accessories**

SHEET NO.:

A4.0


DATE:

August 25, 2023

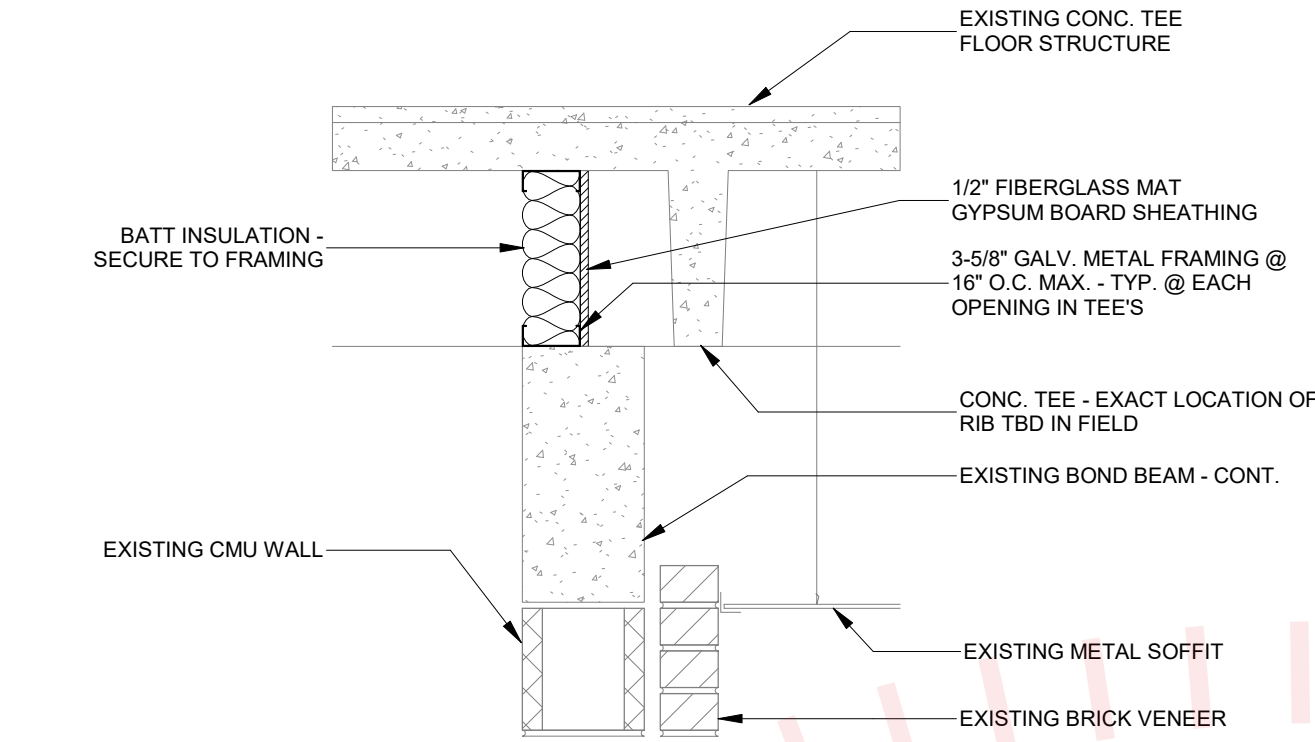


5 Section 1
1" = 1'-0"

NOTE: CONTRACTOR SHALL INSTALL 1/2" FIBERGLASS MAT GYPSUM BOARD SHEATHING TO ENCLOSE OPEN SPACE BETWEEN THE INTERIOR OF THE BUILDING AND THE EXTERIOR SOFFIT. REMOVE EXISTING INSULATION MATERIALS FROM OPENINGS. TAPE AND MUD JOINTS USING COMPATIBLE MATERIALS PER CEMENT BOARD MFR. TO PROVIDE A CONTINUOUS BARRIER. SEE SPECIFICATIONS FOR SHEATHING INFORMATION.

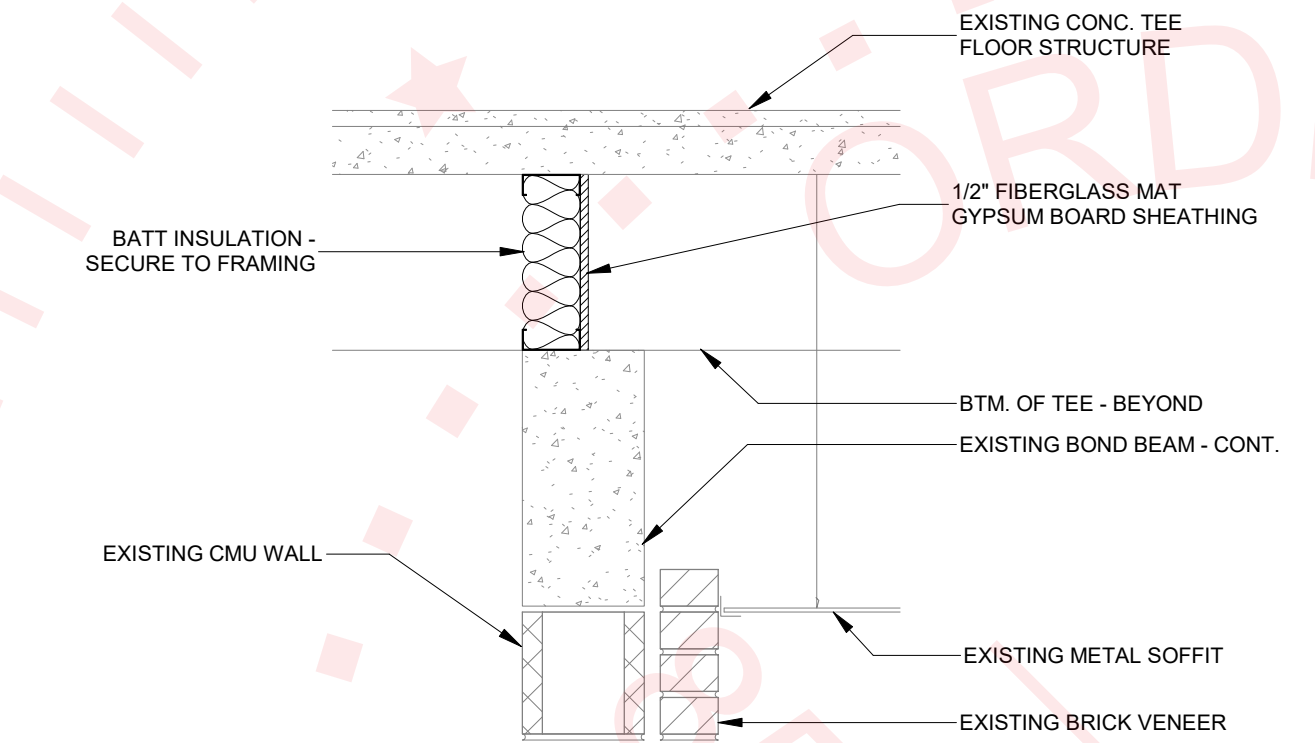


6 Section 2
1" = 1'-0"

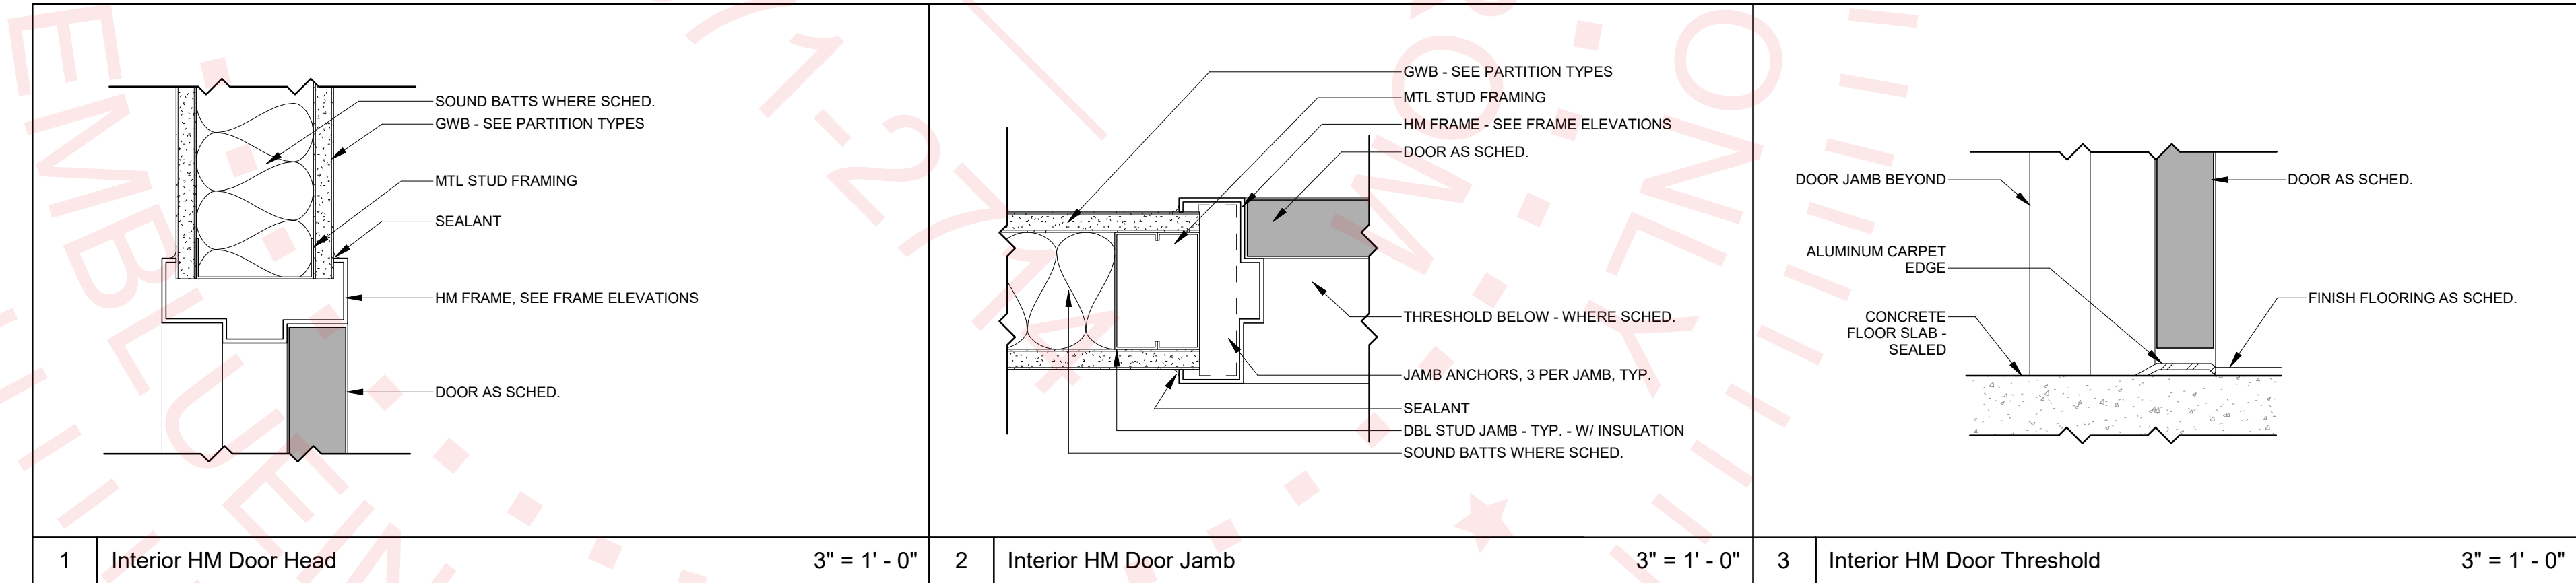

1 Interior HM Door Head 3" = 1' - 0" 2 Interior HM Door Jamb 3" = 1' - 0" 3 Interior HM Door Threshold 3" = 1' - 0"

Door Schedule															
Number	Elevation	Width	Height	Thickness	Material	Finish	Frame Elevation	Head	Jamb	Thr.	Frame Material	Frame Finish	Hardware Set	Fire Rating	Notes
132	A	3' - 0"	7' - 0"	1 3/4"	WOOD	D1	HM1	1/A6.0	2/A6.0	3/A6.0	HM	D1	HW1		

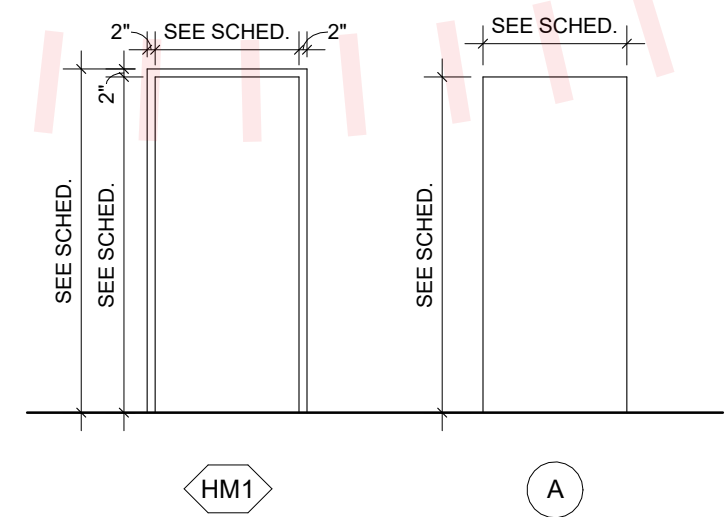

4 Door and Window Elevations
1/4" = 1'-0"

Door Hardware Sets:

Set No. 1 (Storage):			
3 Hinges	CB179 4 1/2 X 4 1/2	US26D	ST
1 Lockset (Storage)	CL3857	626	CR
3 Door Silencers	1229A	Grey	TR
1 Wall Stop	1270VV	606	TR
1 Aluminum Carpet Edge	417	Mill	NA

Door Hardware Legend:

BE	Best Access Systems
BY	By Others
CR	Corbin Russwin
NA	National Guard
SH	Stanley Commercial Hardware
ST	Stanley
TR	Trimco

Door Hardware Notes:

1. NONE

Finish Schedule										
Number	Name	Base Finish	Floor Finish	North Wall	East Wall	South Wall	West Wall	Ceiling Finish	Ceiling Height	Notes
128	STORAGE	WB1	EXISTING	W1	W1	W1	W1	EXISTING	EXISTING	1
130	WOMENS RESTROOM	WB2	F1	W1/W2	W1	W2	W1	C1	9'-3"	
131	MENS RESTROOM	WB2	F1	W2	W1	W1	W1/W2	C1	9'-3"	
132	MECHANICAL	WB1	F2	W1	W1	W1	W1	-	NONE	

Interior Finish Schedule Legend:

FLOORS:

- F1- PORCELAIN TILE: DAL TILE - PORTFOLIO: PF06 IRON GRAY - 12" X 24"
GROUT COLOR: MAPEI ULTRACOLOR PLUS - 27 SILVER
F2- SEALED CONCRETE

WALL BASE:

- WB1- VINYL WALL BASE - MATCH EXISTING
WB2- PORCELAIN TILE: DAL TILE - PORTFOLIO: PF06 IRON GRAY - 12" X 24" (CUT TO 6" X 24")
GROUT COLOR: MAPEI ULTRACOLOR PLUS - 27 SILVER

WALLS:

- W1- PAINT: SHERWIN WILLIAMS - SW7881 REFLECTION
W2- PORCELAIN TILE: DAL TILE - COLOR WHEEL LINEAR - ARCTIC WHITE 0190 - 4" X 12"
GROUT COLOR: MAPEI ULTRACOLOR PLUS - 38 AVALANCHE

CEILING:

- C1- ACOUSTIC CEILING TILE: ARMSTRONG ULTIMA 1912: BEVELED TEGULAR 9/16" - 24" X 24" - WHITE SUPRAFINE GRID - 9/16" - WHITE

DOORS AND FRAMES:

- D1- PAINT: SHERWIN WILLIAMS - MATCH EXISTING

TOILET PARTITION:

- TP1- SCRANTON PRODUCTS: HINEY-HIDERS - SHALE - ORANGE PEEL

Interior Finish Schedule Notes:

1. PAINT ENTIRE ROOM - PROTECT EXISTING FINISHES TO REMAIN.

SEAL:

PROJECT TITLE:

**TCC English Building
Restroom Renovations**
444 Appleyard Dr., Tallahassee, FL 32304

JOB NO.: 23.121

DESIGNED: DC

DRAWN: JR/MP/DC

CHECKED: DC

THIS DRAWING AND ANY REPRODUCTIONS ARE THE PROPERTY AND COPYRIGHT OF BKJ, INC. AND MAY NOT BE REPRODUCED, PUBLISHED, OR USED IN ANY MANNER WITHOUT WRITTEN PERMISSION OF THE ARCHITECT

REVISIONS:

DRAWING PHASE:

100% Construction Documents

DRAWING TITLE:

Schedules and Details

SHEET NO.:

A6.0


DATE:

August 25, 2023


GROUPED FIXTURES

[illegible]

RULE 2 - MULTIPLE FIXTURES EXCEEDING 20 FT

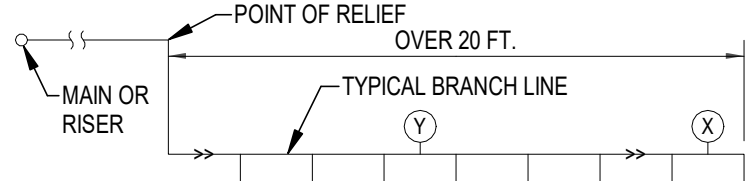

COMBINATION OF RULE 1 AND RULE 2

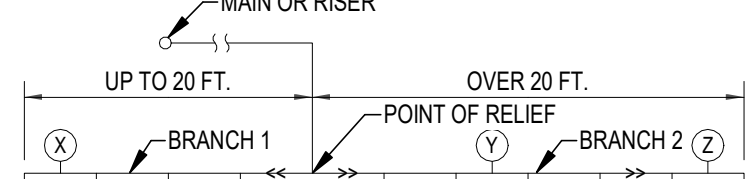


SELECTION METHOD:
USING TABLE 1, SIZE UNIT "X" FOR BRANCH 1 BASE ON RULE 1. SIZE UNITS "Y"
AND "Z" BASED ON RULE 2.

TABLE 2 - WATER PRESSURES UP TO 65 P.S.I.G.

TABLE 2A - WATER PRESSURES 65 P.S.I.G. TO 85 P.S.I.G.

	P.D.I. WATER HAMMER ARRESTERS						
LENGTH OF PIPE (FT.)	NOMINAL PIPE DIAMETER						
	1/2"	3/4"	1"	1-1/4"	1-1/2"	2"	
25	B	B	B	D	E	F	
50	B	C	C	D	F	CF	
75	C	D	D	F	CF	FF	
100	D	E	E	CF	EF	EFF	
125	D	E	E	DF	FF	BFFF	
150	E	F	F	FF	DF	FFFF	

NOTE:

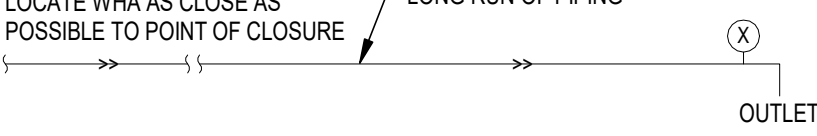

SELECTION METHOD:
USING EITHER TABLE 2 OR 2A (BASED ON SYSTEM PRESSURE), SIZE UNIT "X" BASED ON SIZE
OF PIPE AND LENGTH OF RUN.

GENERAL NOTE:
PROVIDE WATER HAMMER ARRESTERS IN ACCORDANCE WITH STANDARD PDI-WH201

—○

	ELBOW TURNED DOWN
	TEE, OUTLET UP
	TEE, OUTLET DOWN
	NEW PIPE
	EXISTING PIPE TO REMAIN
	EXISTING PIPE TO BE REMOVED
	SANITARY, SOIL OR WASTE PIPING
	SANITARY VENT PIPING
	COLD WATER SUPPLY PIPING
	HOSE BIBB
	WATER HAMMER ARRESTER - SEE DETAIL THIS SHEET
	FLOOR DRAIN - SEE DETAIL C/Ps.1
	WALL CLEAN OUT - SEE DETAIL A/Ps.1

 BALL VALVE (WITH QUARTER TURN HANDLE)

	BUTTERFLY VALVE (WITH QUARTER TURN HANDLE)
---	--

 HINGED CEILING ACCESS PANEL

	MINIMUM INVERT ELEVATION BELOW REFERENCE ELEVATION
	POINT OF CONNECTION, NEW TO EXISTING
	POINT INDICATED LIMIT OF DEMOLITION

CF	ABOVE CEILING	LV	LAVATORY
AP	ABOVE FLOOR	N/A	NOT APPLICABLE
	ABOVE FINISHED FLOOR	PSAN	SANITARY
	AS HIGH AS POSSIBLE	PVENT	VENT
	BELOW FLOOR	TPY	TYPICAL
WVS	BELOW GRADE	UR	URNAL
	COLD WATER SUPPLY	W	WATER HAMMER ARRESTER
N	DOWN	WC	WATER CLOSET
K	EXISTING	WCO	WALL CLEANOUT
	FLOOR DRAIN		
B	HOSE BIBB		
	INVERT ELEVATION		

- CODES WHERE CONFLICTS OCCUR BETWEEN CODES AND BETWEEN THE CONSTRUCTION DOCUMENTS AND CODES, THE MOST RESTRICTIVE REQUIREMENTS SHALL GOVERN.
9. ALL WATER PIPES SHALL BE 1/2" MINIMUM AND 1" MAXIMUM PRESSURE RATED.
10. ALL COPPER PRESSURE PIPE SHALL BE SOLDERED ENTIRELY WITH LEAD-FREE SOLDER.
11. INSTALLATION OF EQUIPMENT AND PIPE SHALL PROVIDE CONVENIENT ACCESS FOR MAINTENANCE.
12. ALL FLOOR DRAINS AND FLOOR SINKS SHALL HAVE MINIMUM 3" DRAIN LINES, DEEP SEAL TRAPS AND AUTOMATIC TRAP PRIMERS (MANUFACTURER: PRECISION PLUMBING PRODUCTS).
13. WATER HANMER ARRESTERS SHALL BE INSTALLED IN ACCORDANCE WITH PD-HW201.
14. ALL HOSE BIBBS, SILL COCKS AND/OR FAUCETS WITH HOSE CONNECTIONS SHALL HAVE A VACUUM BREAKER.
15. GRAVITY FLOW SYSTEMS HAVE SPACE PRIORITY FOR SLOPING PIPES. HOWEVER, SLOPE MUST BE STARTED AT HIGHEST POINT POSSIBLE.
16. ALL PLUMBING VENTS SHALL BE 2" MINIMUM, UNLESS NOTED OTHERWISE.
17. PROVIDE ACCESS PANEL, AT EACH LOCATION WHERE A VALVE OR OTHER DEVICE REQUIRES SERVICE. LOCATE PANEL ABOVE AN INACCESSIBLE AREA.
18. A CLEANOUT SHALL BE PROVIDED AT THE BASE OF EACH WASTE, SOIL STACK OR RAIN LEADER, WHETHER SHOWN ON THE DRAWINGS OR NOT.
19. ANY PIPE THAT PASSES UNDER A FOOTING OR THROUGH A FOUNDATION WALL SHALL BE PROVIDED WITH A RELIEFING ARCH, OR A PIPE SLEEVE. SLEEVE SHALL BE BUILT INTO THE FOUNDATION WALL. THE SLEEVE SHALL BE TWO PIPE SIZES GREATER THAN THE PIPE PASSING THROUGH THE WALL.
20. ANY EXISTING OR NEW DRAIN, WASTE OR VENT UTILITIES ARE BASED ON REFERENCE MATERIAL PROVIDED TO THE ENGINEER AND HAVE NOT BEEN VIEWED BY THE CONTRACTOR. THE CONTRACTOR SHALL LOCATE CONCENTRIC ELEMENTS AND NOTIFY ENGINEER IF VARIANCES BETWEEN THESE DOCUMENTS AND ACTUAL FIELD CONDITIONS EXIST AND MAY MATERIALLY AFFECT THE DESIGN INTENT.

PERFORM WORK IN ACCORDANCE WITH THE FOLLOWING CODES AND ANY APPLICABLE STATUTES, ORDINANCES, CODES, AND REGULATIONS OF GOVERNMENTAL AUTHORITIES HAVING JURISDICTION

- | | | |
|--|--|--|
| ASHRAE | | DOCUMENT REQUIREMENTS RELATED TO SHOP DRAWINGS, PRODUCT DATA AND SAMPLES. |
| a. STANDARD 55 | THERMAL ENVIRONMENTAL CONDITIONS FOR HUMAN OCCUPANCY | 14. THE CONTRACTOR SHALL NOT BE RELIEVED OF RESPONSIBILITY FOR DEVIATIONS FROM REQUIREMENTS OF THE CONTRACT DOCUMENTS BY THE ARCHITECT/ENGINEER'S APPROVAL OF SHOP DRAWINGS, PRODUCT DATA, SAMPLES OR SIMILAR SUBMITTALS UNLESS THE CONTRACTOR HAS SPECIFICALLY INFORMED THE ARCHITECT/ENGINEER IN WRITING OF SUCH DEVIATION AT THE TIME OF SUBMITTAL AND THE ARCHITECT/ENGINEER HAS GIVEN WRITTEN APPROVAL TO THE SPECIFIC DEVIATION. THE CONTRACTOR SHALL NOT BE RELIEVED OF RESPONSIBILITY FOR ERROR OR OMISSIONS IN SHOP DRAWINGS, PRODUCT DATA, SAMPLES OR SIMILAR SUBMITTALS BY THE ARCHITECT/ENGINEER'S APPROVAL THEREOF. |
| b. STANDARD 62.1 | VENTILATION STANDARD FOR ACCEPTABLE INDOOR AIR QUALITY - 2016 | 15. PRIOR TO INSTALLATION, COORDINATE AND ADJUST THE FINAL LOCATION OF WALL MOUNTED DEVICES AND EQUIPMENT WITH ALL WALL MOUNTED FINISHES. |
| c. STANDARD 90.1 | ENERGY STANDARD FOR BUILDINGS EXCEPT LOW RISE RESIDENTIAL BUILDINGS | 16. NOTE ANY SPECIAL REQUIREMENTS INVOLVED IN INSTALLING THE EQUIPMENT IN THE BUILDING. DISMANTLING AND REASSEMBLING OF ANY EQUIPMENT SHALL BE DONE AS REQUIRED FOR ENTRY INTO THE BUILDING AND EQUIPMENT ROOMS. |
| 2. OCCUPATIONAL SAFETY AND HEALTH REGULATIONS (OSHA). | | 17. SUPPORTS AND HANGERS SHALL PRESENT A NEAT, ORDERLY APPEARANCE. |
| 3. NATIONAL FIRE CODES | | 18. CONTRACTOR SHALL MAINTAIN THE INTEGRITY OF ALL FIRE, SMOKE, AND ACOUSTICAL WALL ASSEMBLIES. |
| a. NFPA 1 | UNIFORM FIRE CODE - 2018 (FLORIDA EDITION) | 19. BEAM AND FLOOR PENETRATIONS SHALL BE APPROVED BY A STRUCTURAL ENGINEER. BEAM SLEEVES AND BEAM REINFORCING APPROVED BY STRUCTURAL ENGINEER SHALL BE FURNISHED AND INSTALLED BY THIS CONTRACTOR. |
| b. NFPA 70 | NATIONAL ELECTRICAL CODE - 2017 | 20. CONTRACTOR SHALL FURNISH ALL APPROVED DRAWINGS FOR EACH TYPE OF FIRE RATED ASSEMBLY PENETRATION BY DUCTS, PIPES OR CONDUITS. THE DRAWINGS SHALL BE DISPLAYED ON THE JOB SITE AT ALL TIMES DURING CONSTRUCTION. SEE SPECIFICATIONS. |
| c. NFPA 72 | NATIONAL FIRE ALARM AND SIGNALING CODE - 2016 | 21. CONTRACTOR SHALL GUARANTEE THE WORK AND MATERIALS FOR A PERIOD OF ONE YEAR FROM DATE OF FINAL ACCEPTANCE. THIS GUARANTEE SHALL BE IN ADDITION TO THE WARRANTIES PROVIDED BY MATERIAL SUPPLIERS AND MANUFACTURERS. |
| d. NFPA 90A | STANDARD FOR THE INSTALLATION OF AIR CONDITIONING AND VENTILATION SYSTEMS - 2018 | 22. THE BUILDING WILL REMAIN OCCUPIED DURING CONSTRUCTION. THE OWNER WILL MAKE REASONABLE EFFORTS TO ASSIST THE CONTRACTOR IN COMPLETING THE WORK. COORDINATE WORK WITH THE OWNER'S DESIGNATED REPRESENTATIVE. |
| e. NFPA 90B | STANDARD FOR THE INSTALLATION OF WARM AIR HEATING AND AIR CONDITIONING SYSTEMS - 2018 | 23. EXITWAYS SHALL BE KEPT CLEAR. IF AN EXIT MUST BE TEMPORARILY BLOCKED, PROVIDE THE REQUIRED BARRICADE AND DIRECTIONAL SIGNS FOR TEMPORARY EXITING AND SAFETY. |
| f. NFPA 101 | LIFE SAFETY CODE - 2018 (FLORIDA EDITION) | 24. REMOVE AND REPAIR OR RE-INSTALL EXISTING CEILING ASSEMBLIES AS REQUIRED. REPLACE ANY ASSEMBLIES DAMAGED OR SOILED DURING CONSTRUCTION. |
| 4. 2020 FLORIDA BUILDING CODE, 7TH EDITION | | 25. PROVIDE PROPER PROTECTIVE MEASURES TO PROTECT EXISTING FURNITURE, CARPET AND FINISHES DURING THE COURSE OF CONSTRUCTION. TAKE CARE NOT TO DAMAGE EXISTING SURFACES. REPAIR TO MATCH EXISTING CONDITIONS AS REQUIRED. |
| a. BUILDING CODE | | 26. SEAL HOLES IN WALLS, CEILINGS, FLOORS, ETC. TO MATCH EXISTING ADJACENT SURFACES WHERE EQUIPMENT, CONDUIT AND/OR PIPING ARE REMOVED. |
| b. EXISTING BUILDING CODE | | 27. EXISTING EQUIPMENT IS THE PROPERTY OF THE OWNER AND SHALL BE DISPOSED OF AS DIRECTED BY THE OWNER. DISPOSE OF ALL MATERIALS AND EQUIPMENT SHOWN TO BE REMOVED IN ACCORDANCE WITH LOCAL REGULATIONS. |
| c. ENERGY CONSERVATION CODE | | 28. ITEMS REMOVED AND SAVED FOR REUSE SHALL BE PROTECTED FROM DAMAGE DURING CONSTRUCTION. CONTRACTOR SHALL IDENTIFY ANY DEFECTIVE MATERIALS PRIOR TO DEMOLITION. CONTRACTOR SHALL BE RESPONSIBLE FOR ALL DAMAGE TO MATERIALS AT PROJECT COMPLETION NOT IDENTIFIED PRIOR TO DEMOLITION. |
| d. MECHANICAL CODE | | 29. RELOCATE, AS REQUIRED, ANY EXISTING WIRE AND CONDUIT WHICH INTERFERES WITH INSTALLATION OF THE NEW WORK. |
| e. PLUMBING CODE | | 30. REMOVE ELECTRICAL EQUIPMENT (CONDUIT, POWER & CONTROL WIRING, DISCONNECT SWITCHES STARTERS, ETC.) RELATED TO EQUIPMENT BEING REMOVED OR REPLACED. |
| f. ACCESSIBILITY CODE | | 31. CONTRACTOR SHALL COMPLY WITH "TRENCH SAFETY ACT" (FLORIDA STATUTE 553 PART III) AND OSHA STANDARD 29 CFR 1926.650 SUBPART P FOR ALL UTILITY TRENCHES IN EXCESS OF 4 FEET DEEP. CONTRACTOR SHALL INDICATE WITHIN HIS BID RESPONSE A REFERENCE TO THE TRENCH SAFETY STANDARD AND A SEPARATE LINE ITEM COST OF COMPLIANCE WITH STANDARD. |
| 5. FLORIDA STATUTES | | |
| a. CHAPTER 471 | ENGINEERING | |
| b. CHAPTER 533.80 | BUILDING CONSTRUCTION STANDARDS; FLORIDA BUILDING CODE - ENFORCEMENT | |
| 6. FLORIDA ADMINISTRATIVE CODE | | |
| a. CHAPTER 9B-7 | FLORIDA BUILDING COMMISSION HANDICAPPED ACCESSIBILITY STANDARDS | |
| b. CHAPTER 61G15-34 | RESPONSIBILITY RULES OF PROFESSIONAL ENGINEERS CONCERNING THE DESIGN OF MECHANICAL SYSTEMS | |
| c. CHAPTER 69A-3 | FIRE PREVENTION - GENERAL PROVISIONS | |
| d. CHAPTER 69A-60 | THE FLORIDA FIRE PREVENTION CODE | |
| RESOLVE, IN WRITING, ANY CODE VIOLATION DISCOVERED IN CONTRACT DOCUMENTS WITH THE ENGINEER PRIOR TO BIDDING. AFTER AWARD OF THE CONTRACT, MAKE ANY CORRECTION OR ADDITION NECESSARY FOR COMPLIANCE WITH APPLICABLE CODES AT NO ADDITIONAL COST TO OWNER. | | |
| THE CONTRACTOR SHALL INCLUDE IN THE WORK, WITHOUT EXTRA COST TO THE OWNER, ANY LABOR, MATERIALS, SERVICES, APPARATUS, AND DRAWINGS REQUIRED TO COMPLY WITH ALL APPLICABLE LAWS, ORDINANCES, RULES, AND REGULATIONS. | | |
| WHERE THERE IS CONFLICT BETWEEN THE CONTRACT DOCUMENTS AND THE APPLICABLE CODES, THE CODES SHALL GOVERN, EXCEPT WHERE THE REQUIREMENTS OF THE CONTRACT DOCUMENTS ARE MORE STRINGENT. | | |

ALL DRAINAGE PIPING	
PIPE SIZES, INCHES	MIN. SLOPE INCHES/FOOT
2"	1/4"
3"	1/8"
4"	1/8"
6"	1/8"
8"	1/16"
10"	1/16"

NOTES:
1. COMBINATION DRAIN AND VENT PIPING SHALL BE RUN AT A MAXIMUM SLOPE OF 1/2" PER FOOT

2. THIS CONTRACT SHALL REFER TO ARCHITECTURAL AND STRUCTURAL DRAWINGS FOR DIMENSIONS, FIELD SIZE, DIMENSIONS AND CONDITIONS. IF THE CONTRACTOR IS UNABLE TO INTERPRET THE CONTRACT DOCUMENTS, HE IS RESPONSIBLE TO REQUEST CLARIFICATION IN WRITING TO THE ARCHITECT. IF HE PROCEEDS WITH ANY WORK BEFORE OBTAINING CLARIFICATION, HE SHALL BE HELD RESPONSIBLE FOR DEFICIENCIES ASSOCIATED THEREWITH.
3. BEFORE SUBMITTING FOR THE WORK, EACH BIDDER WILL BE RESPONSIBLE TO EXAMINE THE PREMISES AND SATISFY HIMSELF AS TO THE EXISTING CONDITIONS UNDER WHICH HE WILL BE REQUIRED TO OPERATE AND COMPLETE THE WORK UNDER THIS CONTRACT. NO ALLOWANCE WILL BE SUBSEQUENTLY BE MADE IN THIS CONNECTION ON BEHALF OF THE CONTRACTOR FOR ANY ERROR OR OMISSION ON HIS PART.
4. THE CONTRACTOR SHALL PAY FOR INSPECTION PERMITS, CERTIFICATES, CONNECTION FEES, SYSTEM DEMAND CHARGES AND LICENSE FEES IN CONNECTION WITH HIS WORK.
5. CONSTRUCTION MANAGER SHALL BE RESPONSIBLE FOR COORDINATING WORK OF SUBCONTRACTORS TO AVOID INTERFERENCE.
6. WORK SHALL COMPLY WITH APPLICABLE O.S.H.A. AND E.P.A. REGULATIONS AND GUIDELINES.
7. ERECT AND MAINTAIN REASONABLE PRECAUTIONS FOR SAFETY AND HEALTH INCLUDING POSTING DANGER SIGNS AND OTHER WARNINGS AGAINST HAZARDS INCLUDING PROMULGATING SAFETY REGULATIONS. PROVIDE SAFETY PRECAUTIONS AND BARRICADES FOR PEDESTRIANS AT CONSTRUCTION VEHICLE ACCESS AND EGRESS LOCATIONS.
8. DETERMINE THE SEQUENCE OF CONSTRUCTION, AND ADVISE THE CONSTRUCTION WORK. SUBMIT A COMPLETELY DETAILED CONSTRUCTION PLAN AND PREPARE TO PRE-CONSTRUCTION CONFERENCE.
9. THE CONTRACTOR SHALL STRICTLY BE HOLD TO THE PROJECT SCHEDULE. HE SHALL PROVIDE SUFFICIENT MANPOWER AND EQUIPMENT TO FULLY MOBILIZE, PROCEED WITH AND COMPLETE THE WORK.

P0.1	General Notes, Legends & Schedules
P0.2	Schedules
P1.0	Floor Plans
P2.1	Riser Diagrams
P5.1	Details

P0.1	General Notes, Legends & Schedules
P0.2	Schedules
P1.0	Floor Plans
P2.1	Riser Diagrams
P5.1	Details

bkj
ARCHITECTURE

BKJ, Inc., Architecture
1621 Physicians Dr.
Tallahassee, Florida 32308
(P) 850.778.8007 | (F) 850.546.6150
www.bkjarchitecture.com
FL Architecture Corporation AA26002280

SEAL:

PROJECT TITLE:

**TCC English Building
Restroom Renovations**
444 Appleyard Dr., Tallahassee, FL 32304

PROJECT NO.: 23.121

DESIGNED BY : MPP

DRAWN BY: MPP

CHECKED BY: **MPP**

THIS DRAWING AND ANY REPRODUCTIONS
ARE THE PROPERTY AND COPYRIGHT
OF BKJ, INC. AND MAY NOT BE
REPRODUCED, PUBLISHED, OR USED IN ANY
MANNER WITHOUT WRITTEN
PERMISSION OF THE ARCHITECT

REVISIONS:

PROJECT PHASE:

100% Construction Documents

DRAWING TITLE:

General Notes, Legends & Schedules

SHEET NO.:

P0.1

DATE: _____

August 25, 2023

FIXTURE DESIGNATION	FIXTURE DESCRIPTION	A.D.A. COMPLIANT	MOUNTING METHOD	HEIGHT (A.F.F.)	ROUGH-IN PIPE SIZES				MANUFACTURER AND MODEL NUMBER	ACCESSORIES (SEE SCHEDULE)
					COLD WATER SUPPLY	HOT WATER SUPPLY	FIXTURE TRAP	FIXTURE DRAIN		
WC-1	FLUSH VALVE WATER CLOSET, HIGH EFFICIENCY (1.28 - 1.6 GPF), VITREOUS CHINA, SIPHON JET FLUSHING ACTION, ELONGATED RIM, 1-1/2" TOP SPUD, MIN. 2" BALLPASS TRAPWAY. COLOR: WHITE.	YES	FLOOR	RIM: 16-1/2"	1"	N/A	4"	4"	AMERICAN STANDARD: 3043.001 OR APPROVED EQUAL	SEAT-OPN-FRT FV-1.28-AUTO-B
WC-2	FLUSH VALVE WATER CLOSET, HIGH EFFICIENCY (1.28 - 1.6 GPF), VITREOUS CHINA, SIPHON JET FLUSHING ACTION, ELONGATED RIM, 1-1/2" TOP SPUD, MIN. 2" BALLPASS TRAPWAY. COLOR: WHITE.	NO	FLOOR	RIM: 15"	1"	N/A	4"	4"	AMERICAN STANDARD: 2234.001 OR APPROVED EQUAL	SEAT-OPN-FRT FV-1.28-AUTO-B
UR-1	FLUSH VALVE URINAL, ULTRA HIGH EFFICIENCY (0.125 - 1.0 GPF), VITREOUS CHINA, WASHOUT FLUSHING ACTION, 3/4" TOP SPUD. COLOR: WHITE.	YES	WALL	RIM: 17"	3/4"	N/A	2"	2"	AMERICAN STANDARD: 6690.001 OR APPROVED EQUAL	FV-0.125-AUTO-B
UR-2	FLUSH VALVE URINAL, ULTRA HIGH EFFICIENCY (0.125 - 1.0 GPF), VITREOUS CHINA, WASHOUT FLUSHING ACTION, 3/4" TOP SPUD. COLOR: WHITE.	NO	WALL	RIM: 24"	3/4"	N/A	2"	2"	AMERICAN STANDARD: 6690.001 OR APPROVED EQUAL	FV-0.125-AUTO-B
LV-1	LAVATORY, 20"x18", VITREOUS CHINA, 3 FAUCET HOLES (ONE CENTERED, TWO 4" OFF CENTER), ANTI-SPLASH RIM AND HIGH BACK. COLOR: WHITE.	YES	WALL	RIM: 34"	1/2"	N/A	1-1/4"	2"	AMERICAN STANDARD: 0355.012 OR APPROVED EQUAL	FCT-LV-0.5-AUTO-B DR-LV-C TR-LV
LV-2	LAVATORY, 20"x18", VITREOUS CHINA, 3 FAUCET HOLES (ONE CENTERED, TWO 4" OFF CENTER), ANTI-SPLASH RIM AND HIGH BACK. COLOR: WHITE.	NO	WALL	RIM: 31"	1/2"	N/A	1-1/4"	2"	AMERICAN STANDARD: 0355.012 OR APPROVED EQUAL	FCT-LV-0.5-AUTO-B DR-LV-C TR-LV

1 SUPPLY STOPS: CHROME-PLATED-BRASS, ONE-QUARTER TURN, BALL-TYPE OR COMPRESSION VALVE WITH INLET MATCHING SUPPLY PIPING.

2 FLEXIBLE CONNECTIONS: ASME A112.18.6 BRAIDED- OR CORRUGATED-STAINLESS STEEL, FLEXIBLE HOSE RISER.


3 SUPPORT CARRIERS: ASME A112.6.1M TYPE 1 (URINALS) OR TYPE 2 (CONCEALED ARM FOR LAVATORIES) WITH RECTANGULAR STEEL UPRIGHTS, COUPLING, SEAL, AND MOUNTING HARDWARE.

4 A.D.A. LAVATORIES & SINKS: PROTECT DRAIN AND SUPPLY LINES WITH "TRAP WRAP" OR APPROVED EQUAL.

5 EXTRA MAINTENANCE MATERIALS: FURNISH TWO (2) FLUSHOMETER-VALVE REPAIR KITS FOR EACH TYPE OF FLUSHOMETER VALVE INSTALLED.

ACCESSORY TAG	ACCESSORY DESCRIPTION	MANUFACTURER AND MODEL NUMBER
DR-LV-C	1-1/4" CHROME PLATED BRASS OFFSET DRAIN WITH TAIL PIECE. PROVIDE A PERFORATED FLAT CHROME BRASS STRAINER.	ELKAY: LKAD174 OR APPROVED EQUAL
FCT-LV-0.5-AUTO-B	SINGLE INLET, DECK MOUNTED FAUCET, A.D.A. COMPLIANT, 4" CENTERSET, POLISHED CHROME PLATED BRASS, LEAD FREE, BATTERY POWERED, SENSOR OPERATED, 0.5 GPM AERATOR WITH PRESSURE COMPENSATING FLOW CONTROL.	AMERICAN STANDARD: 605B.205 OR APPROVED EQUAL
FV-0.125-AUTO-B	PISTON TYPE, EXPOSED AUTOMATIC URINAL FLUSH VALVE, A.D.A. COMPLIANT, POLISHED CHROME PLATED, 0.125 GPF, BATTERY POWERED, SENSOR OPERATED, 3/4" SCREWDRIVER ANGLE STOP, VACUUM BREAKER, CAST WALL FLANGE.	AMERICAN STANDARD: 6063.013.002 OR APPROVED EQUAL
FV-1.28-AUTO-B	PISTON TYPE, EXPOSED AUTOMATIC WATER CLOSET FLUSH VALVE, A.D.A. COMPLIANT, POLISHED CHROME PLATED, 1.28 GPF, BATTERY POWERED, SENSOR OPERATED, 1" SCREWDRIVER ANGLE STOP, VACUUM BREAKER, CAST WALL FLANGE.	AMERICAN STANDARD: 6065.121.002 OR APPROVED EQUAL
SEAT-OPN-FRT	EXTRA HEAVY DUTY, OPEN FRONT, ELONGATED SEAT, WITHOUT COVER, SOLID PLASTIC, SELF-SUSTAINING CHECK TYPE HINGE. HINGES SHALL MATCH SEAT COLOR. STAINLESS STEEL POSTS FITTED WITH STAINLESS STEEL WASHERS AND NUTS.	BEMIS: 1655SSCT OR APPROVED EQUAL
TR-LV	CAST BRASS ADJUSTABLE P-TRAP, TUBING OUTLET, 1-1/4" x 1-1/2", CLEANOUT PLUG, POLISHED CHROME PLATED FINISH.	ELKAY: LK500 OR APPROVED EQUAL

FIXTURE TYPE		QUANTITY	WASTE		SUPPLY					
					COLD		HOT		TOTAL	
			UNIT	TOTAL	UNIT	TOTAL	UNIT	TOTAL	UNIT	TOTAL
	LAVATORY (COLD WATER)	7	1	7	2	14			2	14
	URINAL (3/4" VALVE)	3	2	6	5	15			5	15
	WATER CLOSET (FLUSH VALVE)	5	4	20	10	50			10	50
	HOSE BIBB / WALL HYDRANT	2			4	8			4	8
	FLOOR DRAIN	2	2	4						
TOTAL FIXTURE UNITS				37		87		0		87
DOMESTIC WATER DEMAND (GPM)						63.4		0.0		63.4

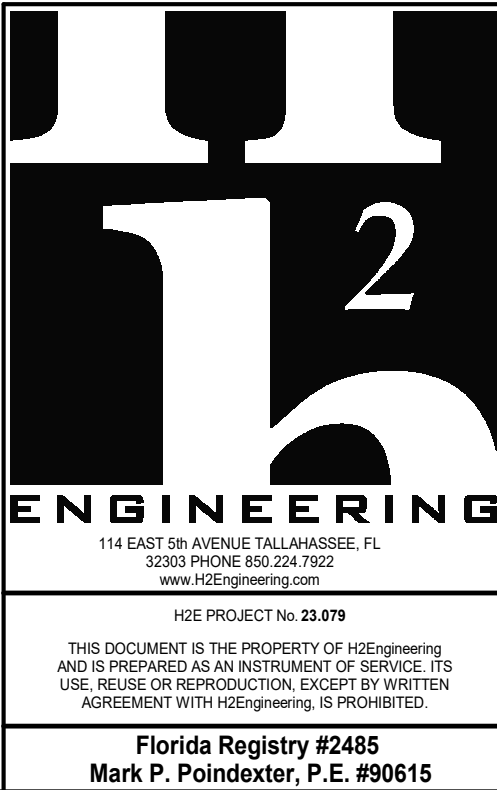

PROJECT TITLE:

**TCC English Building
Restroom Renovations**
444 Appleyard Dr., Tallahassee, FL 32304

PROJECT NO.: 23.121

DESIGNED BY : MPP

DRAWN BY: MPP

CHECKED BY: MPP

THIS DRAWING AND ANY REPRODUCTIONS
ARE THE PROPERTY AND COPYRIGHT
OF B.K.J., INC. AND MAY NOT BE
REPRODUCED, PUBLISHED, OR USED IN ANY
MANNER WITHOUT WRITTEN
PERMISSION OF THE ARCHITECT

REVISIONS:

PROJECT PHASE:

100% Construction Documents

DRAWING TITLE:


Schedules

SHEET NO.:


P0.2

DATE:

August 25, 2023

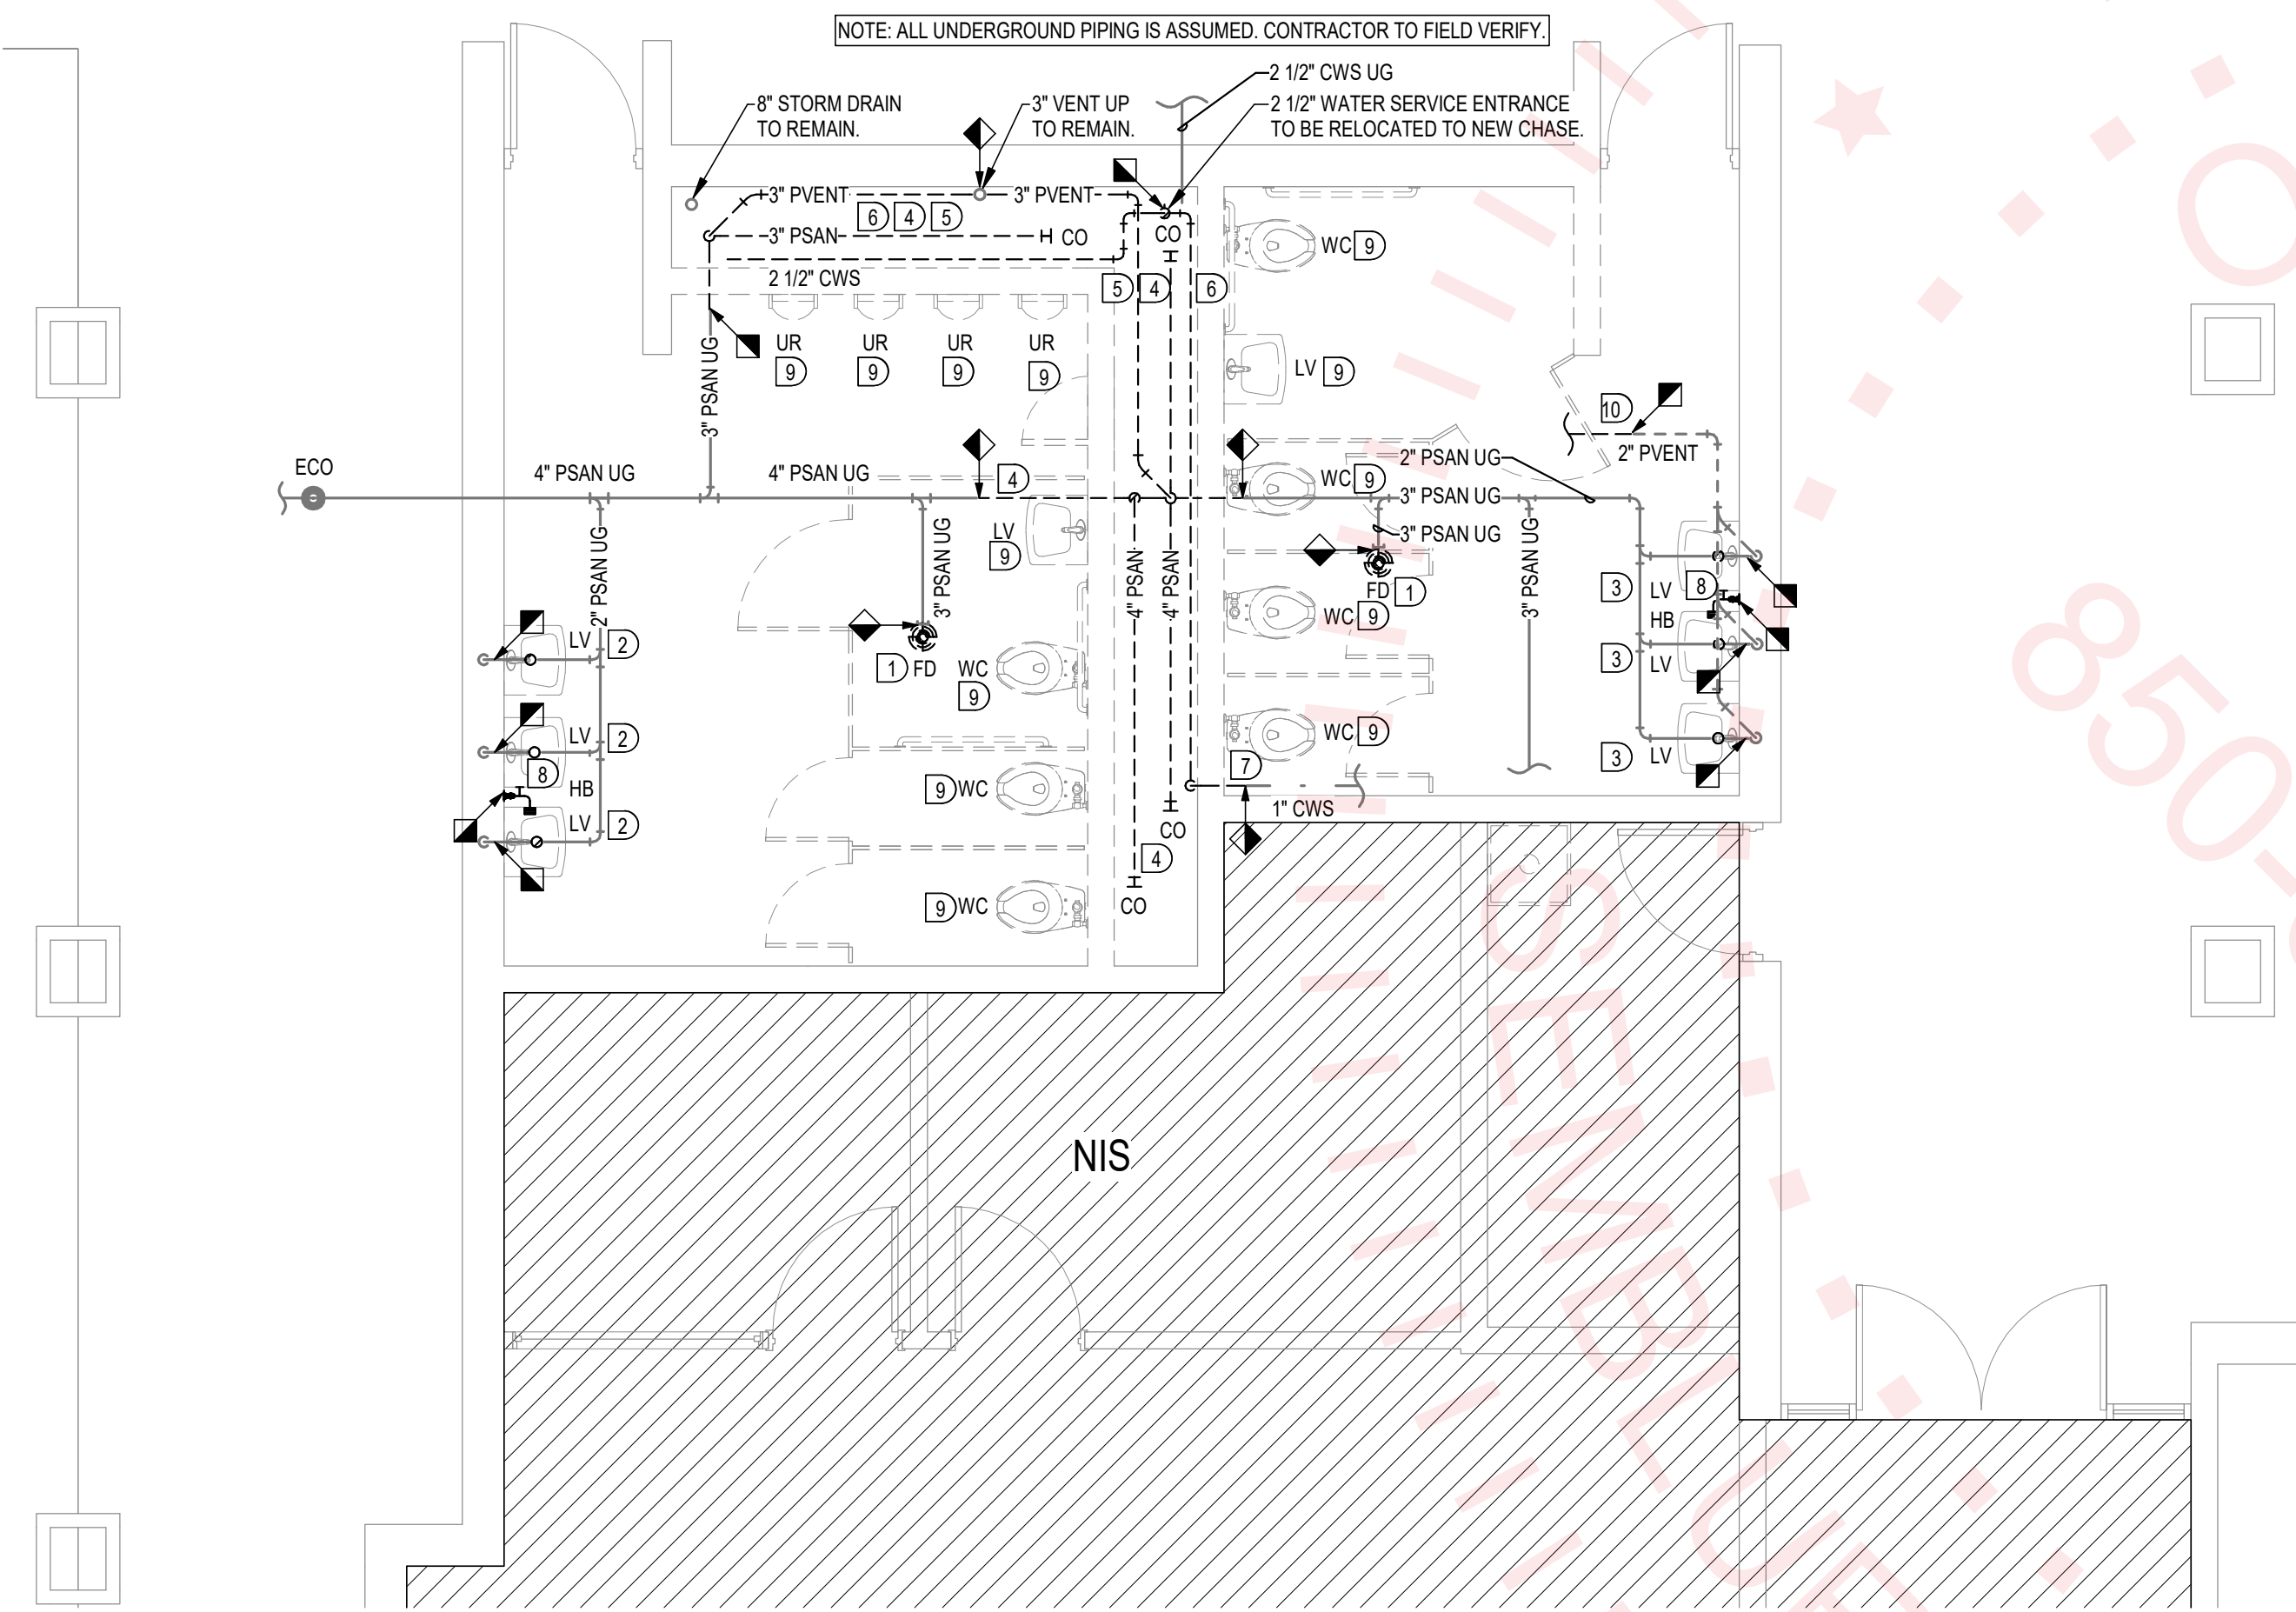

1 Floor Plan - Demolition
1/4" = 1'-0"

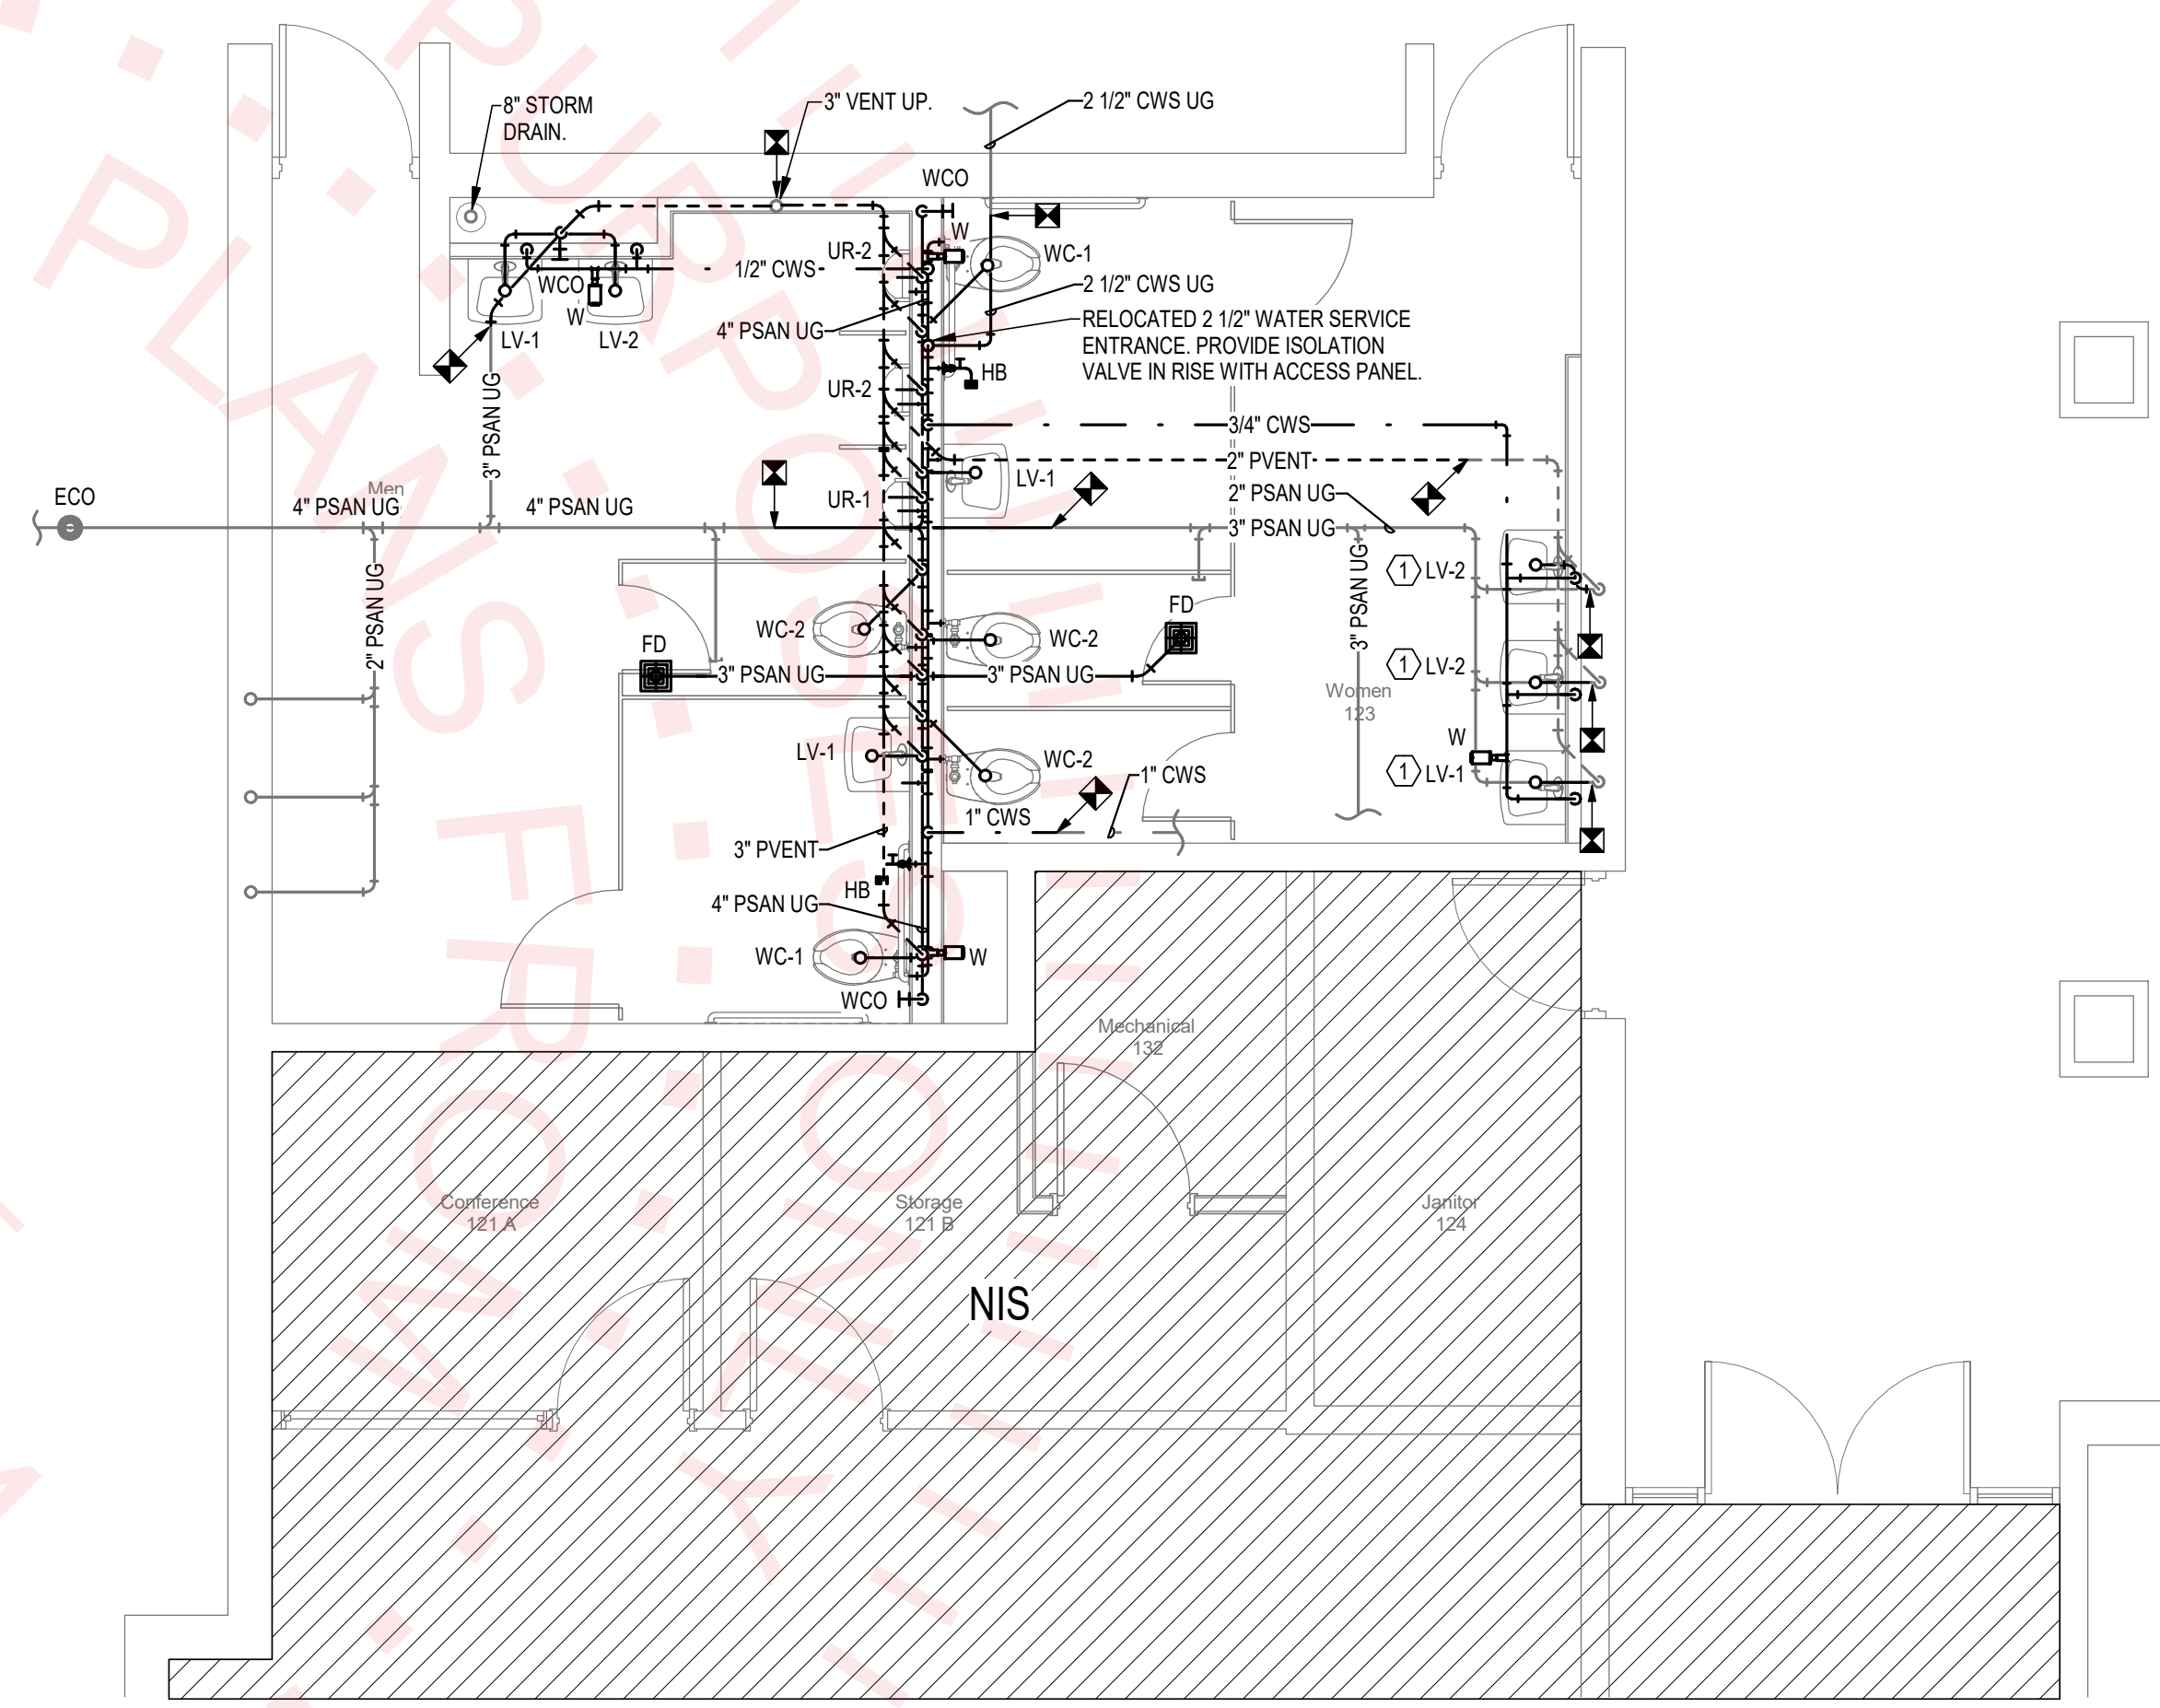

2 Floor Plan - Renovation
1/4" = 1'-0"

DEMOLITION KEYNOTES

- 1 DEMOLISH FLOOR DRAIN AND SANITARY PIPING BELOW FLOOR TO LIMITS INDICATED; CAP AND ABANDON. PATCH FLOOR TO MATCH ADJACENT SURFACE; SEE ARCHITECTURAL PLANS.
- 2 DEMOLISH PLUMBING FIXTURE AND ASSOCIATED WATER SUPPLY, SANITARY AND VENT PIPING BEHIND WALL AND/OR ABOVE CEILING; CAP AND ABANDON. PATCH WALL TO MATCH ADJACENT SURFACE; SEE ARCHITECTURAL PLANS.
- 3 DEMOLISH PLUMBING FIXTURE AND ASSOCIATED WATER SUPPLY BEHIND WALL; CAP AND ABANDON. PATCH WALL TO MATCH ADJACENT SURFACE; SEE ARCHITECTURAL PLANS. EXTEND SANITARY PIPING TO NEW FIXTURE LOCATION AS INDICATED ON RENOVATION PLANS.
- 4 DEMOLISH SANITARY PIPING ABOVE FLOOR IN CHASE TO LIMITS INDICATED BELOW FLOOR. SANITARY PIPING BELOW FLOOR TO REMAIN FOR RECONNECTION AS INDICATED ON RENOVATION PLANS.
- 5 DEMOLISH VENT PIPING TO LIMITS INDICATED. VENT THRU FLOOR TO REMAIN FOR RECONNECTION AS INDICATED ON RENOVATION PLANS.
- 6 DEMOLISH COLD WATER SUPPLY PIPING IN CHASE TO LIMITS INDICATED BELOW FLOOR. COLD WATER BELOW FLOOR TO REMAIN FOR RECONNECTION AS INDICATED ON RENOVATIONS PLANS.
- 7 DEMOLISH COLD WATER SUPPLY IN CHASE TO LIMIT INDICATED ABOVE CEILING. COLD WATER ABOVE CEILING TO REMAIN FOR RECONNECTION AS INDICATED ON RENOVATION PLANS.
- 8 DEMOLISH HOSE BIBB; CAP AND ABANDON. PATCH WALL TO MATCH ADJACENT SURFACE; SEE ARCHITECTURAL PLANS.
- 9 DEMOLISH PLUMBING FIXTURE AND ASSOCIATED WATER SUPPLY, SANITARY AND VENT PIPING TO LIMITS INDICATED.
- 10 ASSUMED LOCATION OF VENT PIPING. CONTRACTOR TO FIELD VERIFY. DEMOLISH TO LIMIT INDICATED AND RECONNECT AS INDICATED ON RENOVATION PLANS.

RENOVATION KEYNOTES

- 1 EXTEND EXISTING SANITARY AS REQUIRED FOR NEW FIXTURE LOCATION.

SEAL:

PROJECT TITLE:

**TCC English Building
Restroom Renovations
444 Appleyard Dr., Tallahassee, FL 32304**

PROJECT NO.: 23.121

DESIGNED BY : MPP

DRAWN BY: MPP

CHECKED BY: MPP

THIS DRAWING AND ANY REPRODUCTIONS ARE THE PROPERTY AND COPYRIGHT OF BKJ, INC. AND MAY NOT BE REPRODUCED, PUBLISHED OR USED IN ANY MANNER WITHOUT WRITTEN PERMISSION OF THE ARCHITECT

REVISIONS:

PROJECT PHASE:

100% Construction Documents

DRAWING TITLE:

Floor Plans

SHEET NO.:

P1.0

DATE:

August 25, 2023

SEAL:

PROJECT TITLE:

**TCC English Building
Restroom Renovations
444 Appleyard Dr., Tallahassee, FL 32304**

PROJECT NO.: **23.121**

DESIGNED BY: **MPP**

DRAWN BY: **MPP**

CHECKED BY: **MPP**

THIS DRAWING AND ANY REPRODUCTIONS
ARE THE PROPERTY AND COPYRIGHT
OF BKJ, INC. AND MAY NOT BE
REPRODUCED, PUBLISHED OR USED IN ANY
MANNER WITHOUT WRITTEN
PERMISSION OF THE ARCHITECT

REVISIONS:

PROJECT PHASE:

**100% Construction
Documents**

DRAWING TITLE:


Riser Diagrams

SHEET NO.:


P2.1

DATE:

August 25, 2023

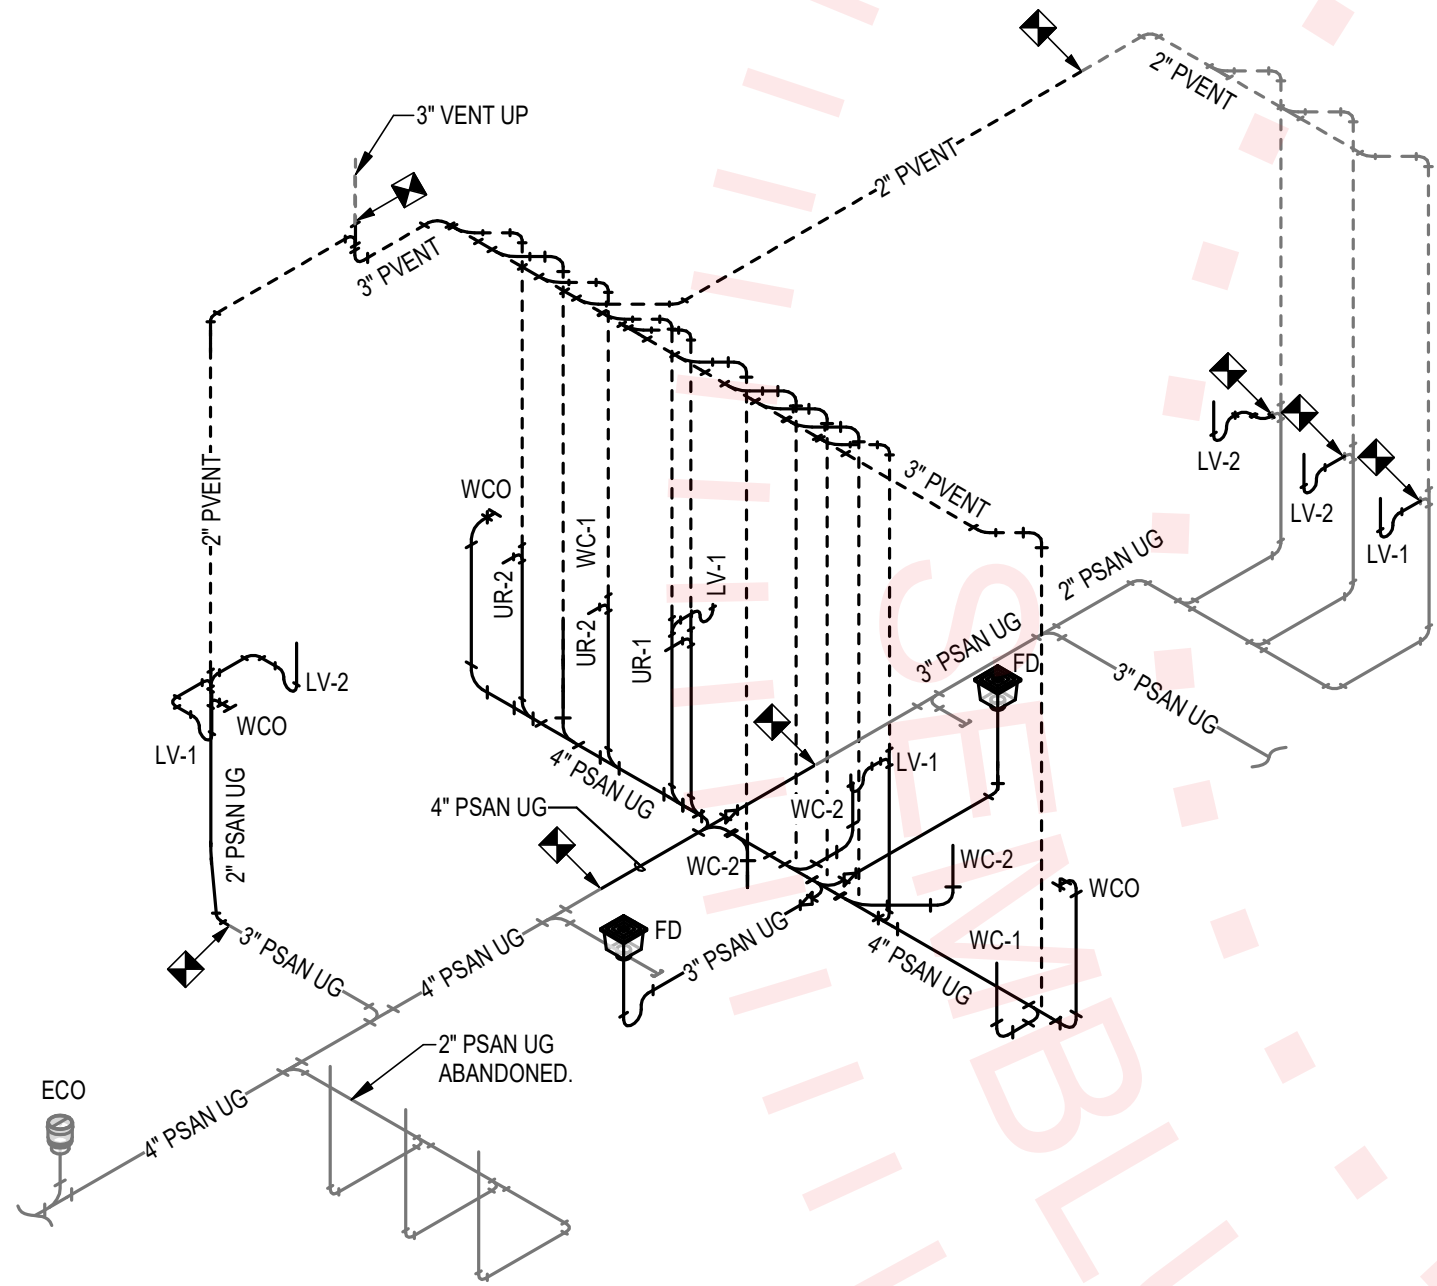

2 Waste & Vent Riser Diagram
P2.1

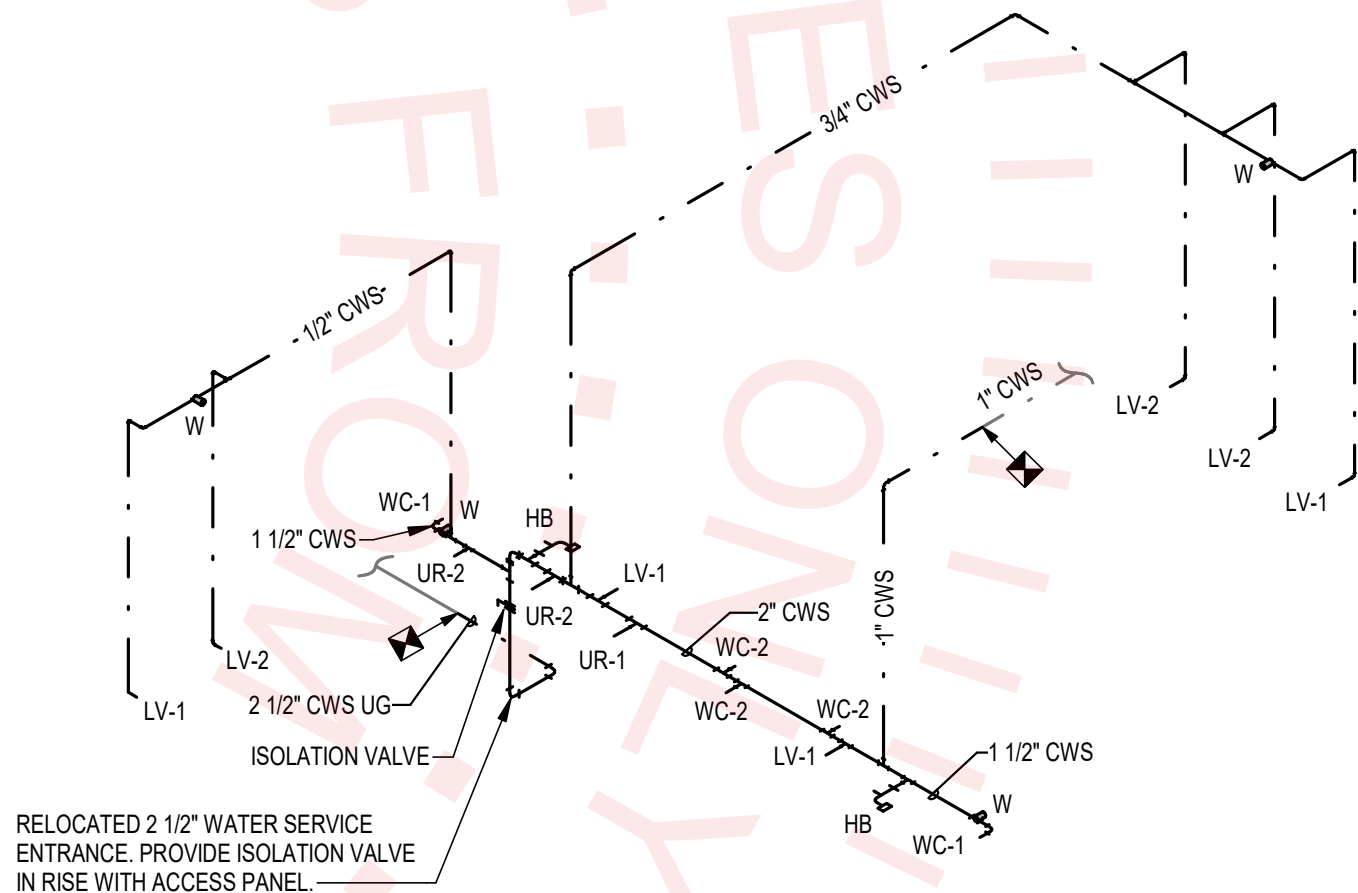

1 Supply Riser Diagram
P2.1

DESIGN CONDITIONS SCHEDULE

OUTDOOR CONDITIONS - DESIGN DAY (TALLAHASSEE, FLORIDA)					
	COOLING (0.4% ANNUAL)	*Fdb	-	*Fwb	96.2 - 76.2
	HEATING (99.6% ANNUAL)	*Fdb			26.5
INDOOR CONDITIONS - SUMMER					
	ALL SPACES	*Fdb	-	%RH	75 - 50
INDOOR CONDITIONS - WINTER					
	ALL SPACES	*Fdb	-	%RH	70 - 30

VENTILATION RATE

		EXHAUST AIR	OUTSIDE AIR	VENTILATION AIR
TYPE OF SPACE		CFM / FT ³	CFM / PERSON	CFM / PERSON
	TOILET (PUBLIC)	50/70	0	0
<u>NOTES:</u>				
1	VENTILATION RATES CALCULATED PER REQUIREMENTS OF FLORIDA EXISTING BUILDING CODE 2020, 809.2 ALTERED EXISTING SYSTEMS.			

FANS


DESIGNATION			EF-3
	SERVICE		CLASS 1 OR 2 EXHAUST
	MOUNTING METHOD		SUSPENDED
	FAN TYPE		CENTRIFUGAL SQUARE IN-LINE
	AIR FLOW	CFM	560
	STATIC PRESSURE	IN.	0.5
	FAN SPEED	RPM	1,121
	FAN DRIVE		DIRECT
	MOTOR SPEED	RPM	1,250
	MOTOR POWER	HP or W	1/4 HP
	MOTOR BRAKE HORSEPOWER	BHP	0.1
	ELECTRONICALLY COMMUTATED MOTOR		YES
	ELECTRICAL CHARACTERISTICS	V / PH	120 / 1
	WEIGHT	LBS.	53
	NOISE LEVEL	SONES or LwA	8.6 SONES
STANDARD NOTES		1, 2, 4, 10, 14, 15, 16, 17, 18	
MANUFACTURER			GREENHECK
MODEL NUMBER			SQ-130HP-VG
DETAIL REFERENCE			EM/5.1
NOTES: (SEE SEQUENCES OF OPERATION ON SHEET IC2.1 FOR FAN CONTROLS)			
1 ELECTRICAL TO PROVIDE DISCONNECT SWITCH.			
2 PROVIDE SOLID STATE SPEED CONTROLLER, FACTORY MOUNTED.			
4 PROVIDE BACKDRAFT DAMPER, GRAVITY OPERATED.			
4 PROVIDE SPRING ISOLATORS.			
14 PROVIDE INSULATED HOUSING.			
15 PROVIDE SIDE DISCHARGE ARRANGEMENT (WHERE INDICATED ON PLANS).			
16 PROVIDE INLET COMPANION FLANGE (WHERE CONNECTED TO DUCTWORK).			
17 PROVIDE OUTLET COMPANION FLANGE (WHERE CONNECTED TO DUCTWORK).			
18 PROVIDE WIRE GUARD (WHERE NOT CONNECTED TO DUCTWORK).			

CONDENSATE PUMP

DESIGNATION			CP-1
	CAPACITY	GPH	36
	TOTAL HEAD	FT.	15
	MOTOR HORSEPOWER	HP	1/30
	ELECTRICAL CHARACTERISTICS	V / PH	120 / 1
MANUFACTURER			LITTLE GIANT
MODEL NUMBER			VCMX-20ULS
NOTES:			
1	PROVIDE ANTI-SWEAT TANK SLEEVE.		

BLOWER COIL UNITS

DESIGNATION			BCU-1
AIR FLOW RATES			
	TOTAL SUPPLY AIR	CFM	500
	OUTSIDE AIR	CFM	0
COOLING COIL DATA - HYDRONIC			
	TOTAL COOLING CAPACITY	MBTUH	11.2
	SENSIBLE COOLING CAPACITY	MBTUH	10.3
	AIR ENTERING COOLING COIL	*Fdb - *Fwb	75.0 - 63.0
	AIR LEAVING COOLING COIL	*Fdb - *Fwb	56.0 - 55.5
	CHW ENTERING & LEAVING TEMPERATURE	*F - *F	45.0 - 57.0
	WATER FLOW	GPM	1.9
	GLYCOL CONCENTRATION	%	0
	RUNOUT PIPE SIZE	IN.	3/4
	CONDENSATE DRAIN SIZE	IN.	1
	CONTROL VALVE (TYPE)		3-WAY
HEATING COIL DATA - HYDRONIC			
	HEATING CAPACITY	MBTUH	11.0
	AIR ENTERING HEATING COIL	*F	70
	AIR LEAVING HEATING COIL	*F	90
	HHW ENTERING & LEAVING TEMPERATURE	*F - *F	150.0 - 130.0
	WATER FLOW	GPM	1.1
	RUNOUT PIPE SIZE	IN.	3/4
	CONTROL VALVE (TYPE)		3-WAY
SUPPLY FAN DATA			
	FAN TYPE		FORWARD CURVED
	DRIVE TYPE		DIRECT
	MOTOR TYPE		ECM
	EXTERNAL STATIC PRESSURE	IN. WG	0.6
	DIRTY FILTER ALLOWANCE	IN. WG	0.7
	MAXIMUM TOTAL STATIC PRESSURE (INCLUDING DIRTY FILTER)	IN. WG	1.8
	FAN MOTOR HORSEPOWER	HP - BHP	1/2 - 0.3
	ELECTRICAL CHARACTERISTICS	V / PH	208 / 3
	MCA / MOCF	AMPS - AMPS	3.0 - 15
	VARIABLE FREQUENCY DRIVE		NONE
UNIT DATA			
	ORIENTATION		VERTICAL
	WEIGHT	LBS	
	FILTER		2" THICK PLEATED
MANUFACTURER			ENVIROTEC
MODEL NUMBER			VDD-08
DETAIL REFERENCE			A/M5.1
NOTES:			
1	BRAKE HORSEPOWER INDICATED IS MAXIMUM ALLOWED.		
2	INSTALL ALL UNITS LOCATED ABOVE GROUND LEVEL FINISHED FLOOR ENTIRELY WITHIN AN AUXILIARY DRAIN PAN. PROVIDE SWITCH INTERLOCKED WITH SUPPLY FAN IN DRAIN PAN.		
3	PROVIDE 3" BASERAIL.		

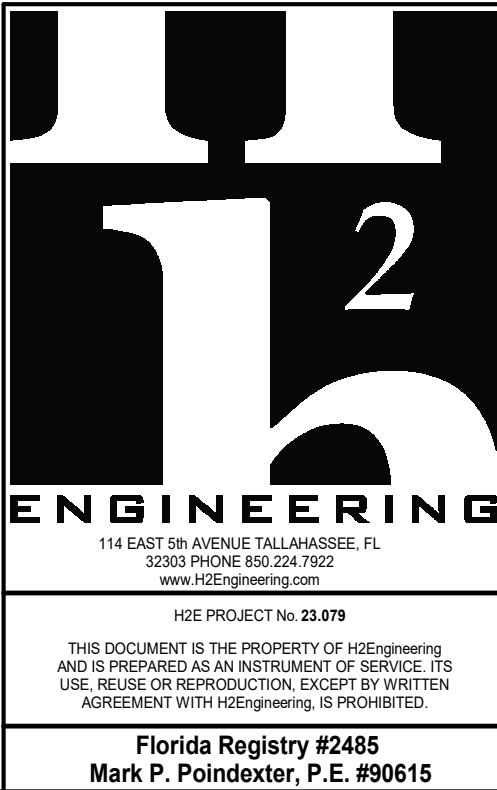

SEAL:

PROJECT TITLE:

**TCC English Building
Restroom Renovations**
444 Appleyard Dr., Tallahassee, FL 32304

PROJECT NO.: 23.121

DESIGNED BY : MPP

DRAWN BY: MPP

CHECKED BY: MPP

THIS DRAWING AND ANY REPRODUCTIONS
ARE THE PROPERTY AND COPYRIGHT
OF BKJ, INC. AND MAY NOT BE
REPRODUCED, PUBLISHED, OR USED IN ANY
MANNER WITHOUT WRITTEN
PERMISSION OF THE ARCHITECT

REVISIONS:

PROJECT PHASE:

100% Construction Documents

DRAWING TITLE:


Schedules

SHEET NO.:

M0.2

DATE:

August 25, 2023

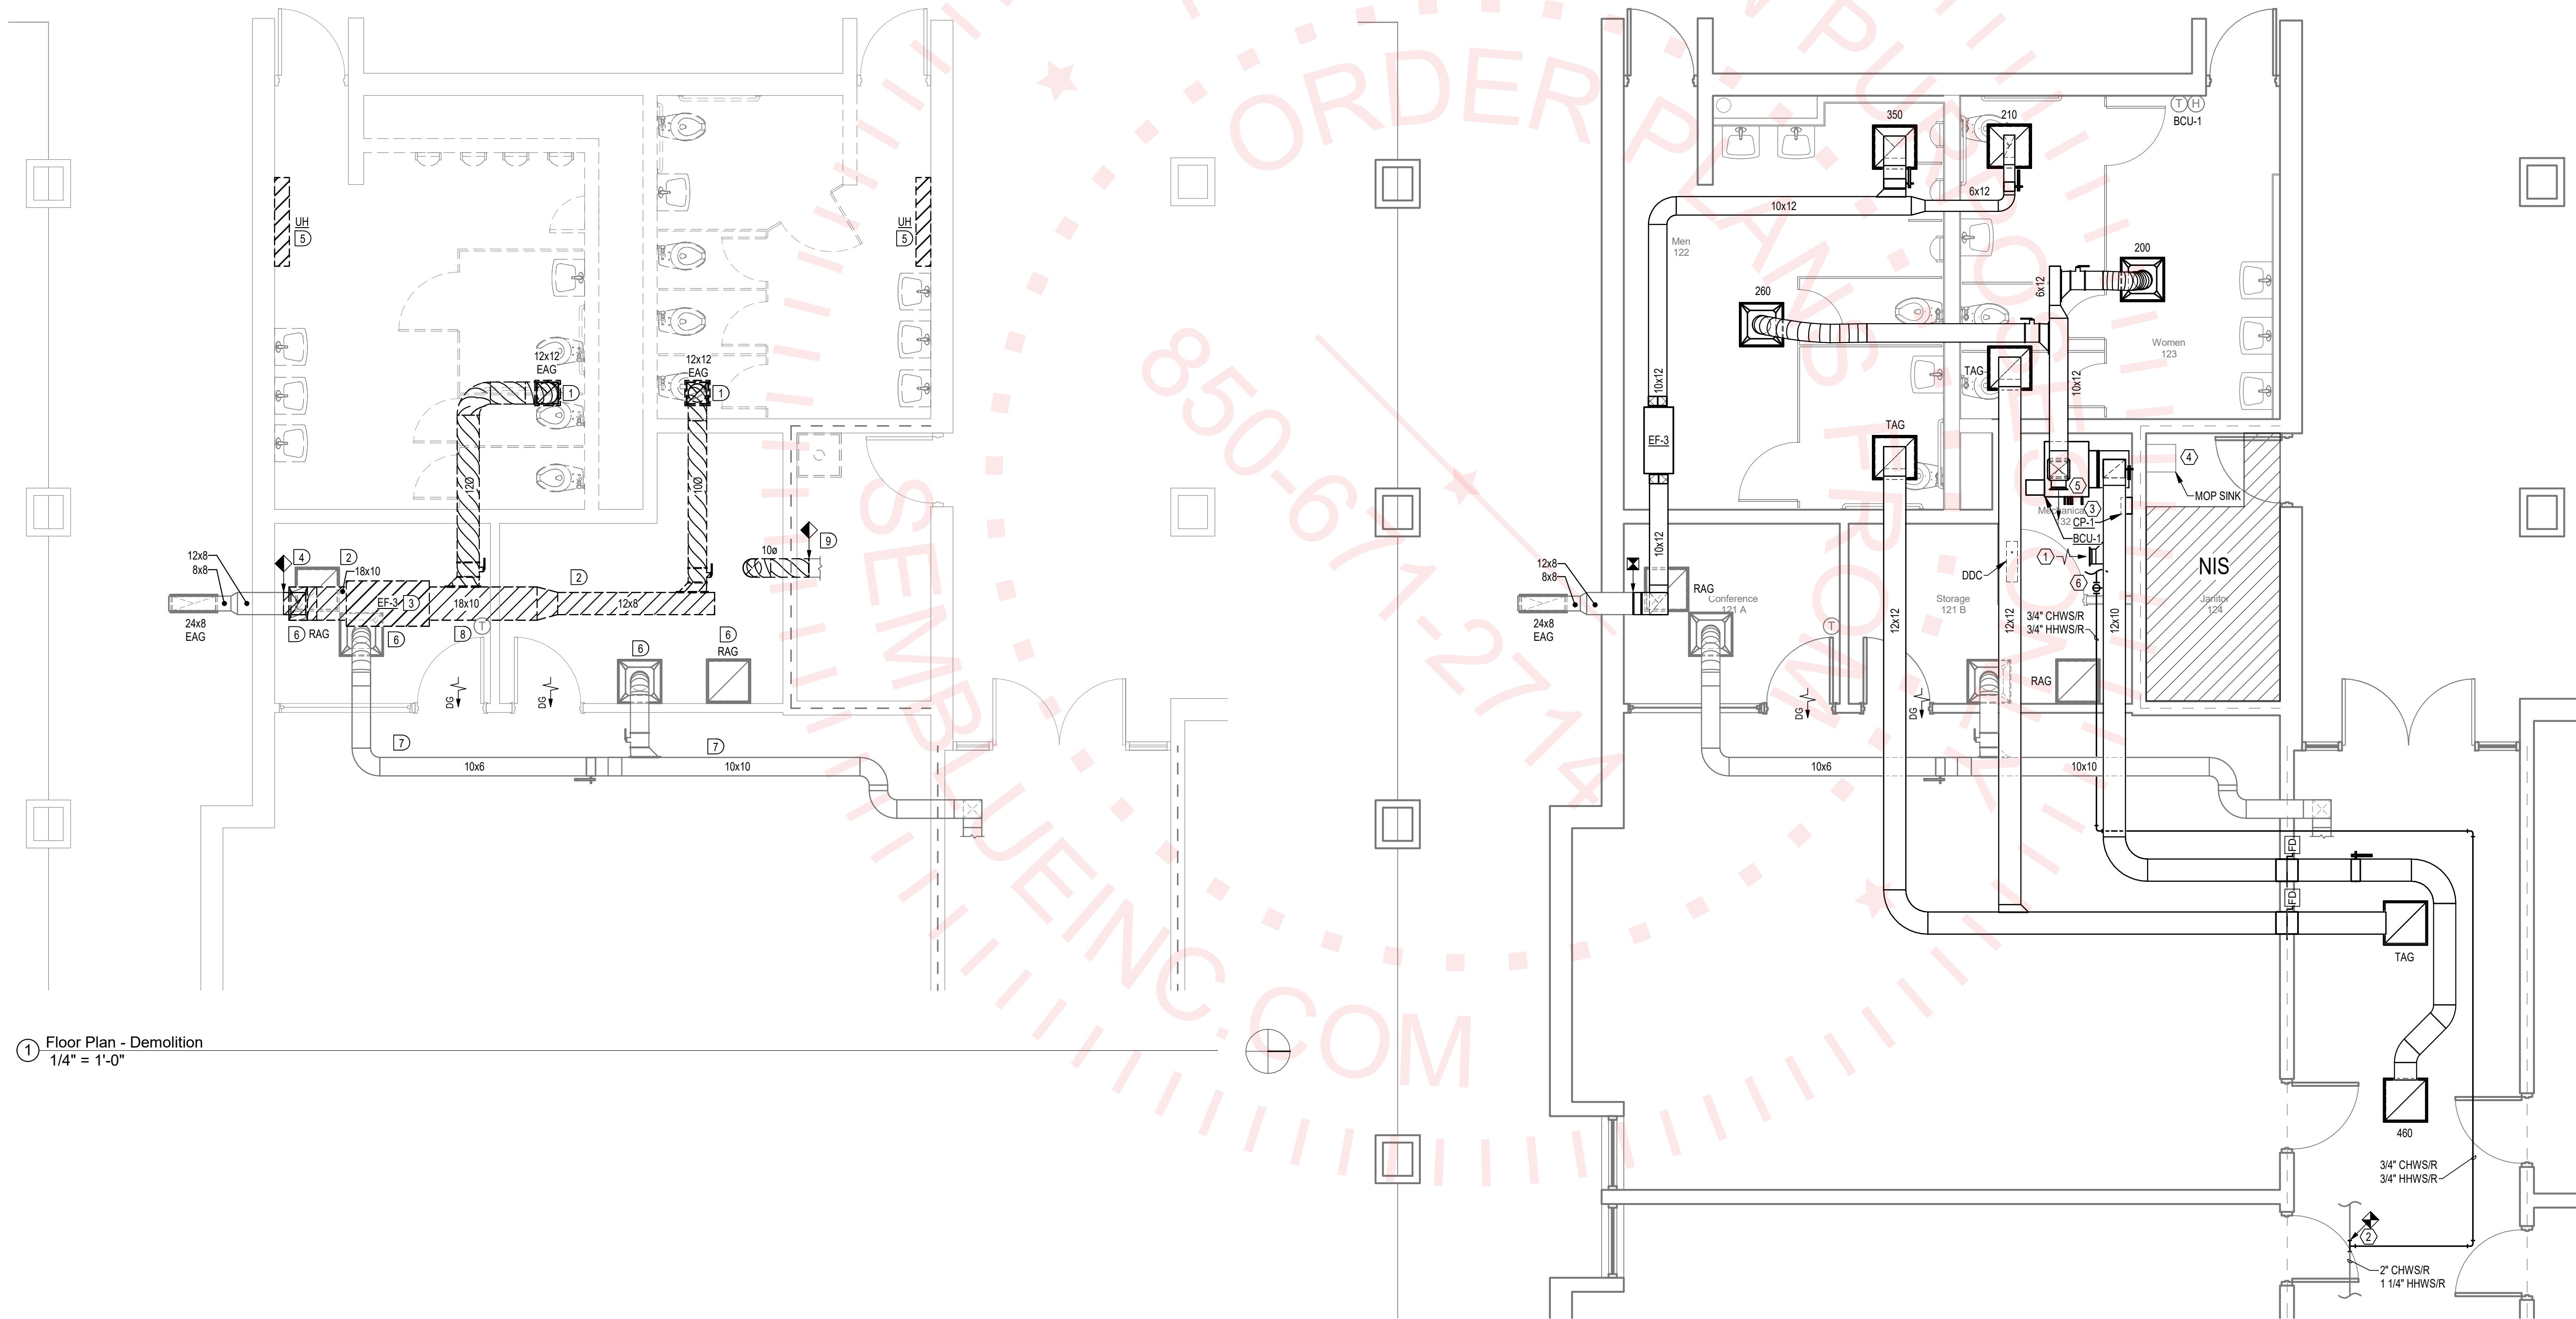

① Floor Plan - Demolition
1/4" = 1'-0"

② Floor Plan - Renovation
1/4" = 1'-0"

DEMOLITION KEYNOTES

- 1 DEMOLISH GRILLE.
- 2 DEMOLISH DUCTWORK TO LIMITS INDICATED.
- 3 DEMOLISH EXHAUST FAN AND ASSOCIATED CONTROLS, HANGERS AND SUPPORTS. SEE ELECTRICAL PLANS FOR POWER REQUIREMENTS.
- 4 NEW DUCTWORK TO BE PROVIDED AS INDICATED ON RENOVATION PLANS.
- 5 DEMOLISH UNIT HEATER AND ASSOCIATED PIPING BELOW FLOOR. PATCH WALL AND FLOOR TO MATCH ADJACENT SURFACE; SEE ARCHITECTURAL DRAWINGS. SEE ELECTRICAL PLANS FOR POWER REQUIREMENTS.
- 6 DIFFUSER/GRILLE TO REMAIN.
- 7 DUCTWORK TO REMAIN.
- 8 TEMPERATURE SENSOR TO REMAIN.
- 9 DEMOLISH DUCT TO LIMIT INDICATED; CAP END OF DUCT.

RENOVATION KEYNOTES

- 1 PROVIDE 8x6 RAG WITH OPPOSED BLADE DAMPER. BALANCE TO 40 CFM.
- 2 CONNECT TO EXISTING 2" CHILLED WATER AND 1 1/4" HEATING HOT WATER PIPING IN CORRIDOR. CONTRACTOR TO FIELD VERIFY EXACT LOCATION.
- 3 DISCHARGE 3/4" CONDENSATE FROM BCU-1 INTO CP-1.
- 4 DISCHARGE 3/4" CONDENSATE FROM CP-1 INTO MOP SINK.
- 5 PROVIDE 8x6 SAR WITH OPPOSED BLADE DAMPER. BALANCE TO 40 CFM.
- 6 RACK HYDRONIC PIPING AND COIL PACKAGE ON WALL. MAINTAIN BLOWER COIL UNIT FILTER AND MANUFACTURER CLEARANCE.

SEAL:

PROJECT TITLE:

**TCC English Building
Restroom Renovations
444 Appleyard Dr., Tallahassee, FL 32304**

PROJECT NO.: 23.121

DESIGNED BY: MPP

DRAWN BY: MPP

CHECKED BY: MPP

THIS DRAWING AND ANY REPRODUCTIONS
ARE THE PROPERTY AND COPYRIGHT
OF BKJ, INC. AND MAY NOT BE
REPRODUCED, PUBLISHED OR USED IN ANY
MANNER WITHOUT WRITTEN
PERMISSION OF THE ARCHITECT

REVISIONS:

PROJECT PHASE:

100% Construction
Documents

DRAWING TITLE:


Floor Plans

SHEET NO.:

M1.0

DATE:


August 25, 2023

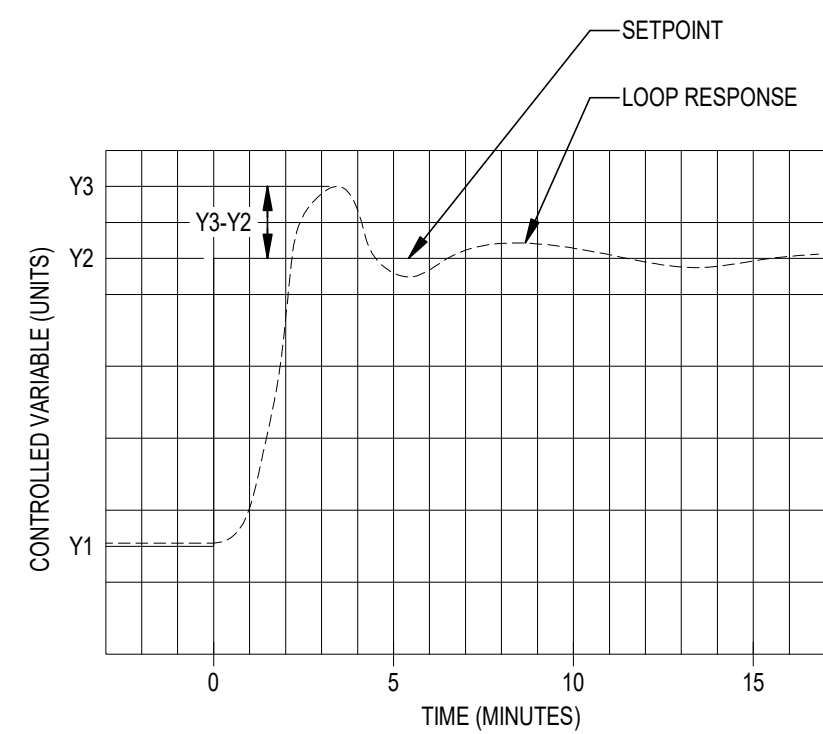

- CONTROL LOOP TUNING NOTES:


1. TEST EACH CONTROL LOOP TO VERIFY STABLE MODE OF OPERATION AND COMPLIANCE WITH SEQUENCE OF OPERATION.
2. ADJUST PROPORTIONAL-INTEGRAL-DERIVATIVE (PID) ACTIONS USING ZERO, DEAD, RATCH, S-BAND, SLOPE, SLOTTED, ULTIMATE OSCILLATION OR FIRST-ORDER-PLUS-DEAD-TIME) OR TRIAL AND ERROR.
3. EACH PROPORTIONAL, INTEGRAL, AND DERIVATIVE GAIN SHALL UTILIZE A LINEAR RESET BASED ON ERROR FROM SETPOINT. CONTRACTOR SHALL DETERMINE MAXIMUM AND MINIMUM RANGE FOR EACH GAIN TO ACHIEVE SPECIFIED PERFORMANCE. MODEL-FREE ADAPTIVE CONTROL, LOOPS AND SELF-LEARNING CONTROL LOOPS SHALL NOT BE USED.
4. BEGIN WITH MEASURED VALUE AT SETPOINT (Y1). ADJUST SETPOINT OR MANUAL OUTPUT OF CONTROLLER TO CREATE A STEP RESPONSE. MAXIMUM OVERSHOOT SHALL EXCEED NO MORE THAN $\pm 2.5 \times$ MAXIMUM OVERSHOOT IN A STEP RESPONSE $(Y3-Y2)/(Y2-Y1) \leq 2.5$
5. INITIAL RESPONSE, INCLUDING OVERSHOOT AND DAMPENING SHALL OCCUR WITHIN APPROXIMATELY 5 MINUTES FROM STEP CHANGE. MEASURED VALUE SHALL ACHIEVE SETPOINT WITHIN APPROXIMATELY 15 MINUTES FROM STEP CHANGE.
6. SUPPLY GRAPHICAL TREND DATA OUTPUT TO ENGINEER SHOWING EACH DDC LOOPS RESPONSE TO A SET POINT CHANGE REPRESENTING AN END DEVICE CHANGE OF AT LEAST 25% OF FULL RANGE. TREND SAMPLING RATE SHALL BE FROM 10 SECONDS TO 1 MINUTE, DEPENDING ON LOOP SPEED. EACH DDC LOOP TREND DATA SHALL SHOW TREND, STEP, END DEVICE RESPONSE, AND CONTROLLED VARIABLE VALUES.

B	CONTROL LOOP TUNING DETAIL
----------	-----------------------------------

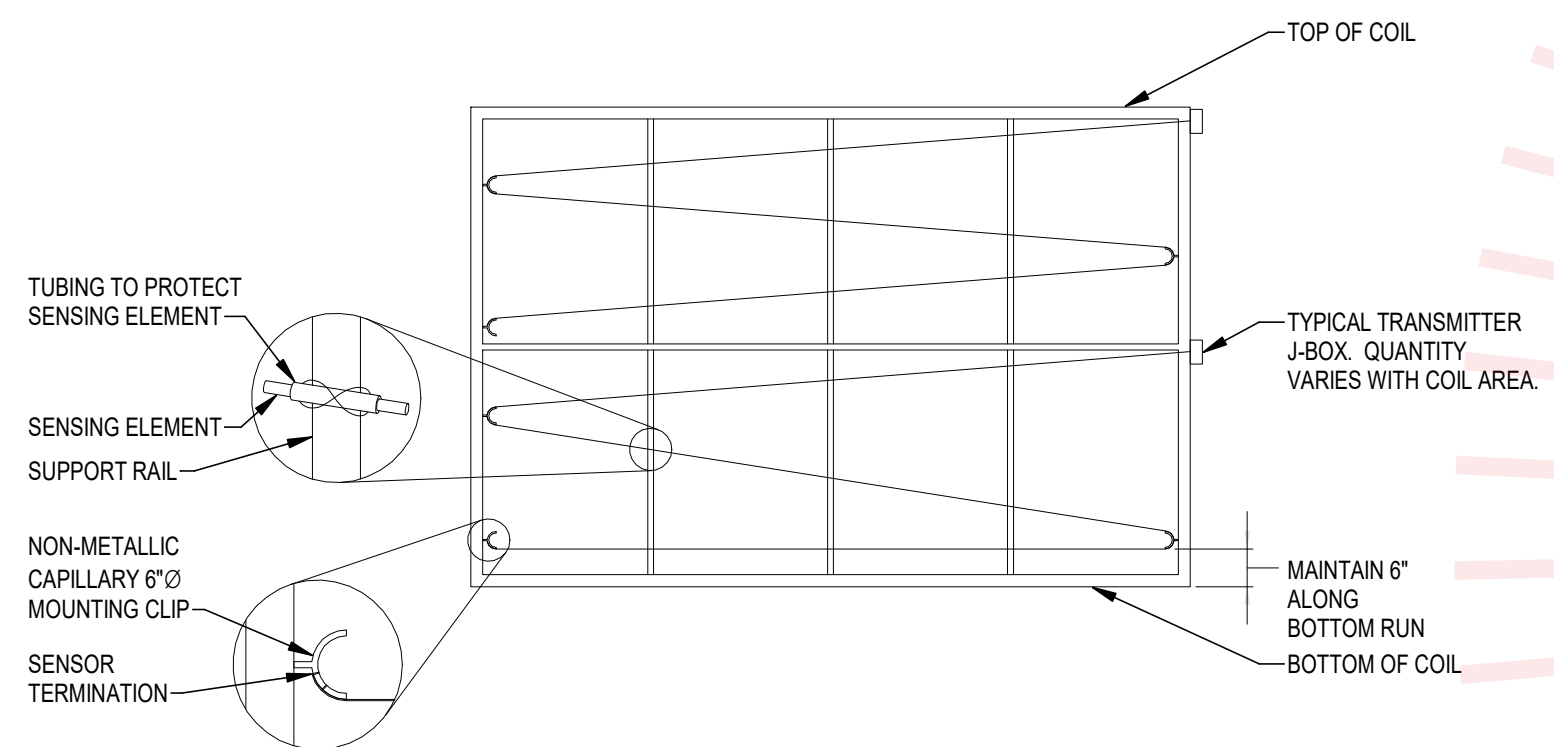

- NOTES:
1. PROVIDE 5 LINEAR FT. OF SENSING ELEMENT FOR EVERY 10 SQ. FT. OF COIL CROSS-SECTIONAL AREA.
 2. PROVIDE MINIMUM 20 FT. LONG ELEMENT FOR LOW TEMPERATURE THERMOSTATS (FREEZE STAT).

C AVERAGING TEMPERATURE SENSOR DETAIL

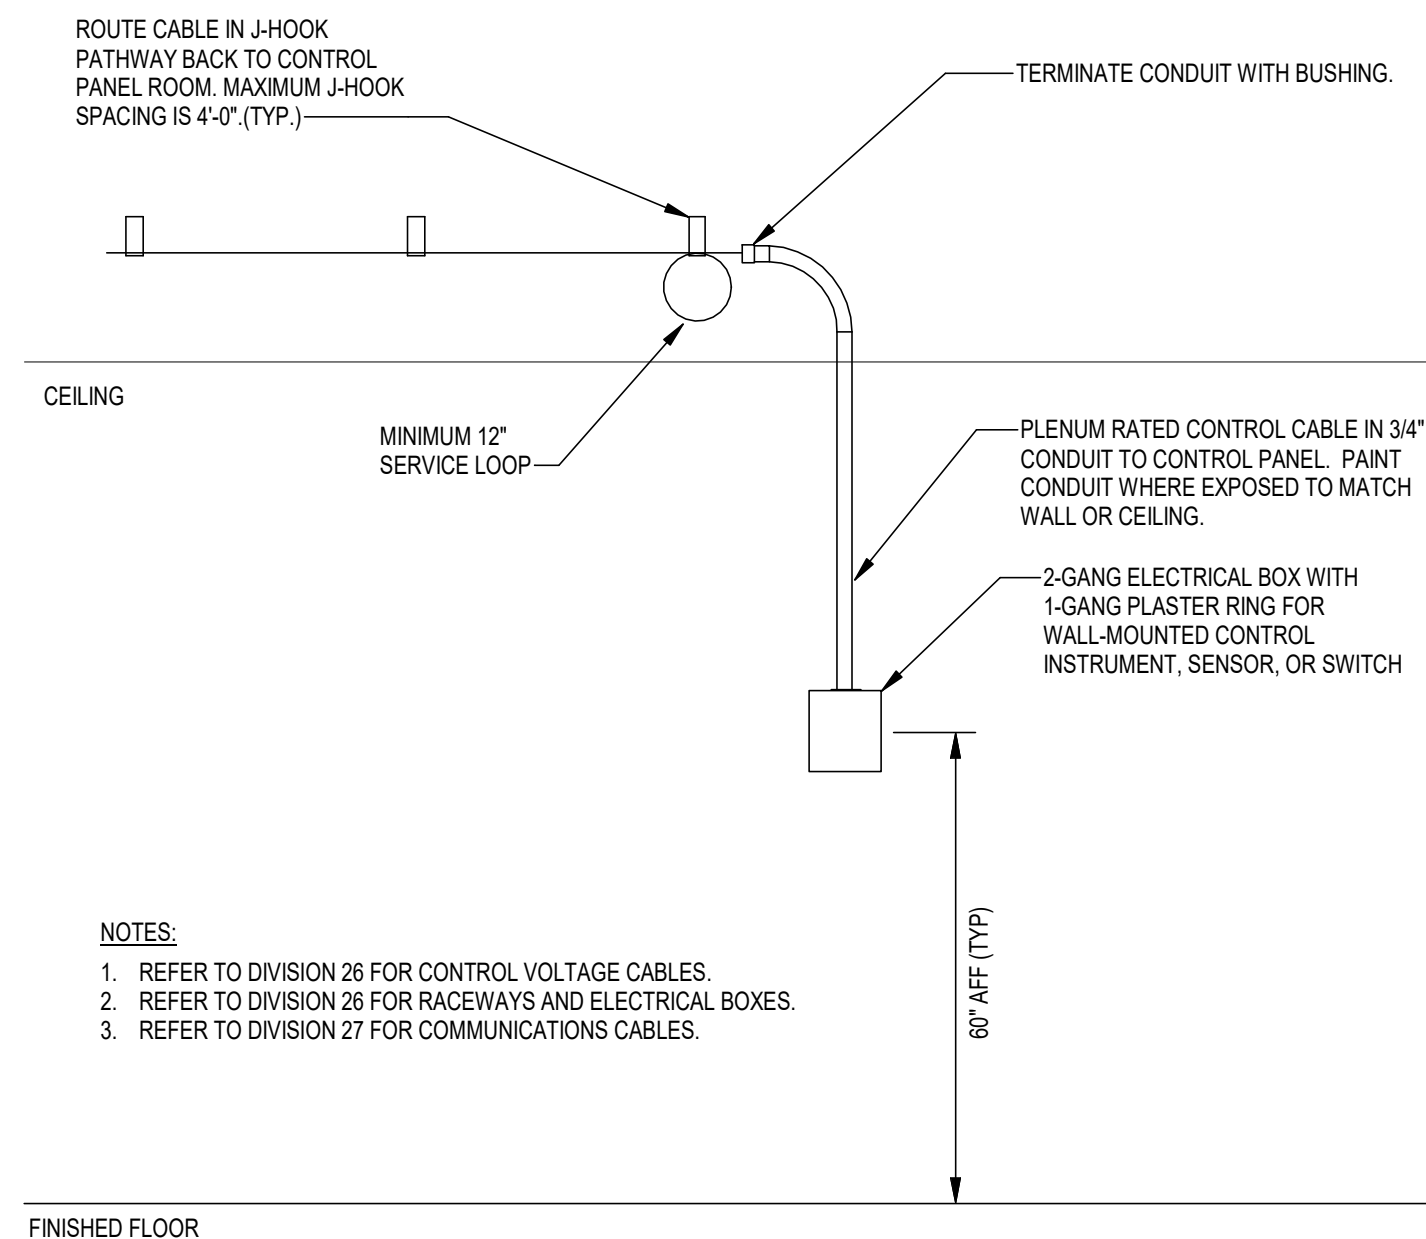

- NOTES:**
1. REFER TO DIVISION 26 FOR CONTROL VOLTAGE CABLES.
 2. REFER TO DIVISION 26 FOR RACEWAYS AND ELECTRICAL BOXES.
 3. REFER TO DIVISION 27 FOR COMMUNICATIONS CABLES.

D NEW WALL-MOUNTED CONTROL DEVICE ROUGH-IN DETAIL


HYDRONIC CONTROL VALVES

CONTROL VALVE TYPE	VALVE					TARGET		SELECTION		ACTUATOR	BASIS OF DESIGN				
	STYLE	SIZE	FLOW RANGE		FLOW CHARACTERISTIC	DIFFERENTIAL PRESSURE	FLOW COEFFICIENT		FLOW COEFFICIENT	DIFFERENTIAL PRESSURE	CONTROL TYPE	MANUFACTURER	MODEL NUMBER		
		(IN.)	(GPM)			(PSI)	(Cv)		(Cv)	(PSI)			2-WAY	3-WAY	
1	BALL	1/2	0.5	- 0.7	EQUAL %	4	0.25	- 0.35	0.3	2.8	- 5.4	MODULATING	BELIMO	B207	B307
2	BALL	1/2	0.8	- 1.1	EQUAL %	4	0.4	- 0.6	0.46	3.0	- 5.7	MODULATING	BELIMO	B208	B308
3	BALL	1/2	1.2	- 1.9	EQUAL %	4	0.6	- 1.0	0.8	2.3	- 5.6	MODULATING	BELIMO	B209	B309
4	BALL	1/2	2.0	- 2.9	EQUAL %	4	1.0	- 1.5	1.2	2.8	- 5.8	MODULATING	BELIMO	B210	B310

NOTES

- 1 REFER TO MECHANICAL EQUIPMENT SCHEDULES (DIV 23) AND SYSTEM CONTROL VALVE SCHEDULE (DIV 25) FOR SPECIFIC VALVES
2 ACTUATORS: PROVIDE MULTI-FUNCTION TECHNOLOGY (MFT)
3 FAIL POSITIONS: REFER TO CONTROL DIAGRAMS FOR INDIVIDUAL VALVES
4 POSITION FEEDBACK: PROVIDE 2 - 10 VDC POSITION FEEDBACK, WHERE INDICATED ON CONTROL DIAGRAMS
5 BALL VALVES: PROVIDE STAINLESS STEEL TRIM
6 2-POSITION APPLICATIONS: PROVIDE LINE SIZE VALVES. REFER TO MECHANICAL PLANS.

A STARTER - WIRING DETAIL

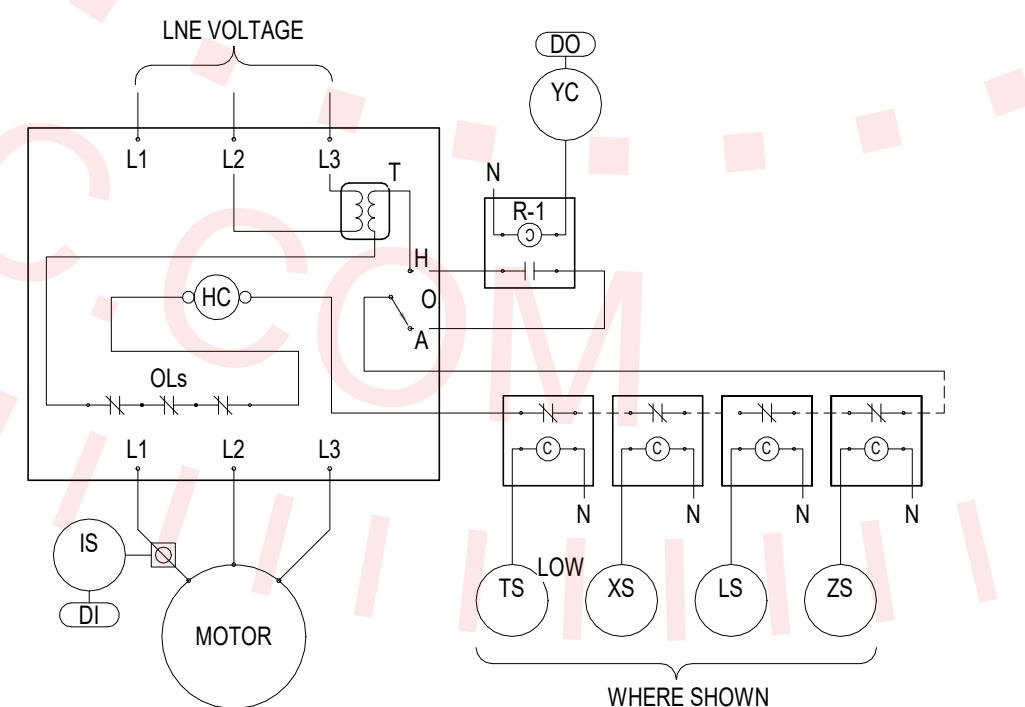

- NOTES:**
1. FIELD VERIFY ALL WIRING TERMINATIONS.
 2. FIELD VERIFY ALL CONNECTIONS.
 3. MOTOR STARTER AND ELECTRICAL POWER CONNECTIONS TO MOTOR STARTER AND MOTOR PROVIDED BY DIVISION 26.
 4. CONTROL COMPONENTS AND ASSOCIATED WIRING PROVIDED BY DIVISION 25.

A STARTER - WIRING DETAIL

SEAL:

PROJECT TITLE:

**TCC English Building
Restroom Renovations**
444 Appleyard Dr., Tallahassee, FL 32304

PROJECT NO.: 23.121

DESIGNED BY : MPP

DRAWN BY: MPP

CHECKED BY: **MPP**

THIS DRAWING AND ANY REPRODUCTIONS
ARE THE PROPERTY AND COPYRIGHT
OF BJK, INC. AND MAY NOT BE
REPRODUCED, PUBLISHED, OR USED IN ANY
MANNER WITHOUT WRITTEN
PERMISSION OF THE ARCHITECT

REVISIONS:

PROJECT PHASE:

100% Construction Documents

DRAWING TITLE:

Schedules & Details

SHEET NO.:

IC0.2

DATE:

August 25, 2023



REAL:

PROJECT TITLE:

**TCC English Building
Restroom Renovations
444 Appleyard Dr., Tallahassee, FL 32304**

PROJECT NO.: 23.121

SIGNED BY : **MPP**

AWN BY: **MPP**

CHECKED BY: MPP

THIS DRAWING AND ANY REPRODUCTIONS
ARE THE PROPERTY AND COPYRIGHT
OF BKJ, INC. AND MAY NOT BE
PRODUCED, PUBLISHED, OR USED IN ANY
MANNER WITHOUT WRITTEN
PERMISSION OF THE ARCHITECT

PROJECT PHASE:

100% Construction Documents

DRAWING TITLE:


Door Plans

SHEET NO.: _____

C1.0

DATE: _____

August 25, 2023

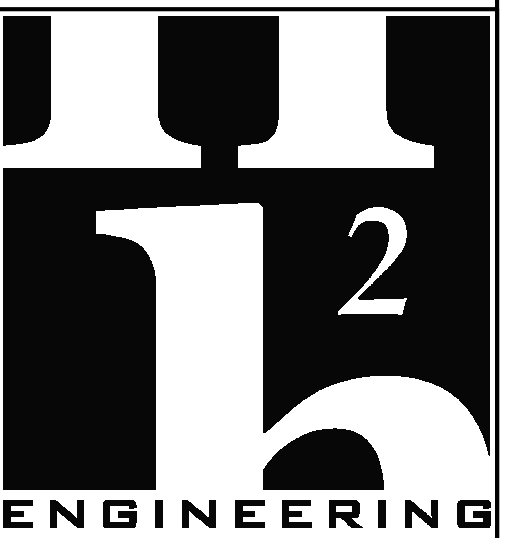


114 EAST 5th AVENUE TALLAHASSEE, FL
32303 PHONE 850.224.7922

H2E PROJECT No. 23.079


THIS DOCUMENT IS THE PROPERTY OF H2Engineering. IT IS PREPARED AS AN INSTRUMENT OF SERVICE. ITS USE, REUSE OR REPRODUCTION, EXCEPT BY WRITTEN AGREEMENT WITH H2Engineering, IS PROHIBITED.

Florida Registry #2485
P. Poindexter, P.E. #90615

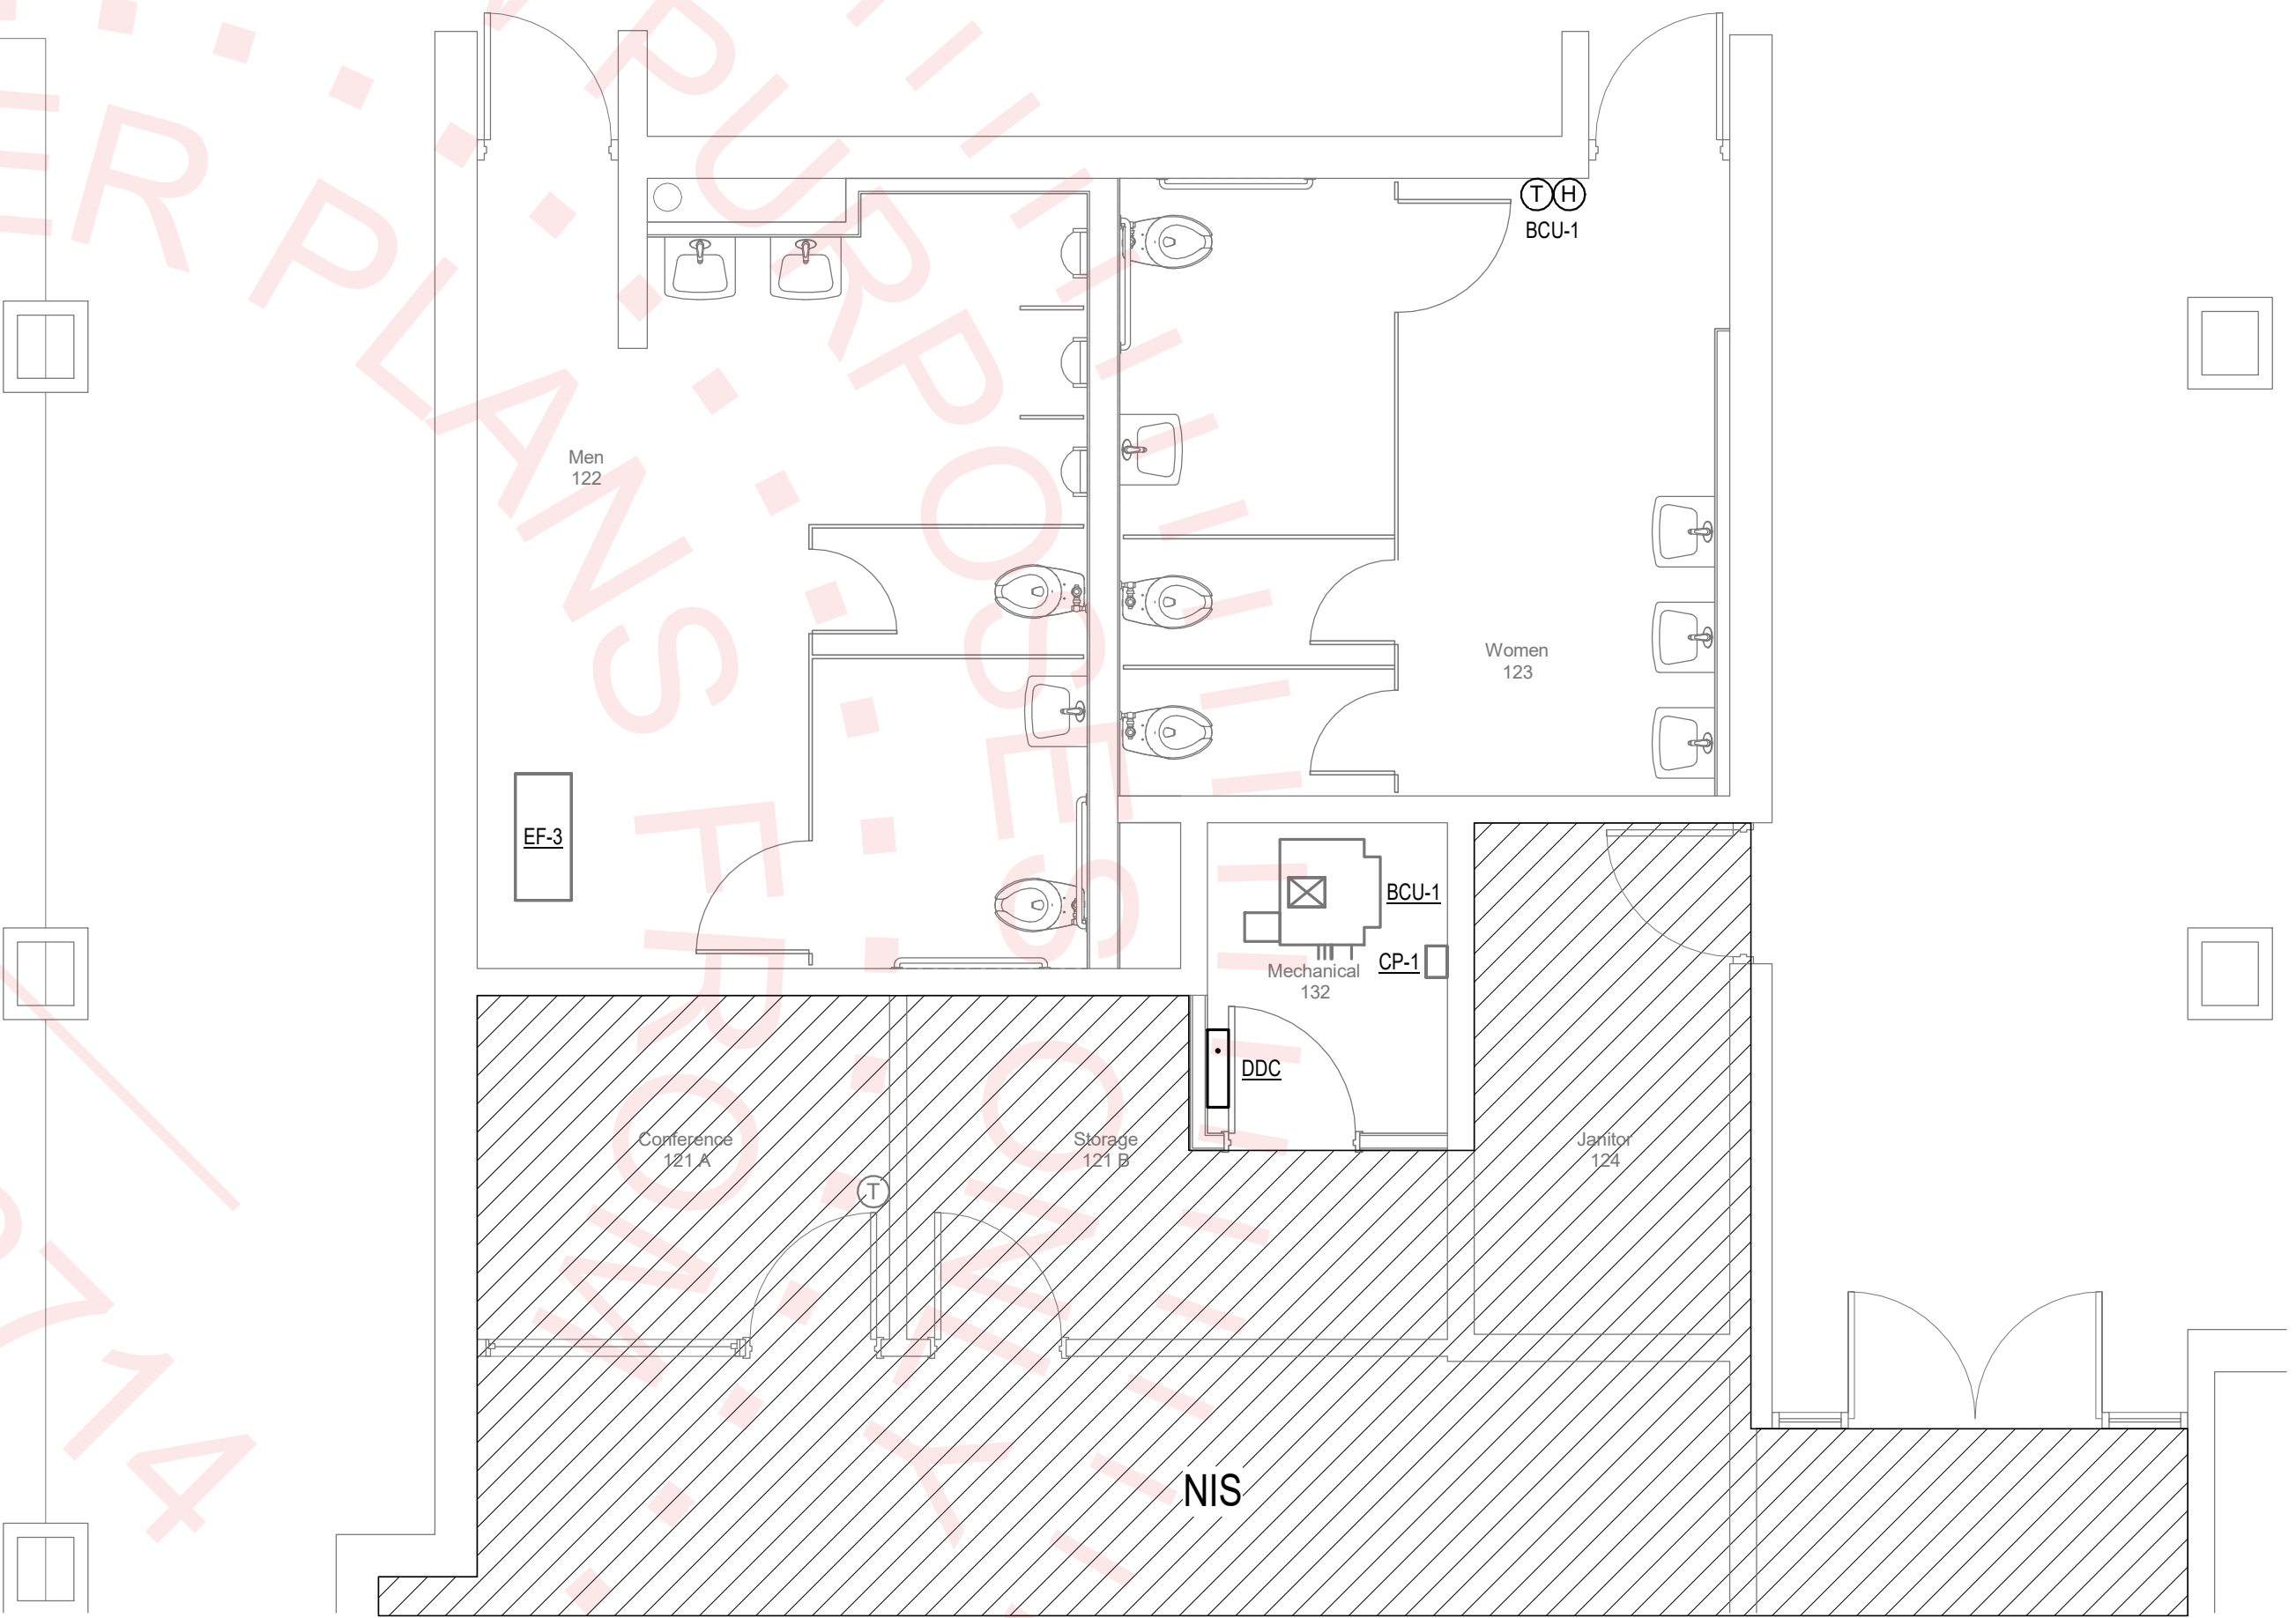

① Floor Plan - Renovation
1/4" = 1'-0"

BLOWER COIL UNITS

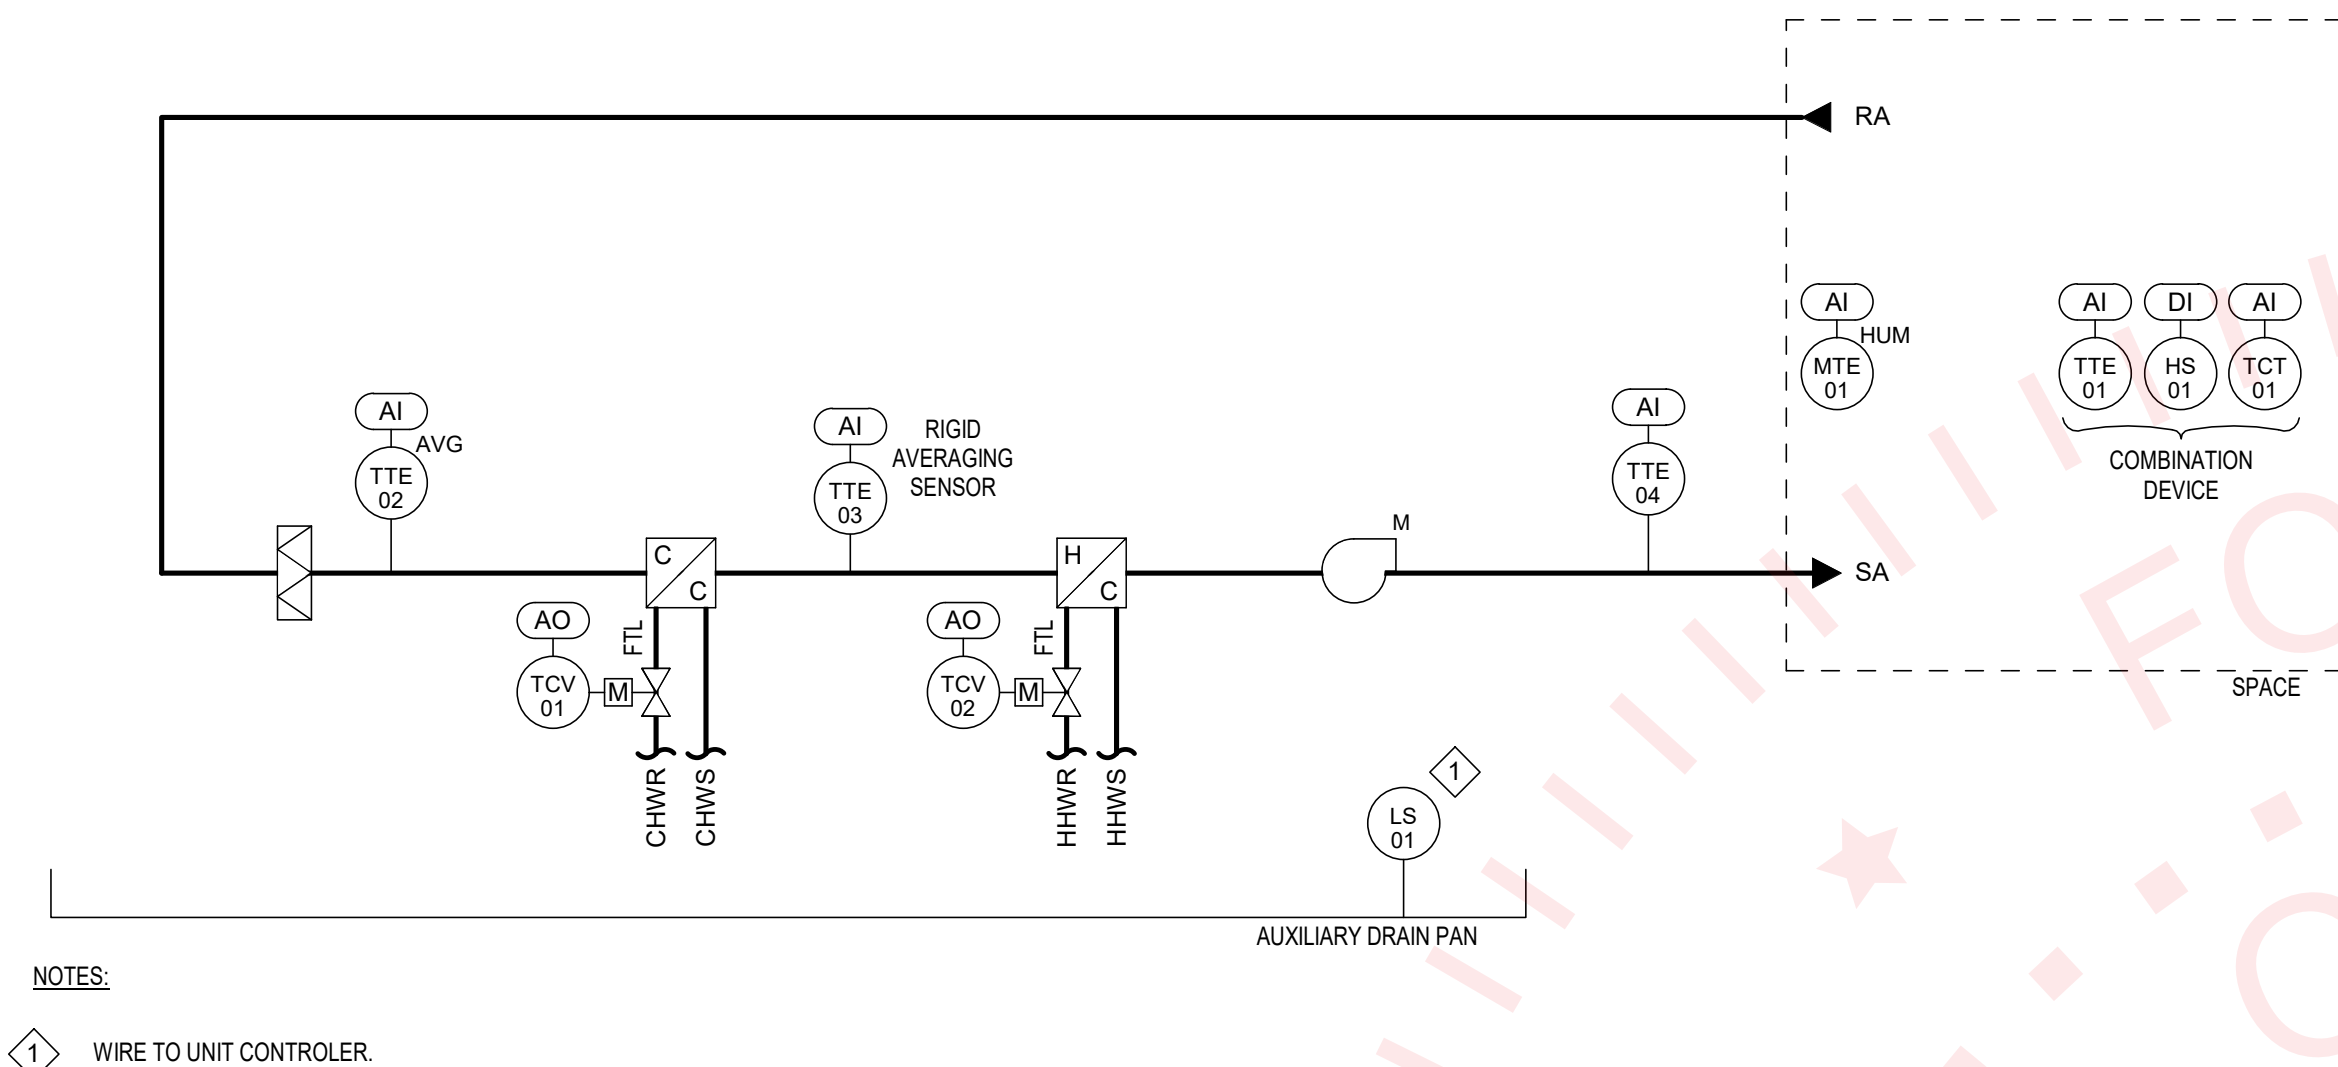

SINGLE ZONE VAV BLOWER COIL UNITS

1.1 GENERAL

- A. THE BLOWER COIL UNIT SHALL BE CONTROLLED BY A SEPARATE, STAND-ALONE, BACNET NETWORK CONTROLLER (NC) OR PROGRAMMABLE APPLICATION CONTROLLER (PAC). SEQUENCE OF OPERATION SHALL NOT RELY ON A COMMUNICATION INTERFACE WITH A REMOTE PANEL. ALL CONTROL LOGIC SHALL RESIDE IN CONTROL PANEL SERVING EQUIPMENT.
- B. THE UNIT CONTROLLER SHALL RESIDE ON THE PRIMARY IP LEVEL NETWORK WITH OTHER PACS AND NCS AS DEFINED IN ARTICLE "SYSTEM ARCHITECTURE" OF SPECIFICATION SECTION 31010.
- C. ALL SET-POINTS, TIME DELAYS, DEAD-BANDS, RESET LIMITS, SELECTABLE POINTS, AND OBJECTS SHALL BE AVAILABLE TO THE USER VIA DYNAMIC GRAPHICS OR TEXT-BASED INTERFACE WITHOUT REQUIRING THE USER TO EDIT THE APPLICATION PROGRAM.

1.2 RUN CONDITIONS

- A. SPACE TEMPERATURE AND HUMIDITY SET-POINTS:**
1. PROVIDE OCCUPIED SPACE TEMPERATURE COOLING (75°F, ADJ) AND HEATING (70°F, ADJ) SET-POINTS. PROVIDE UNOCCUPIED SPACE TEMPERATURE COOLING (80°F, ADJ) AND HEATING (65°F, ADJ) SET-POINTS.
 2. PROVIDE AN OCCUPIED SPACE HUMIDITY SET-POINT (65%, ADJ). PROVIDE AN UNOCCUPIED SPACE HUMIDITY SET-POINT (80%, ADJ).
- B. OCCUPIED MODE:** ENABLE THE UNIT BASED ON AN OCCUPIED TIME SCHEDULE (COORDINATE WITH EXISTING AIR HANDLING UNIT AC-1 SCHEDULE.).
- C. UNOCCUPIED MODE:** THE UNIT IS OFF EXCEPT AS FOLLOWS:
1. **TEMPERATURE CONTROL:** DURING UNOCCUPIED HOURS, RESET THE COOLING AND HEATING TEMPERATURE SET-POINTS EQUAL TO THE RESPECTIVE UNOCCUPIED TEMPERATURE SET-POINTS. IF THE SPACE TEMPERATURE EITHER RISES ABOVE THE UNOCCUPIED COOLING SET-POINT OR FALLS BELOW THE UNOCCUPIED HEATING SET-POINT, THEN ENABLE THE SUPPLY FAN AND TEMPERATURE CONTROL UNTIL THE SPACE TEMPERATURE IS BELOW SET-POINT MINUS A DEAD-BAND (3°F, ADJ) FOR COOLING MODE AND ABOVE SET-POINT PLUS A DEAD-BAND (3°F, ADJ) FOR HEATING MODE.
 2. **HUMIDITY CONTROL:** DURING UNOCCUPIED HOURS, RESET THE DEHUMIDIFICATION SET-POINT TO AN UNOCCUPIED SET-POINT. IF THE SPACE HUMIDITY RISES ABOVE THE SET-POINT, THEN INITIATE DEHUMIDIFICATION MODE UNTIL SPACE HUMIDITY IS BELOW SET-POINT MINUS A DEAD-BAND (5%, ADJ).
 3. **TENANT OVERRIDE:** DURING UNOCCUPIED HOURS, IF THE OVERRIDE BUTTON IS ACTIVATED AT THE SPACE SENSOR, THEN INITIATE AN OCCUPIED MODE OF OPERATION FOR A MINIMUM TIME DELAY (2 HOURS, ADJ).
 4. **OPTIMAL START MODE:** BASED ON SPACE AND OUTSIDE AIR TEMPERATURES, THE BAS SHALL CALCULATE THE TIME PRIOR TO THE SCHEDULED START OF OCCUPIED MODE REQUIRED TO BRING THE SPACE TEMPERATURE TO SET-POINT AND SHALL ENABLE THE SYSTEM AT SUCH TIME, UP TO AN ALLOWABLE TIME SET-POINT (2 HOURS, ADJ) BEFORE THE SCHEDULED START.
- D. EQUIPMENT SCHEDULED DURING UNOCCUPIED HOURS:** THEN ALL OTHER EQUIPMENT (PUMPS, BOILERS, CHILLERS, ETC.) THAT IS REQUIRED FOR OCCUPIED OPERATION SHALL BE PLACED INTO A MODE OF OCCUPIED OPERATION AS DEFINED IN THEIR RESPECTIVE SPECIFICATIONS OF OPERATION.
- D. DEHUMIDIFICATION MODE:** IF THE SPACE TEMPERATURE IS SATISFIED AND HUMIDITY RISES ABOVE THE SET-POINT, THEN INITIATE DEHUMIDIFICATION MODE UNTIL SPACE HUMIDITY IS BELOW SET-POINT MINUS A DEAD - BAND (5%, ADJ).

1.3 SUPPLY FAN

- A. **START/ STOP:** START/ STOP OF THE SUPPLY FAN SHALL BE CONTROLLED THROUGH THE UNIT CONTROLLER. ENABLE THE SUPPLY FAN BASED ON AN OCCUPIED TIME SCHEDULE, INTERLOCKS, OR UNOCCUPIED OVERRIDES.
- B. **STATUS:** SUPPLY FAN OPERATION SHALL BE PROVED THROUGH A CURRENT SWITCH. UPON FAILURE, THE BAS SHALL ANNUNCIATE ONE OF THE FOLLOWING ALARMS:
- 1. **FAN FAILURE:** IF THE FAN IS COMMANDED ON, BUT THE STATUS IS OFF.
 - 2. **FAN IN HAND MODE:** IF THE FAN IS COMMANDED OFF, BUT THE STATUS IS ON.
- C. **SPEED:** PROGRAM A MINIMUM SPEED (8% ADJ.) AND A FAN SPEED SET-POINT TO THE UNIT CONTROLLER. COORDINATE MINIMUM SPEED SET-POINT IN UNIT CONTROLLER WITH THE TAB CONTRACTOR TO ENSURE OUTSIDE AIRFLOW RATE IS MAINTAINED DURING ALL MODES (WHERE APPLICABLE).
- D. **SPACE TEMPERATURE CONTROL:** MODULATE THE FAN SPEED TO MAINTAIN THE SPACE TEMPERATURE COOLING SET-POINT.
- A. **DEHUMIDIFICATION MODE:** MODULATE FAN SPEED TO 50% (ADJ.)

1.4 COOLING VALVE

- A. SUPPLY FAN ON:
1. SUPPLY FAN SPEED > 67%: MODULATE THE COOLING VALVE TO MAINTAIN A COOLING COIL LEAVING AIR TEMPERATURE (56°F, ADJ).
 2. SUPPLY FAN SPEED < 67%: MODULATE THE COOLING VALVE TO MAINTAIN THE SPACE TEMPERATURE COOLING AND HUMIDITY SET-POINTS. CONTROL TO THE MOST DEMANDING OUTPUT OF BOTH THE TEMPERATURE AND HUMIDITY CONTROL LOOPS.
- B. SUPPLY FAN OFF: CLOSE VALVE.

1.5 REHEAT VALVE

- A. SUPPLY FAN ON:
 1. COOLING VALVE OPEN (COOLING MODE): CLOSE VALVE.
 2. COOLING VALVE OPEN (DEHUMIDIFICATION MODE): MODULATE THE REHEAT VALVE TO MAINTAIN THE SPACE TEMPERATURE COOLING SET-POINT.
 3. COOLING VALVE CLOSED: MODULATE THE REHEAT VALVE TO MAINTAIN THE SPACE TEMPERATURE HEATING SET-POINT.
- B. SUPPLY FAN OFF: CLOSE VALVE.

1.6 SAFETIES

- A. FLOAT SWITCH: PROVIDE A FLOAT SWITCH IN THE AUXILIARY DRAIN PAN WIRED IN SERIES WITH THE START COMMAND ON THE MOTOR STARTER TO OVERRIDE ALL CONTROLS AND SHUT DOWN THE AIR HANDLING UNIT UPON DETECTION OF A HIGH WATER LEVEL IN THE DRAIN PAN.

1.7 REQUIRED REPORTS


- A. AIR HANDLING UNIT FAILURE:
1. FREQUENCY: UPON FAILURE OF SUPPLY FAN
 2. DATA: INSTANTANEOUS VALUE OF ALL POINTS ON AIR HANDLING UNIT.
- B. SPACE TEMPERATURE & HUMIDITY:
1. FREQUENCY: WEEKLY
 2. DATA: LOW, HIGH, AND AVERAGE SPACE TEMPERATURE AND HUMIDITY PER DAY.

SINGLE ZONE VAV BLOWER COIL UNIT			POINT TYPE				CONTROL TYPE			EQUIP. DESIG.	SCHEM. DESIG.	NOTES
POINT DESCRIPTION	UNITS	ANALOG IN	ANALOG OUT	DIGITAL IN	DIGITAL OUT	INTEG. POINT	P	I	D			
SUPPLY FAN START/STOP	ON/OFF				1						YC-01	1
SUPPLY FAN STATUS	ON/OFF			1							IS-01	1
SUPPLY FAN SPEED	%		1				X	X			SCT-01	1
COOLING VALVE	% OPEN		1				X	X			TCV-01	
REHEAT VALVE	% OPEN		1				X	X			TCV-02	
FLOAT SWITCH	NORMAL / ALARM										LS-01	1
TENANT OVERRIDE	ON/OFF			1							HS-01	
SPACE TEMPERATURE	DEG F	1									TTE-01	
SPACE TEMPERATURE SET-POINT ADJUST	DEG F	1									TCT-01	
MIXED AIR TEMPERATURE	DEG F	1									TTE-02	
COOLING COIL LEAVING AIR TEMPERATURE	DEG F	1									TTE-03	2
SUPPLY AIR TEMPERATURE	DEG F	1									TTE-04	
SPACE HUMIDITY	%	1									MTE-01	
POINTS (SUB-TOTAL)	#	6	3	2	1							
POINTS (TOTAL WITH SPARE)	#	7	4	3	2							

NOTES:

- SEE MOTOR CONTROLLER DETAILS (VFD, MOTOR STARTER, OR MOTOR CONTACTOR)
- PROVIDE RIGID AVERAGING SENSOR

MISCELLANEOUS

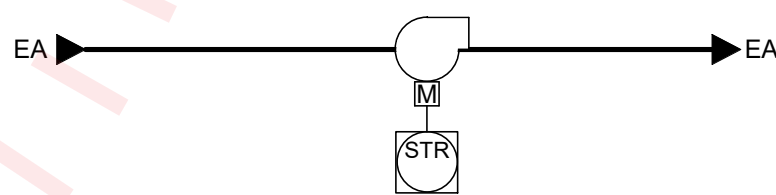

FAN

MISCELLANEOUS

1.1 FANS

- A. FANS (EF): WIRE TO OPERATE WHEN THE ASSOCIATED AHU IS OPERATING:
1. EXISTING AC-1: EF-3

MISCELLANEOUS SYSTEMS AND EQUIPMENT			POINT TYPE					CONTROL TYPE			EQUIP. DESIG.	SCHEM. DESIG.	NOTES
POINT DESCRIPTION	UNITS	ANALOG IN	OUT	DIGITAL IN	OUT	INTEG. POINT	P	I	D				
FAN START/STOP	ON/OFF				1						EF-3	YC	
FAN STATUS	ON/OFF			1							EF-3	IS	
POINTS (SUB-TOTAL)	#	0	0	1	1								
POINTS (TOTAL WITH SPARE)	#	0	0	2	2								
<u>NOTES:</u> 1 SEE MOTOR CONTROLLER DETAILS (VFD, MOTOR STARTER, OR MOTOR CONTACTOR).													



SEAL:

PROJECT TITLE:

**TCC English Building
Restroom Renovations**
444 Appleyard Dr., Tallahassee, FL 32304

PROJECT NO.: 23.121

DESIGNED BY : MPP

DRAWN BY: MPP

CHECKED BY: MPP

THIS DRAWING AND ANY REPRODUCTIONS
ARE THE PROPERTY AND COPYRIGHT
OF BKJ, INC. AND MAY NOT BE
REPRODUCED, PUBLISHED, OR USED IN ANY
MANNER WITHOUT WRITTEN
PERMISSION OF THE ARCHITECT

§

PROJECT PHASE:

100% Construction Documents

DRAWING TITLE:

Controls

SHEET NO.:

IC2.1


DATE:

August 25, 2023

TYPE OF PENETRANT	F-RATING (HR)	CONCRETE FLOORS	CONCRETE OR BLOCK WALLS	GYPSUM WALLS	HILTI PRODUCTS
		BASIS OF DESIGN UL SYSTEM			
CIRCULAR BLANK OPENINGS (8000-9999)	1	F-A-0006, C-AJ-0055, C-AJ-0090	C-AJ-0055, C-AJ-0090	--	CP 680, CP 618, FS-ONE MAX, CFS- BL
	2	F-A-0006, C-AJ-0055, C-AJ-0090	C-AJ-0055, C-AJ-0090	--	
METAL PIPES OR CONDUIT (1000-1999)	1	C-AJ-1226, F-A-1028, F-A-1017	C-AJ-1226, W-J-1067, W-J-1020	W-L-1054, W-L-1058, W-L-1164, W-L-1506	CP 680, FS-ONE MAX, CP 606, CFS-S SL, GFS, GFS-D, MINERAL WOOL
	2	C-AJ-1226, F-A-1028, F-A-1017	C-AJ-1226, W-J-1067, W-J-1020, W-J-1248	W-L-1054, W-L-1058, W-L-1164, W-L-1506	
MIXED PENETRANTS (8000-9999)	1	C-AJ-8099, C-AJ-8056, C-AJ-8143	C-AJ-8099, C-AJ-8056, W-J-8007, C-AJ-8143	W-L-1095, W-L-8013	FS-ONE MAX, CFS-BL, CP 620, CP 618
	2	C-AJ-8099, C-AJ-8056, C-AJ-8143, C-AJ-8252	C-AJ-8099, C-AJ-8056, W-J-8007, C-AJ-8143, C-AJ-8252	W-L-1095, W-L-8013	

1. JOBSITE CONDITIONS OF EACH THROUGH-PENETRATION FIRESTOP SYSTEM MUST MEET ALL DETAILS OF THE UL-CLASSIFIED SYSTEM SELECTED.
- IF JOBSITE CONDITIONS DO NOT MATCH ANY UL-CLASSIFIED SYSTEMS IN THE SCHEDULES ABOVE, CONTACT FIRESTOP MANUFACTURER FOR ALTERNATIVE SYSTEMS OR ENGINEER JOBSITE DRAWINGS.
2. IF JOBSITE CONDITIONS DO NOT MATCH ANY UL-CLASSIFIED SYSTEMS IN THE SCHEDULES ABOVE, CONTACT FIRESTOP MANUFACTURER FOR ALTERNATIVE SYSTEMS OR ENGINEER JOBSITE DRAWINGS.
3. COORDINATE WITH THE FIRESTOP MANUFACTURER TO OBTAIN THE SCHEDULE LISTED IN THE SCHEDULES ABOVE. CHOOSE THE SYSTEM FOR EACH THROUGH-PENETRATION FIRESTOP SYSTEM.
4. COORDINATE WORK WITH OTHER TRADES TO ENSURE THAT PENETRATION OPENING SIZES ARE APPROPRIATE FOR PENETRANT LOCATIONS, AND VICE-VERSA.
5. ALL THROUGH-PENETRATION FIRESTOPS SHALL BE PROVIDED BY ONE MANUFACTURER. APPROVED MANUFACTURERS: HILTI, RECTORSOL, 3M, STL.

GENERAL NOTES:									
1) CONTRACTOR SHALL COORDINATE FIXTURE TYPE WITH ARCHITECTURAL FINISH SCHEDULE(S). ARCHITECT SHALL CONFIRM FINISH OF ALL FIXTURES IN GUEST/PUBLIC AREAS.									
2) LIGHT FIXTURES DEEMED EQUAL TO THOSE SPECIFIED SHALL BE SUBMITTED FOR APPROVAL IN ACCORDANCE WITH SPECIFICATIONS.									
3) PROVIDE MOUNTING TRIM REQUIRED FOR CEILING TYPE INSTALLED.									
TYPE	MANUFACTURER (OR EQUAL)	CATALOG NUMBER	LAMP		LUMEN OUTPUT	CRI	COLOR TEMPERATURE	VOLTAGE	DESCRIPTION
			POWER	QTY					
A	HE WILLIAMS	6DS-L15/840-DIM-UNV-RF-WH-WET/CC	16W	LED	1500	80	4000K	120-277V	6" SQUARE, RECESSED LED DOWNLIGHT, DIE FORMED STEEL HOUSING, FLUSH DIFFUSED ACRYLIC LENS, WIDE FLOOD DISTRIBUTION. 0-10V DIMMING.
B	TRULY GREEN SOLUTIONS	VF1-4835-CC-WH	35W	LED	2450	80	2700K-5000K	120-277V	4" LENSED LED VANITY FIXTURE, DIE-FORMED COLD ROLLED STEEL HOUSING AND POWDER COATED PAINT FINISH. FLUSH MOUNTED TO WALL ABOVE MIRRORS. PROVIDE 4" J-BOX.
F	HE WILLIAMS	75R-4-L50/840-DIM-UNV	33W	LED	5000	80	4000K	120-277V	4" LENSED LED STRIP FIXTURE WITH ROUND, ACRYLIC LENS. SURFACE MOUNTED TO STRUCTURE ABOVE.

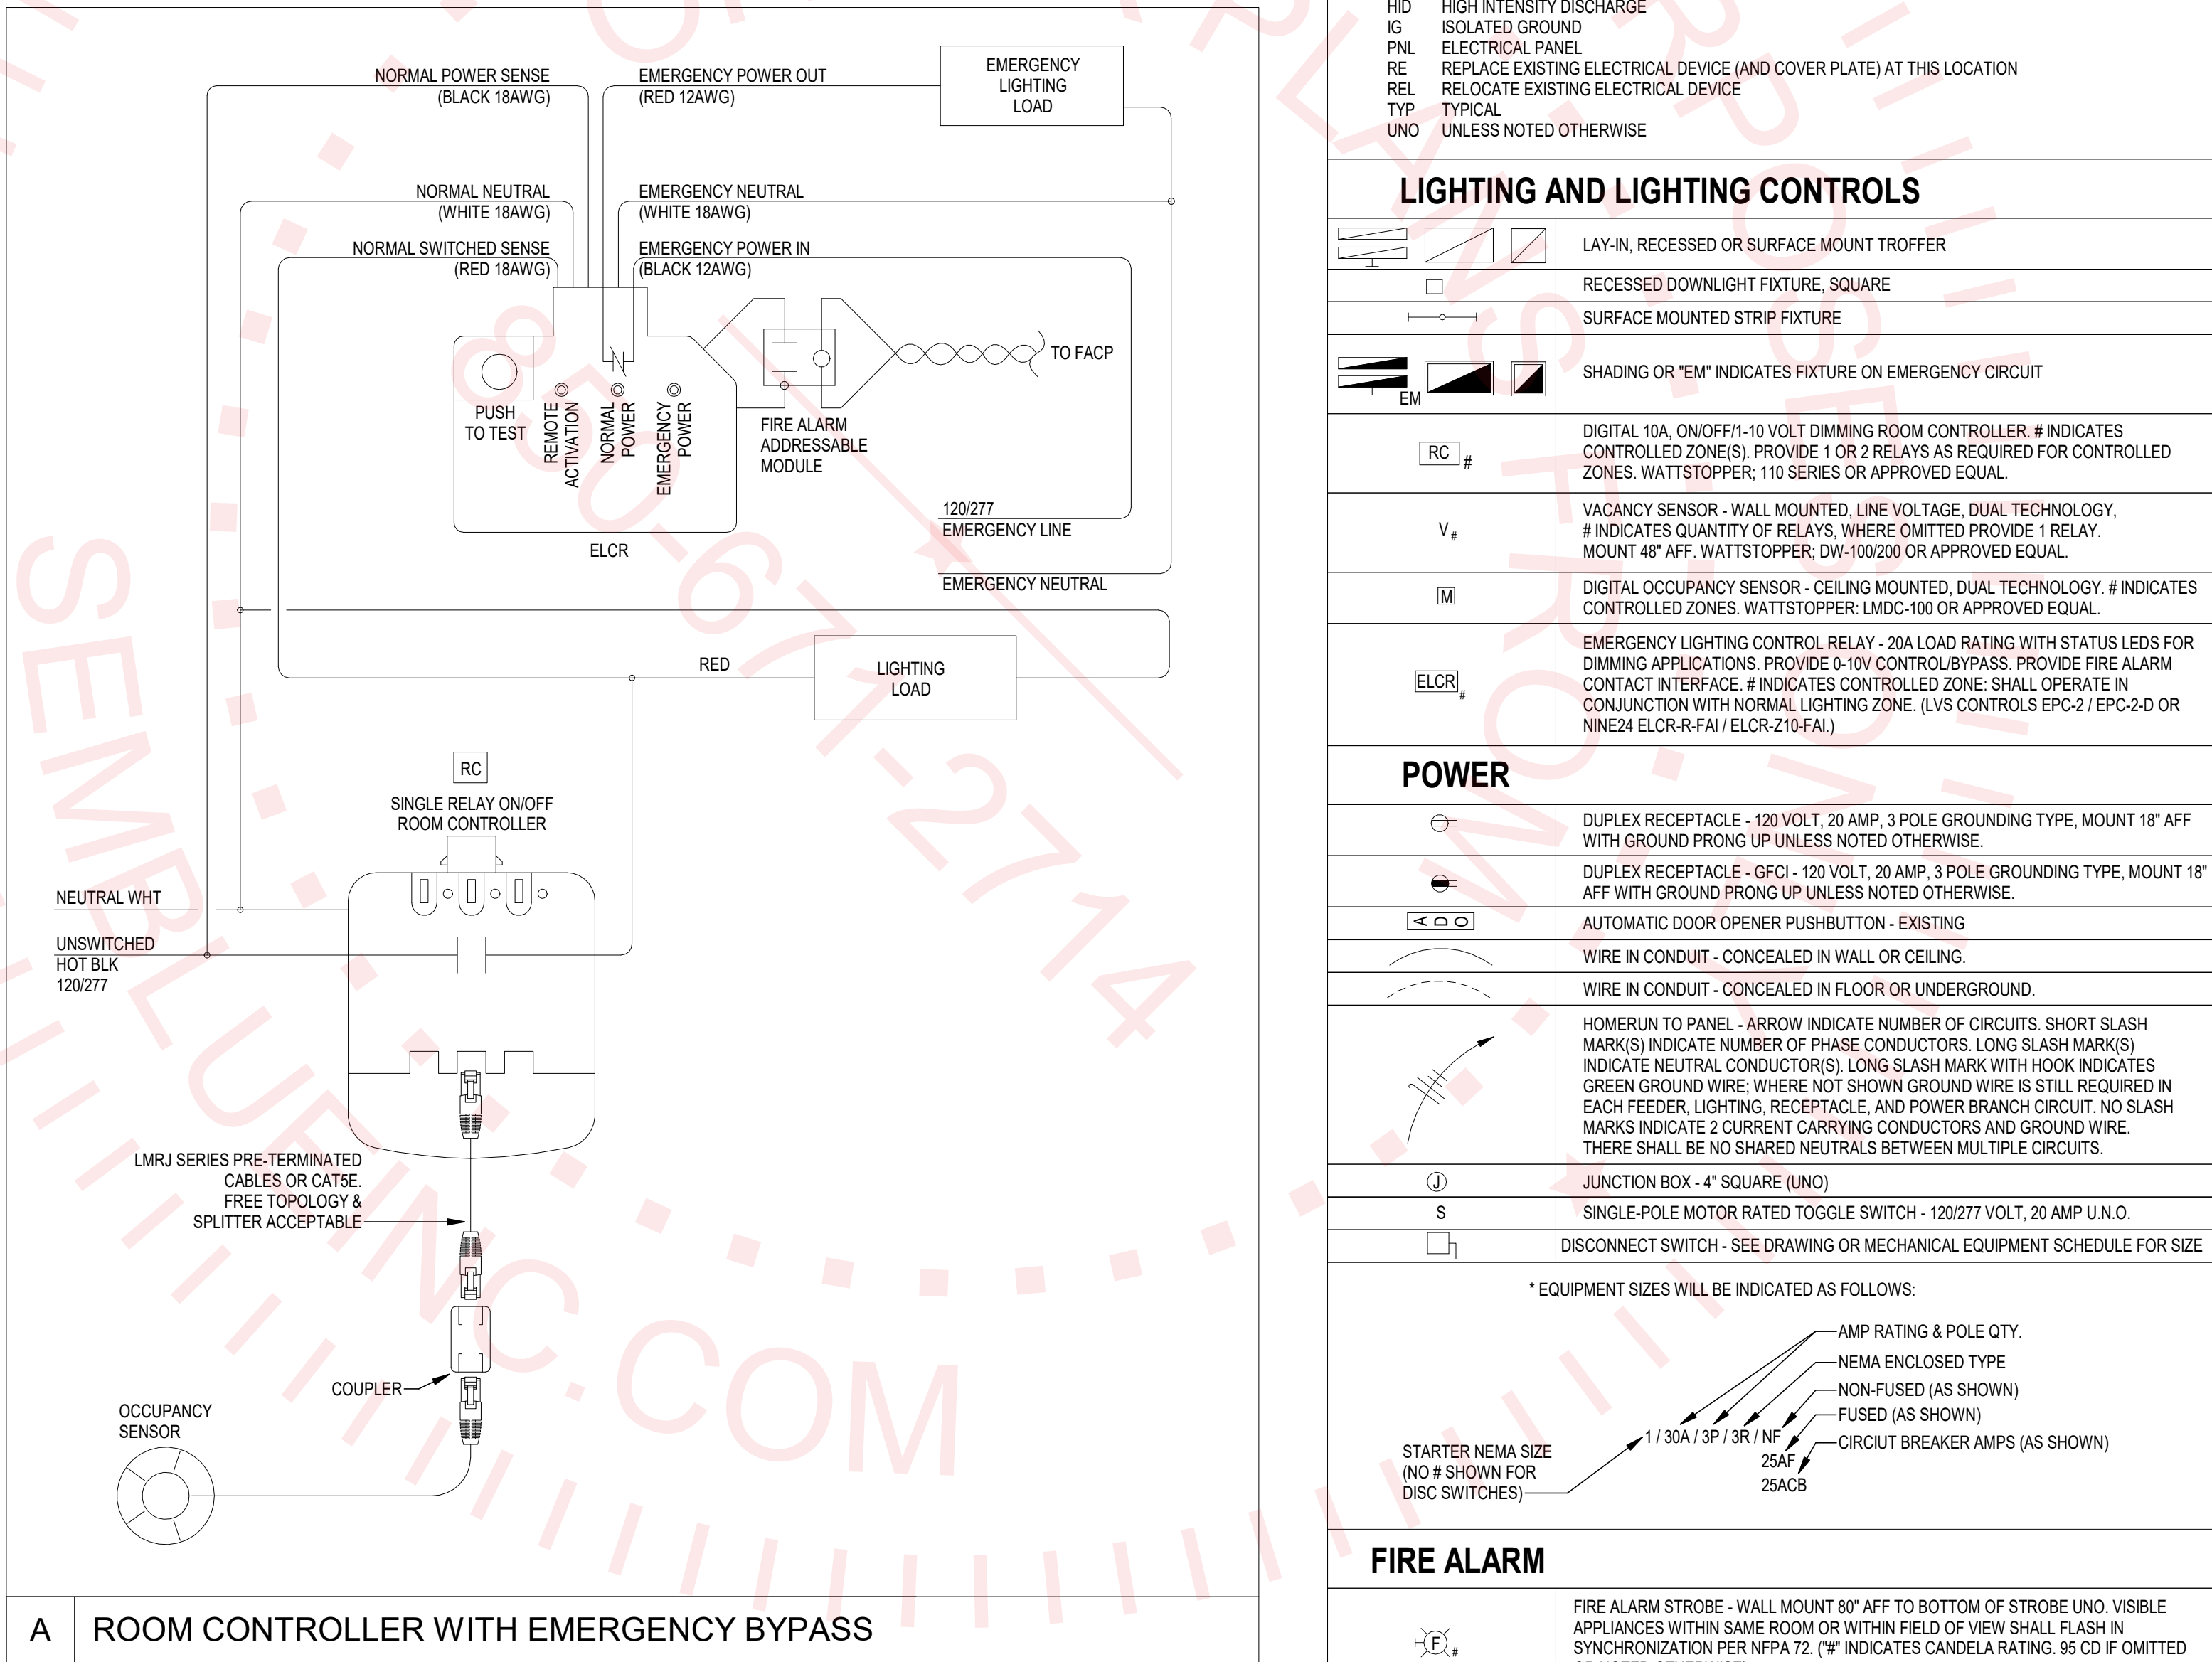


1. WIRING SHALL BE COPPER, TYPE THHN-W-TN IN RACEWAY UNLESS NOTED OTHERWISE. RIGID ELECTRICAL NON-METALLIC SCHEDULE 40 PVC SHALL BE USED IN SLABS AND BELOW GRADE; RIGID STEEL CONDUIT (RSC) SHALL BE USED WHERE EXPOSED TO PHYSICAL DAMAGE. ELECTRICAL METALLIC TUBING (EMT) SHALL BE USED ELSEWHERE WHERE APPROVED BY A E.C. AND LOCAL CODES. FLEXIBLE METAL CONDUIT (FMC) SHALL BE STEEL AND SHALL BE USED TO CONNECT MOVEABLE EQUIPMENT AND/OR SUBJECT TO VIBRATION; LIQUID-TIGHT FLEXIBLE METALLIC CONDUIT (LFMC) SHALL BE USED OUTDOORS OR WHERE SUBJECT TO MOISTURE.
2. CONDUIT SHALL BE STRAPPED IN ACCORDANCE WITH REQUIREMENTS OF N.E.C.
3. CONTRACTOR SHALL BOND AND GROUND SYSTEMS AND EQUIPMENT PER ARTICLE 250 OF N.E.C. PROVIDE A GROUNDING CONDUIT SIZED IN ACCORDANCE WITH ARTICLE 250-122 N.E.C. ON ALL RECEPTABLES AND POWER BRANCH CIRCUITS.
4. LIGHTING FIXTURES SHALL BE SECURELY FASTENED AND SUPPORTED PER N.E.C.
5. THE CONTRACTOR SHALL COORDINATE THE CIRCUIT REQUIREMENTS WITH THE MANUFACTURER OF THE ACTUAL EQUIPMENT FURNISHED UNDER OTHER DIVISIONS OF WORK. THE CIRCUIT BREAKER, WIRE AND CONDUIT SHALL BE SIZED AS RECOMMENDED BY THE EQUIPMENT MANUFACTURER.
6. CIRCUIT BREAKERS SHALL BE BOLT-IN TYPE.
7. IN ALL RECEPTABLES, OUTLET SPACES CONTAINING EQUIPMENT PROVIDING SERVING SUCH AS HEATING, AIR-CONDITIONING, AND REFRIGERATION EQUIPMENT, PROVIDE AT LEAST ONE LIGHTING OUTLET (FIXTURE) CONTAINING A SWITCH OR CONTROLLED BY A WALL SWITCH. AT LEAST ONE POINT OF CONTROL SHALL BE LOCATED AT THE USUAL POINT OF ENTRY TO THESE SPACES. ALSO PROVIDE RECEPTACLE OUTLET(S) AT EASILY ACCESSIBLE LOCATION(S) FOR SERVING THE EQUIPMENT.
8. IN ALL RECEPTABLES, OUTLET SPACES CONTAINING EQUIPMENT PROVIDING SERVING SUCH AS HEATING, AIR-CONDITIONING, AND REFRIGERATION EQUIPMENT, THE RECEPTACLE SHALL BE LOCATED ON THE SAME LEVEL AND WITHIN 25 FT OF THE HEATING, AIR-CONDITIONING, AND REFRIGERATION EQUIPMENT. THE OUTLET SHALL NOT BE CONNECTED TO THE LOAD SIDE OF THE EQUIPMENT DISCONNECTING MEANS. DEVICES AND EQUIPMENT SHALL BE LOCATED AS CLOSE AS POSSIBLE TO THE EQUIPMENT.
9. RELOCATE, AS REQUIRED, ANY EXISTING WIRE AND CONDUIT WHICH INTERFERES WITH INSTALLATION OF THE NEW WORK.

ACT	ABOVE COUNTERTOP
AFC	AVAILABLE FAULT CURRENT
AFB	ABOVE FINISHED FLOOR
AFG	ABOVE FINISHED GRADE
C	CONDUIT
CNT	CONTACTOR
DISC	DISCONNECT
DN	DOWN
EC	ELECTRICAL CONTRACTOR
EM	FIXTURE PROVIDED WITH EMERGENCY BATTERY OR ON EMERGENCY CIRCUIT
ER	EXISTING ELECTRICAL DEVICE RELOCATED TO NEW POSITION
EX	EXISTING ELECTRICAL DEVICE TO REMAIN
GFI	GROUND FAULT CIRCUIT INTERRUPTER
GFI	GROUND FAULT INTERRUPTER
G	GROUND
GRG	GALVANIZED RIGID CONDUIT
HID	HIGH INTENSITY DISCHARGE
IG	ISOLATED GROUND
PNL	ELECTRICAL PANEL
RE	REPLACE EXISTING ELECTRICAL DEVICE (AND COVER PLATE) AT THIS LOCATION
REL	RELOCATE EXISTING ELECTRICAL DEVICE
TYP	TYPICAL
UNO	UNLESS NOTED OTHERWISE

	LAY-IN, RECESSED OR SURFACE MOUNT TROFFER
	RECESSED DOWNLIGHT FIXTURE, SQUARE
	SURFACE MOUNTED STRIP FIXTURE
	SHADING OR "EM" INDICATES FIXTURE ON EMERGENCY CIRCUIT
	DIGITAL 10A, ON/OFF/1-10 VOLT DIMMING ROOM CONTROLLER. # INDICATES CONTROLLED ZONES. PROVIDE 1 OR 2 1/2" RAYS AS REQUIRED FOR CONTROLLED ZONES. WATTS/TOPPER, 110 SERIES OR APPROVED EQUAL.
	VACANCY SENSOR - WALL MOUNTED, LINE VOLTAGE, DUAL TECHNOLOGY, # INDICATES QUANTITY. #, WHERE OMITTED, PROVIDE 1. RELAY. MOUNT 48" AFF. WATTS/TOPPER, DW-100/200 OR APPROVED EQUAL.
	DIGITAL OCCUPANCY SENSOR - CEILING MOUNTED, DUAL TECHNOLOGY, # INDICATES CONTROLLED ZONES. WATTS/TOPPER, LMDC-100 OR APPROVED EQUAL.
	EMERGENCY LIGHTING CONTROL RELAY - 20A LOAD RATING WITH STATUS LEADS FOR DIMMING APPLICATIONS. PROVIDE 0-10V CONTROL/BYPASS. PROVIDE FIRE ALARM CONTACT INTERFACE. # INDICATES CONTROLLED ZONE. SHALL OPERATE IN CONJUNCTION WITH NORMAL LIGHTING ZONE. (LVS CONTROLS EPC-2 / EPC-2-D OR NINE2A ELCR-R-FAI / ELCR-210-FAI.)

	DUPLEX RECEPTACLE - 120 VOLT, 20 AMP, 3 POLE GROUNDING TYPE, MOUNT 18" AFF WITH GROUND PRONG UP UNLESS NOTED OTHERWISE.
	DUPLEX RECEPTACLE - GFCI - 120 VOLT, 20 AMP, 3 POLE GROUNDING TYPE, MOUNT 18" AFF WITH GROUND PRONG UP UNLESS NOTED OTHERWISE.
	AUTOMATIC DOOR OPENER PUSHBUTTON - EXISTING
	WIRE IN CONDUIT - CONCEALED IN WALL OR CEILING.
	WIRE IN CONDUIT - CONCEALED IN FLOOR OR UNDERGROUND.
	HOMERUN TO PANEL - ARROW INDICATE NUMBER OF CIRCUITS, SHORT SLASH MARK(S) INDICATE NUMBER OF PHASE CONDUCTORS, LONG SLASH MARK(S) INDICATE NEUTRAL CONDUCTOR(S), LONG SLASH MARK WITH HOOK INDICATES GREEN GROUND WIRE, NOT SHOWN GROUND WIRE IS STILL REQUIRED IN EACH FEEDER, LIGHTING, RECEPTACLE, AND POWER BRANCH CIRCUIT. NO SLASH MARKS INDICATE 2 CURRENT CARRYING CONDUCTORS AND GROUND WIRE. THERE SHALL BE NO SHARED NEUTRALS BETWEEN MULTIPLE CIRCUITS.
	JUNCTION BOX - 4" SQUARE (UNO)
	SINGLE-POLE MOTOR RATED TOGGLE SWITCH - 120/277 VOLT, 20 AMP U.N.O.
	DISCONNECT SWITCH - SEE DRAWING OR MECHANICAL EQUIPMENT SCHEDULE FOR SIZE

* EQUIPMENT SIZES WILL BE INDICATED AS FOLLOWS

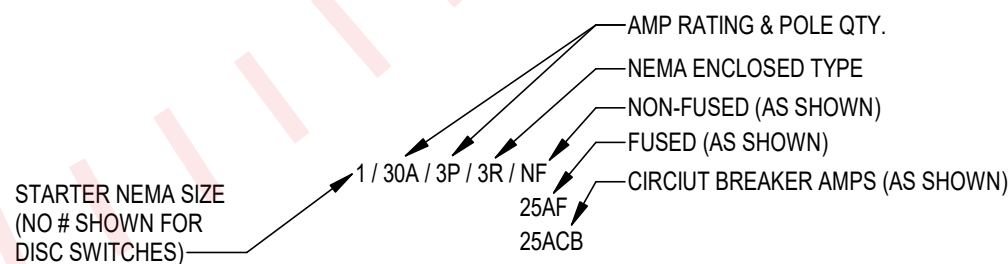

F	FIRE ALARM STROBE - WALL MOUNT 80" AFF TO BOTTOM OF STROBE UNO. VISIBLE APPLIANCES WITHIN SAME ROOM OR WITHIN FIELD OF VIEW SHALL FLASH IN SYNCHRONIZATION PER NFPA 72. ("F" INDICATES CANDELA RATING. 95 CD IF OMITTED OR NOTED OTHERWISE). COLOR: WHITE
F	FIRE ALARM STROBE - CEILING MOUNT. VISIBLE APPLIANCES WITHIN SAME ROOM OR WITHIN FIELD OF VIEW SHALL FLASH IN SYNCHRONIZATION PER NFPA 72. ("F" INDICATES CANDELA RATING. 95 CD IF OMITTED OR NOTED OTHERWISE). COLOR: WHITE
AIM	ADDRESSABLE INTERFACE MODULE - CONNECTED TO FIRE ALARM SYSTEM

	ELECTRICAL DEVICES TO BE REMOVED
	EXISTING SWITCH TO BE REMOVED

1. INSTALL ALL WORK IN ACCORDANCE WITH THE FLORIDA BUILDING CODE 2020, THE FLORIDA FIRE PREVENTION CODE, THE NATIONAL ELECTRICAL CODE 2017 EDITION, AND ALL CODES, ORDINANCES, RULES AND REGULATIONS OF AUTHORITIES HAVING JURISDICTION AT THIS SITE. WHERE CONFLICTS OCCUR BETWEEN CODES AND THE CONSTRUCTION DOCUMENTS, THE MOST RESTRICTIVE REQUIREMENTS SHALL GOVERN.
2. DRAWINGS ARE DIAGRAMMATIC, INDICATIVE OF WORK TO BE FURNISHED AND INSTALLED UNDER THIS CONTRACT. REFER TO ARCHITECTURAL AND STRUCTURAL DRAWINGS FOR ALL DIMENSIONS.
3. FIELD VERIFY ALL DIMENSIONS AND ALL CONDITIONS. IF THE CONTRACTOR IS UNABLE TO INTERPRET THE CONTRACT DOCUMENTS, THE CONTRACTOR IS RESPONSIBLE TO REQUEST CLARIFICATION IN WRITING TO THE ARCHITECT. IF CONTRACTOR PROCEEDS WITH ANY WORK BEFORE OBTAINING CLARIFICATION, CONTRACTOR SHALL BE HELD RESPONSIBLE FOR ALL DEFICIENCIES ASSOCIATED THEREWITH.
4. BEFORE SUBMITTING FOR THE WORK, EACH BIDDER WILL BE RESPONSIBLE TO EXAMINE THE PREMISES AND SATISFY HIMSELF AS TO THE EXISTING CONDITIONS UNDER WHICH CONTRACTOR WILL BE OBLIGED TO OBTAIN AND COME INTO THE WORK UNDER THIS CONTRACT. NO ALLOWANCE WILL SUBSEQUENTLY BE MADE IN THIS CONNECTION ON BEHALF OF THE CONTRACTOR FOR ANY ERROR OR OMISSION ON CONTRACTOR'S PART.
5. THE CONTRACTOR SHALL PAY FOR ALL INSPECTION PERMITS, CERTIFICATES, CONNECTION FEES, SYSTEM DEMAND CHARGES AND LICENSE FEES IN CONNECTION WITH CONTRACTORS WORK.
6. CONSTRUCTION MANAGER SHALL BE RESPONSIBLE FOR COORDINATING WORK OF ALL SUBCONTRACTORS TO AVOID INTERFERENCE.
7. ALL WORK SHALL COMPLY WITH APPLICABLE O.S.H.A. AND E.P.A. REGULATIONS AND GUIDELINES.
8. ERECT AND MAINTAIN ALL REASONABLE PRECAUTIONS FOR SAFETY AND HEALTH INCLUDING POSTING DANGER SIGNS AND OTHER WARNINGS AGAINST HAZARDS INCLUDING PROMULGATING SAFETY REGULATIONS. PROVIDE SAFETY PRECAUTIONS AND BARRICADES FOR PEDESTRIANS AT CONSTRUCTION VEHICLES AND MATERIALS STORAGE LOCATIONS.
9. COORDINATE AND SEQUENCE ALL DEMOLITION, CLEANING AND CONSTRUCTION WORK. SUBMIT A COMPLETELY DETAILED CONSTRUCTION SCHEDULE PRIOR TO PRE-CONSTRUCTION CONFERENCE.
10. THE CONTRACTOR SHALL STRICTLY BE HELD TO THE PROJECT SCHEDULE. CONTRACTOR SHALL PROVIDE SUFFICIENT MANPOWER AND EQUIPMENT TO FULLY MOBILIZE, PROCEED WITH AND COMPLETE THE WORK.
11. THE CONTRACTOR SHALL BE RESTRICTED TO AREAS SPECIFIED BY THE OWNER FOR ON-SITE STORAGE OF CONSTRUCTION MATERIALS. THE CONTRACTOR IS RESPONSIBLE FOR THE PROTECTION AND SECURITY OF ALL EQUIPMENT AND MATERIALS.
12. THE CONTRACTOR SHALL MAINTAIN A CLEAN WORK ENVIRONMENT AT ALL TIMES AND SHALL CLEAN CONSTRUCTION SITE OF ALL DEBRIS AT COMPLETION OF THE JOB AND BEFORE FINAL PAYMENT IS MADE.
13. THE CONTRACTOR SHALL FURNISH "AS-BUILT" DRAWINGS TO THE OWNER AT COMPLETION OF CONSTRUCTION.
14. CONTRACTOR SHALL GUARANTEE THE WORK AND MATERIALS FOR A PERIOD OF ONE YEAR FROM DATE OF FINAL ACCEPTANCE. THIS GUARANTEE SHALL BE IN ADDITION TO THE WARRANTIES PROVIDED BY MATERIAL SUPPLIERS AND MANUFACTURERS.
15. CONTRACTORS USE OF AN APPROVAL STAMP ON DOCUMENTS SUBMITTED AS SHOP DRAWINGS, PRODUCT DATA, SAMPLES OR SIMILAR SUBMITTALS CERTIFIES THAT THE CONTRACTOR HAS COMPLIED WITH THE CONTRACT DOCUMENT REQUIREMENTS RELATED TO "SHOP DRAWINGS, PRODUCT DATA AND SAMPLES".
16. THE CONTRACTOR SHALL NOT BE RELIEVED OF RESPONSIBILITY FOR DEVIATIONS FROM REQUIREMENTS OF THE CONTRACT DOCUMENTS BY THE ARCHITECT/ENGINEER'S APPROVAL OF SHOP DRAWINGS, PRODUCT DATA, SAMPLES OR SIMILAR SUBMITTALS. THE CONTRACTOR HAS SPECIFICALLY INFORMED THE ARCHITECT/ENGINEER IN WRITING OF SUCH DEVIATION AT THE TIME OF SUBMITTAL AND THE ARCHITECT/ENGINEER HAS GIVEN WRITTEN APPROVAL TO THE SPECIFIC DEVIATION. THE CONTRACTOR SHALL NOT BE RELIEVED OF RESPONSIBILITY FOR ERRORS OR OMISSIONS IN SHOP DRAWINGS, PRODUCT DATA, SAMPLES OR SIMILAR SUBMITTALS BY THE ARCHITECT/ENGINEER'S APPROVAL THEREOF.
17. PRIOR TO INSTALLATION, COORDINATE AND ADJUST THE FINAL LOCATION OF ALL WALL MOUNTED DEVICES AND EQUIPMENT WITH ALL CASEWORK, SHELVING, MARKER BOARDS, BULLETIN BOARDS OR OTHER WALL MOUNTED FURNISHINGS.
18. NOTE ANY SPECIAL REQUIREMENTS INVOLVED IN INSTALLING THE EQUIPMENT IN THE BUILDING. DISMANTLING AND REASSEMBLING OF ANY EQUIPMENT SHALL BE DONE AS REQUIRED FOR ENTRY INTO THE BUILDING AND EQUIPMENT ROOMS.
19. ENTRY AND REMOVAL OF EQUIPMENT FROM THE BUILDING SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR. CONTRACTOR SHALL REPAIR ANY DAMAGED MATERIALS TO THEIR ORIGINAL CONDITION. SURFACES SHALL BE REPAIRED TO MATCH THE EXISTING ADJACENT UNDAMAGED SURFACES.
20. SUPPORTS AND HANGERS SHALL PRESENT A NEAT, ORDERLY APPEARANCE.
21. CONTRACTOR SHALL MAINTAIN THE INTEGRITY OF ALL FIRE AND SMOKE WALL ASSEMBLIES AND ACOUSTICAL WALLS.
22. CONTRACTOR SHALL FURNISH UL APPROVED DRAWINGS FOR EACH TYPE OF FIRE RATED ASSEMBLY PENETRATION BY DUCTS, PIPES OR CONDUITS. THESE DRAWINGS SHALL BE DISPLAYED ON THE JOB SITE AT ALL TIMES DURING CONSTRUCTION. SEE SPECIFICATIONS.
23. THE BUILDING WILL REMAIN OCCUPIED DURING CONSTRUCTION. THE OWNER WILL MAKE ALL REASONABLE EFFORTS TO ASSIST THE CONTRACTOR IN COMPLETING THE WORK. COORDINATE ALL WORK WITH THE OWNER'S DESIGNATED REPRESENTATIVE.
24. EXIT WAYS SHALL BE KEPT CLEAR. IF AN EXIT MUST BE TEMPORARILY BLOCKED, PROVIDE THE REQUIRED BARRICADE AND DIRECTIONAL SIGNS FOR TEMPORARY EXITING AND SAFETY.
25. PROVIDE PROPER PROTECTIVE MEASURES TO PROTECT EXISTING FURNITURE, CARPET AND FINISHES SHALL BE DAMAGED DURING CONSTRUCTION. TAKE CARE NOT TO DAMAGE EXISTING SURFACES. REPAIR TO MATCH EXISTING CONDITIONS AS REQUIRED.
26. SEAL ALL HOLES IN WALLS, CEILINGS, FLOORS, ETC. TO MATCH EXISTING ADJACENT SURFACES WHERE EQUIPMENT, CONDUIT AND/OR PIPING ARE REMOVED.
27. EXISTING EQUIPMENT IS THE PROPERTY OF THE OWNER AND SHALL BE DISPOSED OF AS DIRECTED BY THE OWNER. DISPOSE OF ALL MATERIALS AND EQUIPMENT SHOWN TO BE REMOVED IN ACCORDANCE WITH LOCAL REGULATIONS.
28. ITEMS REMOVED AND SAVED FOR REUSE SHALL BE PROTECTED FROM DAMAGE DURING CONSTRUCTION. CONTRACTOR SHALL IDENTIFY ANY DEFECTIVE MATERIALS PRIOR TO DEMOLITION. CONTRACTOR SHALL BE RESPONSIBLE FOR ALL DAMAGE TO MATERIALS AT PROJECT COMPLETION NOT IDENTIFIED PRIOR TO DEMOLITION.
29. ALARM, SUPERVISORY AND TROUBLE SIGNALS SHALL BE AUTOMATICALLY TRANSMITTED TO AN APPROVED CENTRAL STATION, REMOTE SUPERVISING STATION OR PROPRIETARY SUPERVISING STATION AS DEFINED IN NFPA 72 OR, WHEN APPROVED BY THE BUILDING OFFICIAL, SHALL SOUND AN AUDIBLE SIGNAL AT A CONSTANTLY ATTENDED LOCATION. COORDINATE WITH DIVISION 5 CONTRACTORS AS REQUIRED.
30. FIRE ALARM DRAWINGS INDICATE DESIGN INTENT. ACTUAL DEVICE TYPES, QUALITIES AND STANDARDS SHALL BE INDICATED ON THE ALARM CONTROL PANEL. ALL FIRE ALARM CODES AND STANDARDS. ANY DEVIATIONS FROM THE DRAWINGS SHALL BE INDICATED ON FIRE ALARM SHOP DRAWINGS SUBMITTED BY THE FIRE ALARM CONTRACTOR.

1. UNLESS OTHERWISE NOTED, REMOVE ALL ELECTRICAL MATERIALS AND EQUIPMENT FROM AREAS INDICATED FOR DEMOLITION.
2. REMOVE ALL ELECTRICAL EQUIPMENT (CONDUIT, POWER & CONTROL WIRING, DISCONNECT SWITCHES, STARTERS, ETC.) RELATED TO EQUIPMENT BEING REMOVED OR REPLACED.
3. REMOVE UNUSED CONDUIT TO THE EXTENT NECESSARY TO ACCOMMODATE NEW WORK AND WHERE CONDUIT IS VISIBLE ABOVE THE FLOOR LINE. EXISTING UNUSED CONDUIT WHICH IS CONCEALED, AND WHICH DOES NOT INTERFERE WITH THE WORK, MAY REMAIN IN PLACE. SEAL ABANDONED LINES THAT REMAIN IN PLACE BEHIND WALLS OR FLOOR SURFACES. REMOVE EXISTING UNUSED WIRES.
4. WIRING AND CONDUIT FOR ELECTRICAL DEVICES NOT BEING REMOVED SHALL BE REMOVED BACK TO NEAREST JUNCTION BOX. ANY DEVICES DOWNSTREAM FROM THESE POINTS SHALL REMAIN OPERABLE.
5. CONTRACTOR SHALL REMOVE ALL ELECTRICAL WORK FROM PARTITIONS AND WALLS BEING REMOVED. CONTRACTOR SHALL REMOVE AND/OR RELOCATE ALL LIGHTING FIXTURES SHOWN REQUIRING WORK. WORK INCLUDES REWIRING TO THE FIXTURES, SWITCHES AND RECEPTACLES. CONNECTION TO EXISTING CIRCUIT SHALL BE MADE OVER EXISTING CIRCUIT. CONTRACTOR SHALL PROVIDE A NEW HOMERUN TO CLOSEST AVAILABLE PANEL AND PROVIDE A NEW CIRCUIT BREAKER LEG UP TO EXISTING. THE CIRCUITS TO NEW EQUIPMENT BY OTHER SHALL BE NEW HOMERUNS AND NEW CIRCUIT BREAKERS ADEQUATE FOR THE LOAD CONNECTION.
6. CONTRACTOR SHALL, UPON COMPLETION OF WORK, ENSURE ALL EXISTING CIRCUITS ADJACENT TO THE REMOVED AREAS ARE IN PROPER WORKING CONDITION.
7. CONTRACTOR SHALL MAKE ALL NECESSARY ADJUSTMENTS TO ELECTRICAL DEVICES REQUIRED TO ACCOMMODATE NEW WALLS AND CEILINGS. BECAUSE OF THE NATURE OF THE JOB, UNFORESEEN INTERFERENCES MAY OCCUR. CLOSE COORDINATION BETWEEN TRADES IS REQUIRED. VERIFY ALL CONNECTION REQUIREMENTS BEFORE ROUGH-IN.
8. ALL REMOVED MATERIALS SHALL BE CAREFULLY STORED, PACKAGED, AND DISPOSED OF ACCORDING TO EPA REQUIREMENTS. ALL FEES ASSOCIATED WITH LEGAL DISPOSAL OF LAMPS & BALLASTS SHALL BE PAID FOR BY THE CONTRACTOR.

E.O. 1	General Notes, Legends & Schedules
E.1.0	Floor Plans

SEAL:

PROJECT TITLE:

**TCC English Building
Restroom Renovations**
444 Appleyard Dr., Tallahassee, FL 32304

PROJECT NO.: 23.121

DESIGNED BY : **BJM**

DRAWN BY: **BJM**

CHECKED BY: DRH

THIS DRAWING AND ANY REPRODUCTION THEREOF
ARE THE PROPERTY OF AND CONTAIN THE CONFIDENTIAL INFORMATION OF
BECK & CO. INC. AND MAY NOT BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT THE WRITTEN PERMISSION OF BECK & CO. INC.

REPRODUCED, PUBLISHED, OR USED IN ANY
MANNER WITHOUT WRITTEN
PERMISSION OF THE ARCHITECT

[illegible][illegible]

PROJECT PHASE:

00% Construction Documents

DRAWING TITLE:


General Notes, Legends & Schedules

SHEET NO.:

E0.1

DATE:

August 25, 2023

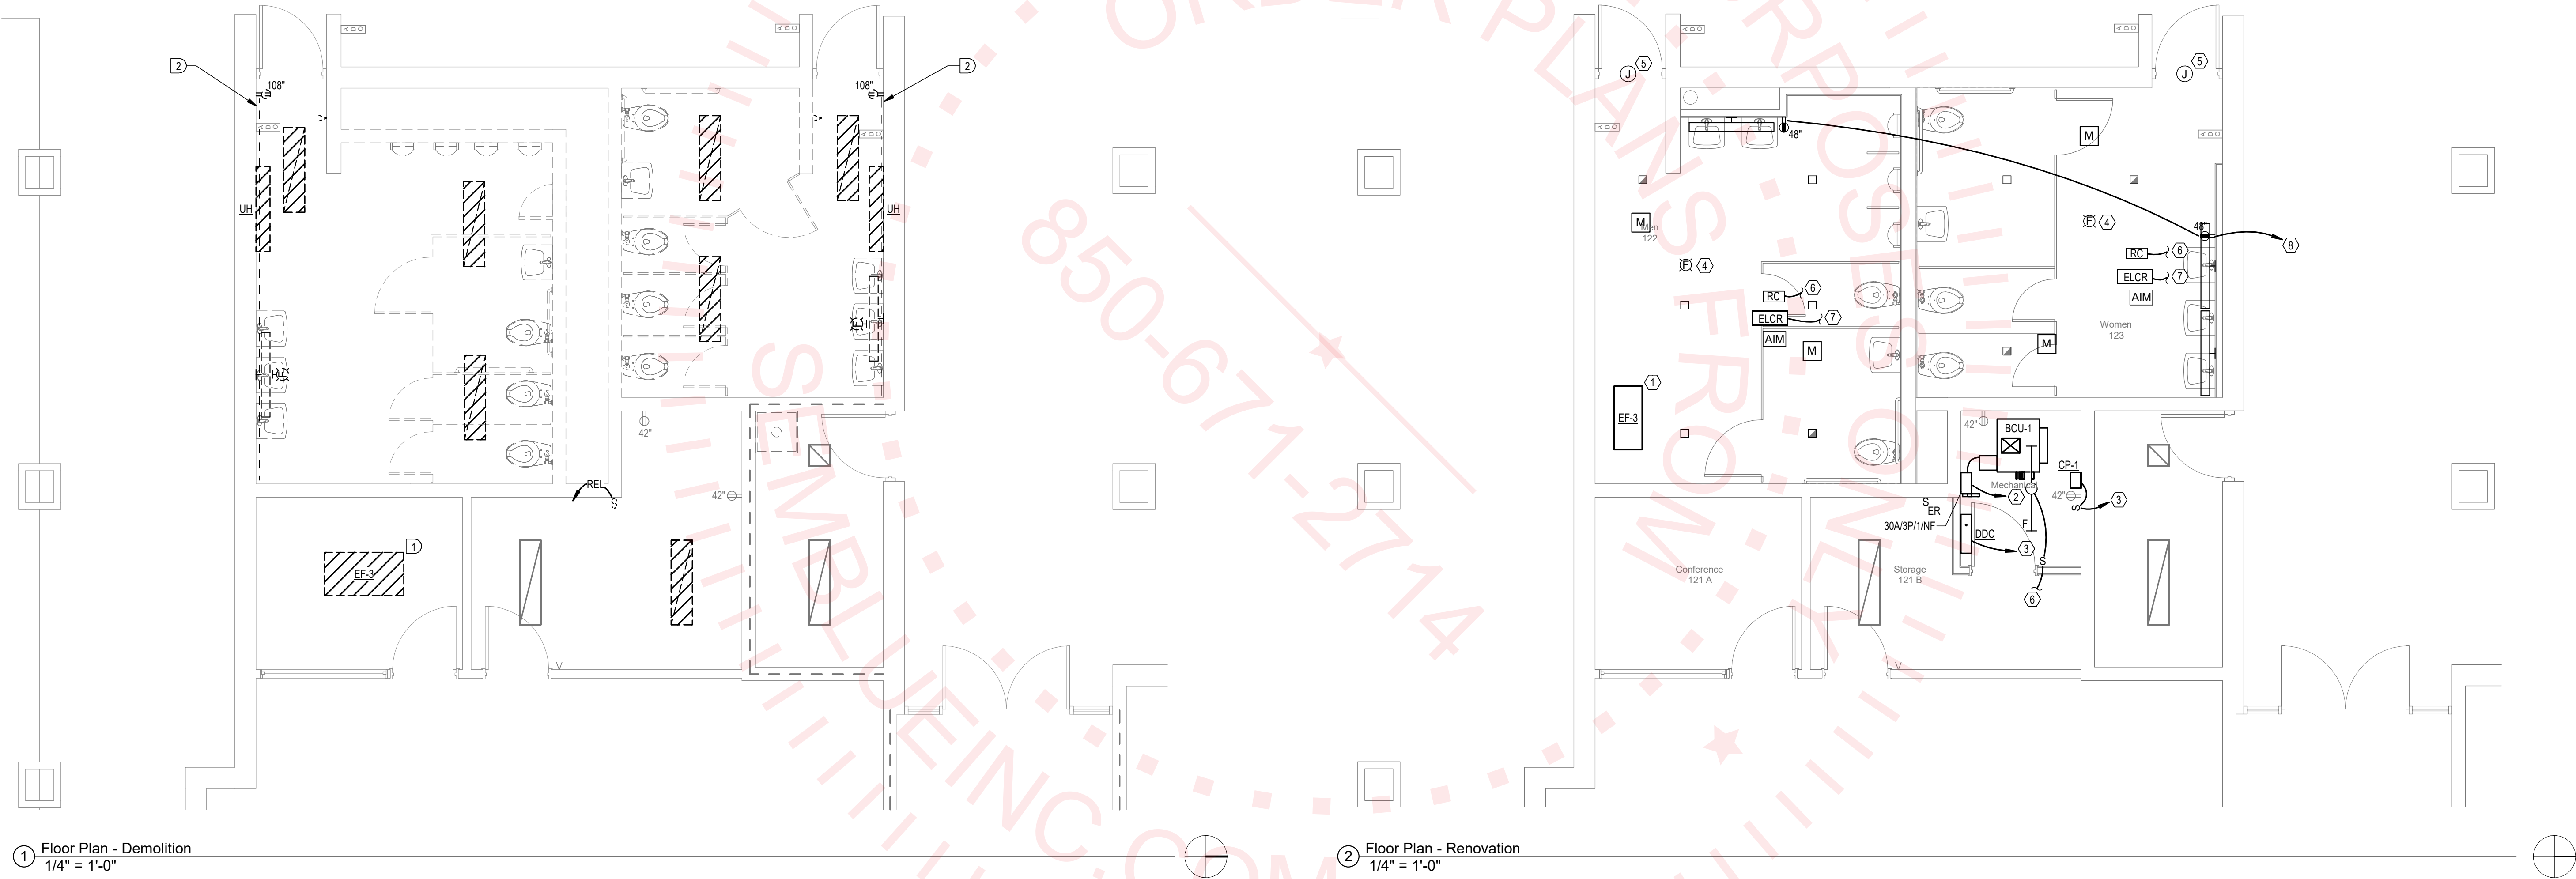

1 Floor Plan - Demolition
1/4" = 1'-0"

2 Floor Plan - Renovation
1/4" = 1'-0"

DEMOLITION GENERAL NOTES

1. ALL DEVICES SHOWN DASHED SHALL BE DEMOLISHED. ALL OTHER DEVICES ARE EXISTING TO REMAIN. UNO.
2. DISCONNECT WIRING AT PANEL OR NEAREST DEVICE OR JUNCTION BOX TO REMAIN ON SAME CIRCUIT.
3. REMOVE ANY AND ALL ABANDONED WIRING, CONDUIT AND OUTLET BOXES WITHIN PROJECT AREA.
4. REUSE EXISTING LIGHTING CIRCUITS IN PROJECT AREA FOR NEW LIGHTING.

DEMOLITION KEYNOTES

- 1 DISCONNECT POWER TO EXISTING HVAC EQUIPMENT. PRESERVE CIRCUIT FOR RE-USE DURING RENOVATION.
- 2 DEMOLISH 2 CONDUITS SERVING FIRE ALARM DEVICE AND RECEPTACLE ALONG TOP OF WALL BACK TO NEAREST JUNCTION BOX. PRESERVE CIRCUITS FOR RE-USE DURING RENOVATION. NEW CONDUITS TO BE ROUTED ABOVE NEW CEILING.


RENOVATION GENERAL NOTES

1. ALL SQUARE DOWNLIGHTS SHALL BE TYPE 'A', UNO.
2. ALL 4 FOOT VANITY FIXTURES SHALL BE TYPE 'B', UNO.
3. RECONNECT NEW LIGHTS TO EXISTING LIGHTING CIRCUITS IN PROJECT AREA.
4. UPDATE ALL PANEL SCHEDULES TO SHOW MODIFIED LOADS. LABEL ALL SPARE BREAKERS AS SPARE AND TURN OFF.
5. LOCATION OF CEILING MOUNT AND WALL MOUNT DEVICES IS DIAGRAMMATIC AND SHOWN FOR CLARITY. REFER TO ARCHITECTURAL RCP PLAN FOR EXACT LOCATION OF ALL CEILING MOUNT DEVICES. WHERE NOT INDICATED ON ARCHITECT'S RCP PLAN, COORDINATE WITH ARCHITECT PRIOR TO INSTALLATION. COORDINATE WITH ARCHITECT FOR FINAL LOCATION OF ALL EXTERIOR AND INTERIOR WALL MOUNT DEVICES.

RENOVATION KEYNOTES

- 1 EXTEND/RECONNECT EXISTING CIRCUIT MADE AVAILABLE DURING DEMOLITION TO NEW HVAC EQUIPMENT. PROVIDE NEW 15A/1P BREAKER TO REPLACE EXISTING BREAKER.
- 2 NEW 2#12, #12G IN 1/2" C. HOMERUN TO 120/208V PANEL IN ELECTRICAL ROOM WITH AVAILABLE SPACE. PROVIDE NEW 15A/3P BREAKER.
- 3 NEW 2#12, #12G IN 1/2" C. HOMERUN TO 120/208V PANEL IN ELECTRICAL ROOM WITH AVAILABLE SPACE. PROVIDE NEW 15A/1P BREAKER.
- 4 CONNECT NEW FIRE ALARM DEVICE TO EXISTING FIRE ALARM CIRCUIT MADE AVAILABLE DURING DEMOLITION. ROUTE NEW CONDUIT ABOVE NEW CEILING FROM NEAREST JUNCTION BOX ON THE SAME CIRCUIT.
- 5 FOR AUTOMATIC DOOR OPENER. CONNECT EXISTING AUTOMATIC DOOR OPENER TO THE CIRCUIT MADE AVAILABLE DURING DEMOLITION. ROUTE NEW CONDUIT ABOVE NEW CEILING FROM NEAREST EXISTING JUNCTION BOX ON THE SAME CIRCUIT. CUT DOOR OPENER PLUG CORD AND HARDWIRE TO NEW JUNCTION BOX ABOVE CEILING.
- 6 CONNECT TO EXISTING NORMAL LIGHTING CIRCUIT FEEDING THIS SPACE WITH 2#12, #12G. CIRCUIT MADE AVAILABLE DURING DEMOLITION.
- 7 CONNECT TO EXISTING EMERGENCY LIGHTING CIRCUIT FEEDING THIS SPACE WITH 2#12, #12G. CIRCUIT MADE AVAILABLE DURING DEMOLITION.
- 8 NEW 2#12, #12G IN 1/2" C. HOMERUN TO 120/208V PANEL IN ELECTRICAL ROOM WITH AVAILABLE SPACE. PROVIDE NEW 20A/1P BREAKER.

KEYPLAN

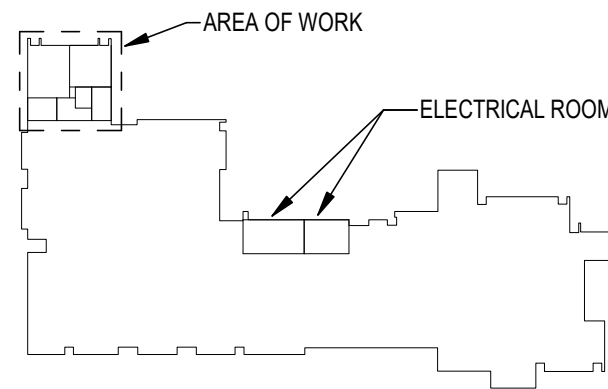

h2 ENGINEERING
114 EAST 5th AVENUE TALLAHASSEE, FL 32303
PHONE 850.224.7822
www.h2engineering.com
HSE PROJECT No. 23.079
THIS DOCUMENT IS THE PROPERTY OF h2Engineering AND IS PREPARED AS AN INSTRUMENT OF SERVICE. ITS USE, REUSE OR REPRODUCTION, EXCEPT BY WRITTEN AGREEMENT WITH h2Engineering, IS PROHIBITED.
Florida Registry #2485
Daniel R. Haberfeld, P.E. #91238

bkij
ARCHITECTURE
BKiJ, Inc., Architecture
1621 Physicians Dr.
Tallahassee, Florida 32308
(P) 850.778.8007 (F) 850.546.8150
www.bkijarchitecture.com
FL Architecture Corporation AA26002280

SEAL:

PROJECT TITLE:

TCC English Building
Restroom Renovations
444 Appleyard Dr., Tallahassee, FL 32304

PROJECT NO.: 23.121

DESIGNED BY : BJM

DRAWN BY: BJM

CHECKED BY: DRH

THIS DRAWING AND ANY REPRODUCTIONS ARE THE PROPERTY AND COPYRIGHT OF BKiJ, INC. AND MAY NOT BE REPRODUCED, PUBLISHED OR USED IN ANY MANNER WITHOUT WRITTEN PERMISSION OF THE ARCHITECT

REVISIONS :

PROJECT PHASE:

100% Construction Documents

DRAWING TITLE:

Floor Plans

SHEET NO. :

E1.0

DATE:

August 25, 2023