

Project Description

THIS PROJECT INCLUDES THE INTERIOR RENOVATION OF APPROXIMATELY 5,511 SF IN THE UNIVERSITY CENTER A BUILDING, SUITE 1500, ON THE 1ST FLOOR, FOR THE FSU CONTROLLER'S OFFICE. THE CONSTRUCTION TYPE IS TYPE I B (SPRINKLERED, PROTECTED).

INCLUDED IN THE SCOPE OF RENOVATION ARE REPLACEMENT OF ALL EXISTING ACOUSTICAL CEILING GRID AND TILES, NEW LED LIGHTING THROUGHOUT THE SPACE, MODIFICATIONS TO THE EXISTING SPRINKLER SYSTEM, RELOCATE EXISTING HEADS AND ADD NEW ONES TO ACCOMMODATE THE NEW LAYOUT, REWORK EXISTING HVAC DUCTWORK, PROVIDE NEW AIR SUPPLY AND RETURN VENTS. ALL NEW INTERIOR PARTITIONS WILL BE CONSTRUCTED OF LIGHT GAUGE METAL STUDS AND 5/8" GYPSUM BOARD AND SOUND BATTS AT WALL CAVITIES WHERE INDICATED IN THE DRAWINGS. ALL NEW FINISHES THROUGHOUT.

Applicable Codes:

THE SUBJECT PROJECT IS TO COMPLY WITH THE FOLLOWING COMPONENTS OF THE FLORIDA BUILDING CODE (FBC), EIGHTH (2023) EDITION (UNLESS NOTED OTHERWISE).

- FL BLDG CODE, BUILDING (FBC-B)
- FL BLDG CODE, EXISTING BUILDING (FBC-EB)
- FL BLDG CODE, ACCESSIBILITY (FBC-A)
- FL BLDG CODE, ENERGY CONSERVATION (FBC- EC)
- FL BLDG CODE, MECHANICAL (FBC-M)
- FL BLDG CODE, FUEL GAS (FBC-FG)
- FL BLDG CODE, PLUMBING (FBC-P)
- FL FIRE PREVENTION CODE (FFPC)
- NATIONAL ELECTRICAL CODE (NEC 70), 2020 EDITION

NOTE:
WHERE MODIFICATIONS TO THE EXISTING FIRE SPRINKLER SYSTEM ARE REQUIRED, THE FIRE PROTECTION SUBCONTRACTOR SHALL SUBMIT FOR A SEPARATE PERMIT PRIOR TO WORK BEING PERFORMED.

NOTE:
WHERE MODIFICATIONS TO THE EXISTING FIRE ALARM SYSTEM ARE REQUIRED, THE FIRE ALARM SUBCONTRACTOR SHALL SUBMIT FOR A SEPARATE PERMIT PRIOR TO WORK BEING PERFORMED. FIRE ALARM WORK TO BE INCLUDED IN GENERAL CONTRACTORS SCOPE OF WORK, COORDINATE WITH TRAVIS MARCHANT, FSU PROJECT MANAGER.

FSU General Notes:

1. ALL WORK TO COMPLY WITH FLORIDA STATE UNIVERSITY'S DESIGN GUIDELINES UNLESS STATED OTHERWISE IN DRAWINGS AND SPECIFICATIONS.
2. BUILDING CODE ADMINISTRATION FEES PAID BY FLORIDA STATE UNIVERSITY. ALL OTHER FEES TO BE PAID BY CONTRACTOR.
3. CONTRACTOR TO FIELD VERIFY ALL DIMENSIONS AND FIELD CONDITIONS AT THE SITE PRIOR TO START OF CONSTRUCTION. IF NEEDED, NOTIFY ARCHITECT IN WRITING OF ANY DISCREPANCIES OR DISCOVERED PROBLEMS. WRITTEN DIMENSIONS SHALL TAKE PRECEDENCE OVER SCALED DIMENSIONS.
4. THE CONTRACTOR SHALL BE RESPONSIBLE FOR FINAL APPROVAL OF ALL FINISH MATERIAL SELECTIONS PER THE OWNER'S REQUEST.
5. THE CONTRACTOR ASSUMES ALL RESPONSIBILITY FOR THE MATERIALS AND METHODS OF CONSTRUCTION USED FOR THIS PROJECT.
6. ANY DEVIATION FROM THE CONSTRUCTION DOCUMENTS SHALL BE APPROVED BY THE ARCHITECT PRIOR TO CONSTRUCTION.
7. ALL MATERIALS, SYSTEMS AND CONSTRUCTION COMPONENTS ARE TO BE INSTALLED PER THE MANUFACTURER'S SPECIFICATIONS.
8. CONTRACTOR SHALL MAKE AVAILABLE TO THE BUILDING INSPECTOR DOCUMENTATION NECESSARY TO VERIFY THAT ALL COMPONENTS REQUIRING PRODUCT APPROVAL PER FS 553.842 ARE IN COMPLIANCE WITH PRODUCT APPROVAL INSTALLATION REQUIREMENTS.
9. ALL WORK IS TO BE IN STRICT COMPLIANCE WITH ALL STATE AND LOCAL LAWS AND CODES WHICH APPLY TO THIS USE AND TO GENERALLY ACCEPTED CONSTRUCTION TRADE PRACTICES.
10. THE CONTRACTOR SHALL REMOVE FROM THE SITE AND DISPOSE OF ALL TRASH, DEBRIS AND CONSTRUCTION MATERIALS DUE TO CONSTRUCTION PRIOR TO COMPLETION OF THE WORK. THE CONTRACTOR SHALL LEAVE THE SITE IN A CONDITION EQUAL TO OR BETTER THAN IT WAS BEFORE COMMENCEMENT OF THE WORK ON THIS CONTRACT. THE CONTRACTOR SHALL ALSO INSURE THAT ALL PROPER SAFETY MEASURES ARE TAKEN DURING THE TIME OF CONSTRUCTION.
11. BEFORE SUBMITTING FOR THE WORK, EACH BIDDER WILL BE RESPONSIBLE TO EXAMINE THE PREMISES AND SATISFY HIMSELF AS TO THE EXISTING CONDITIONS UNDER WHICH HE WILL BE OBLIGATED TO OPERATE AND COMPLETE THE WORK UNDER THIS CONTRACT. NO ALLOWANCE WILL SUBSEQUENTLY BE MADE IN THIS CONNECTION ON BEHALF OF THE CONTRACTOR FOR ANY ERROR OR OMISSION ON HIS PART.
12. CONSTRUCTION MANAGER SHALL BE RESPONSIBLE FOR COORDINATING WORK OF SUBCONTRACTORS TO AVOID INTERFERENCES.
13. ERECT AND MAINTAIN REASONABLE PRECAUTIONS FOR SAFETY AND HEALTH INCLUDING POSTING DANGER SIGNS AND OTHER WARNINGS AGAINST HAZARDS INCLUDING PROMULGATING SAFETY REGULATIONS. PROVIDE SAFETY PRECAUTIONS AND BARRICADES FOR PEDESTRIANS AT CONSTRUCTION VEHICLE ACCESS AND EGRESS LOCATIONS.
14. COORDINATE AND SEQUENCE DEMOLITION, CLEANING AND CONSTRUCTION WORK. SUBMIT A COMPLETELY DETAILED CONSTRUCTION SCHEDULE PRIOR TO PRE-CONSTRUCTION CONFERENCE.
15. THE CONTRACTOR SHALL STRICTLY BE HELD TO THE PROJECT SCHEDULE. HE SHALL PROVIDE SUFFICIENT MANPOWER AND EQUIPMENT TO FULLY MOBILIZE, PROCEED WITH AND COMPLETE THE WORK.
16. THE CONTRACTOR SHALL BE RESTRICTED TO AREAS SPECIFIED BY THE OWNER FOR ON-SITE STORAGE OF CONSTRUCTION MATERIALS. THE CONTRACTOR IS RESPONSIBLE FOR THE PROTECTION AND SECURITY OF EQUIPMENT AND MATERIALS.
17. THE CONTRACTOR SHALL MAINTAIN A CLEAN WORK ENVIRONMENT AT ALL TIMES AND SHALL CLEAN CONSTRUCTION SITE OF DEBRIS AT COMPLETION OF THE JOB AND BEFORE FINAL PAYMENT IS MADE.
18. CONTRACTOR'S USE OF AN APPROVAL STAMP ON DOCUMENTS SUBMITTED AS SHOP DRAWINGS, PRODUCT DATA, SAMPLES AND SIMILAR SUBMITTALS CERTIFIES THAT THE CONTRACTOR HAS COMPLIED WITH THE CONTRACT DOCUMENT REQUIREMENTS RELATED TO "SHOP DRAWINGS, PRODUCT DATA AND SAMPLES".
19. THE CONTRACTOR SHALL NOT BE RELIEVED OF RESPONSIBILITY FOR DEVIATIONS FROM REQUIREMENTS OF THE CONTRACT DOCUMENTS BY THE APPROVAL OF SHOP DRAWINGS, PRODUCT DATA, SAMPLES OR SIMILAR SUBMITTALS UNLESS THE CONTRACTOR HAS SPECIFICALLY INFORMED THE ARCHITECT IN WRITING OF SUCH DEVIATION AT THE TIME OF SUBMITTAL AND THE ARCHITECT HAS GIVEN WRITTEN APPROVAL TO THE SPECIFIC DEVIATION. THE CONTRACTOR SHALL NOT BE RELIEVED OF RESPONSIBILITY FOR ERRORS OR OMISSIONS IN SHOP DRAWINGS, PRODUCT DATA, SAMPLES OR SIMILAR SUBMITTALS BY THE ARCHITECT'S APPROVAL THEREOF.
20. CONTRACTOR SHALL GUARANTEE THE WORK AND MATERIALS FOR A PERIOD OF ONE YEAR FROM DATE OF FINAL ACCEPTANCE. THIS GUARANTEE SHALL BE IN ADDITION TO THE WARRANTIES PROVIDED BY MATERIAL SUPPLIERS AND MANUFACTURERS.

INTERIOR RENOVATION
FOR
FSU UCA Suite 1500

5600A UNIVERSITY CENTER, TALLAHASSEE, FL 32306

FSU Project No. 2400665



100% CONSTRUCTION DOCUMENTS



Architect:

Bonnie Davenport, AIA
BKJ, Inc. Architecture

1621 Physicians Drive
Tallahassee, FL 32308

850.778.8007
bdavenport@bkjarchitecture.com



Mechanical & Plumbing Engineer:

Robert Richards, P.E.
H2 Engineering

114 East 5th Avenue
Tallahassee, FL 32303

850.224.7922
rrichards@h2engineering.com

Electrical Engineer:

Anthony Wyrick, P.E.
H2 Engineering

114 East 5th Avenue
Tallahassee, FL 32303

850.224.7922
awyrick@h2engineering.com



Construction Manager:


Callie Neal
Ripee Construction, Inc.

2107 Delta Way
Tallahassee, FL 32303

850.668.6805
callie@rippeeconstruction.com


Drawing Index:

CS	COVER SHEET
A0.1	ANNOTATIONS, SYMBOLS
A0.2	LIFE SAFETY PLAN
AD1.0	DEMOLITION PLAN
AD1.1	DEMOLITION RCP
A1.0	FLOOR PLAN
A1.1	REFLECTED CEILING PLAN
A6.0	FINISH SCHEDULE & PLAN
A6.1	DOOR SCHEDULE
A6.2	DOOR & WINDOW DETAILS
A7.0	INTERIOR ELEVATIONS & MILLWORK
FS0.1	GENERAL NOTES & LEGENDS
FSD1.0	DEMOLITION PLAN - FIRE SPRINKLER
FS1.0	RENOVATION PLAN - FIRE SPRINKLER
P0.1	GENERAL NOTES & LEGENDS
P0.2	SCHEDULES & DETAILS
P1.0	RENOVATION PLAN - PLUMBING
M0.1	GENERAL NOTES & LEGENDS
MD1.0	PARTIAL FIRST FLOOR DEMOLITION PLAN
M1.0	PARTIAL FIRST FLOOR PLAN
M5.1	DETAILS
E0.1	GENERAL NOTES & LEGENDS
ED1.0	DEMOLITION PLAN - LIGHTING
ED2.0	DEMOLITION PLAN - POWER
E1.0	RENOVATION PLAN - LIGHTING
E2.0	RENOVATION PLAN - POWER
E3.0	PANEL SCHEDULES
E5.0	DETAILS
E5.1	DETAILS
T0.1	GENERAL NOTES & LEGENDS
TD1.0	DEMOLITION PLAN - TELECOM
T1.0	RENOVATION PLAN - TELECOM
T5.0	DETAILS
ES0.1	GENERAL NOTES & LEGENDS
ESD1.0	DEMOLITION PLAN - ELECTRONIC SAFETY
ES1.0	RENOVATION PLAN - ELECTRONIC SAFETY
FE0.1	GENERAL NOTES & LEGENDS
FED1.0	DEMOLITION PLAN - FIRE ALARM
FE1.0	RENOVATION PLAN - FIRE ALARM

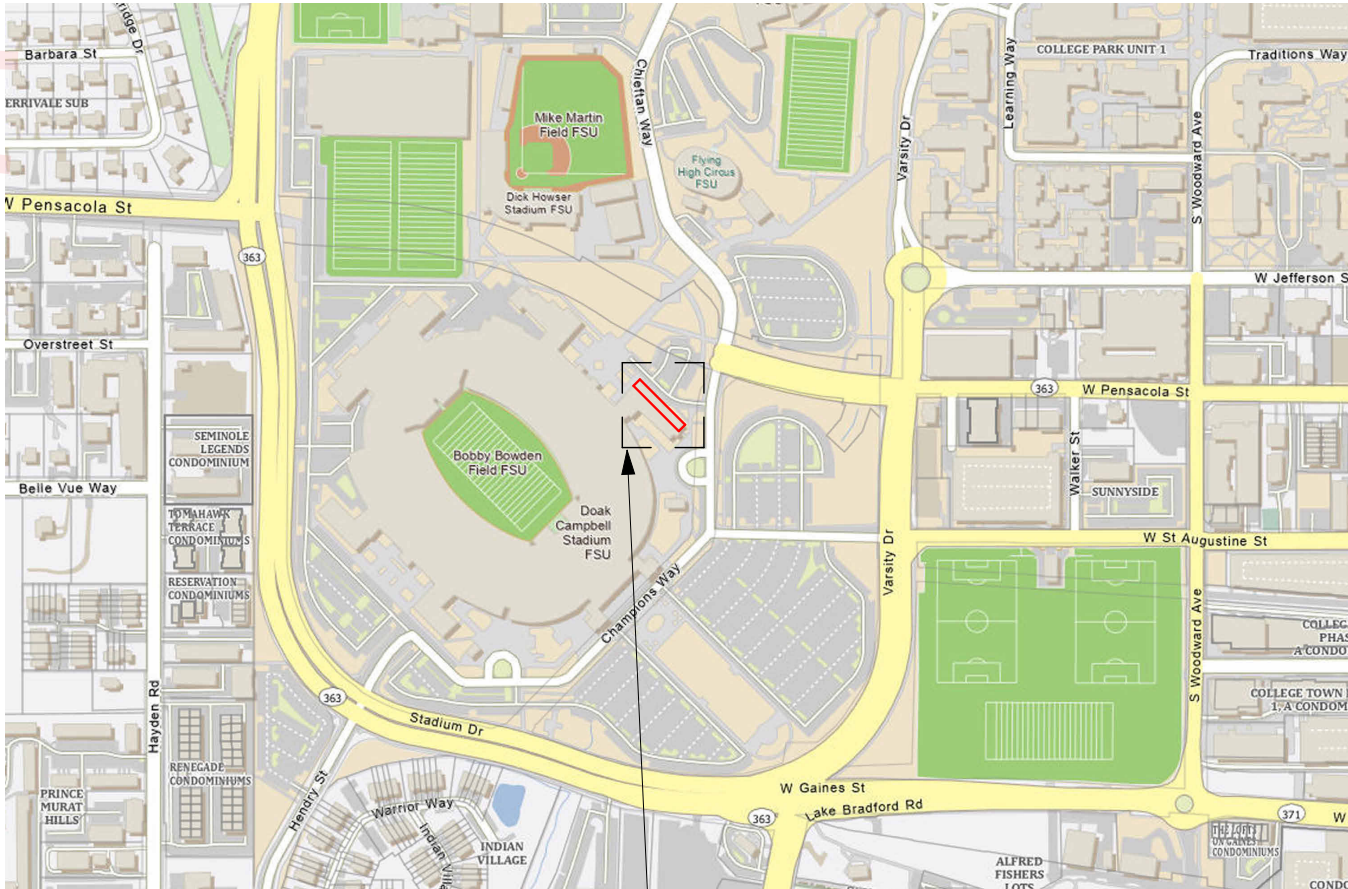

PROJECT AREA

AREA MAP:

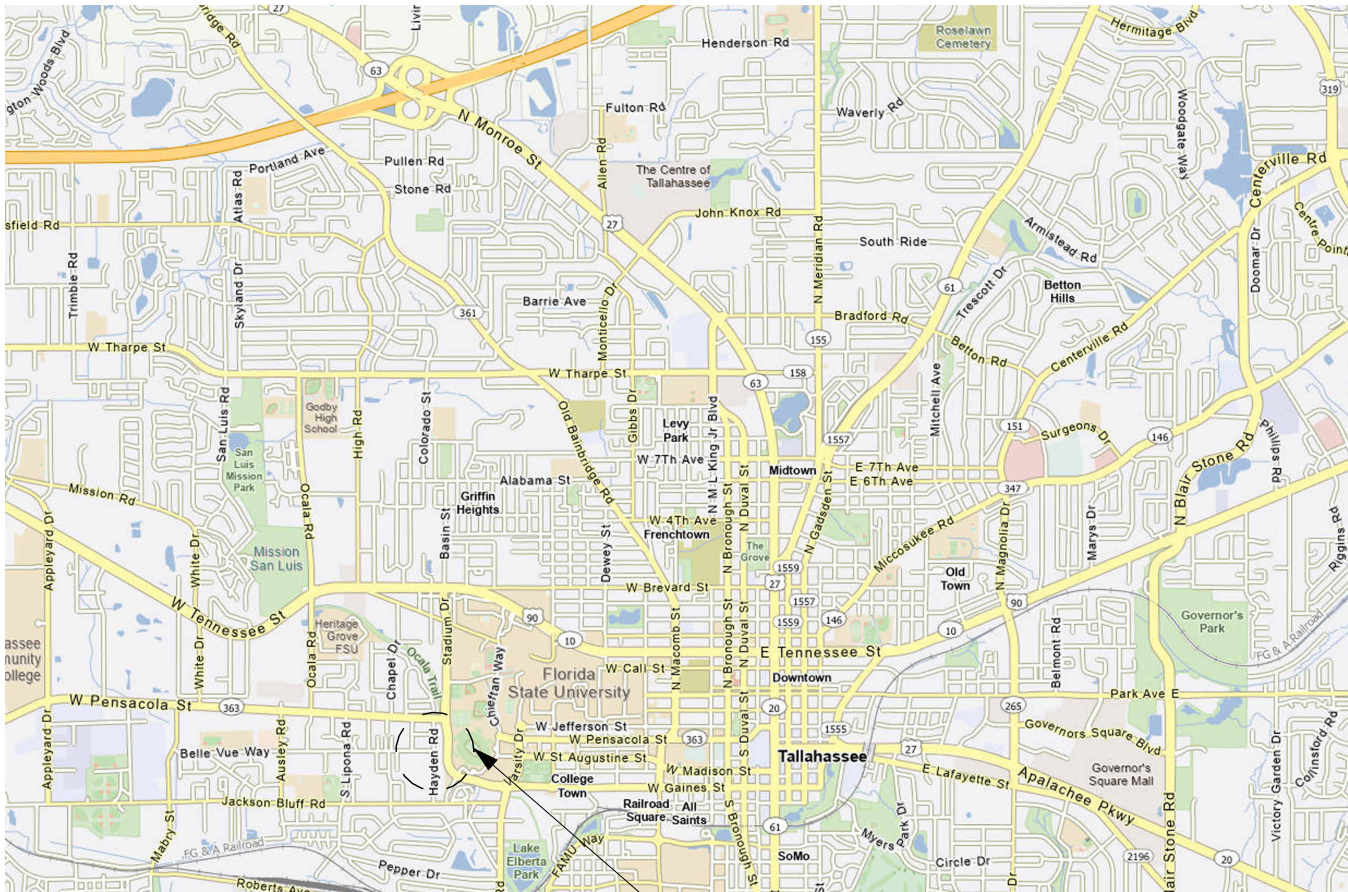

PROJECT LOCATION

LOCATION MAP:



SEAL:

PROJECT TITLE:

Interior Renovation for
FSU UCA Suite 1500
FSU Project No. 2400665
Tallahassee, Florida

JOB NO.: 23.153

DESIGNED: BD/ML

DRAWN: MP

CHECKED: BD/ML

THIS DRAWING AND ANY REPRODUCTIONS ARE THE PROPERTY AND COPYRIGHT OF BKJ, INC. AND MAY NOT BE REPRODUCED, PUBLISHED, OR USED IN ANY MANNER WITHOUT WRITTEN PERMISSION OF THE ARCHITECT

REVISIONS:

DRAWING PHASE:

100% Construction Documents

DRAWING TITLE:

Cover Sheet

SHEET NO.:

CS

DATE:

April 12, 2024

Abbreviations:

#	NUMBER
@	AND
&	AND
+	AND
AB	ANCHOR BOLT
A/C	AIR CONDITIONING / AIR
CONDITIONER	
ABV	ABOVE
ACI	AMERICAN CONCRETE INSTITUTE
ACT	ACOUSTICAL CEILING TILE
ADA	AMERICANS WITH DISABILITIES ACT
ADDL	ADDITIONAL
ADJ	ADJACENT / ADJUST
AFF	ABOVE FINISH FLOOR
AFG	ABOVE FINISH GRADE
AG	ABOVE GRADE
ALT	ALTERNATE
ALUM	ALUMINUM
ANOD	ANODIZED
AOR	ARCHITECT OF RECORD
ARCH	ARCHITECT / ARCHITECTURAL
ASPH	ASPHALT
ASTM	AMERICAN SOCIETY OF TESTING AND MATERIALS
BD	BOARD
BL	BUILDING LINE
BLDG	BUILDING
BLM	BEAM
BO	BOTTOM OF
BOF	BOTTOM OF FOOTING
BOW	BOTTOM OF WALL
BSMT	BASEMENT
BTM	BOTTOM
BRG	BEARING
BYND	BEYOND
C/C	CENTER TO CENTER
CL	CENTERLINE
CAB	CABINET / CABINETRY
CB	CATCH BASIN
CEM	CEMENT
CF	CUBIC FEET
CFM	CUBIC FEET PER MINUTE
CH	CHANNEL
CIP	CAST-IN-PLACE
CIR	CIRCLE, CIRCULAR
CJ	CONTROL JOINT
CLG	CEILING
CL	CLOSET
CLR	CLEARANCE / CLEAR
CMU	CONCRETE MASONRY UNIT
CNTR	COUNTER
CO	CLEAN OUT / CASSED OPENING
COL	COLUMN
COMP	COMPRESSOR / COMPOSITE
COMPR	COMPRESSIBLE
CONC	CONCRETE
CONSTR	CONSTRUCTION
CONT	CONTINUOUS
CONTR	CONTRACTOR
CORR	CORRUGATED
CPT	CARPET
CS	COUNTERSINK / COUNTERSUNK
CT	CERAMIC TILE
CTR	CENTER
CTYD	COURTYARD
CUYD	CUBIC YARDS
CW	COLD WATER
d	PENNY
dB	DECIBAL
DBL	DOUBLE
DEG	DEGREES
DEMO	DEMOLISH / DEMOLITION
DF	DRINKING FOUNTAIN
DIA	DIAMETER
DIM	DIMENSION
DL	DEAD LOAD
DN	DOWN
DS	DOWNSPOUT
DTL	DETAIL
DWG	DRAWING
DWGS	DRAWINGS

EA	EACH
EF	EXHAUST FAN
EJ	EXPANSION JOINT
ELEC	ELECTRIC / ELECTRICAL
ELEV	ELEVATOR / ELEVATION
ENCL	ENCLOSURE
EPDM	ETHYLENE PROYLENE DIENE M-CASS
EQ	EQUAL
EQUIP	EQUIPMENT
EW	EACH WAY
EWC	ELECTRICAL WATER COOLER
EX	EXISTING / EXHAUST
EXH	EXHAUST
EXIST	EXISTING
EXT	EXTERIOR
FA	FIRE ALARM
FAP	FIRE ALARM PANEL
FAS	FIRE ALARM STROBE / HORN
FD	FLOOR DRAIN / FIRE DEPARTMENT
FE	FIRE EXTINGUISHER
FEB	FIRE EXTINGUISHER WITH BRACKET
FEC	FIRE EXTINGUISHER IN CABINET
FF	FINISH FLOOR
FHC	FIRE HOSE CABINET
FIN	FINISH
FIXT	FIXTURE
FLG	FLASHING
FL	FLOOR
FLR	FLOOR
FLUOR	FLUORESCENT
FND	FOUNDATION
FO	FACE OF
FOS	FACE OF STUD
FRP	FIBERGLASS REINFORCED PANEL
FT	FOOT / FEET
FTG	FOOTING
FV	FIELD VERIFY
GA	GAUGE
GALV	GALVANIZED
GC	GENERAL CONTRACTOR
GEN	GENERAL
GFCI	GROUND FAULT CIRCUIT INTERRUPT
GFI	GROUND FAULT INTERRUPT
GND	GROUND
GWB	GYPSPUM WALLBOARD
GYP	GYPSPUM
H/C	HANDICAPPED ACCESSIBLE
HB	HOSE BIBB
HC	HOLLOW CORE
HDR	HEADER
HDRL	HANDRAIL
HM	HOLLOW METAL
HORZ	HORIZONTAL
HR	HOUR
HGT	HEIGHT
HT	HEIGHT
HTR	HEATER
HVAC	HEATING, VENTILATION, AND AIR CONDITIONING
HW	HOT WATER / HARDWARE
ICF	INSULATED CONCRETE FORM
ID	INSIDE DIAMETER
IN	INCHES
INCL	INCLUDES / INCLUDING
INSUL	INSULATION
INT	INTERIOR
INV	INVERT
IR	IMPACT RESISTANT
IRGWB	IMPACT RESISTANT GYPSPUM WALLBOARD
JAN	JANITOR
JB	JAMB
JBOX	JUNCTION BOX
JCT	JUNCTION
JST	JOIST
JT	JOINT
K	KIPS
KD	KILN DRIED
KDAT	KILN DRIED AFTER TREATMENT

L	STEEL ANGLE, LENGTH
LAM	LAMINATED
LAV	LAVATORY
LBS	POUNDS
LF	LINEAR FEET
LH	LEFT HAND
LINO	LINOLEUM
LL	LIVE LOAD
LLH	LONG LEG HORIZONTAL
LLV	LONG LEG VERTICAL
LT	LIGHT
LTG	LIGHTING
LTL	LINTEL
LTVT	LIGHTWEIGHT
LVR	LOUVER
M	METER
MAR	MARBLE
MAS	MASONRY
MATL	MATERIAL
MAX	MAXIMUM
MC	MEDICINE CABINET
MECH	MECHANICAL
MED	MEDIUM
MEMBR	MEMBRANE
MEZZ	MEZZANINE
MFR	MANUFACTURER
MIN	MINIMUM
MISC	MISCELLANEOUS
MRK	MARK
MO	MASONRY OPENING
MOD	MODULAR
MRGWB	MOISTURE RESISTANT GYPSPUM WALLBOARD
MTD	MOUNTED
MTL	METAL
MULL	MULLION
N	NORTH
N/A	NOT APPLICABLE
NIC	NOT IN CONTRACT
NO	NUMBER
NOM	NOMINAL
NS	NON SHRINK
NTS	NOT TO SCALE
O/	OVER
OA	OVERALL
OC	ON CENTER
OCCS	OCCUPANTS
OD	OUTSIDE DIAMETER / OVERFLOW DRAIN
OH	OVERHEAD / OPPOSITE HAND
OHD	OVERHEAD DOOR
OPP	OPPOSITE
OPH	OPPOSITE HAND
OPNG	OPENING
OZ	OUNCE
PART	PARTITION
PCC	PRE-CAST CONCRETE
PCF	POUNDS PER CUBIC FOOT
PERF	PERFORATED
PKG	PARKING
PL	PLATE / PLASTER / PROPERTY LINE
PLAM	PLASTIC LAMINATE
PLUMB	PLUMBING
PLYWD	PLYWOOD
PNL	PANEL
PR	PAIR
PREFAB	PREFABRICATED
PREP	PREPARE / PREPARATION
PSF	POUNDS PER SQUARE FOOT
PSI	POUNDS PER SQUARE INCH
PT	PRESSURED TREATED / PAINT / POINT
PVC	POLYVINYL CHLORIDE
PVMT	PAVEMENT
PWR	POWER
QC	QUALITY CONTROL
QT	QUARRY TILE
QTY	QUANTITY

RA	RETURN AIR
RAD	RADIUS
RBR	RUBBER
RCP	REFLECTED CEILING PLAN
RD	ROOF DRAIN
REF	REFERENCE
REINF	REINFORCED / REINFORCEMENT
RET	RETURN
REQD	REQUIRED
REV	REVISION
RH	RIGHT HAND
RM	ROOM
RMV	REMOVE
RO	ROUGH OPENING
ROW	RIGHT OF WAY
SA	SUPPLY AIR
SAN	SANITARY
SC	SOLID CORE
SCHED	SCHEDULE / SCHEDULED
SD	SMOKE DETECTOR
SECT	SECTION
SEW	SEWER
SF	SQUARE FEET
SGL	SIGNAL / SINGLE
SHT	SHEET
SIM	SIMILAR
SJ	SAWED JOINT
SPECS	SPECIFICATIONS
SPKLR	SPRINKLER
SQ	SQUARE
SS	SANITARY SEWER
SST	STAINLESS STEEL
STC	SOUND TRANSMISSION COEFFICIENT
STD	STANDARD
STL	STEEL
STOR	STORAGE
STRUCT	STRUCTURE / STRUCTURAL
SUSP	SUSPENDED
SW	STORMWATER
SYD	SQUARE YARD
SYS	SYSTEM
T&G	TONGUE AND GROOVE
T/D	TELEPHONE / DATA
TBD	TO BE DETERMINED
TEL	TELEPHONE
TEMP	TEMPORARY / TEMPERATURE
THK	THICK
THR	THRESHOLD / THREADED
TJ	TOOLED JOINT
TME	TO MATCH EXISTING
TO	TOP OF
TOB	TOP OF BEAM
TOC	TOP OF CONCRETE
TOF	TOP OF FOOTING
TOS	TOP OF STEEL
TOW	TOP OF WALL
TS	STRUCTURAL TUBE STEEL
TV	TELEVISION
TYP	TYPICAL
U/S	UNDERSIDE
UNF	UNFINISHED
UNO	UNLESS NOTED OTHERWISE
UNO	UNLESS OTHERWISE NOTED
UR	URINAL
VB	VAPOR BARRIER
VCT	VINYL COMPOSITE TILE
VERT	VERTICAL
VEST	VESTIBULE
VIF	VERIFY IN FIELD
VFY	VERIFY
VOL	VOLUME
VP	VISION PANEL
VT	VINYL TILE
VTR	VENT THROUGH ROOF
W/	WITH
W/O	WITHOUT
WC	WATER CLOSET
WCT	WAINSCOT
WD	WOOD
WP	WATERPROOF, WATERPROOFING
WT	WATER TABLE
WWF	WELDED WIRE FABRIC

Legend of Architectural Symbols:

1 View Name 1/8" = 1'-0"	DRAWING TITLE	101	DOOR TAG
	PROJECT NORTH		ELEVATION MARKER
	TRUE NORTH	1i	WALL TAG
		1i	STOREFRONT TAG
		A 1'-0"	CEILING TAG
	Room Name Rm 101		ROOM TAG
			KEYNOTE
		101 OR 1	ACCESSORY / EQUIPMENT TAG
		1/4" / 1' - 0"	SLOPE MARKER
	Name Elevation		LEVEL MARKER
		1 SIM A101	DETAIL REFERENCE
			REVISION CLOUD & MARKER
		1/A1.1	DOOR / WINDOW / STOREFRONT DETAIL REFERENCE
		1 A1.1	SECTION MARKER
		1 A	COLUMN GRID
		1 / A101	MATCHLINE

bki

ARCHITECTURE

BKJ, Inc., Architecture
1621 Physicians Dr.
Tallahassee, Florida 32308
(P) 850.778.8007 | (F) 850.546.6150
www.bkjarchitecture.com
FL Architecture Corporation A40002280

SEAL:

PROJECT TITLE:

Interior Renovation for
FSU UCA Suite 1500
FSU Project No. 2400665
Tallahassee, Florida

JOB NO.: 23.153

DESIGNED: BD/ML

DRAWN: JH/MP/MB

CHECKED: BD/ML

THIS DRAWING AND ANY REPRODUCTIONS
ARE THE PROPERTY AND COPYRIGHT
OF BKJ, INC. AND MAY NOT BE
REPRODUCED, PUBLISHED, OR USED IN ANY
MANNER WITHOUT WRITTEN
PERMISSION OF THE ARCHITECT

REVISIONS:

DRAWING PHASE:

100% Construction
Documents

DRAWING TITLE:


Annotations, Symbols

SHEET NO.:

A0.1

DATE:

April 12, 2024

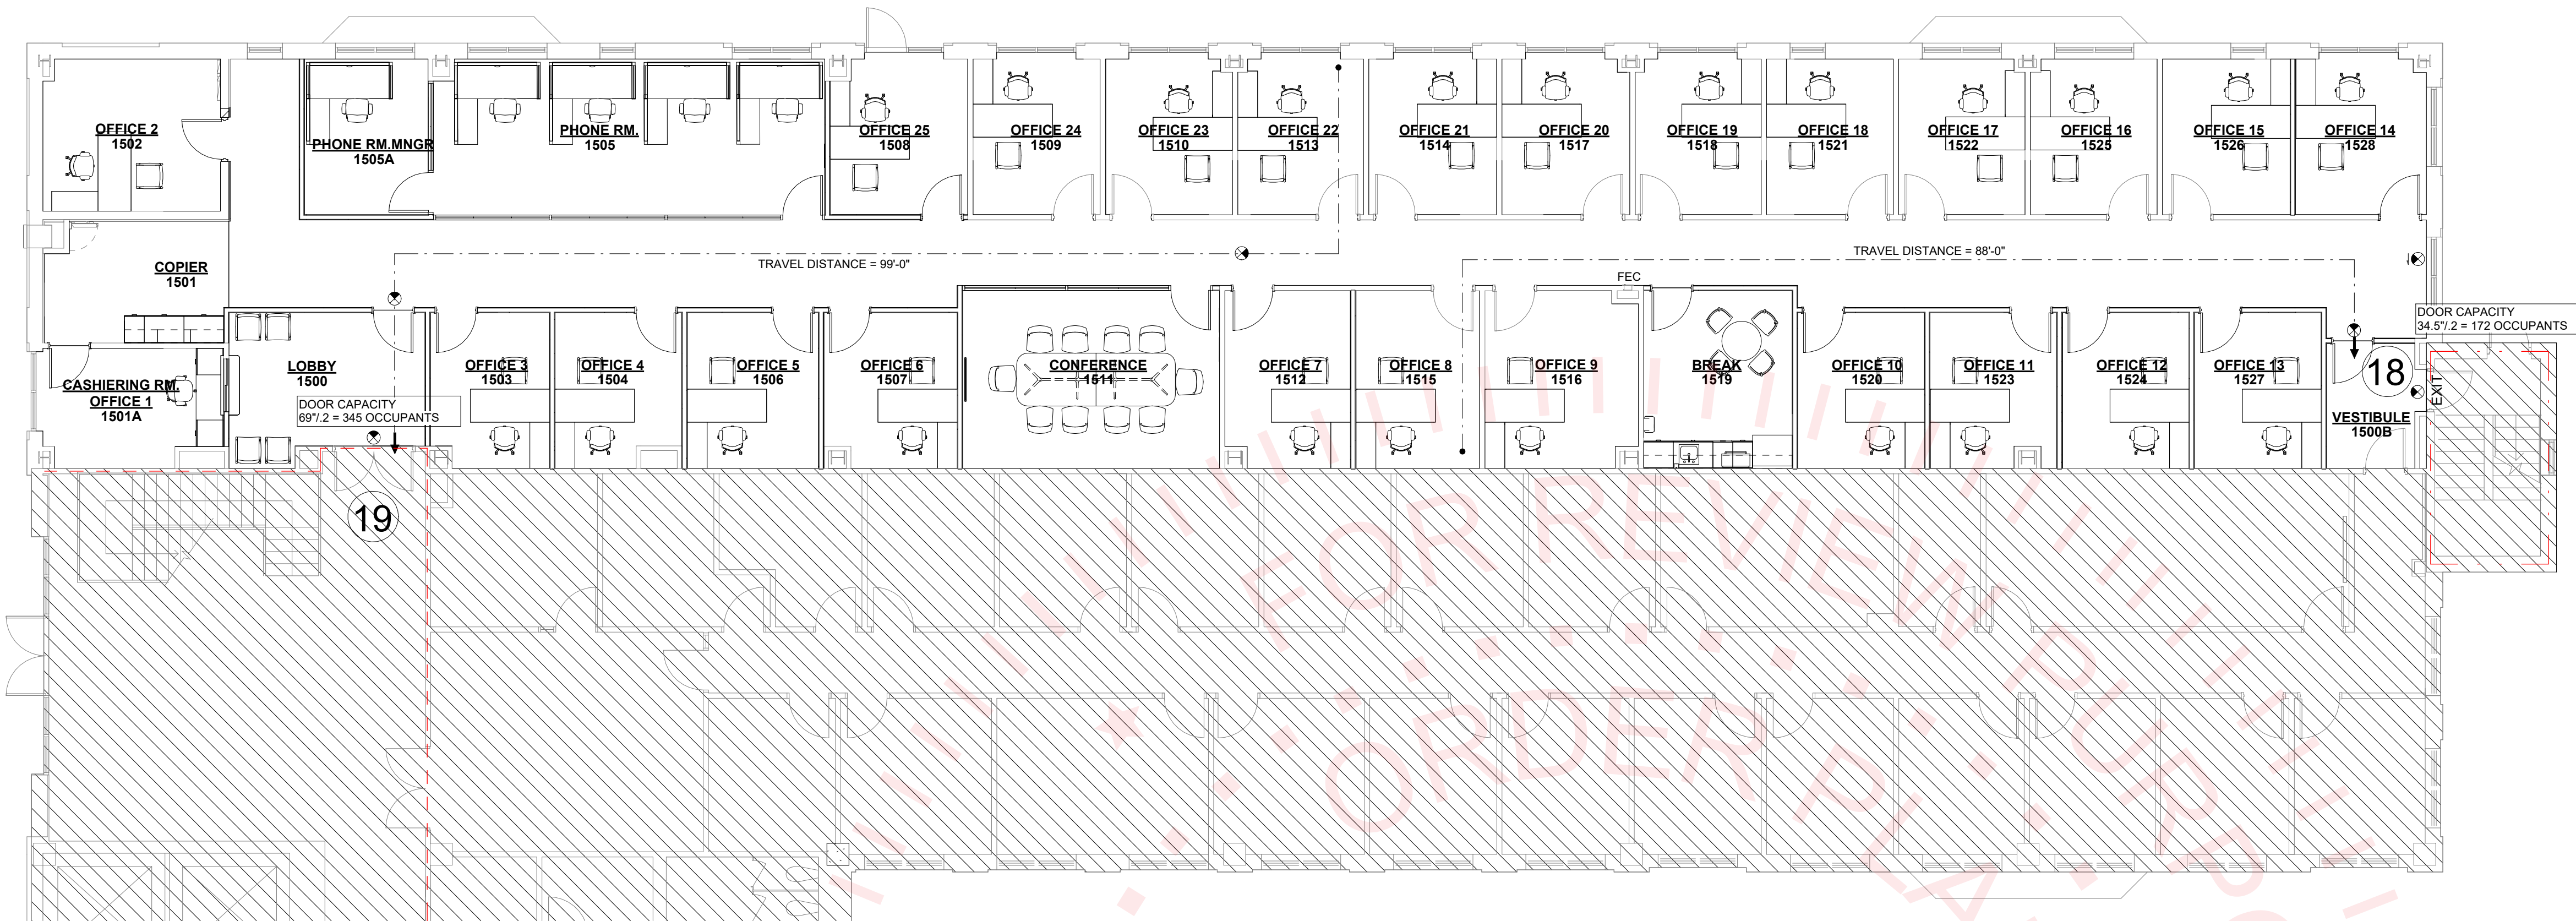


Life Safety Plan General Notes:

1. SEE ELECTRICAL DRAWINGS FOR INFORMATION ON EMERGENCY EGRESS LIGHTING LOCATIONS AND/OR FIRE ALARM INFORMATION.

Life Safety Legend:

- EXISTING WALLS
- EXISTING ELEMENTS
- NEW WALLS
- NEW ELEMENTS
- 1-HR FIRE RATED WALL
- 2-HR FIRE RATED WALL
- SMOKE PARTITION
- TRAVEL DISTANCE
- NOT IN CONTRACT
- NUMBER OF OCCUPANTS AT EXIT
- FIRE EXTINGUISHER CABINET (EXISTING)
- EXIT SIGN

1 Floor Plan - Life Safety
1/8" = 1'-0"



Code Summary

		Allowed/ Required	Provided	Comments
General Project Information				
Project Name:	FSU UCA Suite 1500			
Project Location:	5600 University Center			
City:	Tallahassee			
County:	Leon			
State:	Florida			
Use and Occupancy Classification				
Occupancy Group Classification				
FBC-B (304.1)	Business Group B			Professional Services
FFPC (6.1.11)	Business			
Hazard Classification (FFPC: 39.1.5 & 6.2.2.3)	Ordinary Hazard			
Building Area				
Renovated Area	5,511			
Total	5,511			
Occupant Loads (FBC-B: Table 1004.5, FFPC: Table 7.3.1.2)				
Renovated Area - GSF	5,511			
General Business Areas - GSF	5,511/150 = 37			
Total Occupant Load	37			
Total Egress Capacity:	517			Main entrance and Existing Stairs
Building will be provided with a Fire Alarm System (FFPC: 39.3.4.1)				
		yes	yes	
Construction Type:				
Type I B, Protected, Sprinklered				
Fire Resistance Rating for Building Elements (Type I B, Protected)				
Table 601 (FBC-B)				
Structural Columns		2hr	2hr	
Bearing Walls Exterior		2hr	2hr	
Nonbearing Walls Exterior (see table 602) ("x" distance >= 30')		0hr	0hr	
Nonbearing Interior Walls and Partitions		0hr	0hr	
Floor Construction		2hr	2hr	
Roof Construction		1hr	1hr	
Minimum Fire Resistance				
Stair		2hr	2hr	
Shaft/Elev. Equip. Rm.		2hr	2hr	
Fire Walls		N/A	N/A	Existing 4hr rated ext wall on stadium side
Tenant Separations		0hr	0hr	
Occupancy Separations		N/A	N/A	
Horizontal Exit		N/A	N/A	
Corridors	FBC-B: 708.1 & 1020.2	0hr	0hr	With sprinkler system

	Allowed/ Required	Provided	Comments
Classification of Finishes (FBC-B: Table 803.11, FFPC: 39.3.3)			
Interior exit stairways, int. exit ramps and exit passageways	B	A, B	
Corridors and enclosure for exit access stairways and exit access ramps	C	A, B, C	
Rooms and enclosed spaces	C	A, B, C	
Exit enclosure and exit access corridors - floor finish	Class II	Class II	
Common Path of Egress Travel (FBC-B Table 1006.2.1 and FFPC 39.2.5.3.1)			
Maximum Travel Distance	100'	<100'	
Exit Travel Distance (FBC-B: Table 1017.2, FFPC: 39.2.6.3)			
Maximum Travel Distance	300'	99'	
Minimum Corridor Width (FBC-B: Table 1020.3)			
Minimum corridor width	44"	60"	
Dead End Corridor (FBC-B: Table 1020.5)			
Maximum Dead End Corridor, 1st Floor	50'	12'	
Minimum Number of Exits (FBC-B: Table 1006.3.2, FFPC: 7.4)			
Minimum Number of Exits Required	2	2	
Distance between exits (FBC-1007.1.1)			
Diagonal dimension of the area		180'	
Distance between exits		150'	
Minimum Number of Required Plumbing Fixtures (FBC-P Table 403.1)			
Total occupancy load	37		N/A Restrooms not included in scope of work
Male occupants	18		
Female occupants	19		
The interior space use and total number of occupants has not changed, no changes required or planned for the building plumbing fixture requirements.			



SEAL:

PROJECT TITLE:

Interior Renovation for
FSU UCA Suite 1500
FSU Project No. 2400665
Tallahassee, Florida

JOB NO.: 23.153

DESIGNED: BD/ML

DRAWN: JH/MP/MB

CHECKED: BD/ML

THIS DRAWING AND ANY REPRODUCTIONS ARE THE PROPERTY AND COPYRIGHT OF BKJ, INC. AND MAY NOT BE REPRODUCED, PUBLISHED, OR USED IN ANY MANNER WITHOUT WRITTEN PERMISSION OF THE ARCHITECT

REVISIONS:

DRAWING PHASE:
100% Construction Documents

DRAWING TITLE:


Life Safety Plan

SHEET NO.:

A0.2

DATE:

April 12, 2024

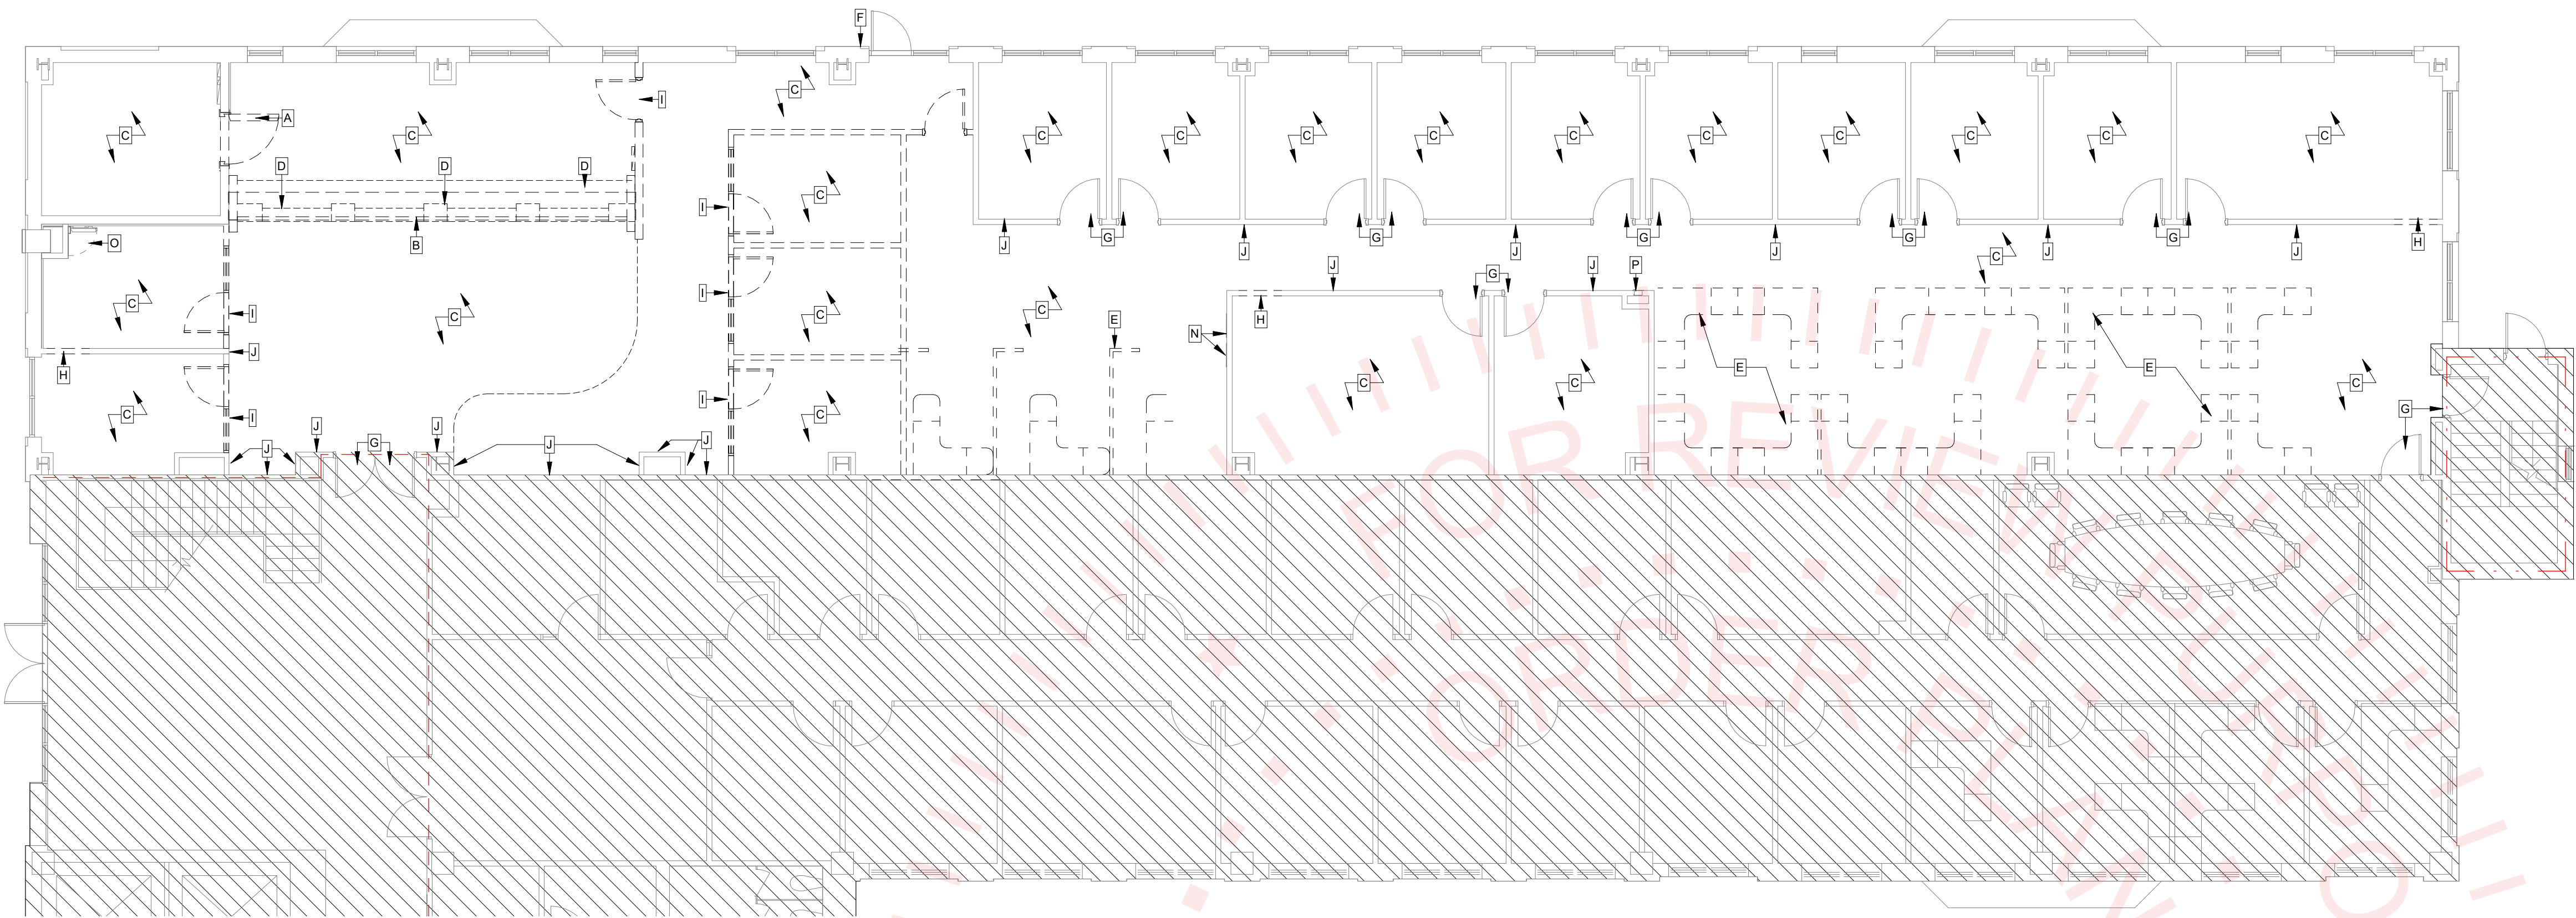

1 Floorplan - Demolition
1/8" = 1'-0"

General Demolition Notes:


1. ALL DASHED WALLS ARE TO BE REMOVED AS INDICATED PER LEGEND. DOORS WITHIN WALLS TO BE REMOVED SHALL BE REMOVED INCLUDING ALL ASSOCIATED TRIMS AND HARDWARE UNLESS SPECIFICALLY INDICATED TO BE SALVAGED.
2. "SAFE-OFF" M.P.E. SYSTEMS BY QUALIFIED MECHANICAL, PLUMBING, AND ELECTRICAL CONTRACTOR, AS REQUIRED.
3. ALL DAMAGE TO FINISH SURFACES AND ALL THROUGH-SLAB OR WALL PENETRATIONS THAT REMAIN FOLLOWING THE DEMOLITION OF EXISTING WALLS SHALL BE NOTED BY CONTRACTOR FOR REPAIR AND SEALING DURING RENOVATION.
4. ALL DOORS AND HARDWARE ARE TO REMAIN IN PLACE AND PROTECTED UNLESS OTHERWISE INDICATED.
5. REMOVE MISCELLANEOUS WALL-MOUNTED ITEMS WITHIN THE WORK AREA, INCLUDING TACK BOARDS, WHITE BOARDS, CLOCKS. COORDINATE STORAGE AND REINSTALLATION W/ OWNER, UNLESS OTHERWISE NOTED.
6. EXISTING ROLLER SHADES ON WINDOWS TO REMAIN. PROTECT AS NEEDED DURING CONSTRUCTION.

Demolition Plan Legend:

- EXISTING WALLS
- EXISTING ELEMENTS
- WALLS TO BE DEMOLISHED
- ELEMENTS TO BE DEMOLISHED
- 1-HR FIRE RATED WALL
- 2-HR FIRE RATED WALL
- NOT IN CONTRACT

Demolition Keynotes:

- A REMOVE AND DISPOSE OF EXISTING VAULT DOOR.
- B REMOVE AND DISPOSE OF EXISTING ROLL-UP DOOR ABOVE CEILING.
- C REMOVE AND DISPOSE OF EXISTING FLOOR FINISH & WALL BASE TO EXTENTS SHOWN. PREPARE SUBSTRATE FOR NEW FINISH INCLUDING FLOOR TOPPING AND PATCHING.
- D REMOVE AND DISPOSE OF ALL EXISTING MILLWORK / CASEWORK / BASE CABINETS.
- E REMOVE AND DISPOSE OF ALL CUBICLES.
- F REMOVE EXISTING CARD SWIPE. SALVAGE FOR POTENTIAL RELOCATION. COORDINATE WITH OWNER.
- G DOOR AND DOOR HARDWARE TO REMAIN. PROTECT DURING CONSTRUCTION.
- H DEMOLISH OPENING IN EXISTING WALL TO ACCOMMODATE NEW DOOR. COORDINATE EXTENTS OF DEMOLITION WITH NEW WORK.
- I REMOVE AND DISPOSE OF EXISTING HM DOOR ASSEMBLY INCLUDING SIDE LITE WHERE APPLICABLE.
- J REMOVE AND DISPOSE OF EXISTING CHAIR RAIL ON WALLS. REPAIR WALLS AS NEEDED.
- K REMOVE CEILING GRID, LIGHTS, REGISTERS AND ANY ADDITIONAL CEILING MOUNTED DEVICES - SEE MEP DRAWINGS.
- L REMOVE AND DISPOSE OF EXISTING GYPSUM CEILING IN ITS ENTIRETY.
- M EXISTING GYPSUM CEILINGS TO REMAIN
- N EXISTING ELECTRICAL PANELS TO REMAIN.
- O EXISTING DROPBOX TO REMAIN OPERATIONAL FOR COLLECTIONS ONE TIME A DAY DURING CONSTRUCTION. COORDINATE WITH OWNER.
- P EXISTING FIRE EXTINGUISHER CABINET TO REMAIN. PROTECT AS NEEDED DURING CONSTRUCTION.

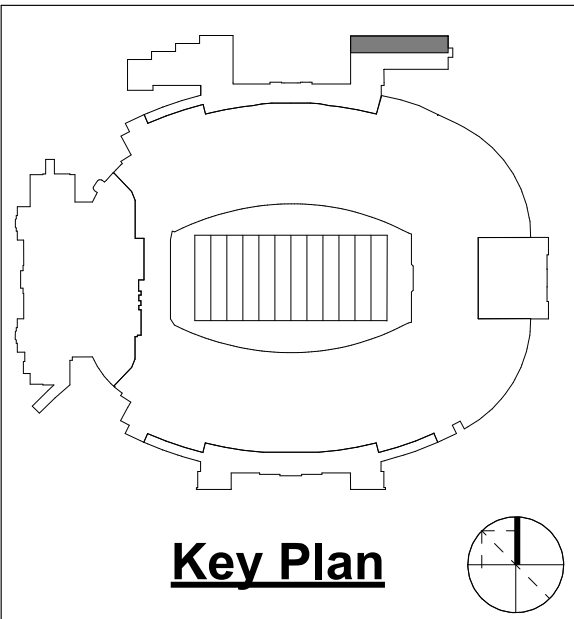

SEAL:

PROJECT TITLE:

Interior Renovation for
FSU UCA Suite 1500
FSU Project No. 2400665
Tallahassee, Florida

JOB NO.: 23.153

DESIGNED: BD/ML

DRAWN: MP

CHECKED: BD/ML

THIS DRAWING AND ANY REPRODUCTIONS ARE THE PROPERTY AND COPYRIGHT OF BKI, INC. AND MAY NOT BE REPRODUCED, PUBLISHED, OR USED IN ANY MANNER WITHOUT WRITTEN PERMISSION OF THE ARCHITECT


REVISIONS:

DRAWING PHASE:
100% Construction Documents

DRAWING TITLE:
Demolition Plan

SHEET NO.:
AD1.0

DATE:
April 12, 2024

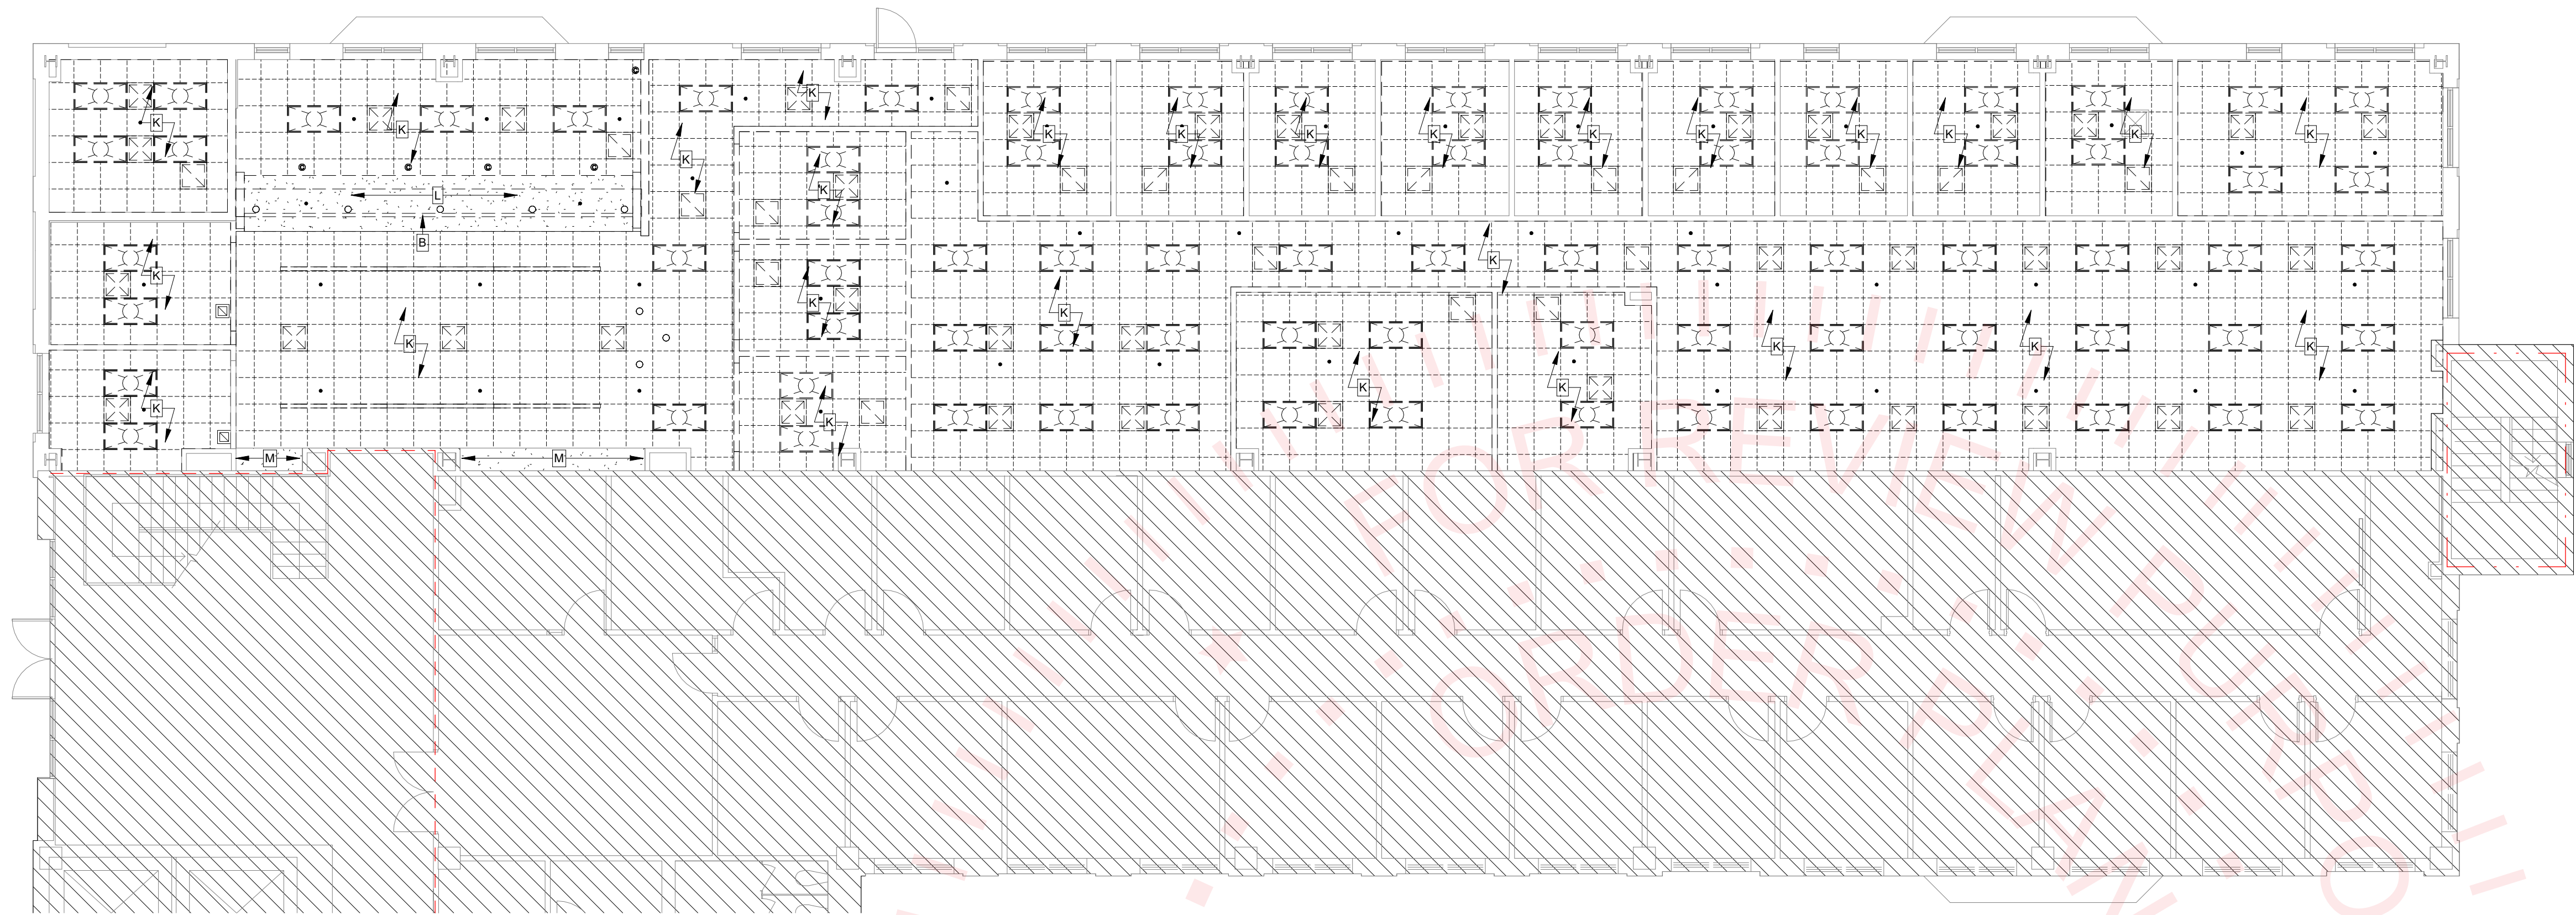

1 RCP - Demolition
1/8" = 1'-0"

General Demolition Notes:

1. ALL DASHED WALLS ARE TO BE REMOVED AS INDICATED PER LEGEND. DOORS WITHIN WALLS TO BE REMOVED SHALL BE REMOVED INCLUDING ALL ASSOCIATED TRIMS AND HARDWARE UNLESS SPECIFICALLY INDICATED TO BE SALVAGED.
2. "SAFE-OFF" M.P.E. SYSTEMS BY QUALIFIED MECHANICAL, PLUMBING, AND ELECTRICAL CONTRACTOR, AS REQUIRED.
3. ALL DAMAGE TO FINISH SURFACES AND ALL THROUGH-SLAB OR WALL PENETRATIONS THAT REMAIN FOLLOWING THE DEMOLITION OF EXISTING WALLS SHALL BE NOTED BY CONTRACTOR FOR REPAIR AND SEALING DURING RENOVATION.
4. ALL DOORS AND HARDWARE ARE TO REMAIN IN PLACE AND PROTECTED UNLESS OTHERWISE INDICATED.
5. REMOVE MISCELLANEOUS WALL-MOUNTED ITEMS WITHIN THE WORK AREA, INCLUDING TACK BOARDS, WHITE BOARDS, CLOCKS. COORDINATE STORAGE AND REINSTALLATION W/ OWNER, UNLESS OTHERWISE NOTED.
6. EXISTING ROLLER SHADES ON WINDOWS TO REMAIN. PROTECT AS NEEDED DURING CONSTRUCTION.

Demolition RCP Legend:


- EXISTING WALLS
- EXISTING ELEMENTS
- WALLS TO BE DEMOLISHED
- ELEMENTS TO BE DEMOLISHED
- 1-HR FIRE RATED WALL
- 2-HR FIRE RATED WALL
- NOT IN CONTRACT

RCP Legend:

- GYPSUM BOARD
- 2x2 ACOUSTIC CEILING TILE

Demolition Keynotes:

- A REMOVE AND DISPOSE OF EXISTING VAULT DOOR.
- B REMOVE AND DISPOSE OF EXISTING ROLL-UP DOOR ABOVE CEILING.
- C REMOVE AND DISPOSE OF EXISTING FLOOR FINISH & WALL BASE TO EXTENTS SHOWN. PREPARE SUBSTRATE FOR NEW FINISH INCLUDING FLOOR TOPPING AND PATCHING.
- D REMOVE AND DISPOSE OF ALL EXISTING MILLWORK / CASEWORK / BASE CABINETS.
- E REMOVE AND DISPOSE OF ALL CUBICLES.
- F REMOVE EXISTING CARD SWIPE. SALVAGE FOR POTENTIAL RELOCATION. COORDINATE WITH OWNER.
- G DOOR AND DOOR HARDWARE TO REMAIN. PROTECT DURING CONSTRUCTION.
- H DEMOLISH OPENING IN EXISTING WALL TO ACCOMMODATE NEW DOOR. COORDINATE EXTENTS OF DEMOLITION WITH NEW WORK.
- I REMOVE AND DISPOSE OF EXISTING HM DOOR ASSEMBLY INCLUDING SIDE LITE WHERE APPLICABLE.
- J REMOVE AND DISPOSE OF EXISTING CHAIR RAIL ON WALLS. REPAIR WALLS AS NEEDED.
- K REMOVE CEILING GRID, LIGHTS, REGISTERS AND ANY ADDITIONAL CEILING MOUNTED DEVICES - SEE MEP DRAWINGS.
- L REMOVE AND DISPOSE OF EXISTING GYPSUM CEILING IN ITS ENTIRETY.
- M EXISTING GYPSUM CEILINGS TO REMAIN
- N EXISTING ELECTRICAL PANELS TO REMAIN.
- O EXISTING DROPBOX TO REMAIN OPERATIONAL FOR COLLECTIONS ONE TIME A DAY DURING CONSTRUCTION. COORDINATE WITH OWNER.
- P EXISTING FIRE EXTINGUISHER CABINET TO REMAIN. PROTECT AS NEEDED DURING CONSTRUCTION.

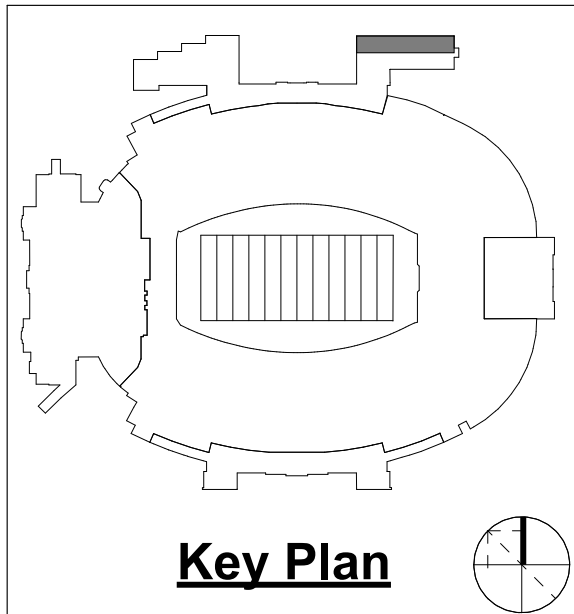

SEAL:

PROJECT TITLE:

**Interior Renovation for
FSU UCA Suite 1500
FSU Project No. 2400665
Tallahassee, Florida**

JOB NO.: 23.153

DESIGNED: BD/ML

DRAWN: JH/MP/MB

CHECKED: BD/ML

THIS DRAWING AND ANY REPRODUCTIONS ARE THE PROPERTY AND COPYRIGHT OF BKI, INC. AND MAY NOT BE REPRODUCED, PUBLISHED, OR USED IN ANY MANNER WITHOUT WRITTEN PERMISSION OF THE ARCHITECT

REVISIONS:

DRAWING PHASE:
100% Construction Documents

DRAWING TITLE:


Demolition RCP

SHEET NO.:


AD1.1

DATE:

April 12, 2024

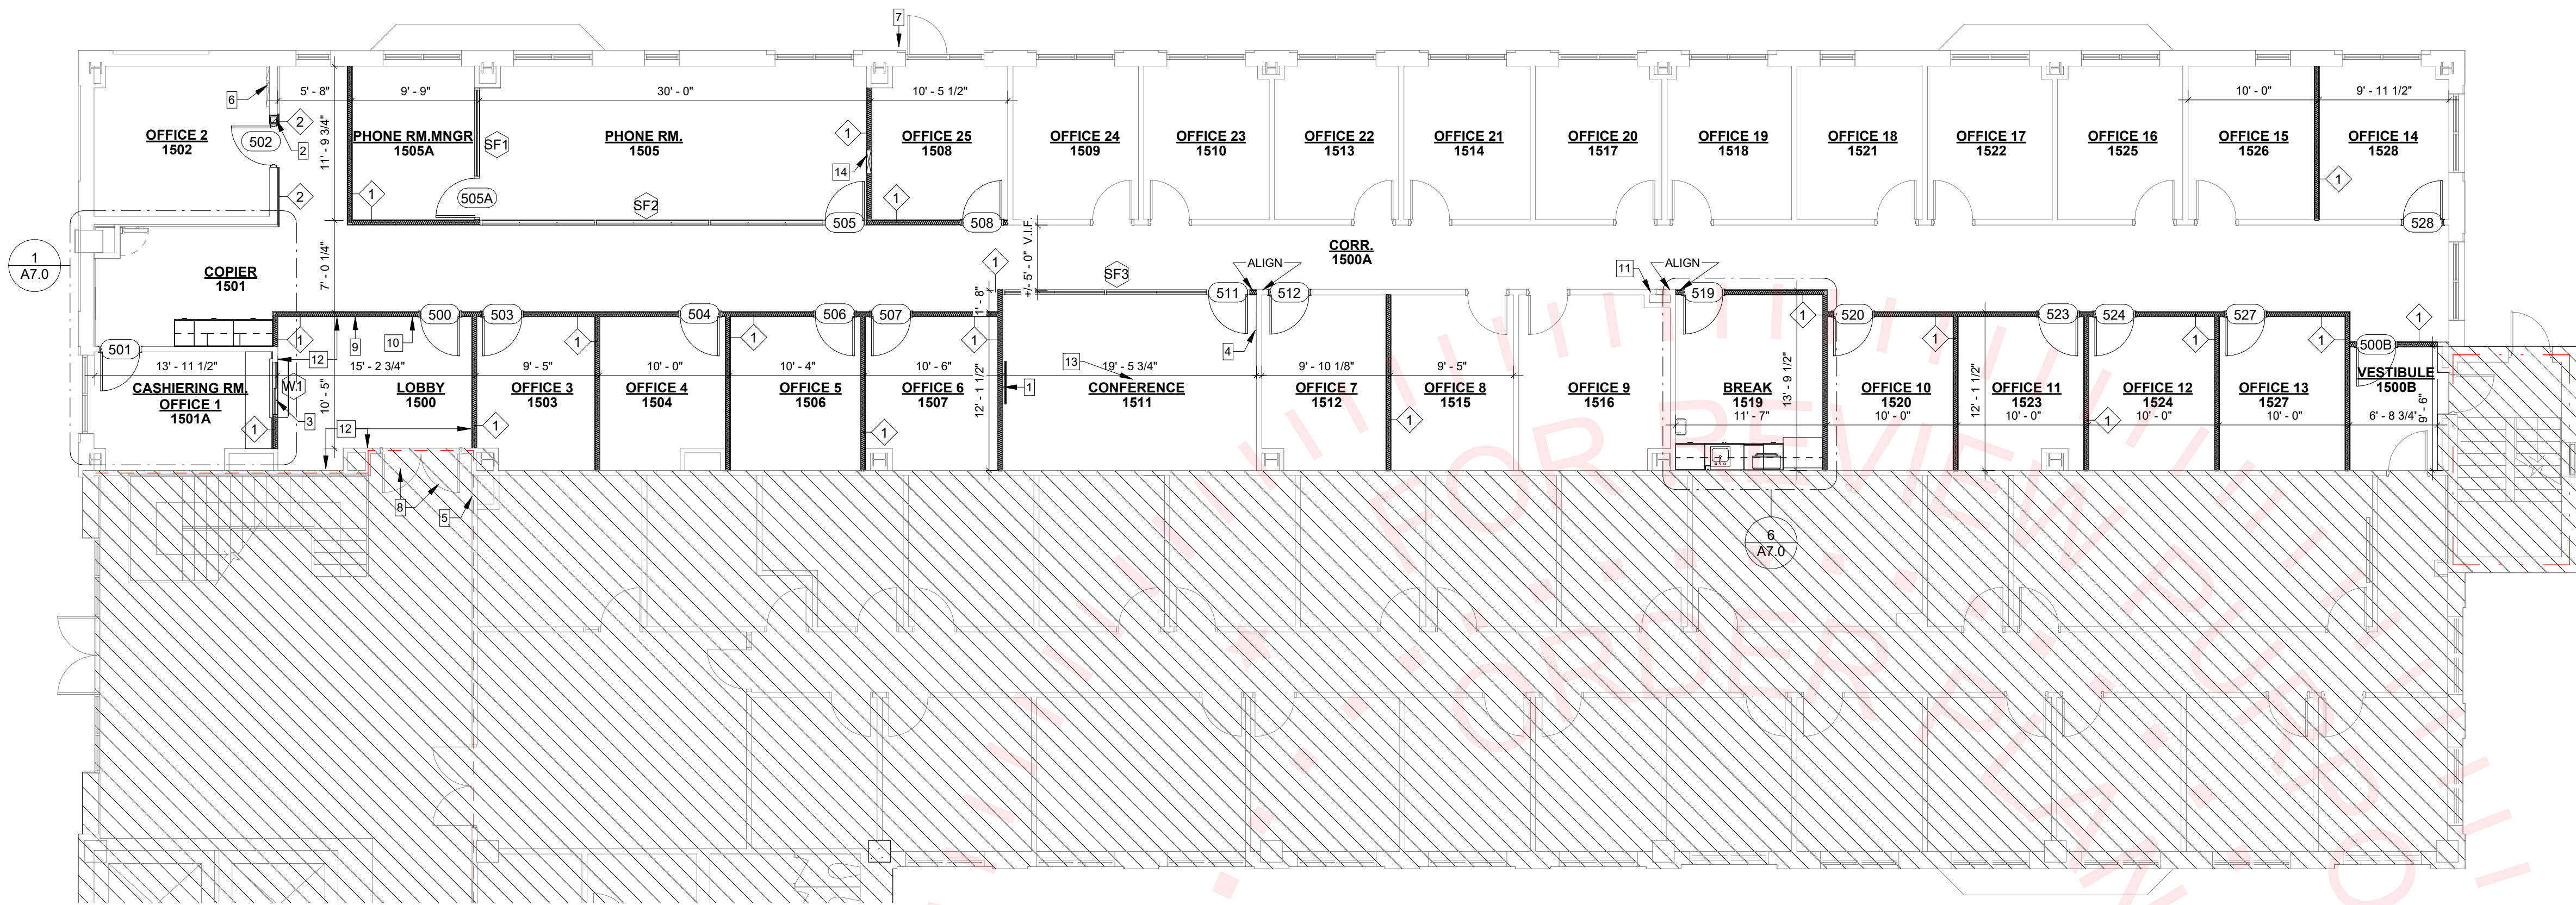


1 Floor Plan - New
1/8" = 1'-0"

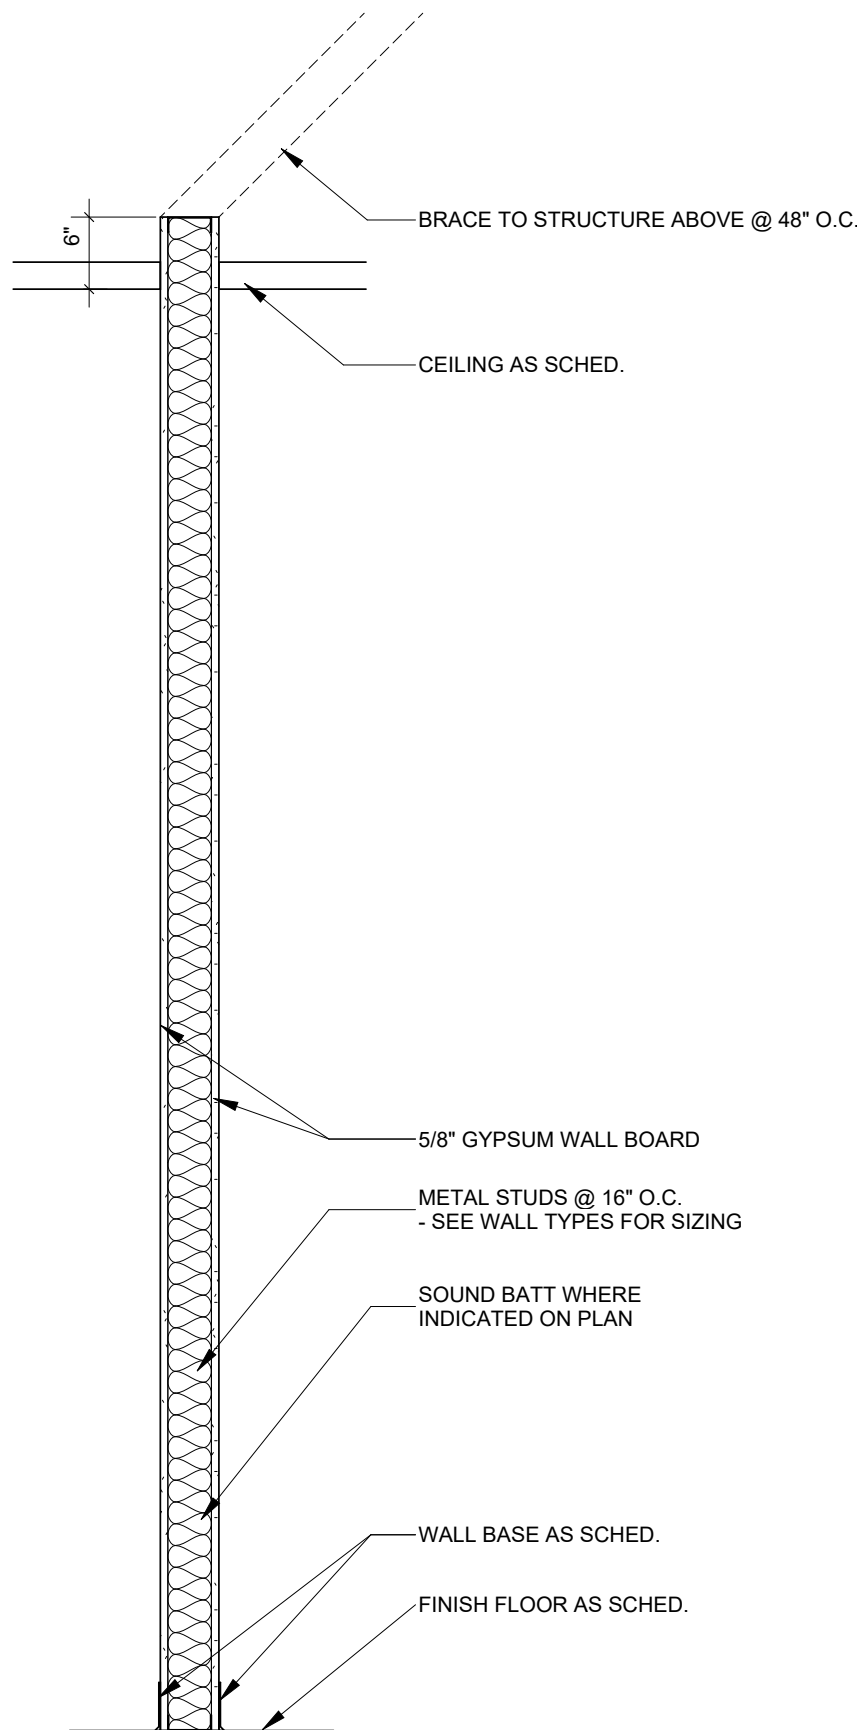


2 Typical Wall Section
3/4" = 1'-0"

Wall Types:

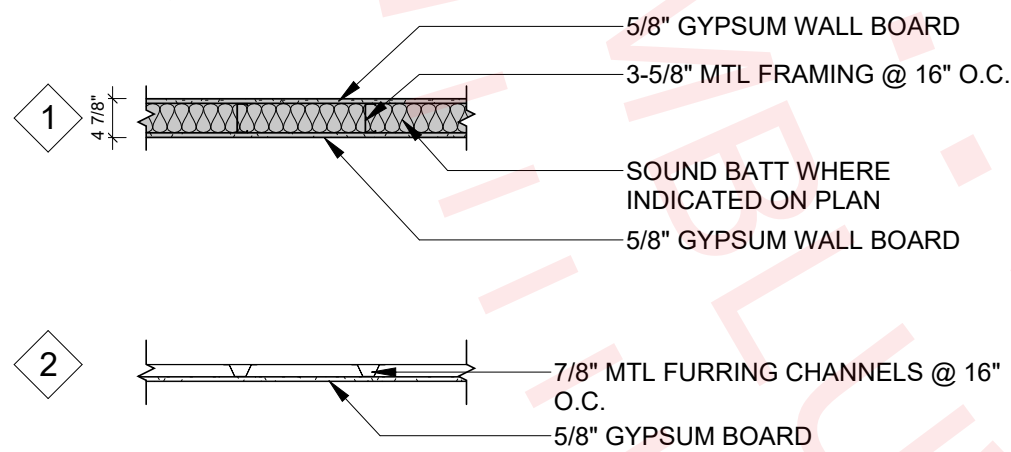

Partition Notes:


DEFAULT PARTITION HEIGHT: EXTEND 6" ABOVE CEILING GRID

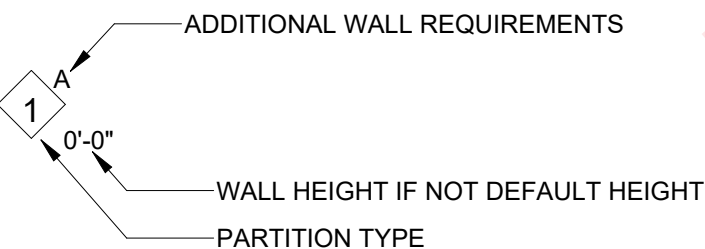

Floor Plan General Notes:


1. ALL DIMENSIONS FOR NEW PARTITIONS ARE TO FACE OF STUD. DIMENSIONS TO EXISTING WALLS ARE TO FACE OF FINISH SURFACE.
2. ALL DOOR OPENINGS TO BE LOCATED 6" FROM FACE OF STUD OF ADJACENT WALL ON HINGE SIDE UNLESS OTHERWISE NOTED. SEE DOOR SCHEDULE COMMENTS AND PLAN DIMENSIONS.
3. FIRE EXTINGUISHERS SHALL BE MOUNTED BETWEEN 41" MIN. AND 48" MAX. ABOVE FINISH FLOOR. PORTABLE FIRE EXTINGUISHERS SHALL BEAR THE LABEL OF AN APPROVED AGENCY, BE AN APPROVED TYPE, AND BE INSTALLED IN A LOCATION VISIBLE AND ACCESSIBLE TO THE OCCUPANTS. VERIFY LOCATION IN FIELD WITH FIRE MARSHALL.
4. ANY PENETRATIONS THROUGH AN EXISTING FIRE RATED ASSEMBLY, EITHER PRIOR TO CONSTRUCTION ACTIVITIES, OR AS A RESULT OF CONSTRUCTION SHALL BE SEALED WITH APPROPRIATE U.L. RATED ASSEMBLY.
5. PROVIDE PLYWOOD BLOCKING BEHIND GYP. BOARD TO SUPPORT EQUIPMENT AND/OR MISC. ITEMS INSTALLED (MILLWORK, TOILET PAPER HOLDERS, GRAB BARS, MIRRORS, KITCHEN SHELVING ETC.).
6. CONTRACTOR TO COORDINATE DELIVERY OF ALL OWNER SUPPLIED ITEMS.
7. CONTRACTOR TO SUBMIT SHOP DRAWINGS FOR ALL MILLWORK.
8. THE DESIGN AND CONSTRUCTION OF ALL NON-LOAD BEARING INTERIOR LIGHT GAUGE METAL FRAMING SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR. AT A MINIMUM, THIS FRAMING SHALL BE CONSTRUCTED OF 20 GAUGE (30 MIL - 33 KSI) OR 20 GAUGE EQ (18 MIL - 70 KSI) METAL STUDS AND TRACK. STUDS SHALL HAVE MAXIMUM SPACING OF 16" O.C., WITH DOUBLE STUDS AT DOOR AND WINDOW JAMBS. PROVIDE A MINIMUM OF TWO #10 SELF TAPPING SCREWS AT ALL CONNECTIONS.
9. AT ALL UTILITY TRENCHES IN EXISTING SLAB, ADD 6 MIL. VAPOR BARRIER AFTER SOIL HAS BEEN TREATED. PROVIDE #3 DOWELS @ 24" O.C. ON BOTH SIDES. DRILL HOLES 6" DEEP IN ADJACENT SLAB. DOWELS TO FIT TIGHT AND SECURE IN HOLES.
10. ALL SURFACE MOUNTED ELECTRICAL CONDUIT TO BE PAINTED TO MATCH THE WALL UNLESS OTHERWISE NOTED.

Floor Plan Legend:

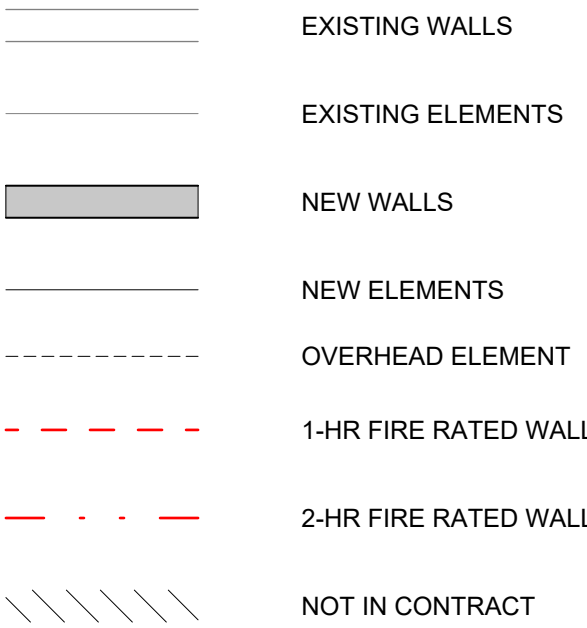

Floor Plan Keynotes:

1. PROVIDE BLOCKING FOR WALL MOUNTED LARGE SCREEN TV. OWNER SUPPLIED, AND INSTALLED - COORDINATE HEIGHT OF DATA/POWER RECEPTACLE W/ ELECTRICAL DWG.
2. INFILL OPENING WITH 8" CMU BLOCK AS NEEDED FOR NEW DOOR FRAME INSTALLATION.
3. INSTALL SLIDING TRANSACTION WINDOW. MANUFACTURER: C.R. LAURENCE. MODEL: SLIDING DAISY PASS-THRU W/ KEY LOCK. MODEL NO: D1041. FINISH: SATIN ANODIZED.
4. RECESSED ELECTRICAL PANELS TO REMAIN
5. INSTALL NEW ADA OPERATOR. BASIS OF DESIGN: OPERATOR - BESAM SW100, PUSH PLATES - BEA LPR36. - COORDINATE WITH ELECTRICAL.
6. CLEAN AND PAINT EXISTING CONDUIT / PANEL BOXES TO MATCH WALL. FIRE ALARM BOXES TO REMAIN RED AS REQ. PER CODE.
7. REMOVE CARD SWIPE, PATCH / REPAIR WALL AND/OR USE BLANK PLATE OVER EXPOSED OPENING AS NEEDED. SAVE FOR POTENTIAL REUSE.
8. PROVIDE FSU SEAL VINYL GRAPHIC ON BOTH EXISTING ENTRY DOORS. FINAL GRAPHIC TO BE PROVIDED BY OWNER.
9. PROVIDE 4' X 8' PLYWOOD BLOCKING FOR SIGNAGE. WALL TO BE LEVEL 5 FINISH. - COORDINATE LOCATION W/ OWNER.
10. INSTALL CARD SWIPE. COORDINATE WITH OWNER IF REMOVED CARD SWIPE TO BE REUSED - COORDINATE WITH ELECTRICAL.
11. EXISTING FIRE EXTINGUISHER CABINET TO REMAIN.
12. INSTALL 1X4 FINISH GRADE POPULAR WOOD CHAIR RAIL @ 34" AFF. PAINTED TO MATCH WALL PAINT COLOR. CONFIRM INSTALL HEIGHT WITH SELECTED CHAIR HEIGHT.
13. ELECTRICAL / DATA FLOOR BOX LOCATION TO BE COORDINATED W/ OWNER AND SELECTED FURNITURE. - SEE ELECTRICAL DWG.
14. NEW ELECTRICAL PANEL - COORDINATE W/ ELECTRICAL DWG.

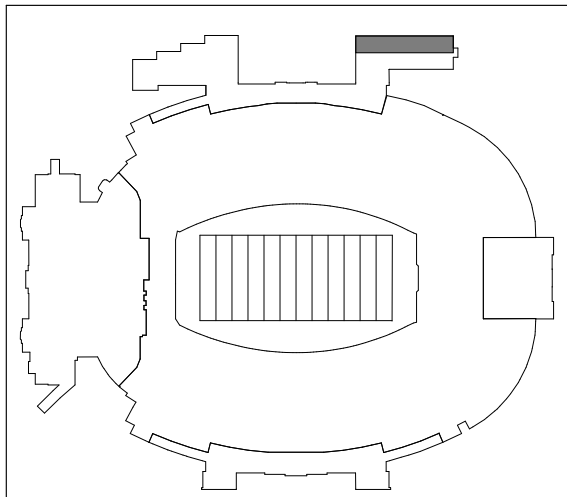

Key Plan

SEAL:

PROJECT TITLE:

Interior Renovation for
FSU UCA Suite 1500
FSU Project No. 2400665
Tallahassee, Florida

JOB NO.: 23.153

DESIGNED: BD/ML

DRAWN: MP

CHECKED: BD/ML

THIS DRAWING AND ANY REPRODUCTIONS ARE THE PROPERTY AND COPYRIGHT OF BKJ, INC. AND MAY NOT BE REPRODUCED, PUBLISHED, OR USED IN ANY MANNER WITHOUT WRITTEN PERMISSION OF THE ARCHITECT

REVISIONS:

DRAWING PHASE:
100% Construction Documents

DRAWING TITLE:


Floor Plan

SHEET NO.:


A1.0

DATE:


April 12, 2024

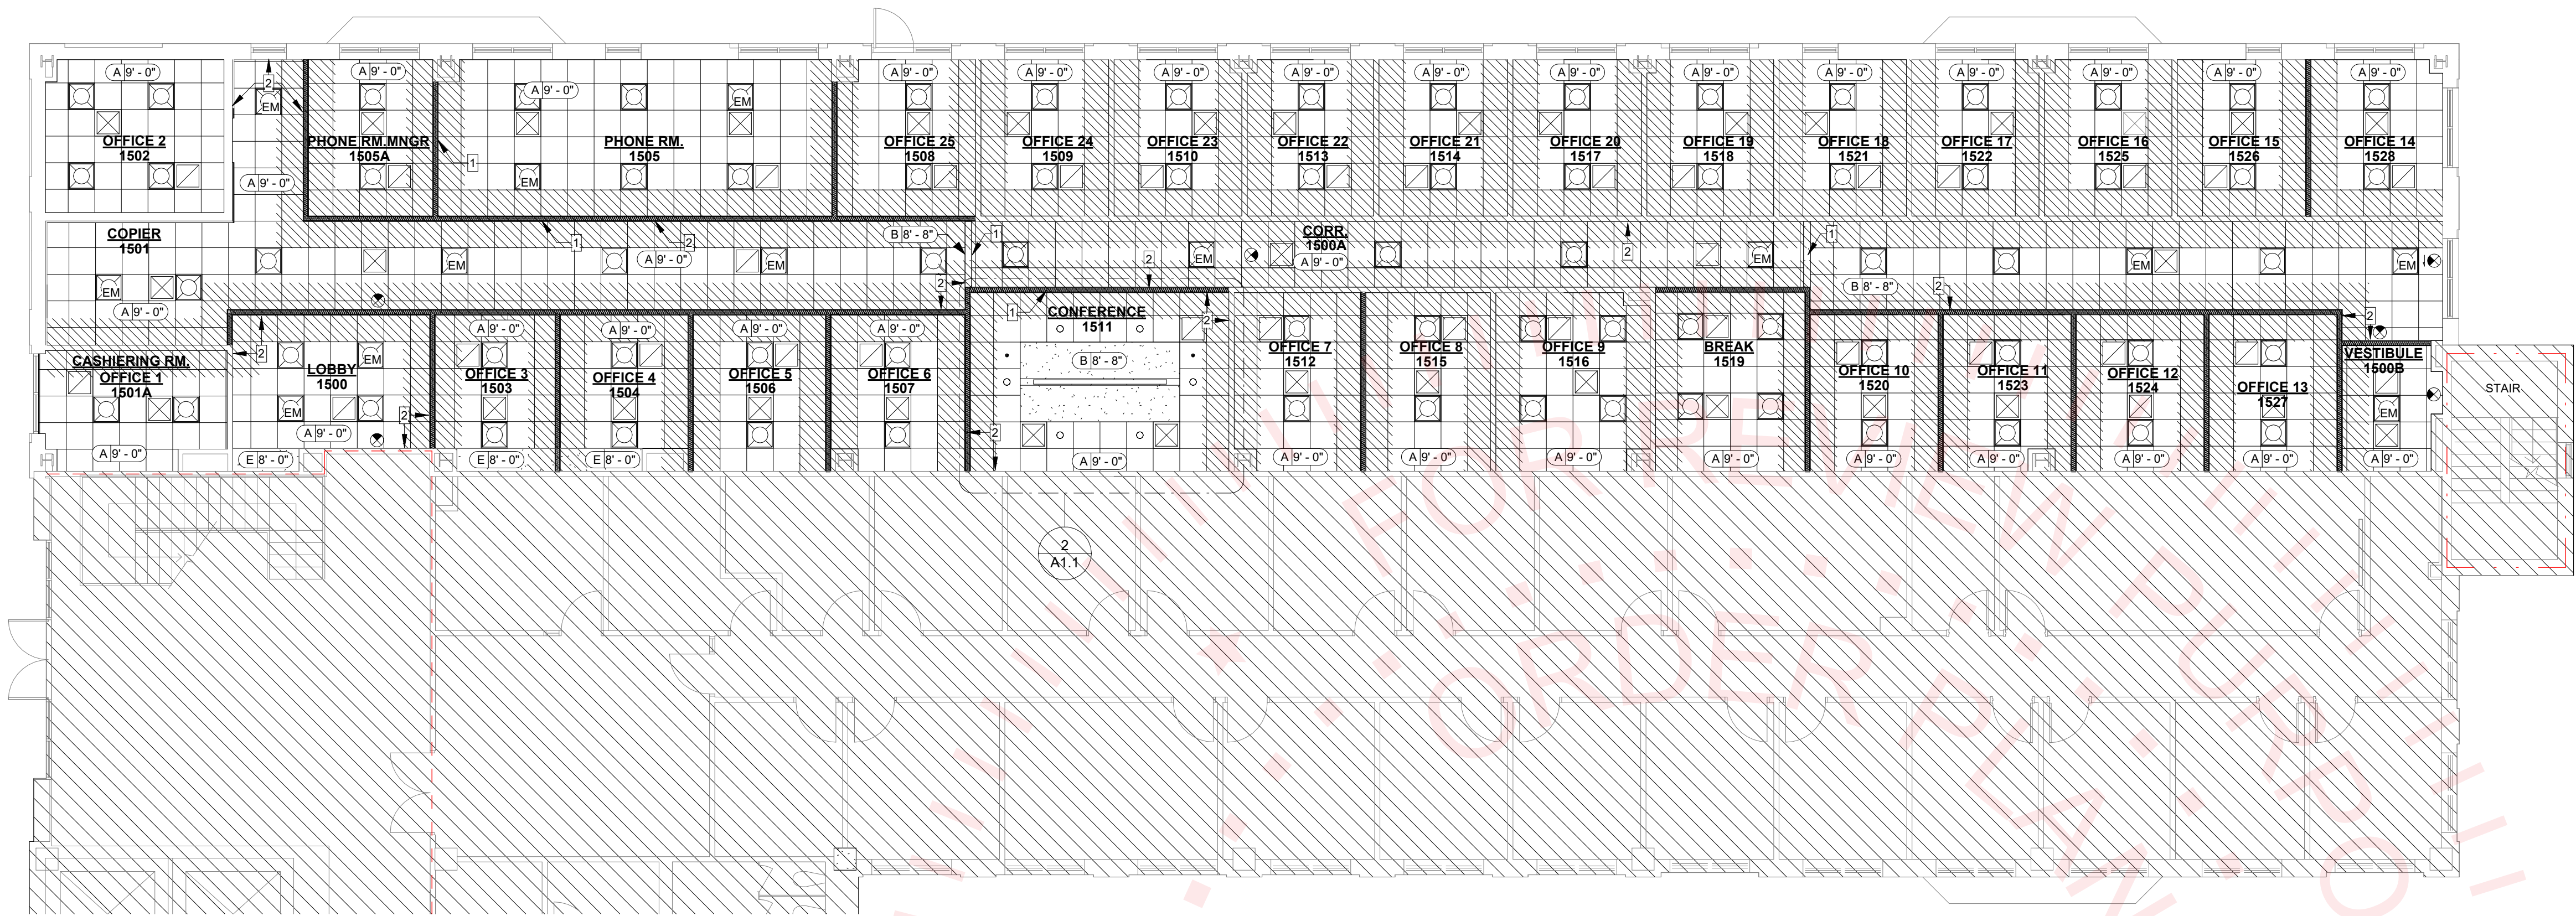


1 RCP - New
1/8" = 1'-0"

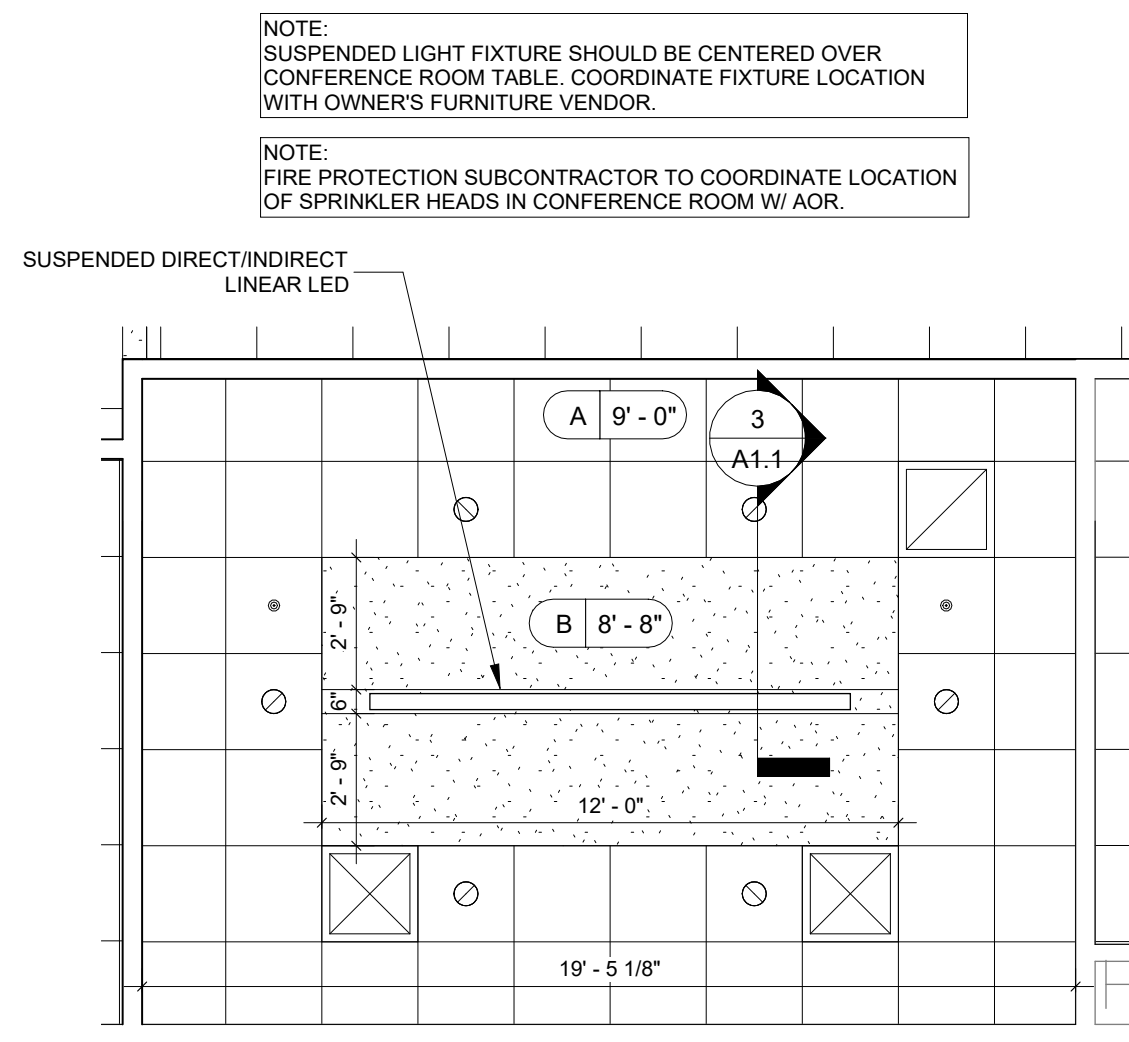

2 Conference Room Enlarged RCP
1/4" = 1'-0"

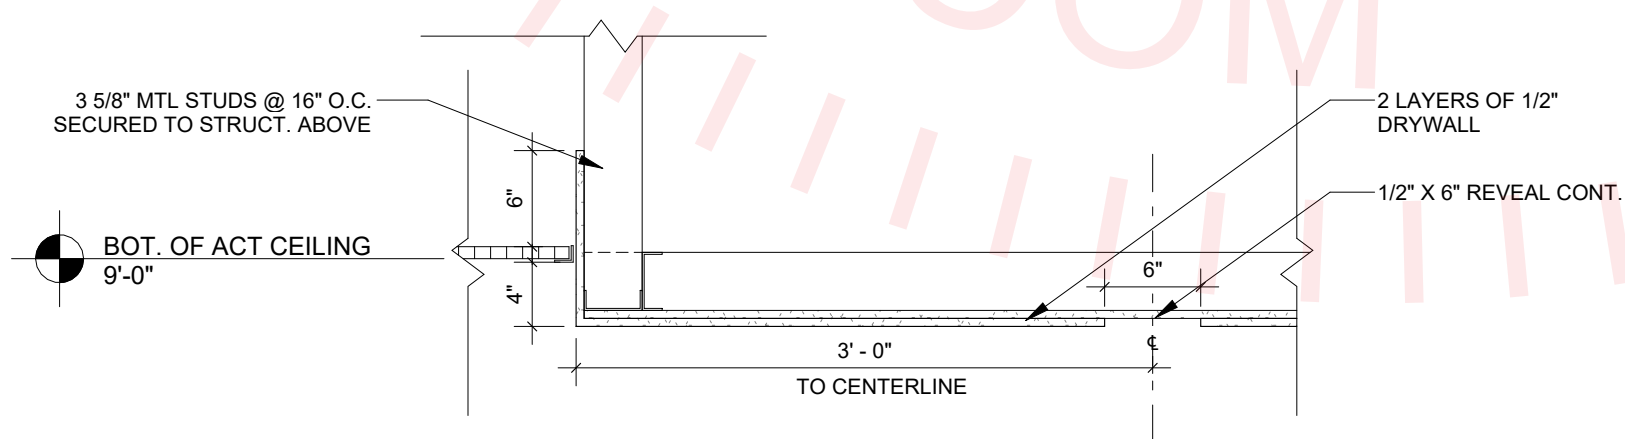

3 Conference Drywall Ceiling
1" = 1'-0"

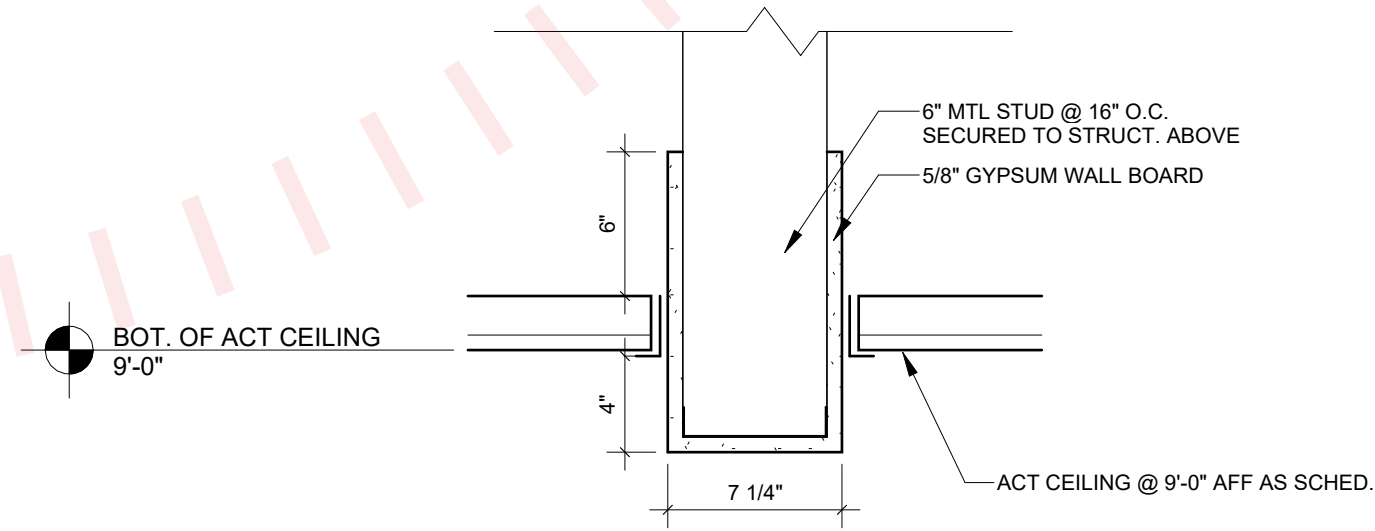

4 Standard Bulkhead @ Corridors
1 1/2" = 1'-0"

RCP General Notes:

- COORDINATE WITH ELECTRICAL PLAN FOR LOCATION OF FIXTURES AND SWITCHING. ANY DISCREPANCIES DISCOVERED IN THE DRAWINGS SHALL BE BROUGHT TO THE ATTENTION OF THE ARCHITECT.
- COORDINATE WITH MECHANICAL PLAN FOR LOCATION OF DUCTWORK AND DIFFUSERS. ANY DISCREPANCIES DISCOVERED IN THE DRAWINGS SHALL BE BROUGHT TO THE ATTENTION OF THE ARCHITECT.

Ceiling Finish Legend:

- A 9'-0"
- CEILING HEIGHT
- CEILING FINISH
- A - ACOUSTICAL CEILING TILE
- B - GYPSUM BOARD CEILING
- E - EXISTING TO REMAIN

RCP Legend:


- GYPSUM BOARD
- 2x2 ACOUSTIC CEILING TILE

Lighting & HVAC Legend:

- 2'x2' RECESSED LIGHT FIXTURE
- 2'x2' RECESSED EMERGENCY LIGHT FIXTURE
- 2" LED RECESSED CAN LIGHT
- 4"WX10'L SUSPENDED LED FIXTURE
- SUPPLY DIFFUSER
- RETURN GRILLE
- SPRINKLER HEAD
- EXIT LIGHT
- UNFACED BATTS INSULATION
- 24" STRIP WHERE SHOWN ON ONE SIDE OF WALL
- 48" STRIP WHERE SHOWN ON BOTH SIDES OF WALL

RCP Keynotes:

- STANDARD BULKHEAD DETAIL ABOVE STOREFRONT AND IN CORRIDORS
- PROVIDE ARMSTRONG SHADOW EDGE MOLDING IN CORRIDORS, LOBBY AND CONFERENCE ROOM.

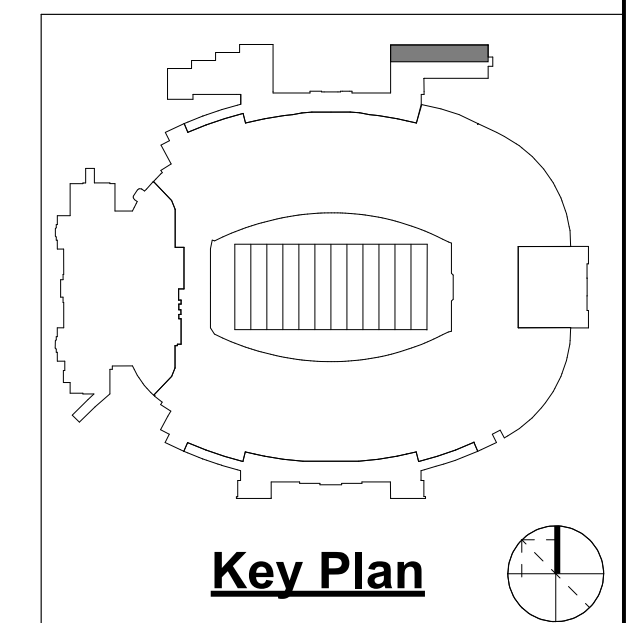

SEAL:

PROJECT TITLE:

**Interior Renovation for
FSU UCA Suite 1500
FSU Project No. 2400665
Tallahassee, Florida**

JOB NO.: 23.153

DESIGNED: BD/ML

DRAWN: MP

CHECKED: BD/ML

THIS DRAWING AND ANY REPRODUCTIONS
ARE THE PROPERTY AND COPYRIGHT
OF BKJ, INC. AND MAY NOT BE
REPRODUCED, PUBLISHED, OR USED IN ANY
MANNER WITHOUT WRITTEN
PERMISSION OF THE ARCHITECT

REVISIONS:

DRAWING PHASE:
**100% Construction
Documents**

DRAWING TITLE:

Reflected Ceiling Plan

SHEET NO.:

A1.1

DATE:

April 12, 2024

Finish Schedule										
Number	Name	Base Finish	Floor Finish	North Wall	East Wall	South Wall	West Wall	Ceiling Finish	Ceiling Height	Notes
1500	LOBBY	WB1	LVT1	PT4	PT1	PT1	PT1	C1	9'-0" / 8'-0"	1
1500A	CORR.	WB1	CT1	PT1	PT1	PT1	PT1	C1	9'-0"	
1500B	VESTIBULE	WB1	CT2	PT1	PT1	PT1	PT1	C1	9'-0"	
1501	COPIER	WB1	LVT1	PT1	PT1	PT1	PT1	C1	9'-0"	
1501A	CASHIERING RM. OFFICE 1	WB1	CT1	PT1	PT1	PT1	PT1	C1	9'-0"	
1502	OFFICE 2	WB1	CT1	PT1	PT1	PT1	PT1	C1	9'-0"	
1503	OFFICE 3	WB1	CT1	PT1	PT1	PT1	PT1	C1	9'-0" / 8'-0"	
1504	OFFICE 4	WB1	CT1	PT1	PT1	PT1	PT1	C1	9'-0" / 8'-0"	
1505	PHONE RM.	WB1	CT1	PT1	PT1	PT1	PT1	C1	9'-0"	
1505A	PHONE RM.MNGR	WB1	CT1	PT1	PT1	PT1	PT1	C1	9'-0"	
1506	OFFICE 5	WB1	CT1	PT1	PT1	PT1	PT1	C1	9'-0"	
1507	OFFICE 6	WB1	CT1	PT1	PT1	PT1	PT1	C1	9'-0"	
1508	OFFICE 25	WB1	CT1	PT1	PT1	PT1	PT1	C1	9'-0"	
1509	OFFICE 24	WB1	CT1	PT1	PT1	PT1	PT1	C1	9'-0"	
1510	OFFICE 23	WB1	CT1	PT1	PT1	PT1	PT1	C1	9'-0"	
1511	CONFERENCE	WB1	CT1	PT1	PT1	PT1	PT4	C1	9'-0"	
1512	OFFICE 7	WB1	CT1	PT1	PT1	PT1	PT1	C1	9'-0"	
1513	OFFICE 22	WB1	CT1	PT1	PT1	PT1	PT1	C1	9'-0"	
1514	OFFICE 21	WB1	CT1	PT1	PT1	PT1	PT1	C1	9'-0"	
1515	OFFICE 8	WB1	CT1	PT1	PT1	PT1	PT1	C1	9'-0"	
1516	OFFICE 9	WB1	CT1	PT1	PT1	PT1	PT1	C1	9'-0"	
1517	OFFICE 20	WB1	CT1	PT1	PT1	PT1	PT1	C1	9'-0"	
1518	OFFICE 19	WB1	CT1	PT1	PT1	PT1	PT1	C1	9'-0"	
1519	BREAK	WB1	LVT1	PT1	PT1	PT1	PT1	C1	9'-0"	
1520	OFFICE 10	WB1	CT1	PT1	PT1	PT1	PT1	C1	9'-0"	
1521	OFFICE 18	WB1	CT1	PT1	PT1	PT1	PT1	C1	9'-0"	
1522	OFFICE 17	WB1	CT1	PT1	PT1	PT1	PT1	C1	9'-0"	
1523	OFFICE 11	WB1	CT1	PT1	PT1	PT1	PT1	C1	9'-0"	
1524	OFFICE 12	WB1	CT1	PT1	PT1	PT1	PT1	C1	9'-0"	
1525	OFFICE 16	WB1	CT1	PT1	PT1	PT1	PT1	C1	9'-0"	
1526	OFFICE 15	WB1	CT1	PT1	PT1	PT1	PT1	C1	9'-0"	
1527	OFFICE 13	WB1	CT1	PT1	PT1	PT1	PT1	C1	9'-0"	
1528	OFFICE 14	WB1	CT1	PT1	PT1	PT1	PT1	C1	9'-0"	

Interior Finish Schedule Legend:

WALL BASE:
WB1- TARKETT, TDC 4.25", COLOR 63 - BURNT UMBER

PAINT:
PT1- GYPSUM WALLS - SW 7043 WORDLY GRAY
PT2- CEILINGS - SW 7007 CEILING BRIGHT WHITE
PT3- DOORS AND FRAMES - SW 7674 PEPPERCOORN
PT4- WALL ACCENT - SW 7584 RED THEATRE

STAIN:
ST1- COLOR SELECTED FROM DOOR MANUFACTURER'S FULL RANGE OF PREFINISHED STAINS, MATCH EXISTING.

CARPET TILE:
CT1- MANNINGTON COMMERCIAL, TRANSMIT EXCHANGE 2, COLOR - HAPTICS (13143), 24" X24"
CT2- MANNINGTON COMMERCIAL, ENTRYWAY SYSTEMS, FRIXTION, INERTIA, COLOR- KINETIC (11360), 18" X 36"

LUXURY VINYL TILE:
LVT1- MANNINGTON COMMERCIAL, UPWARD 20 , FROSTED OAK (UPW20-5020), 6" X 36"

PLASTIC LAMINATE:
PL1- CABINETS - WILSONART, TRACELESS - SMOKY VELVET ELM (15604-31)


SOLID SURFACE:
SS1-COUNTER TOP - WILSONART, YUKON RIVERSTONE (9196RS)

FLOORING TRANSITION STRIP:
FTS1- TARKETT - ME003 - METALEDGE TROIS - IRONSTONE (00178)

CEILING:
C1 - 24"X24" ARMSTRONG FINE FISSURED - ANGLED TENGULAR (1756)
C2 - 1/2" GYPSUM BOARD CEILING - PAINTED, PT2

Interior Finish Schedule Notes:

1. INSTALL 1X4 FINISH GRADE POPULAR WOOD CHAIR RAIL @ 34" AFF. PAINTED TO MATCH WALL PAINT COLOR. CONFIRM HEIGHT OF CHAIR RAIL WITH OWNER.
2. CARPET TO BE INSTALLED HORIZONTAL BRICK ASHLAR ORIENTED PERPENDICULAR TO THE NORTH AND SOUTH PERIMTER WALLS. CARPET INSTALLATION TO MATCH INSTALLATION IN UCA SUITE 5600A. CM TO CONTACT AOR IF CLARIFICATION IS NEEDED.

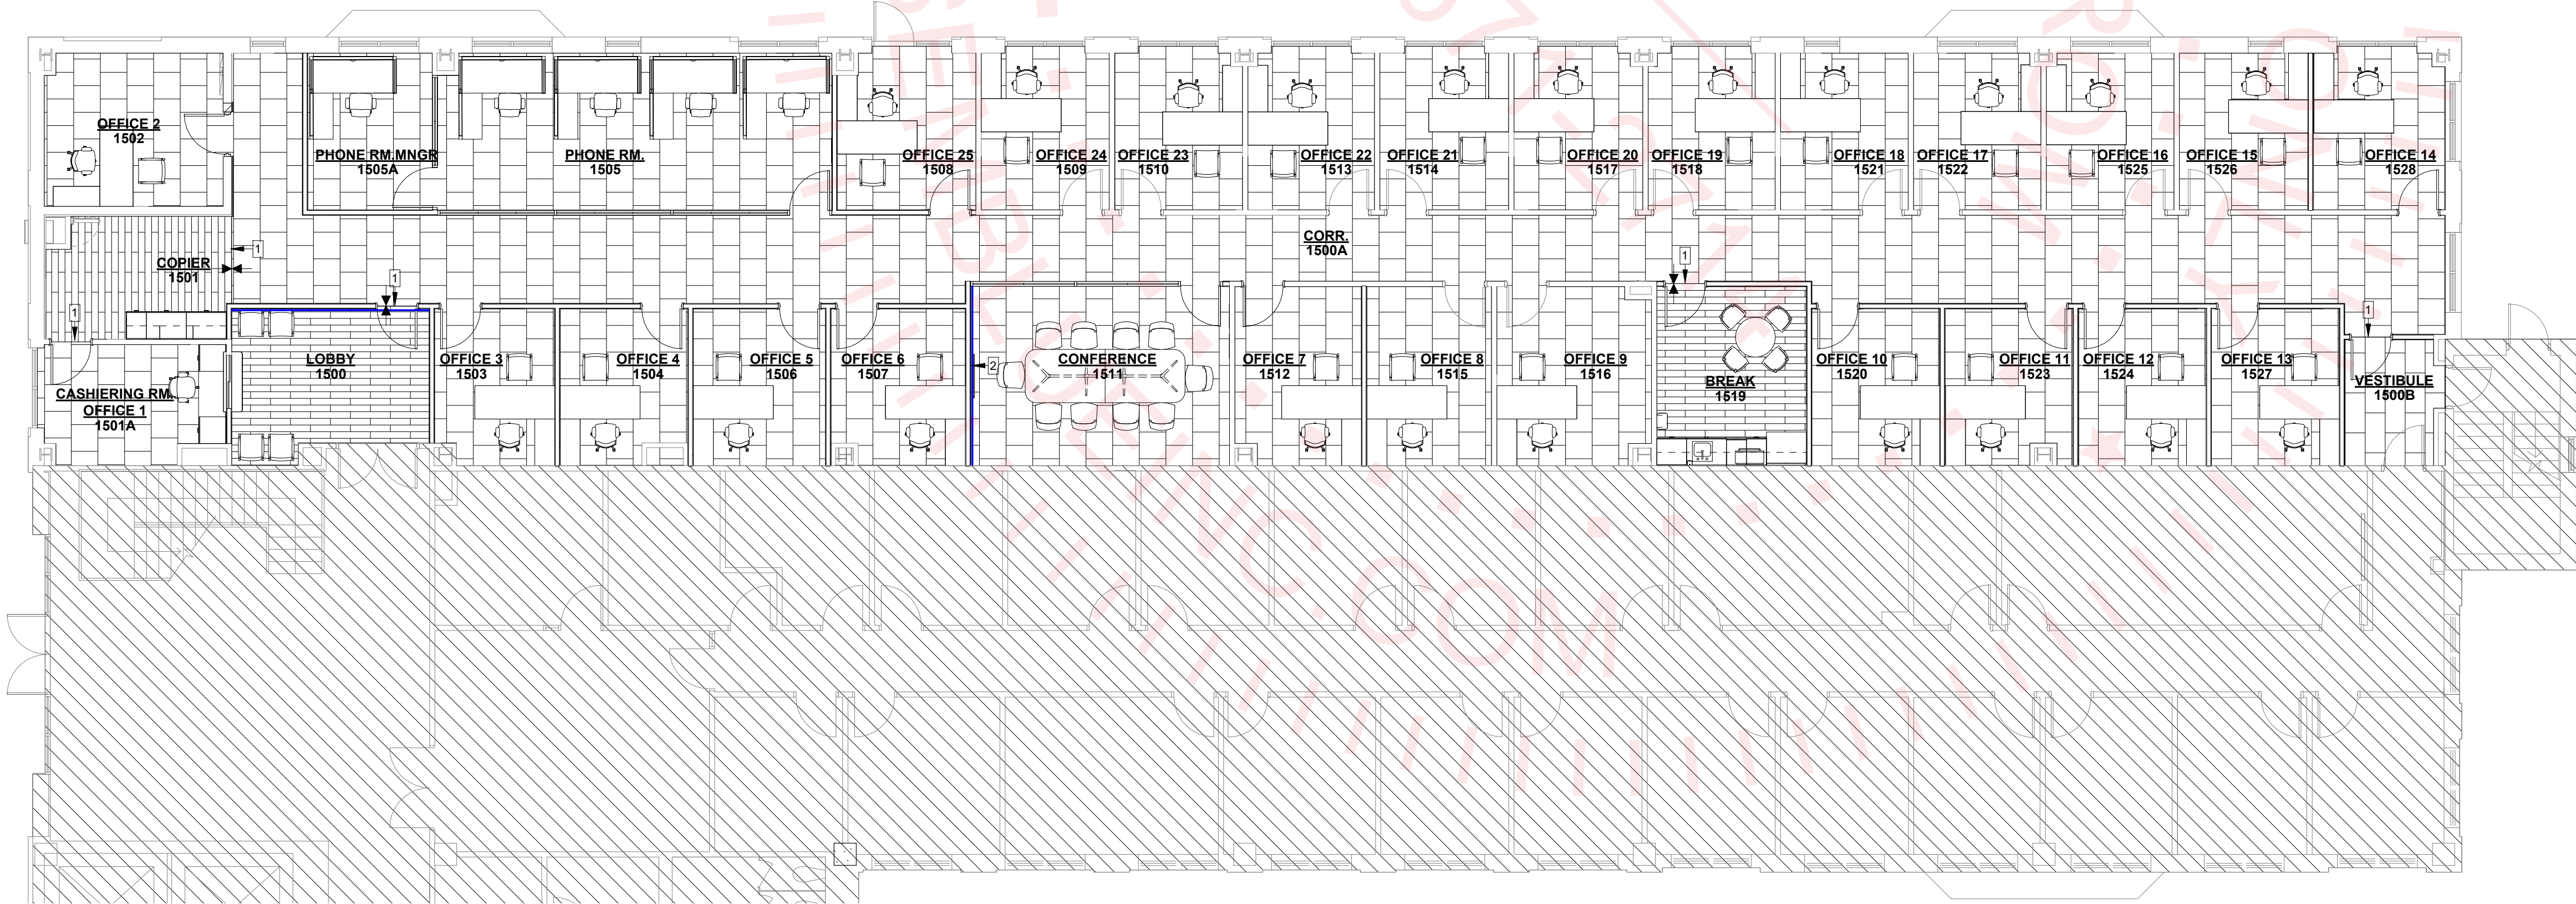


Finish Plan Keynotes:

- 1 PROVIDE FLOORING TRANSITION STRIP - FTS1 METAL EDGE

Finish Plan Legend:

- 6" x 36" VT
- 24" x 24" CARPET TILE
- 18" x 36" ENTRYWAY CARPET TILE
- ACCENT WALL PAINT - PT4
- TRANSITION BETWEEN MATERIALS



SEAL:

PROJECT TITLE:

**Interior Renovation for
FSU UCA Suite 1500
FSU Project No. 2400665
Tallahassee, Florida**

JOB NO.: 23.153

DESIGNED: BD/ML

DRAWN: MP

CHECKED: BD/ML

THIS DRAWING AND ANY REPRODUCTIONS ARE THE PROPERTY AND COPYRIGHT OF BKJ, INC. AND MAY NOT BE REPRODUCED, PUBLISHED, OR USED IN ANY MANNER WITHOUT WRITTEN PERMISSION OF THE ARCHITECT

REVISIONS:

DRAWING PHASE:
100% Construction Documents

DRAWING TITLE:

Finish Schedules & Plan

SHEET NO.:

A6.0

DATE:

April 12, 2024

Door Schedule																	
Numb er	Elevation	Width	Height	Thickness	Material	Finish	Frame Elevation	Head	Jamb	Thr.	Frame Material	Frame Finish	Hardware Set	Rm. Signage	Fire Rating	Notes	
500	B	3' - 0"	7' - 0"	1 3/4"	WD	ST1	HM1	1/A6.2	2/A6.2	15/A6.2	HM	PT3	HW-3B	-		2	
500B	A	3' - 0"	7' - 0"	1 3/4"	WD	ST1	HM1	1/A6.2	2/A6.2	15/A6.2	HM	PT3	HW-3A	-			
501	B	3' - 0"	7' - 0"	1 3/4"	WD	ST1	HM1	1/A6.2	2/A6.2	15/A6.2	HM	PT3	HW-2	TYPE 'B'			
502	B	3' - 0"	7' - 0"	1 3/4"	WD	ST1	HM1	3/A6.2	4/A6.2	14/A6.2	HM	PT3	HW-2	TYPE 'B'		3	
503	B	3' - 0"	7' - 0"	1 3/4"	WD	ST1	HM1	1/A6.2	2/A6.2	14/A6.2	HM	PT3	HW-2	TYPE 'B'			
504	B	3' - 0"	7' - 0"	1 3/4"	WD	ST1	HM1	1/A6.2	2/A6.2	14/A6.2	HM	PT3	HW-2	TYPE 'B'			
505	C	3' - 0"	7' - 0"	1 3/4"	AL	FA	SF2	5/A6.2	7/A6.2 - 8/A6.2	16/A6.2	AL	FA	HW-4	TYPE 'A'		1	
505A	C	3' - 0"	7' - 0"	1 3/4"	AL	FA	SF1	5/A6.2	7/A6.2 - 8/A6.2	16/A6.2	AL	FA	HW-2	TYPE 'A'		1	
506	B	3' - 0"	7' - 0"	1 3/4"	WD	ST1	HM1	1/A6.2	2/A6.2	14/A6.2	HM	PT3	HW-2	TYPE 'B'			
507	B	3' - 0"	7' - 0"	1 3/4"	WD	ST1	HM1	1/A6.2	2/A6.2	14/A6.2	HM	PT3	HW-2	TYPE 'B'			
508	B	3' - 0"	7' - 0"	1 3/4"	WD	ST1	HM1	1/A6.2	2/A6.2	14/A6.2	HM	PT3	HW-2	TYPE 'B'			
511	C	3' - 0"	7' - 0"	1 3/4"	AL	FA	SF3	5/A6.2	7/A6.2-8/A6.2	16/A6.2	AL	FA	HW-1B	TYPE 'A'		1	
512	B	3' - 0"	7' - 0"	1 3/4"	WD	ST1	HM1	1/A6.2	2/A6.2	14/A6.2	HM	PT3	HW-2	TYPE 'B'			
519	B	3' - 0"	7' - 0"	1 3/4"	WD	ST1	HM1	1/A6.2	2/A6.2	15/A6.2	HM	PT3	HW-1A	TYPE 'A'			
520	B	3' - 0"	7' - 0"	1 3/4"	WD	ST1	HM1	1/A6.2	2/A6.2	14/A6.2	HM	PT3	HW-2	TYPE 'B'			
523	B	3' - 0"	7' - 0"	1 3/4"	WD	ST1	HM1	1/A6.2	2/A6.2	14/A6.2	HM	PT3	HW-2	TYPE 'B'			
524	B	3' - 0"	7' - 0"	1 3/4"	WD	ST1	HM1	1/A6.2	2/A6.2	14/A6.2	HM	PT3	HW-2	TYPE 'B'			
527	B	3' - 0"	7' - 0"	1 3/4"	WD	ST1	HM1	1/A6.2	2/A6.2	14/A6.2	HM	PT3	HW-2	TYPE 'B'			
528	B	3' - 0"	7' - 0"	1 3/4"	WD	ST1	HM1	1/A6.2	2/A6.2	14/A6.2	HM	PT3	HW-2	TYPE 'B'			

Door Hardware Function Legend :

REFER TO WRITTEN SPECIFICATION FOR DOOR HARDWARE.

HW-1A : PASSAGE

HW-1B : STOREFRONT PASSAGE

HW-2: OFFICE

HW-3A: STOREROOM

HW-3B: STOREROOM W/ ELECTRIC STRIKE CARD SWIPE

HW-4 : STOREFRONT ENTRY

Door Schedule Notes:

1. PROVIDE BLANK BACKER PLATE ON BACK SIDE OF ROOM SIGNAGE ON GLASS STOREFRONT WALLS. MATCH SIGNAGE FIELD COLOR.
2. PROVIDE CARD SWIPE ON DOOR
3. FIELD VERIFY HEIGHT OF EXISTING OPENING. ADJUST HEIGHT OF NEW DOOR AS NEEDED FOR EXISTING OPENING.

Door Notes:


1. NEW WOOD DOORS TO MATCH EXISTING CONFIGURATION AND PREFINISHED STAIN.
2. VINYL GRAPHIC ON STOREFRONT - TBD
3. PROVIDE TYPE "B" SIGNAGE ON ALL EXISTING OFFICES 14 - 24 (NOT SHOWN ON SCHEDULE)

Glazing Legend:



- G1 1/4" CLEAR TEMPERED GLASS
G2 1/4" TEMPERED GLASS W/ VINYL FILM AS INDICATED
G3 3/8" CLEAR TEMPERED GLASS
G4 3/8" TEMPERED GLASS W/ VINYL FILM AS INDICATED

Door Legend:

- AL ALUMINUM
FA FACTORY
HM HOLLOW METAL
PL PLASTIC LAMINATE
PT PAINT
ST STAIN
S SIMILAR
WD WOOD

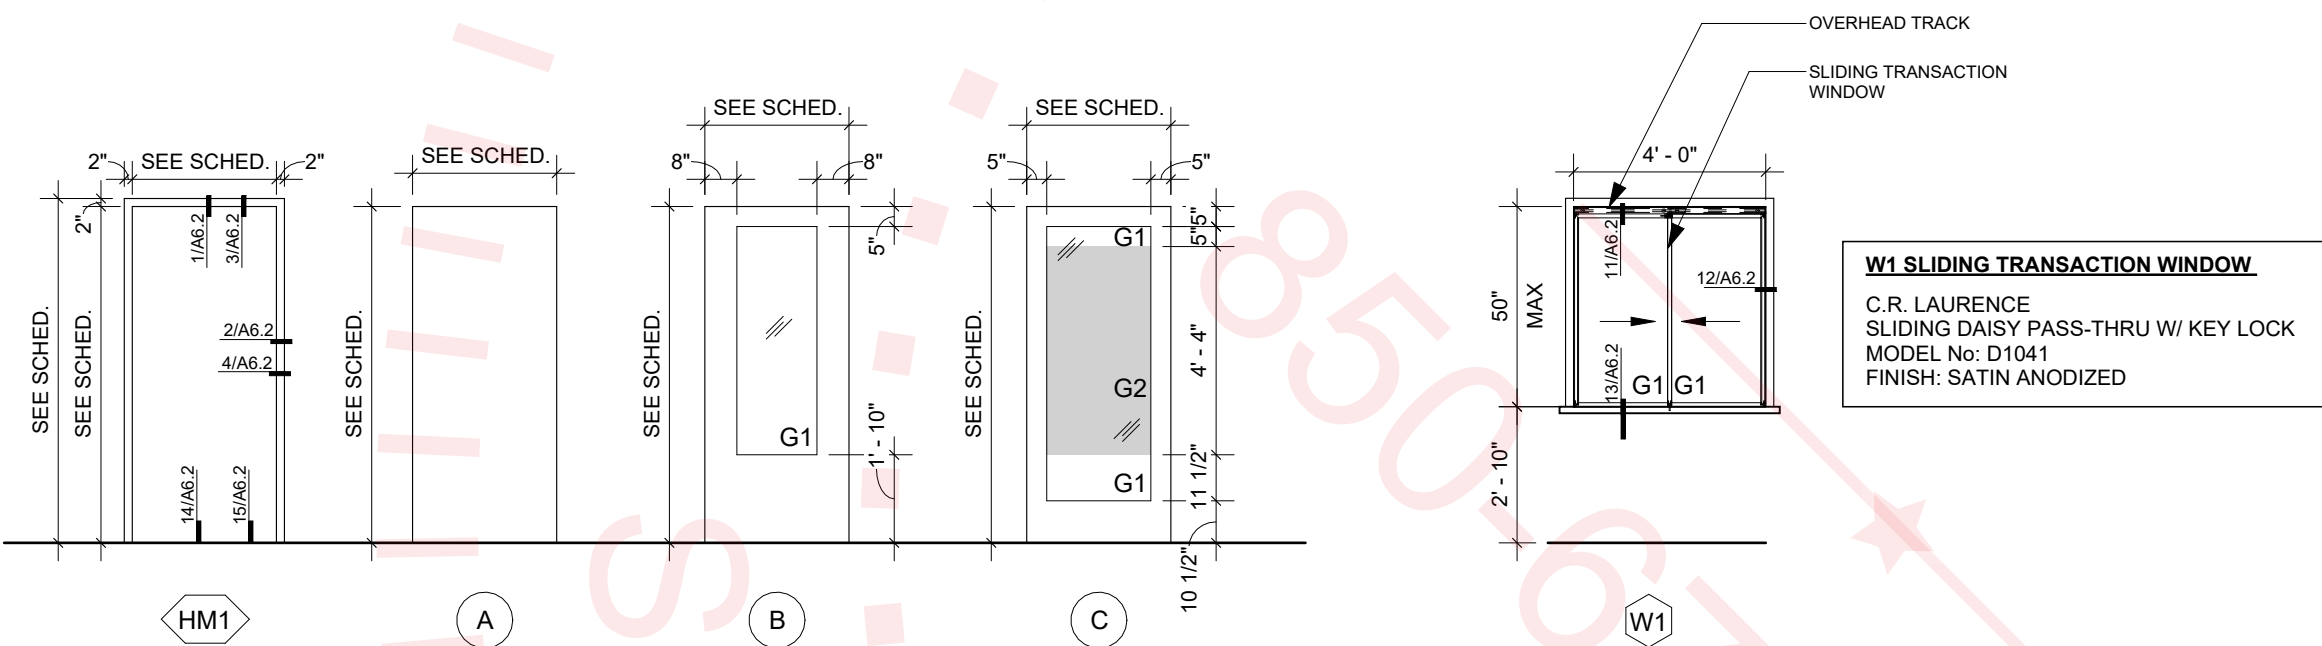

1 Door and Window Elevations
1/4" = 1'-0"

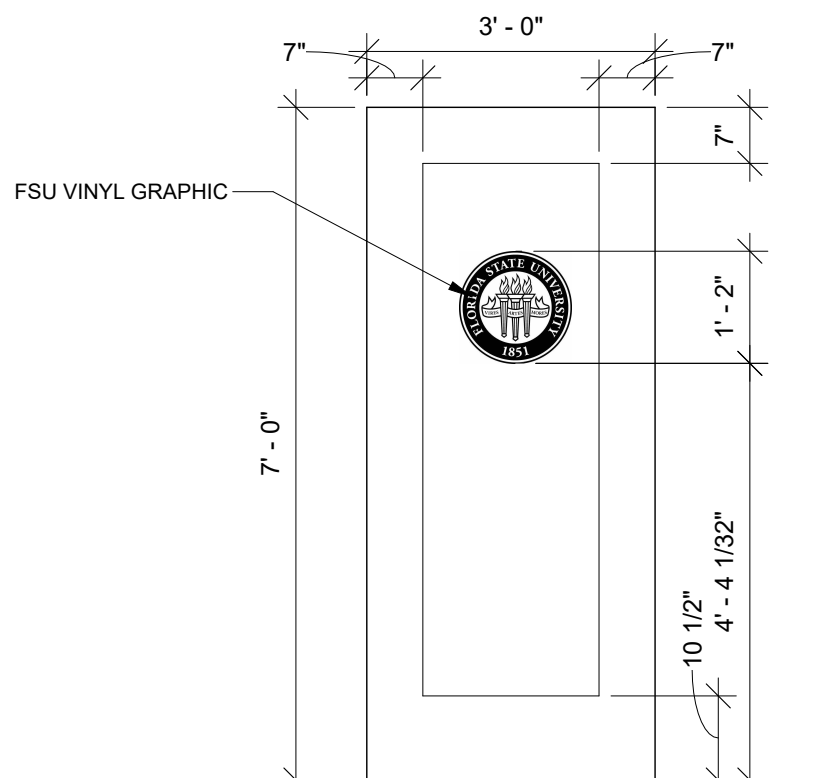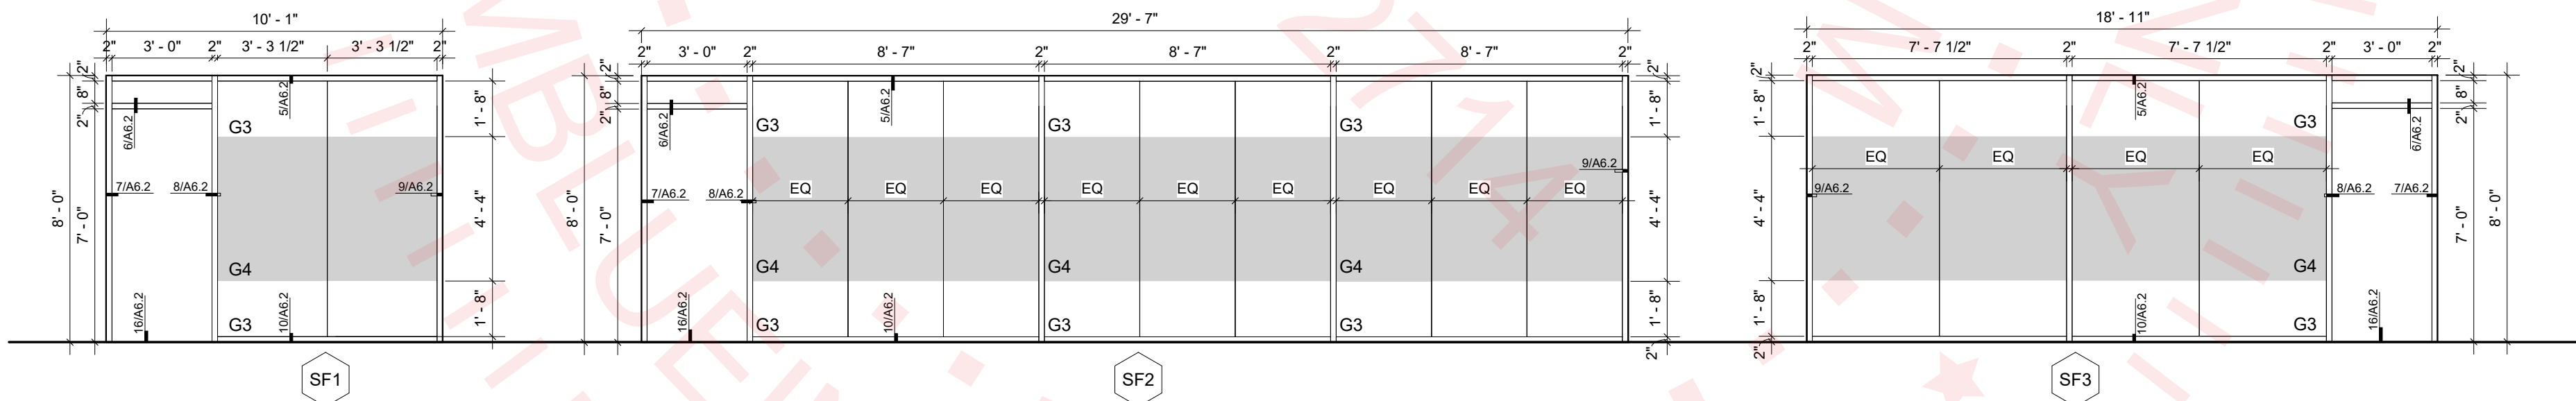


3 Door Graphic Elevation
1/2" = 1'-0"



4 Enlarged Door Graphic- Example
3" = 1'-0"

NOTE: OBTAIN FSU APPROVED ARTWORK FROM OWNER. APPLY TO EXISTING ENTRY DOUBLE DOORS ON BOTH SIDE.

SIGNAGE Elevations

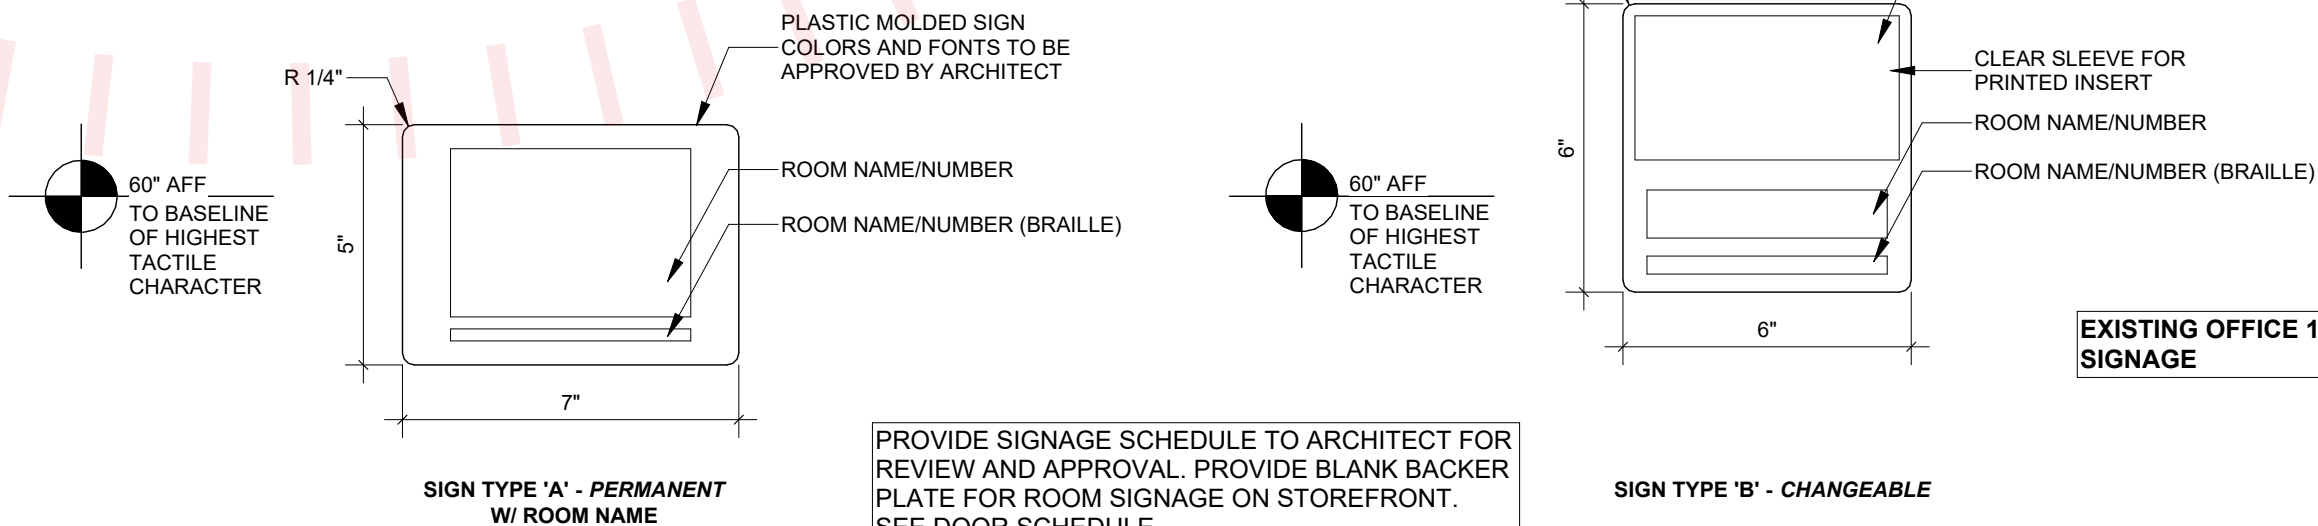

2 Signage Elevations
3" = 1'-0"



SEAL:

PROJECT TITLE:

Interior Renovation for
FSU UCA Suite 1500
FSU Project No. 2400665
Tallahassee, Florida

JOB NO.: 23.153

DESIGNED: BD/ML

DRAWN: MP

CHECKED: BD/ML

THIS DRAWING AND ANY REPRODUCTIONS ARE THE PROPERTY AND COPYRIGHT OF BkI, INC. AND MAY NOT BE REPRODUCED, PUBLISHED, OR USED IN ANY MANNER WITHOUT WRITTEN PERMISSION OF THE ARCHITECT

REVISIONS:

DRAWING PHASE:
100% Construction Documents

DRAWING TITLE:






Door Schedule

SHEET NO.:

A6.1

DATE:

April 12, 2024

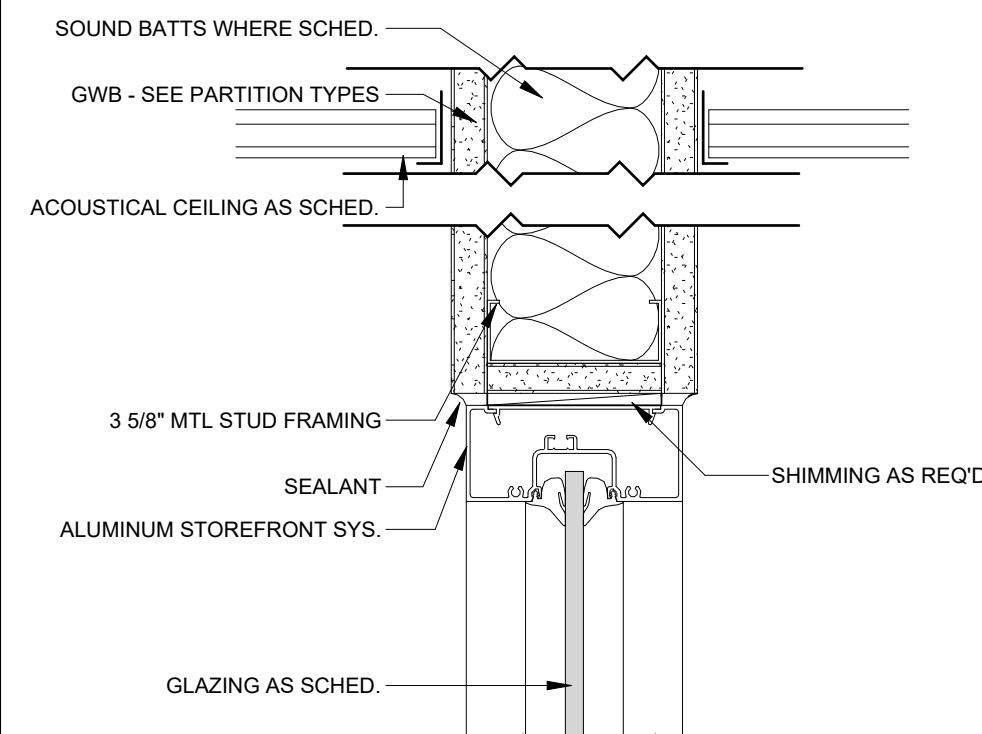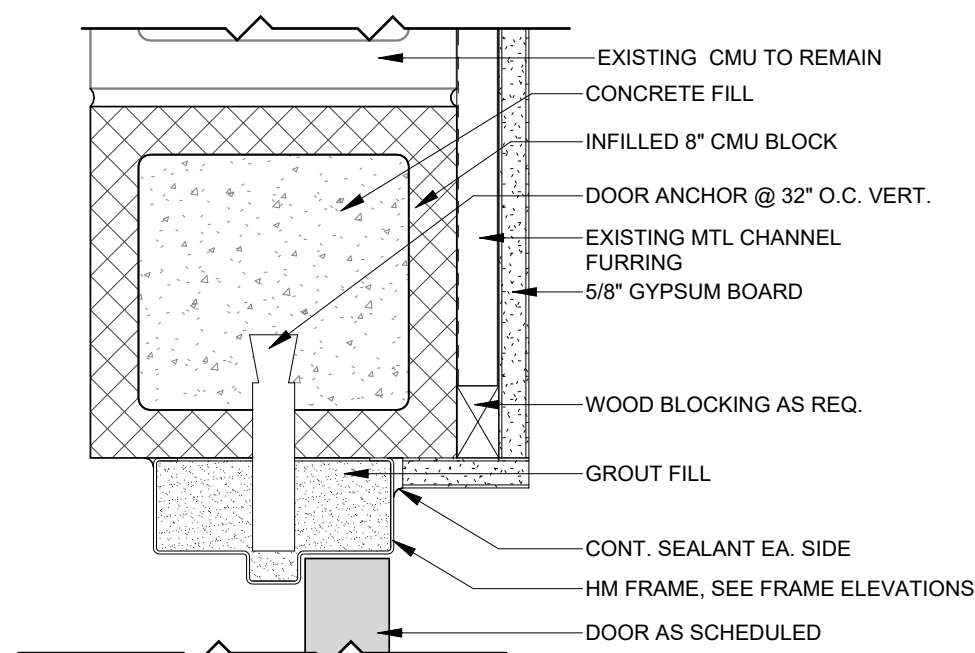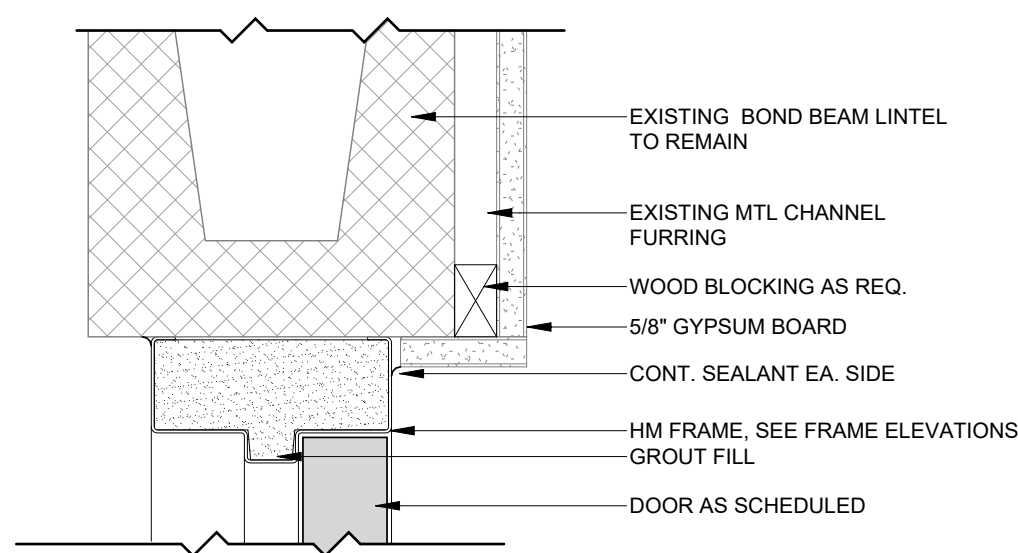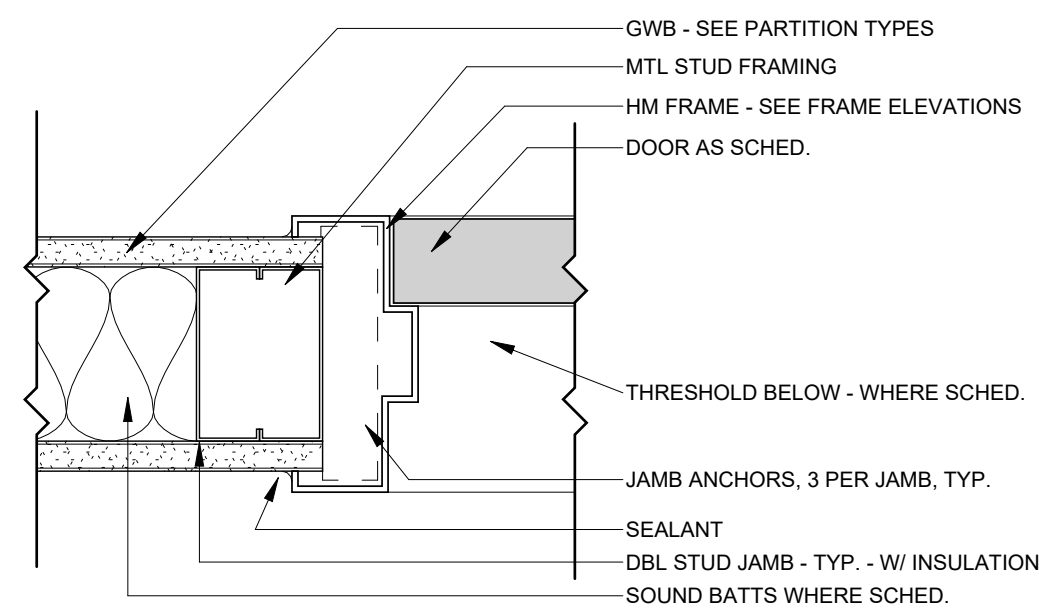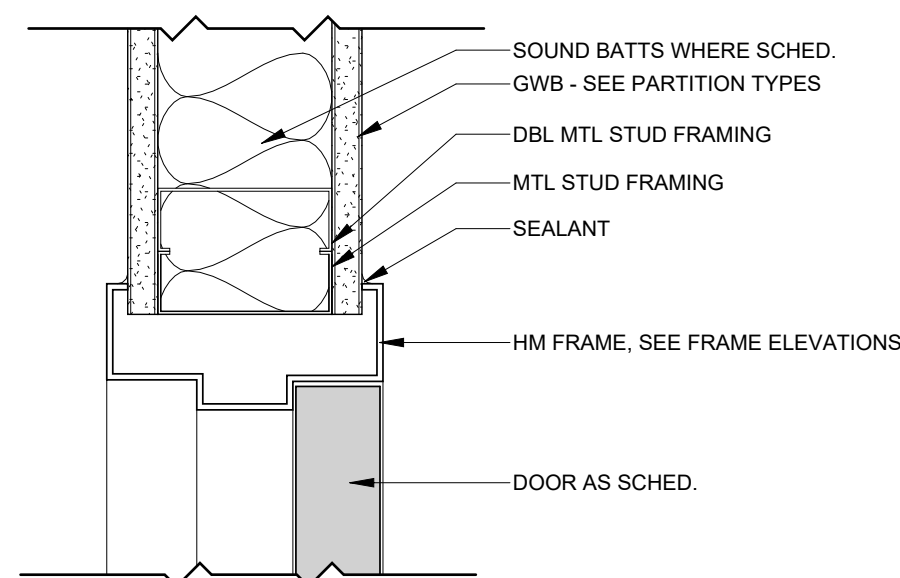






1	Interior HM Door Head	3" = 1' - 0"
---	-----------------------	--------------

Interior HM Door Jamb	3" = 1' - 0"
-----------------------	--------------

3	Interior HM Door Head at CMU Wall	3" = 1' - 0"
---	-----------------------------------	--------------

4	Interior HM Door Jamb at CMU Wall	3" = 1' - 0"
---	-----------------------------------	--------------

5	Interior Storefront Window Head	3" = 1' - 0"
---	---------------------------------	--------------

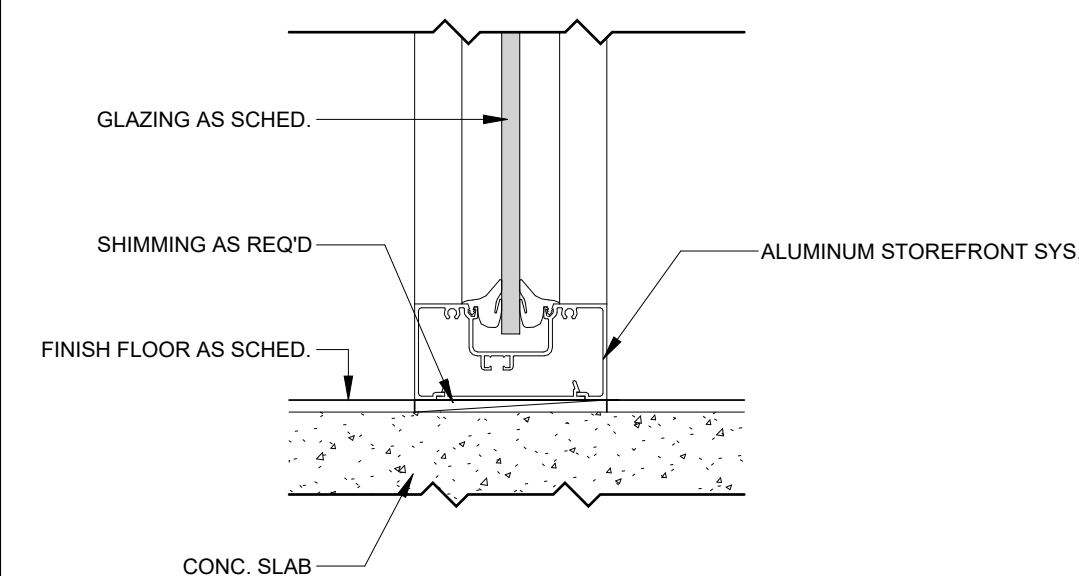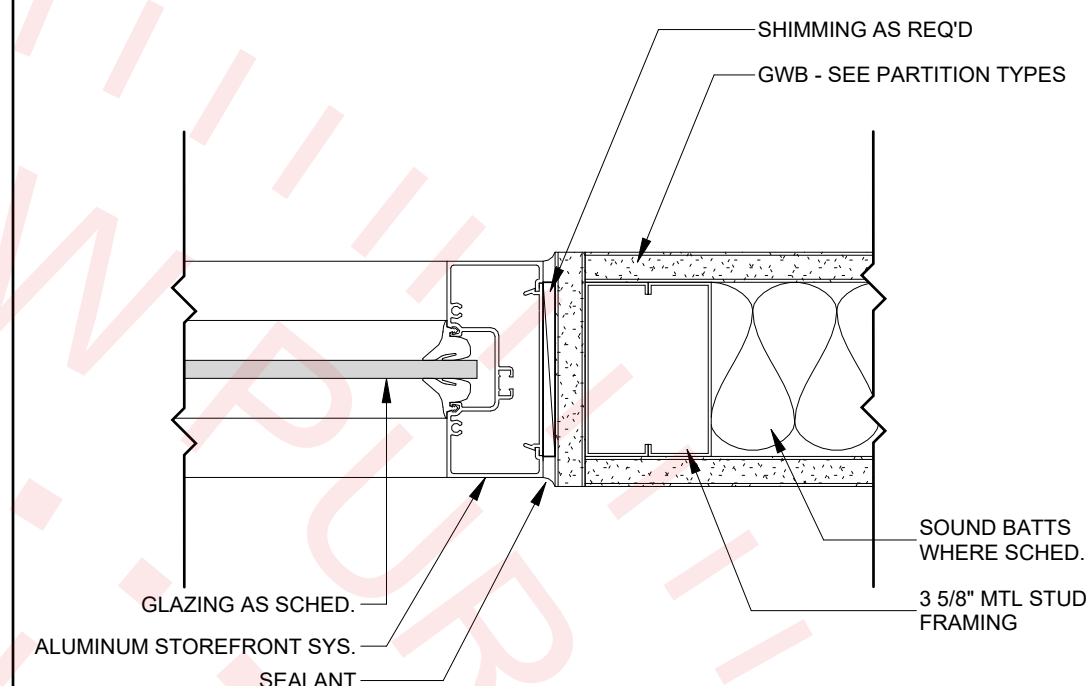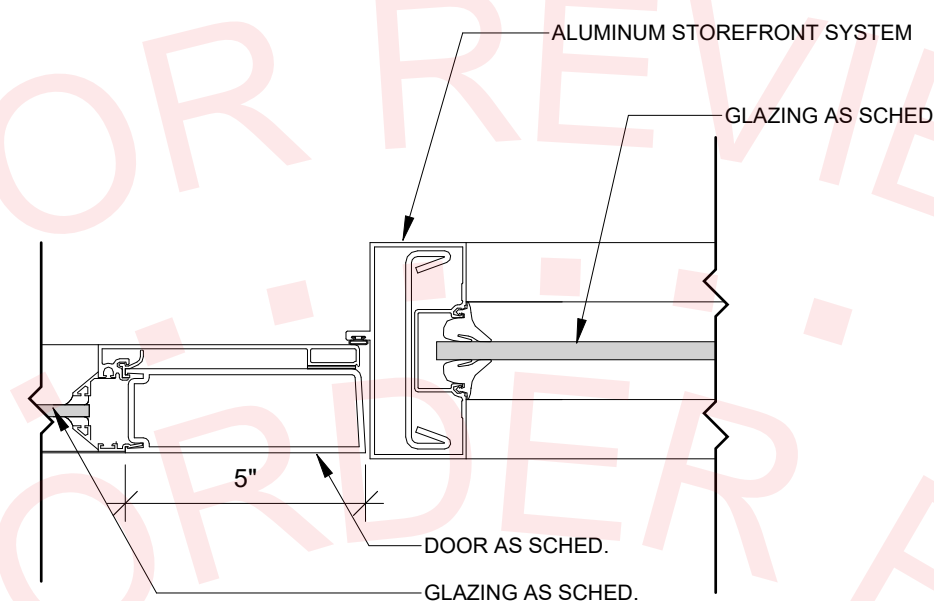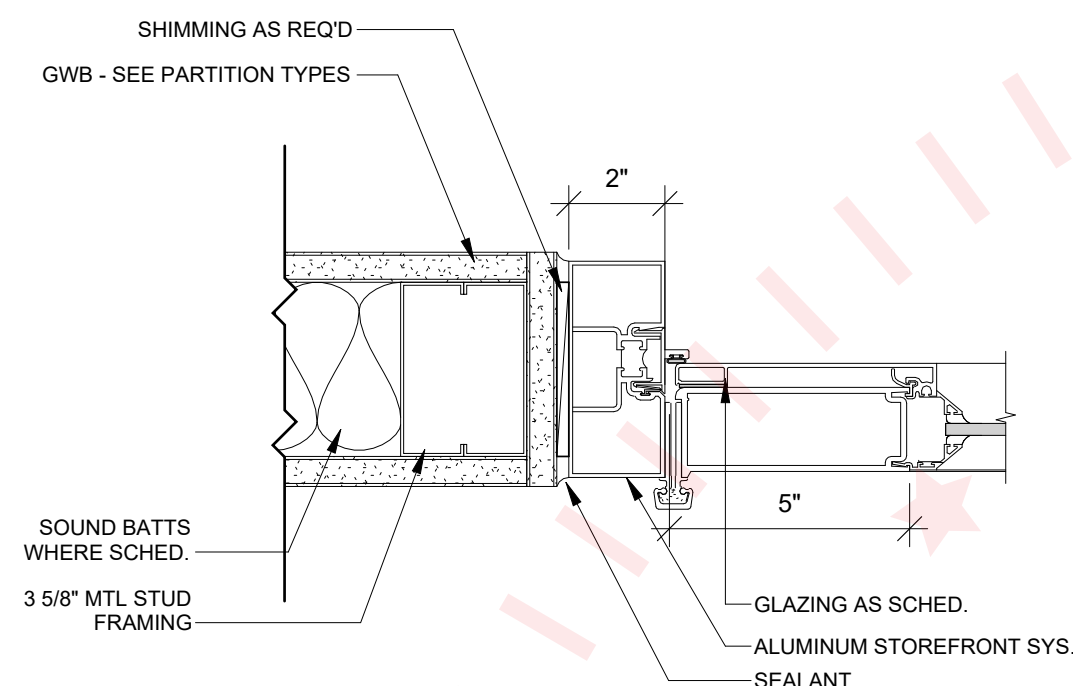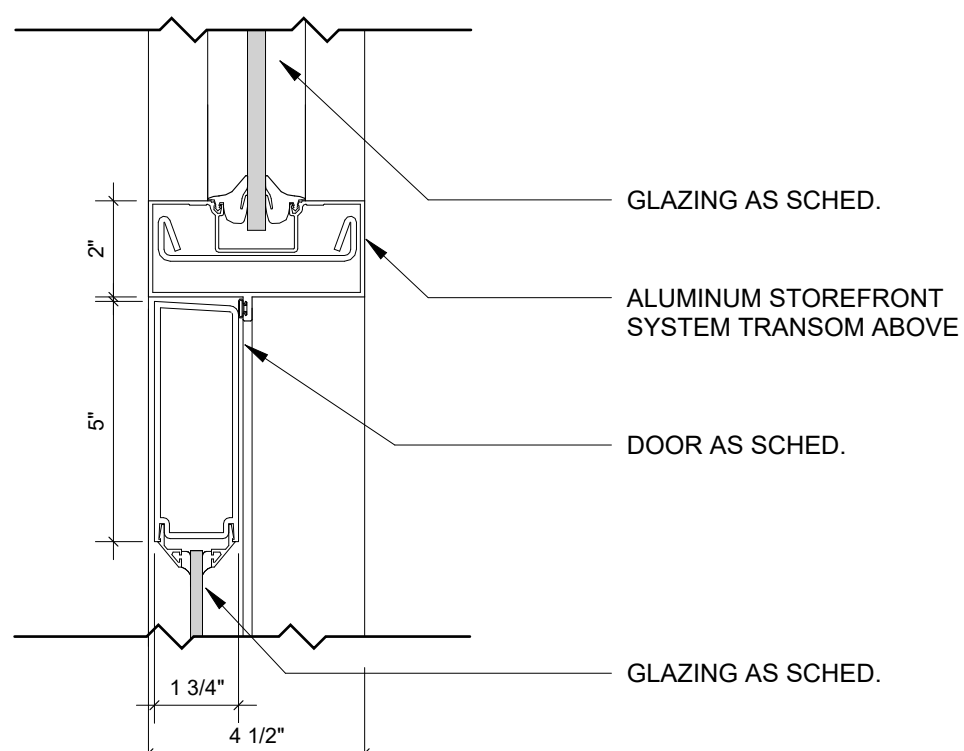






6	Interior Storefront Transom & Door Head	3" = 1' - 0"
---	---	--------------

Interior Storefront Door Jamb	3" = 1' - 0"
-------------------------------	--------------

8	Interior Storefront Door / Window Jamb	3" = 1' - 0"
---	--	--------------

9	Interior Storefront Window Jamb	3" = 1' - 0"
---	---------------------------------	--------------

10	Interior Storefront Window Sill	3" = 1' - 0"
----	---------------------------------	--------------

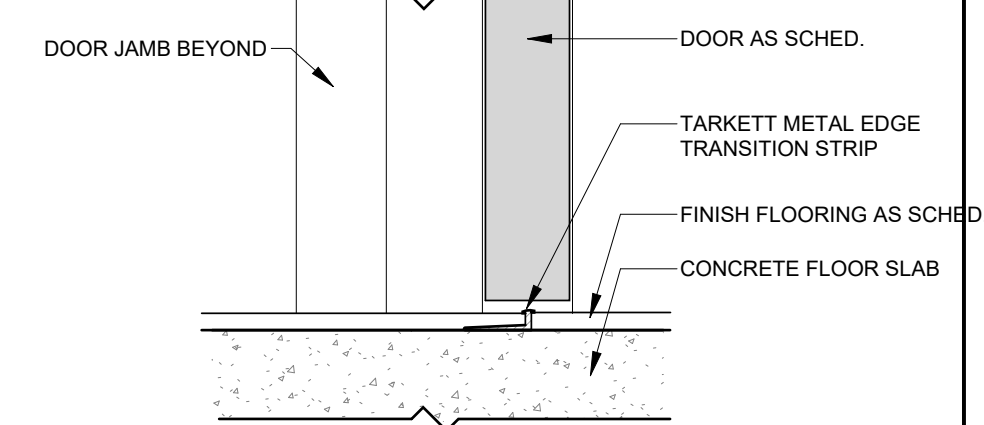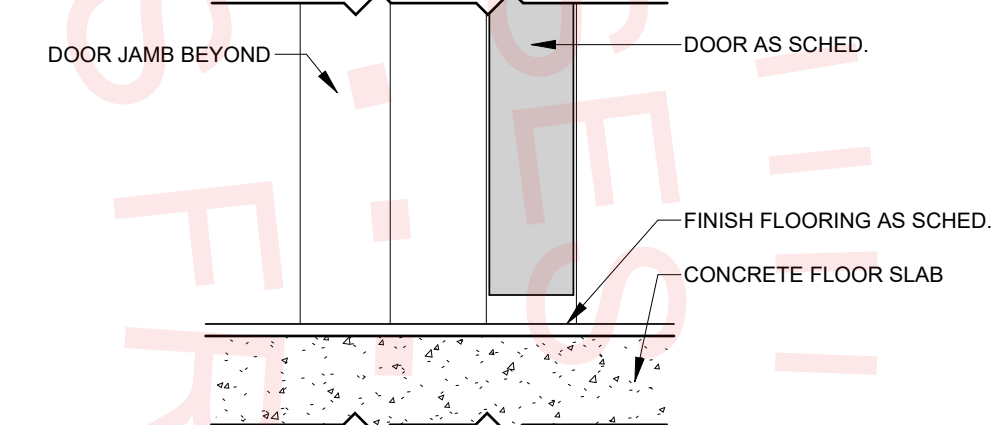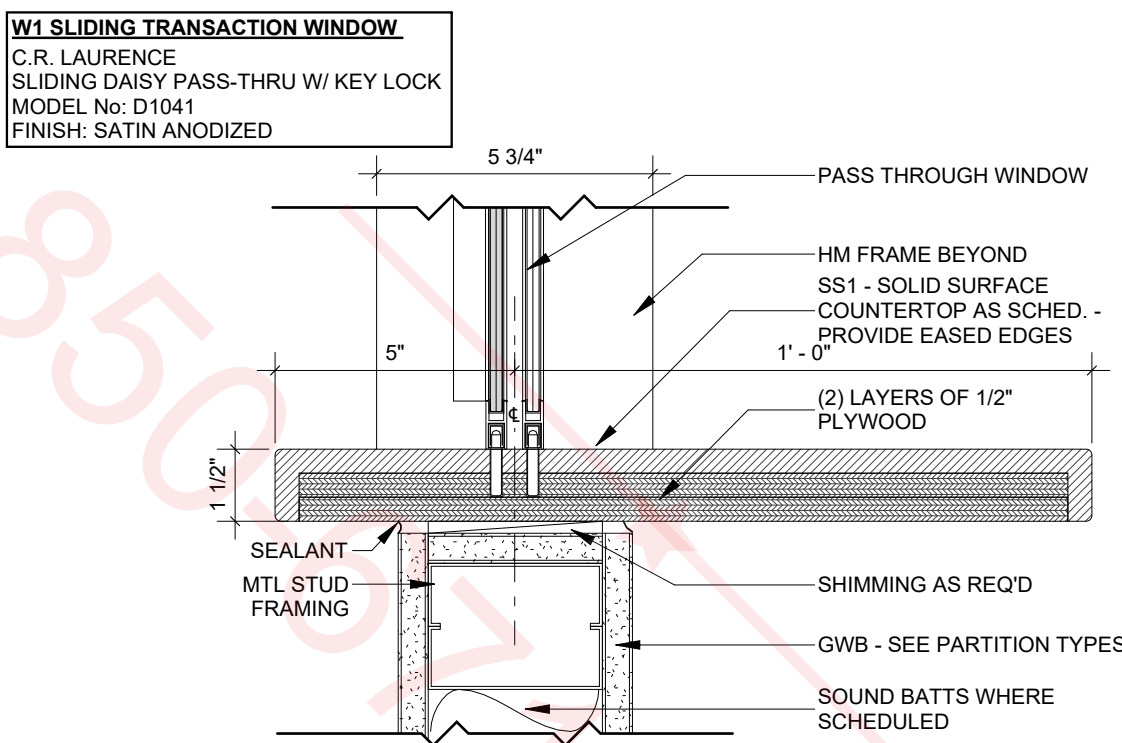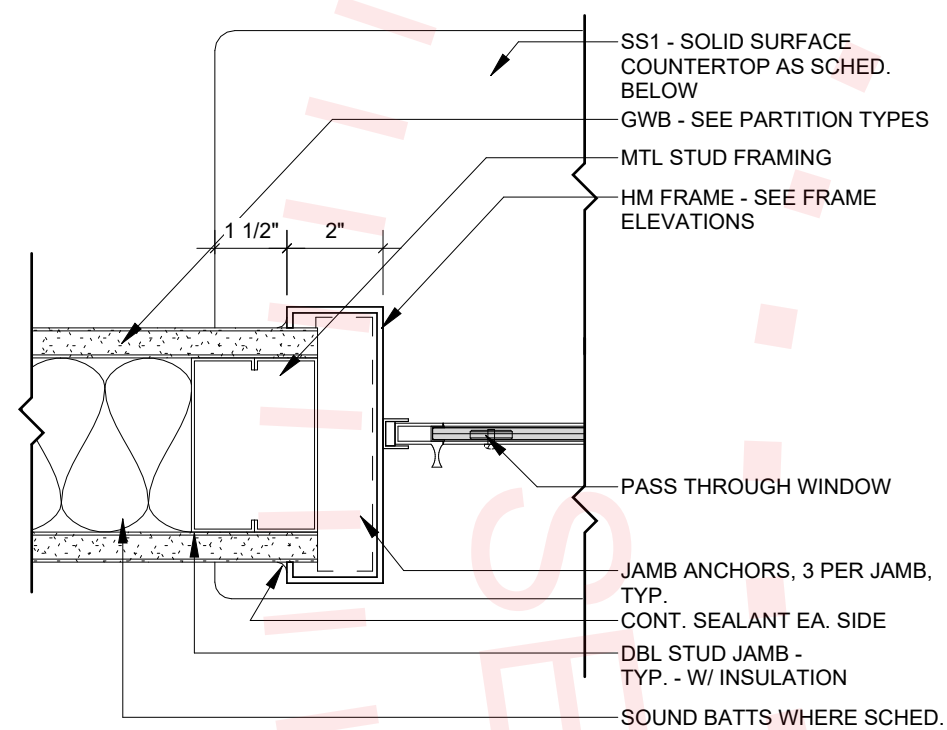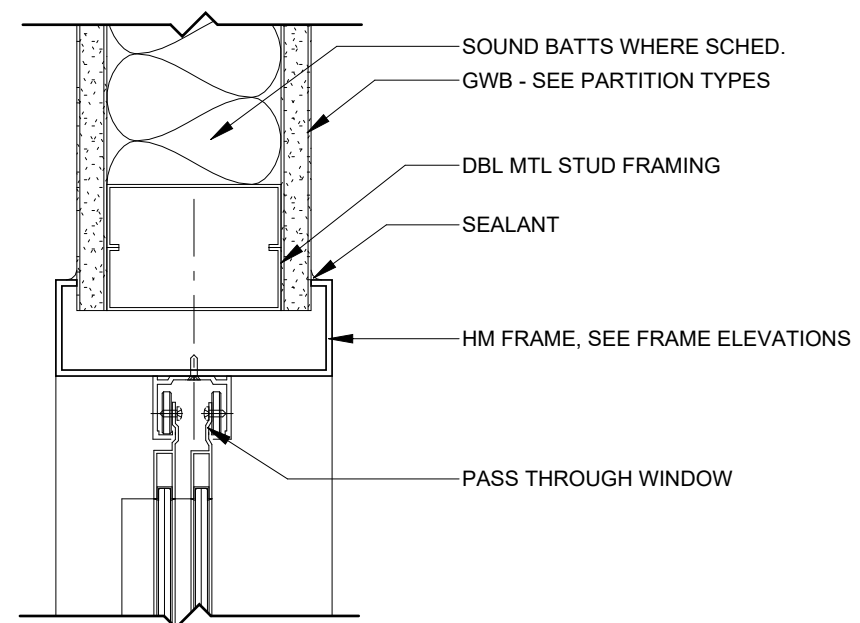


11	Interior HM Pass Through Window Head	3" = 1' - 0"
----	--------------------------------------	--------------

Interior HM Pass Through Window Jamb	3" = 1' - 0"
--------------------------------------	--------------

13	Interior HM Pass Through Window Sill	3" = 1' - 0"
----	--------------------------------------	--------------

14	Interior HM Door Threshold	3" = 1' - 0"
----	----------------------------	--------------

15	Interior HM Door Threshold w/ Metal Edge Transition	3" = 1' - 0"
----	---	--------------

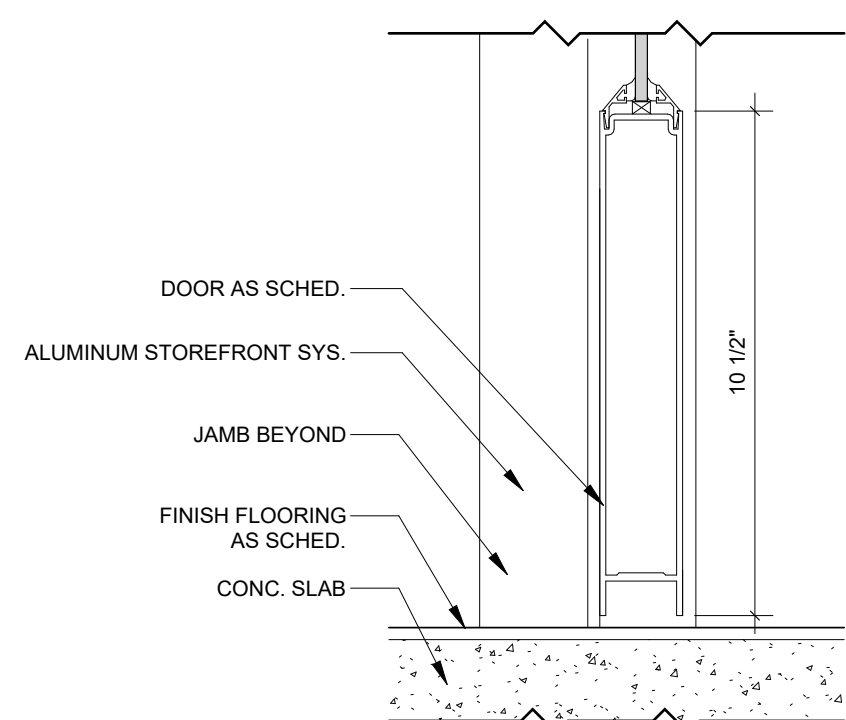

16	Interior Storefront Door Threshold	3" = 1' - 0"
----	------------------------------------	--------------

SEAL:

PROJECT TITLE:

**Interior Renovation for
FSU UCA Suite 1500
FSU Project No. 2400665
Tallahassee, Florida**

JOB NO.: 23.153

DESIGNED: Designer

CHECKED: Checker

THIS DRAWING AND ANY REPRODUCTIONS
ARE THE PROPERTY AND COPYRIGHT
OF BKJ, INC. AND MAY NOT BE
REPRODUCED, PUBLISHED, OR USED IN ANY
MANNER WITHOUT WRITTEN
PERMISSION OF THE ARCHITECT

REVISIONS:

DRAWING PHASE:
100% Construction Documents

DRAWING TITLE:

Door & Window Details

SHEET NO.:

A6.2

















DATE:

April 12, 2024

Equipment Schedule				
No.	Name	Manufacturer	Model	Owner Provided/ CM Installed
1	Refrigerator	TBD	TBD	•
2	Microwave	TBD	TBD	•
3	Coffee Maker	TBD	TBD	•

Accessory Schedule:

A1- SOAP DISPENSER: GOJO FMX-12 MODEL 5150-06
A2- PAPER TOWEL DISPENSER: GEORGIA-PACIFIC MODEL 59462A

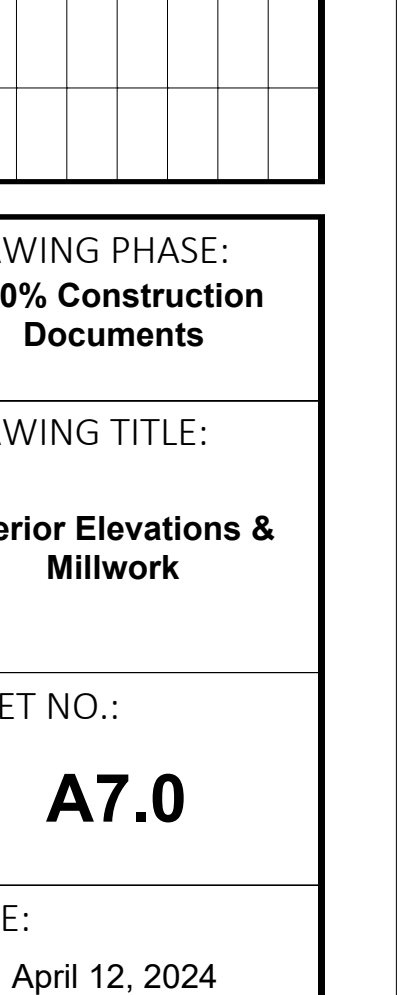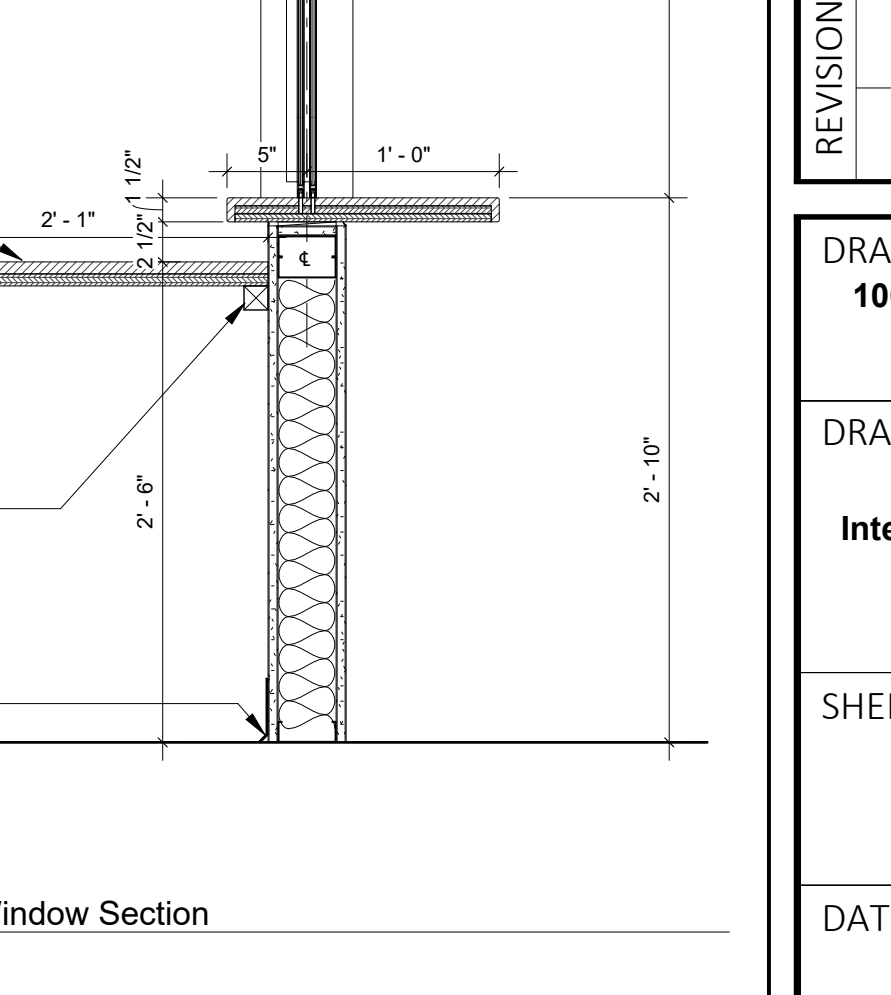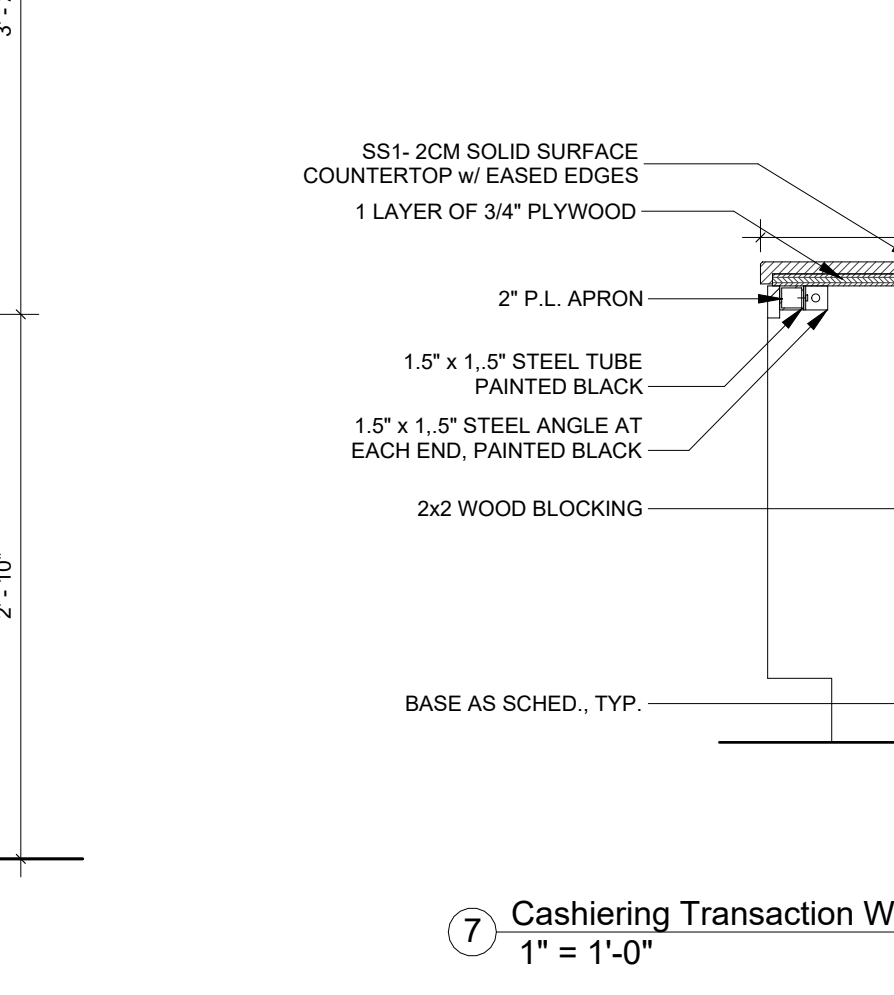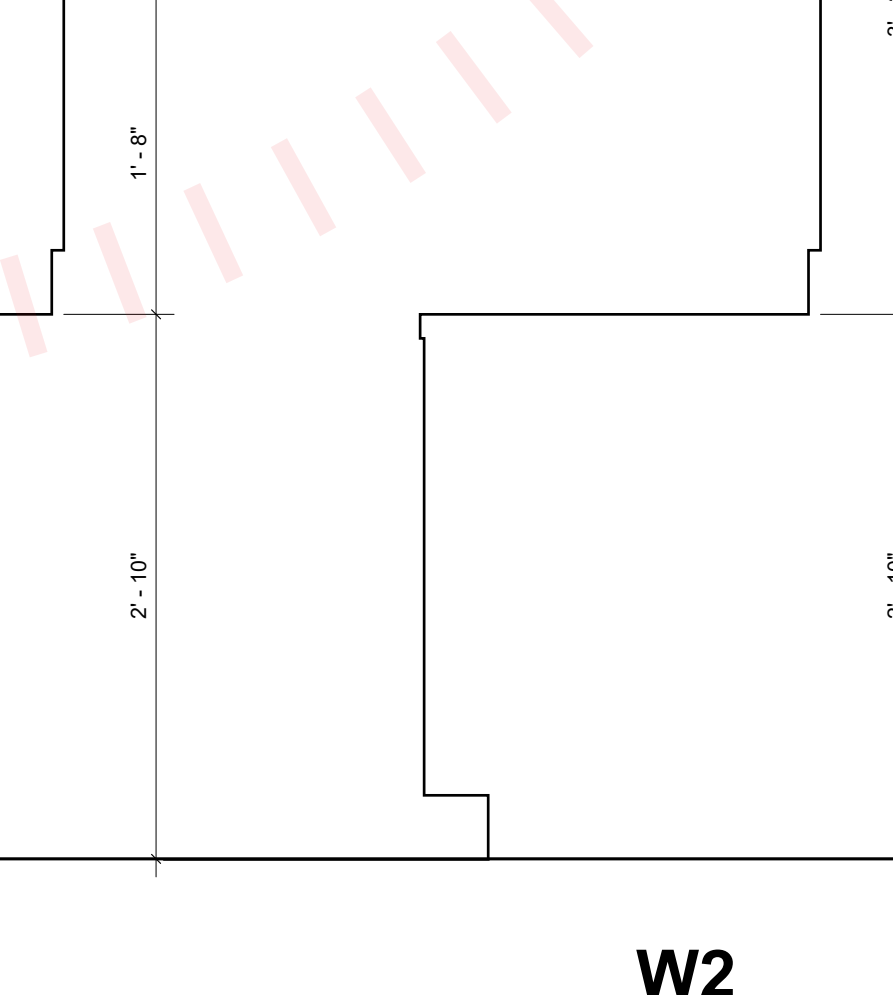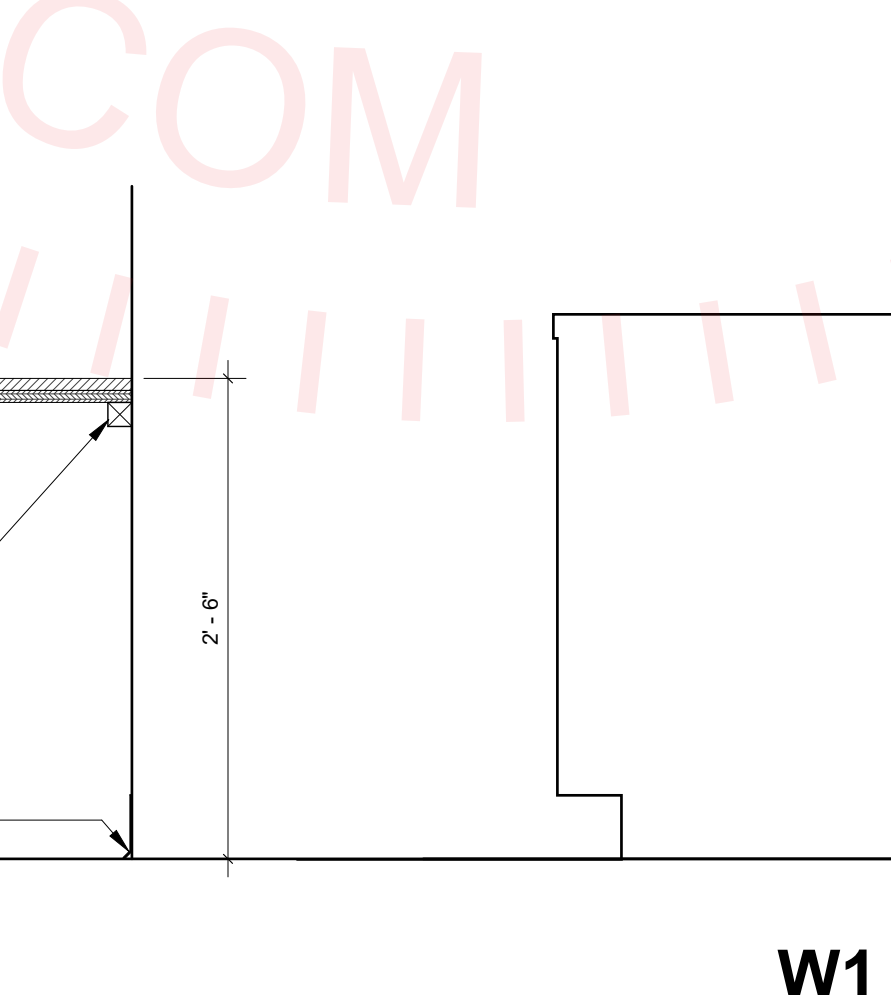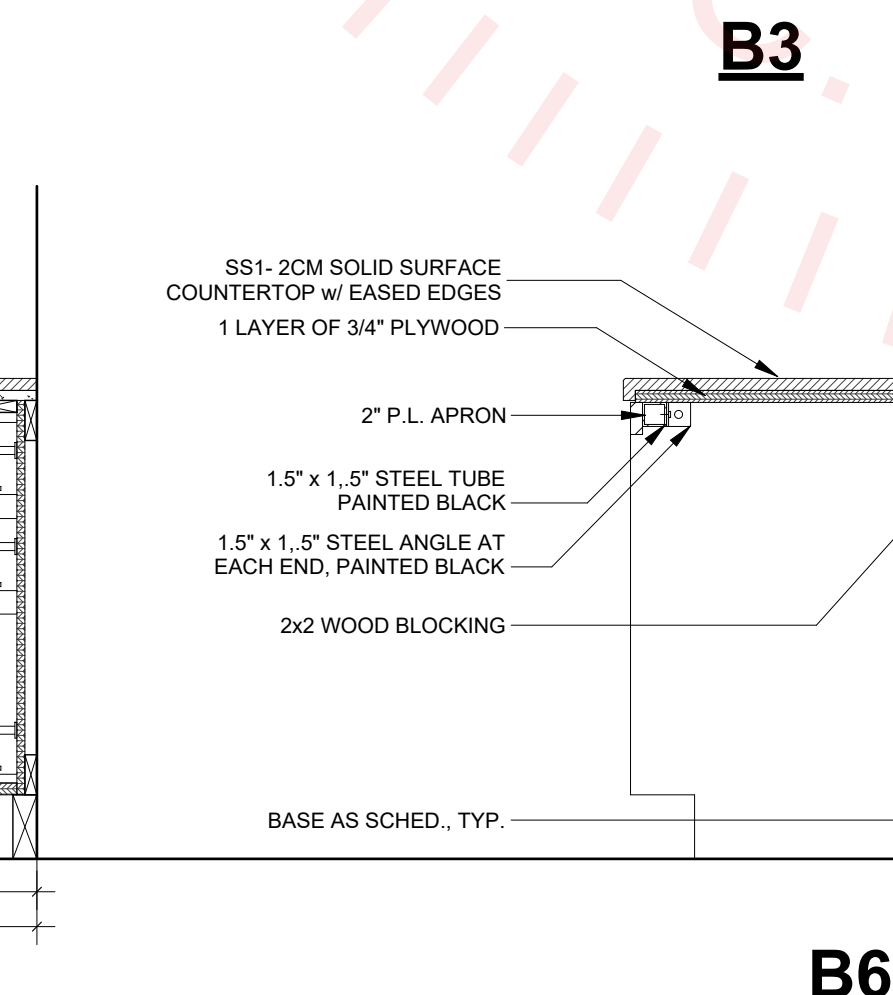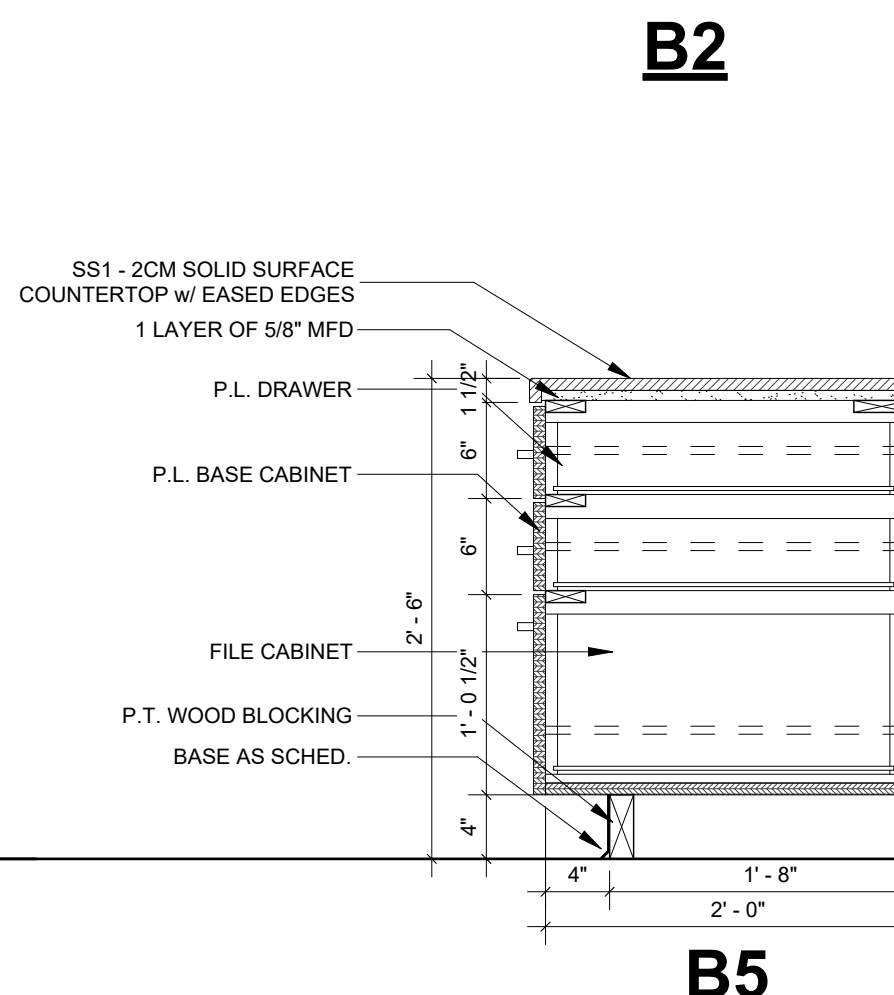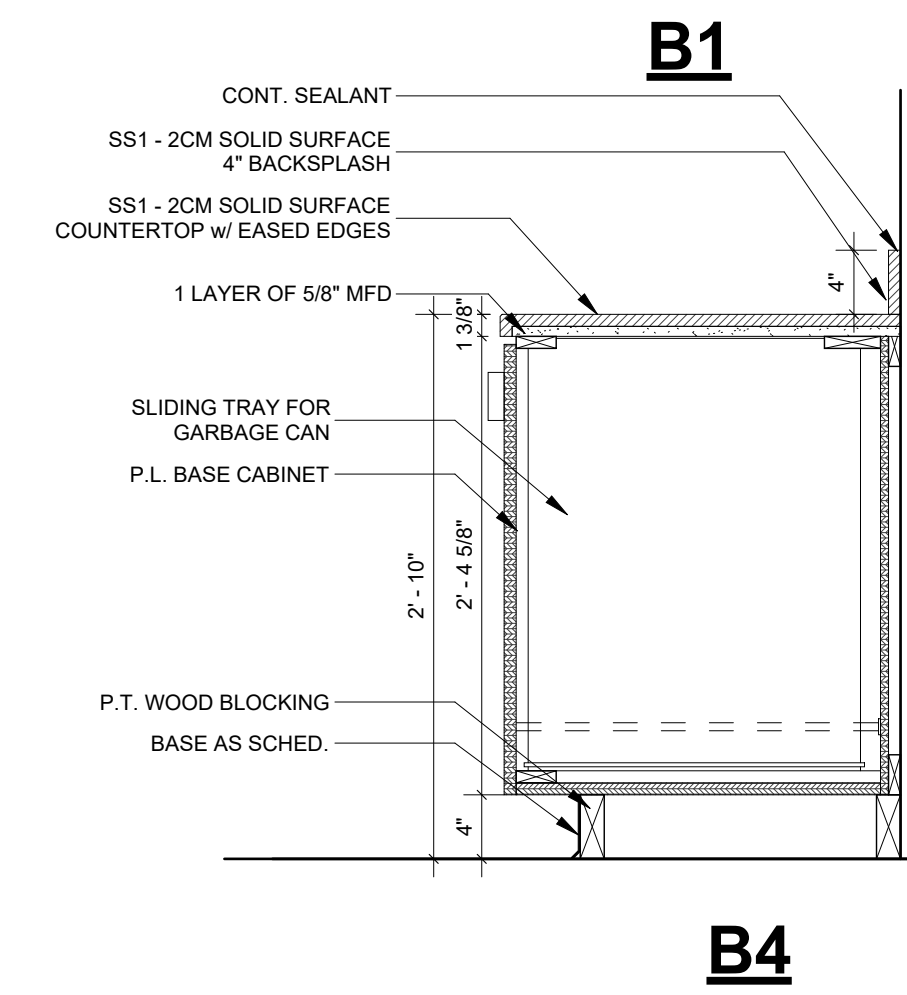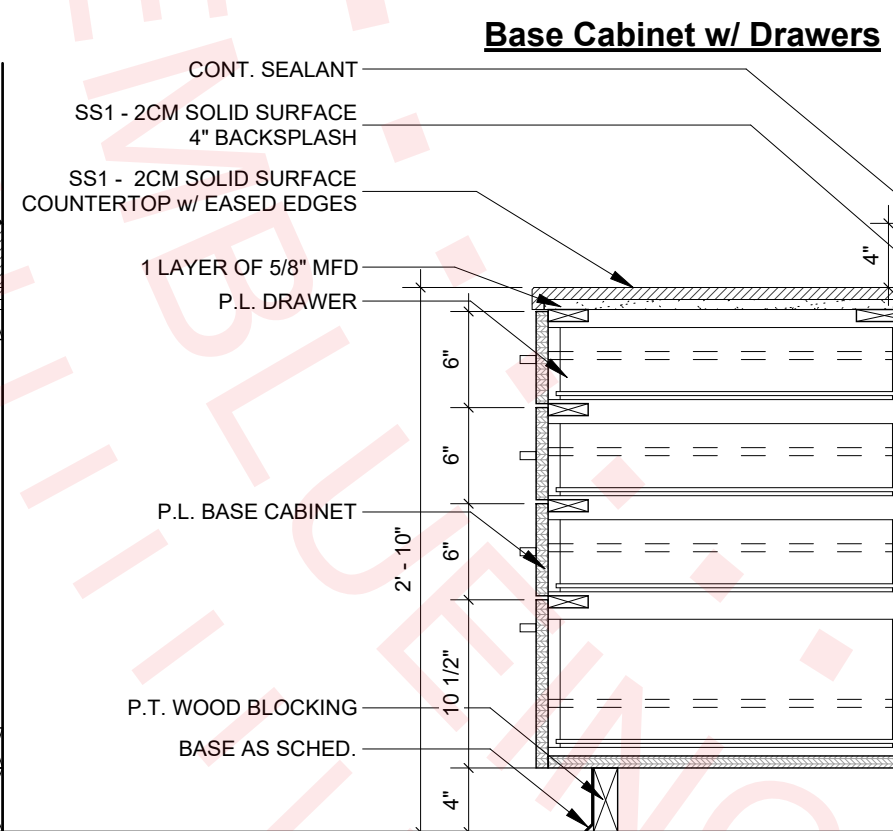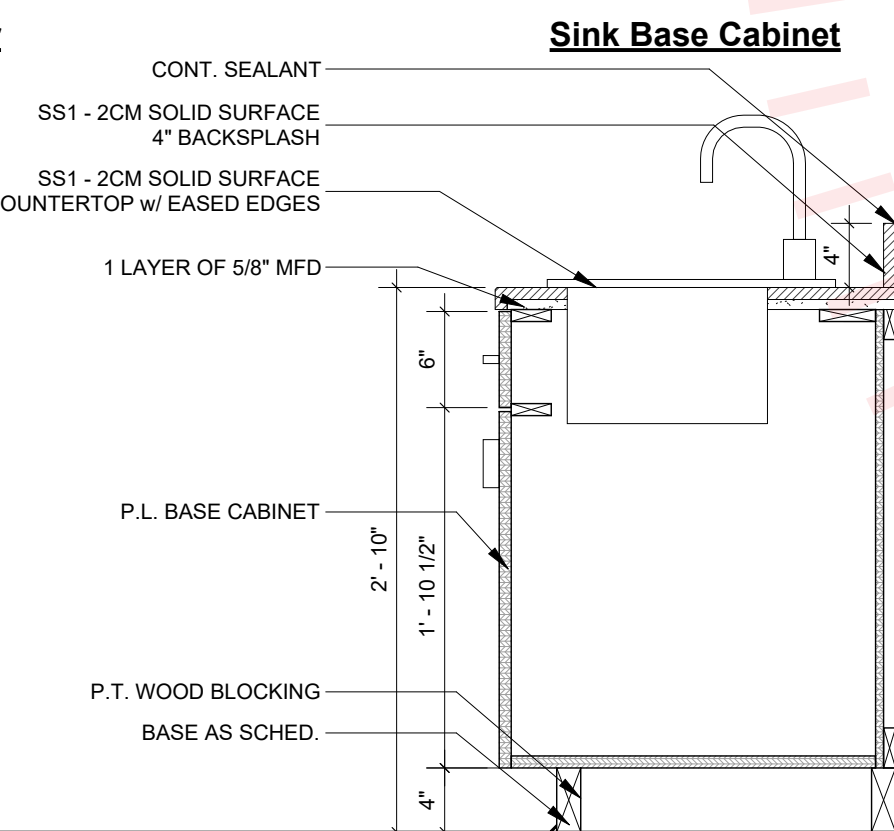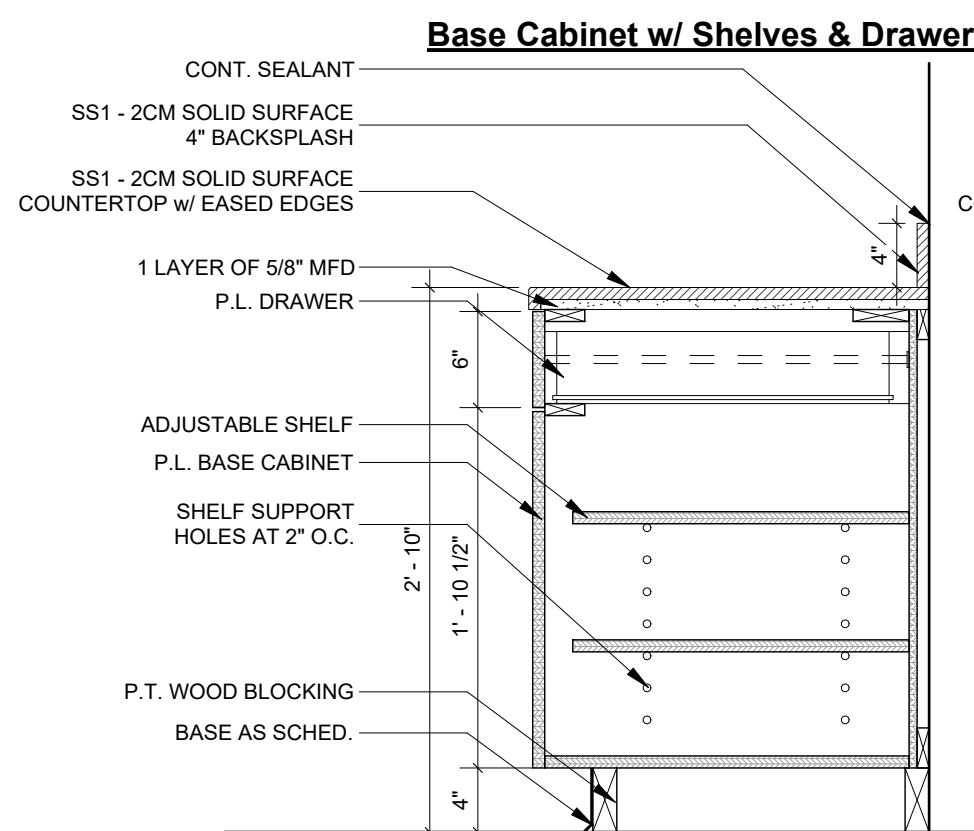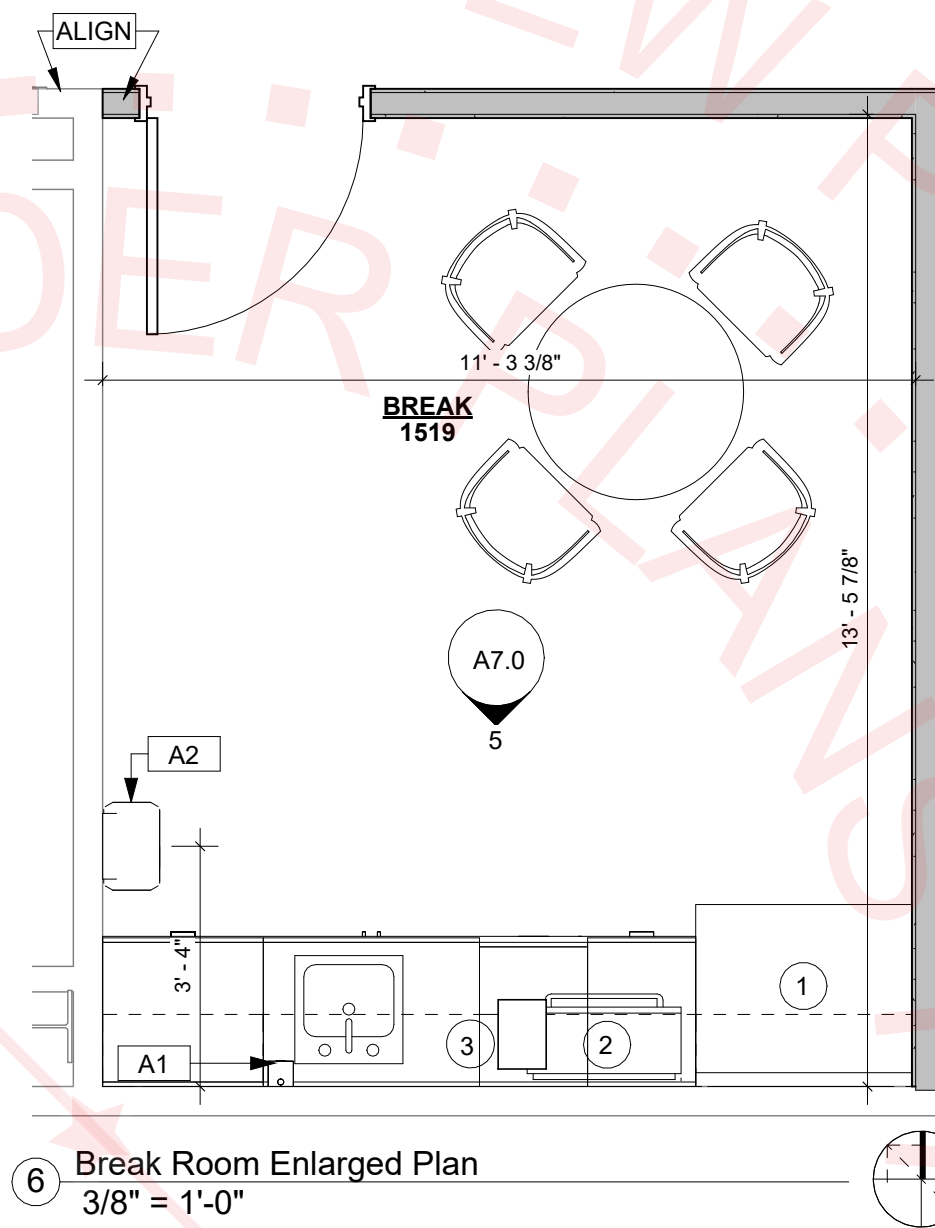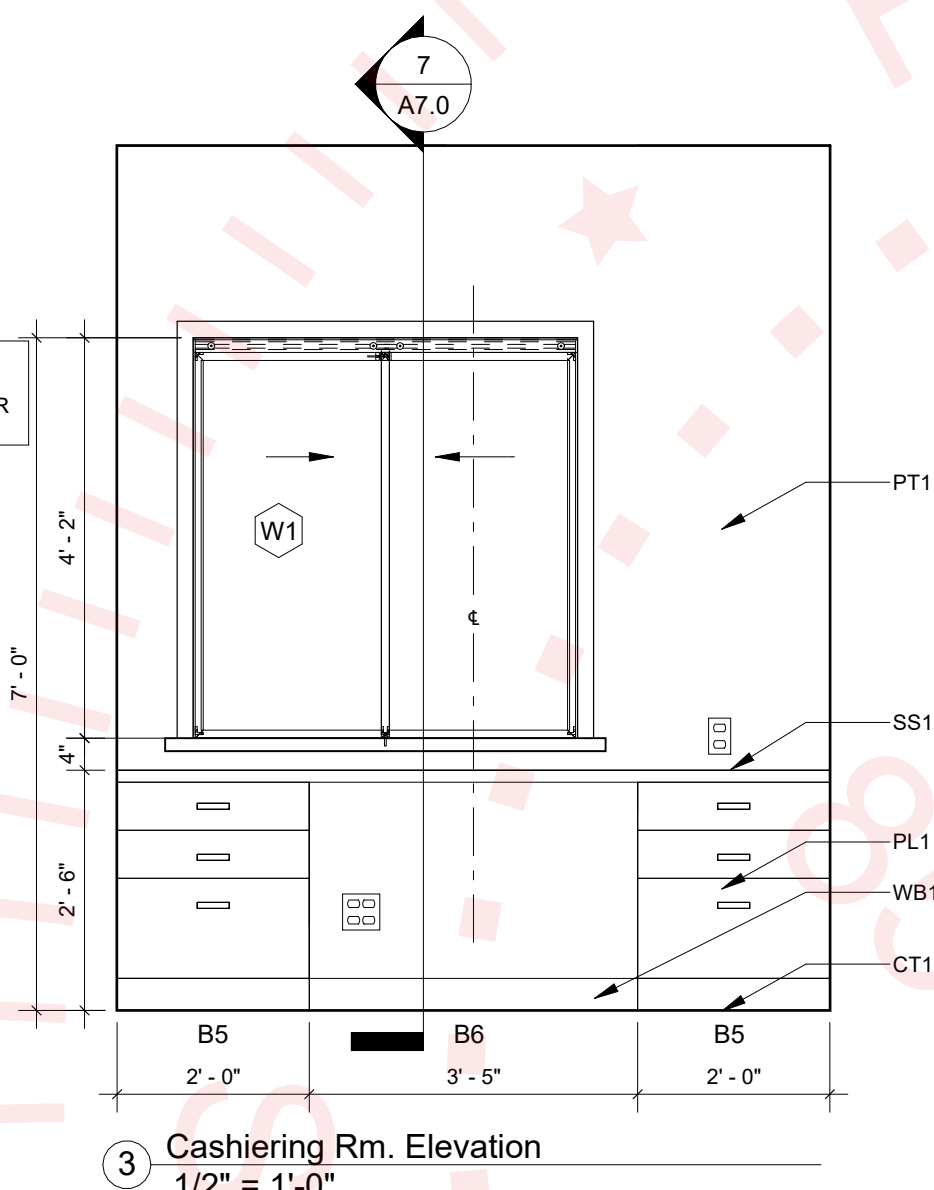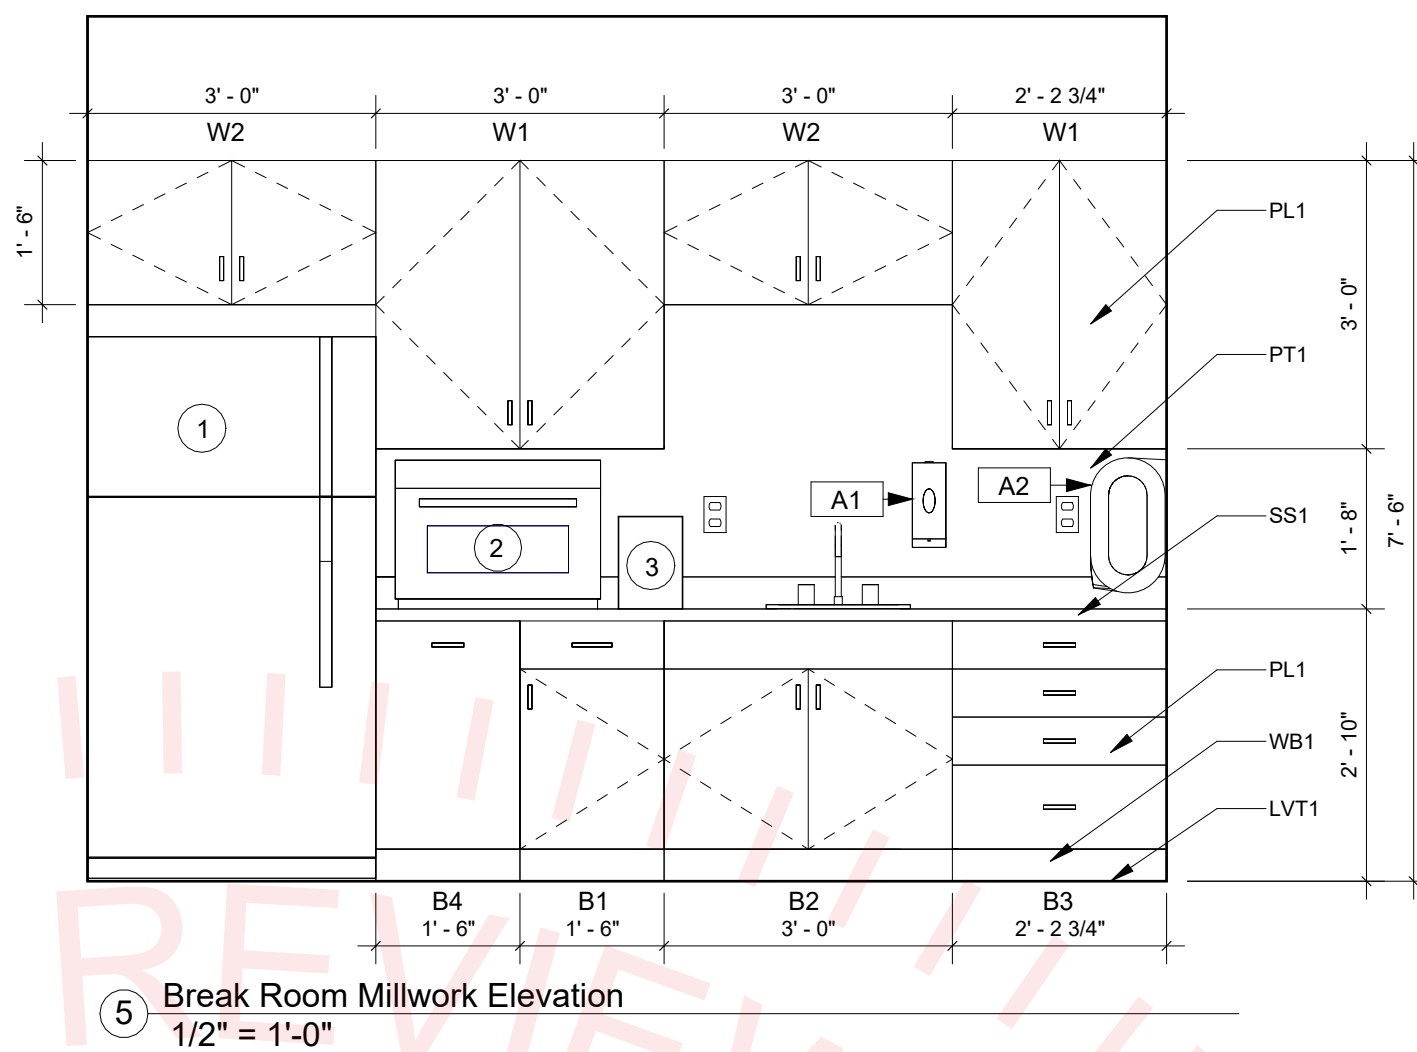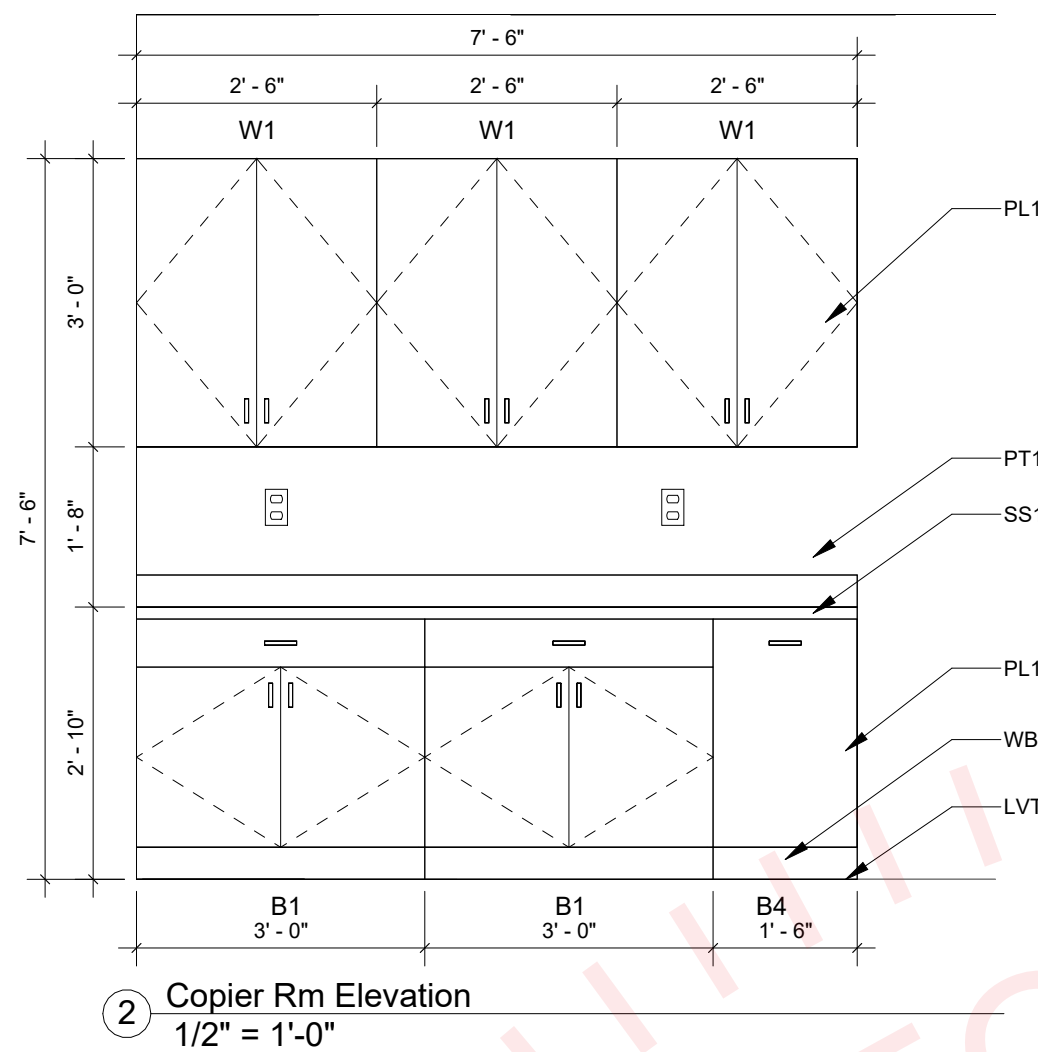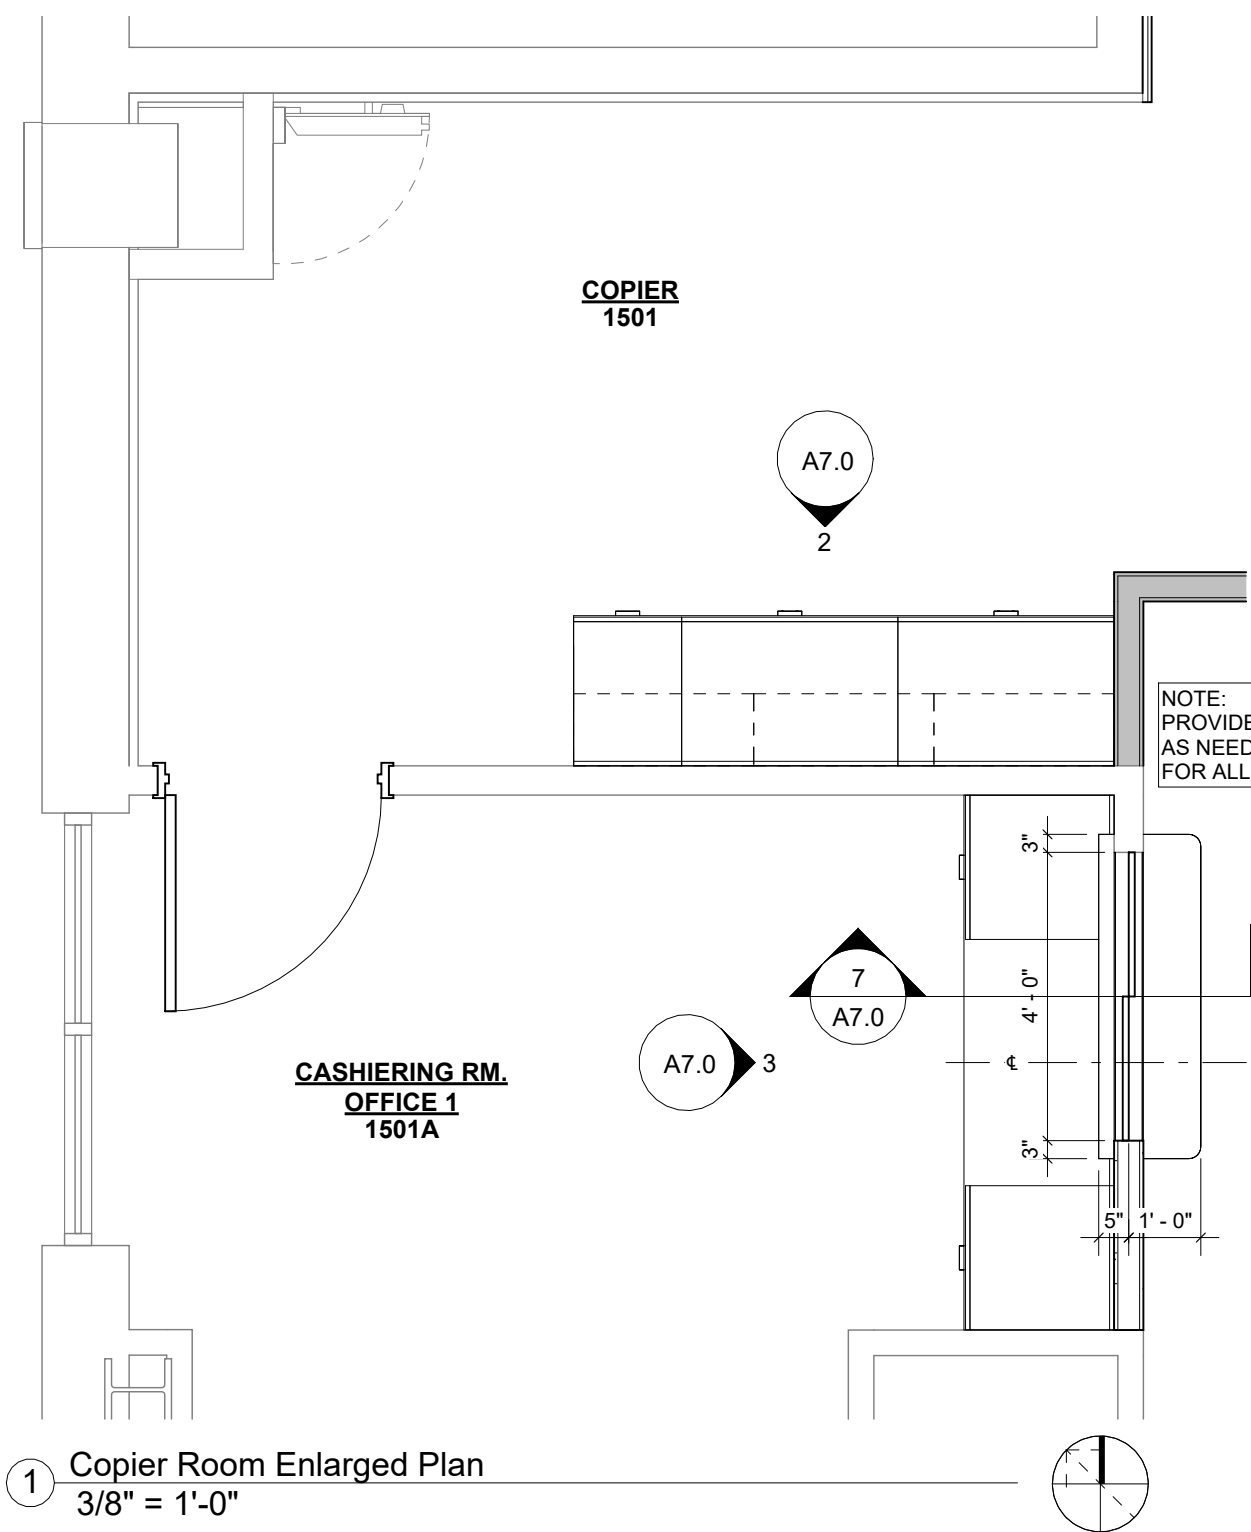


Millwork General Notes:

- MILLWORK TO BE USED AS BASIS OF DESIGN.
- CONTRACTOR TO SUBMIT SHOP DRAWINGS FOR ALL MILLWORK TO TENANT FOR COORDINATION AND FINAL APPROVAL.
- MILLWORK DIMENSIONS ARE MEASURED FROM FACE OF FINISH SURFACE

Millwork Finish Schedule:

PLASTIC LAMINATE:
PL1- CABINETS - WILSONART - TRACELESS - SMOKY VELVET ELM (15604-31)
SS1- COUNTER TOP - WILSONART, YUKON RIVERSTONE (9196RS)

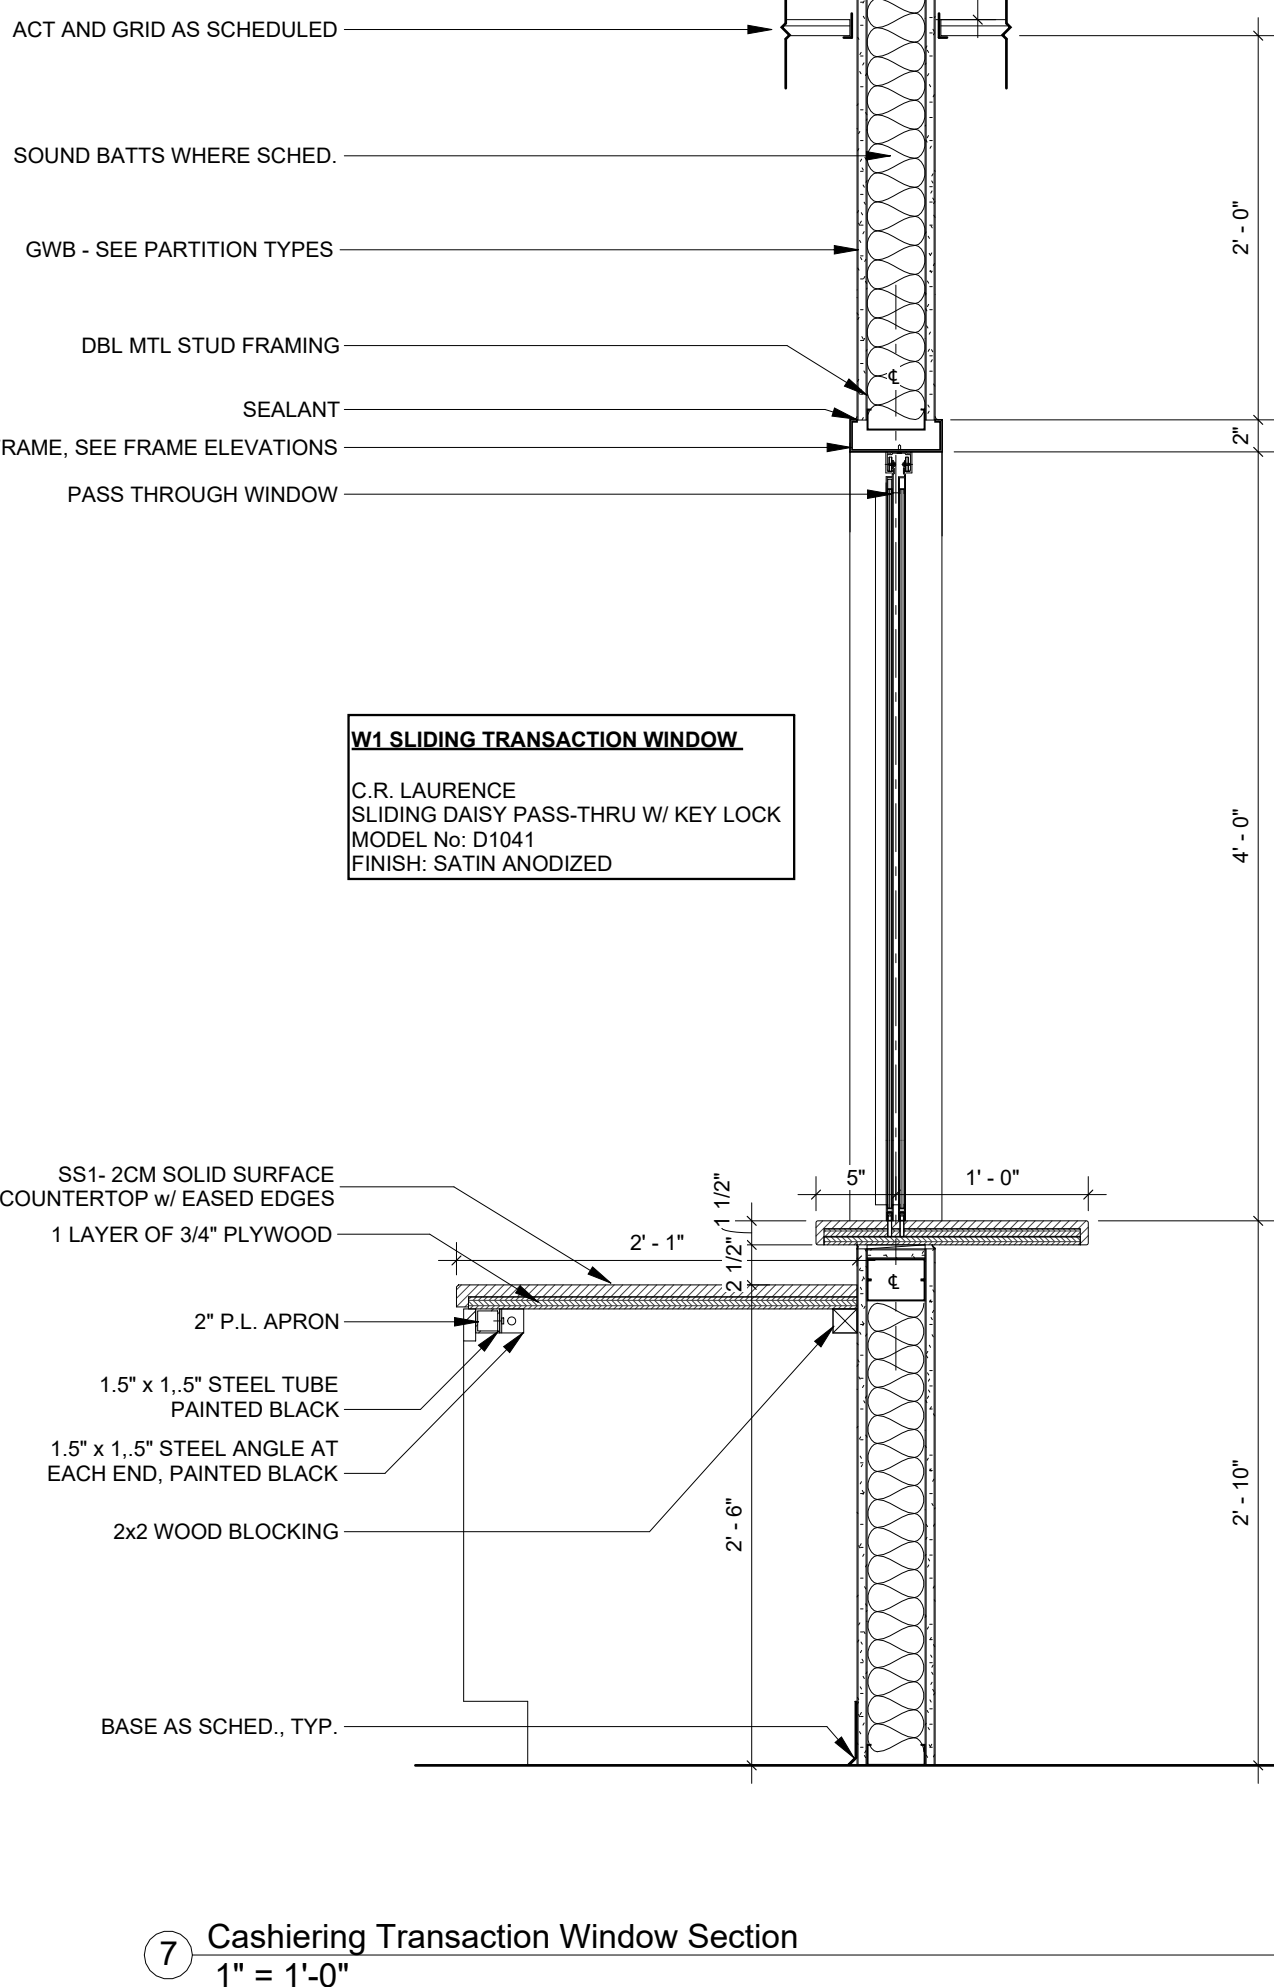

SEAL:

PROJECT TITLE:

Interior Renovation for
FSU UCA Suite 1500
FSU Project No. 2400665
Tallahassee, Florida

JOB NO.: 23.153

DESIGNED: BD/ML

DRAWN: MP

CHECKED: BD/ML

THIS DRAWING AND ANY REPRODUCTIONS
ARE THE PROPERTY AND COPYRIGHT
OF BKJ, INC. AND MAY NOT BE
REPRODUCED, PUBLISHED, OR USED IN ANY
MANNER WITHOUT WRITTEN
PERMISSION OF THE ARCHITECT

REVISIONS:

DRAWING PHASE:
100% Construction
Documents

DRAWING TITLE:

Interior Elevations &
Millwork

SHEET NO.:


A7.0

DATE:



April 12, 2024

DEMOLITION KEYNOTES

1 IN THIS VICINITY, REMOVE SPRINKLER HEADS AND ASSOCIATED BRANCH PIPING BACK TO MAIN. CAP PIPING FOR FUTURE RECONNECTION. REFER TO RENOVATION PLAN.

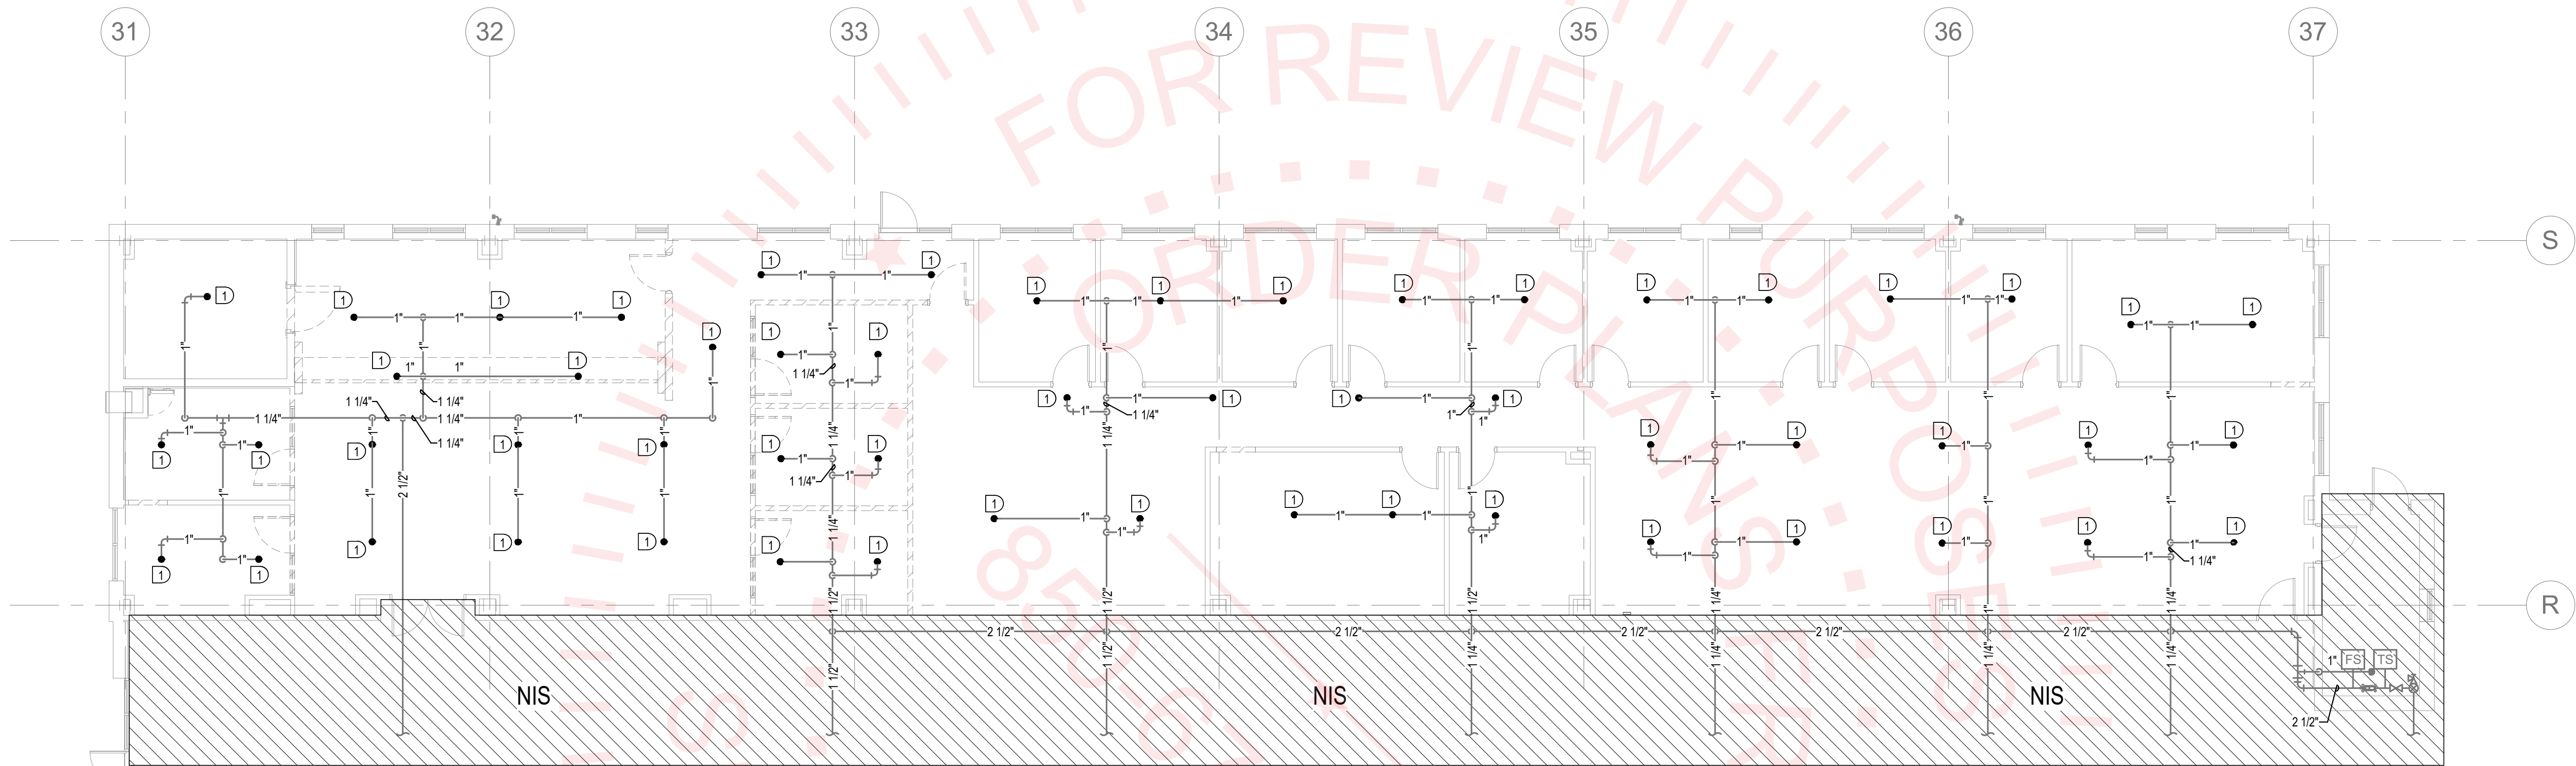


1 DEMOLITION PLAN - FIRE SPRINKLER
1/8" = 1'-0"

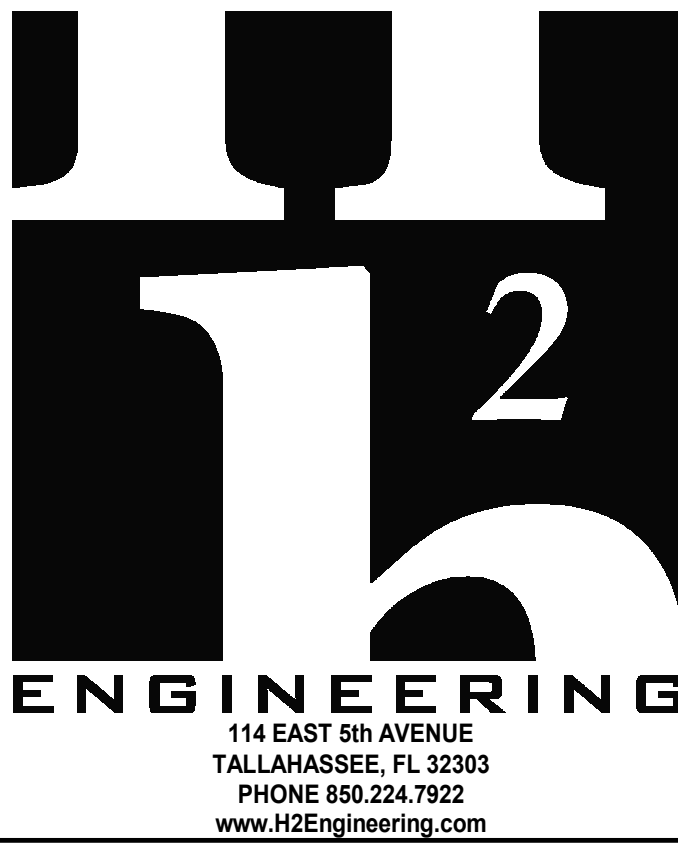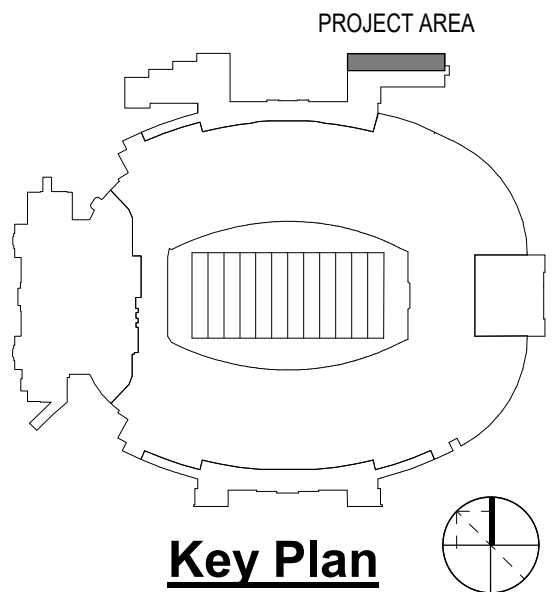

H2E PROJECT No. 23-178
THIS DOCUMENT IS THE PROPERTY OF H2ENGINEERING AND IS PREPARED AS AN INSTRUMENT OF SERVICE. ITS USE, REUSE OR REPRODUCTION, EXCEPT BY WRITTEN AGREEMENT WITH H2ENGINEERING, INC., IS PROHIBITED.

Florida Registry #2485
Robert D. Richards, P.E. #90648

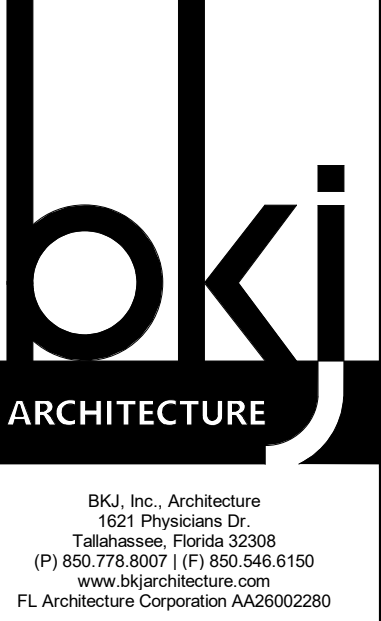

SEAL:

PROJECT TITLE:

Interior Renovation for FSU
UCA Suite 1500
FSU Project No. 2400665,
Tallahassee, Florida 32306

JOB NO.: 23-178

DESIGNED: RDR

DRAWN: MAW

CHECKED: RDR

THIS DRAWING AND ANY REPRODUCTIONS ARE THE PROPERTY AND COPYRIGHT OF BKL, INC. AND MAY NOT BE REPRODUCED, PUBLISHED, OR USED IN ANY MANNER WITHOUT WRITTEN PERMISSION OF THE ARCHITECT

REVISIONS:

DRAWING PHASE:
100% Construction Documents

DRAWING TITLE:
DEMOLITION PLAN - FIRE SPRINKLER

SHEET NO.:
FSD1.0

DATE:
April 12, 2024

RENOVATION KEYNOTES

① IN THIS VICINITY, PROVIDE NEW SPRINKLER HEAD(S) IN ACCORDANCE WITH NFPA 13.

bki

ARCHITECTURE

BKJ, Inc., Architecture

1621 Physicians Dr.

Tallahassee, Florida 32308

(P) 850.778.8007 | (F) 850.546.6150

www.bkjarchitecture.com

FL Architecture Corporation AA00002280

SEAL:

PROJECT TITLE:

Interior Renovation for FSU
UCA Suite 1500
FSU Project No. 240065,
Tallahassee, Florida 32306

JOB NO.: 23-178

DESIGNED: RDR

DRAWN: MAW

CHECKED: RDR

THIS DRAWING AND ANY REPRODUCTIONS ARE THE PROPERTY AND COPYRIGHT OF BKJ, INC. AND MAY NOT BE REPRODUCED, PUBLISHED, OR USED IN ANY MANNER WITHOUT WRITTEN PERMISSION OF THE ARCHITECT


REVISIONS:

DRAWING PHASE:
100% Construction Documents


DRAWING TITLE:
RENOVATION PLAN - FIRE SPRINKLER

SHEET NO.:
FS1.0

DATE:
April 12, 2024

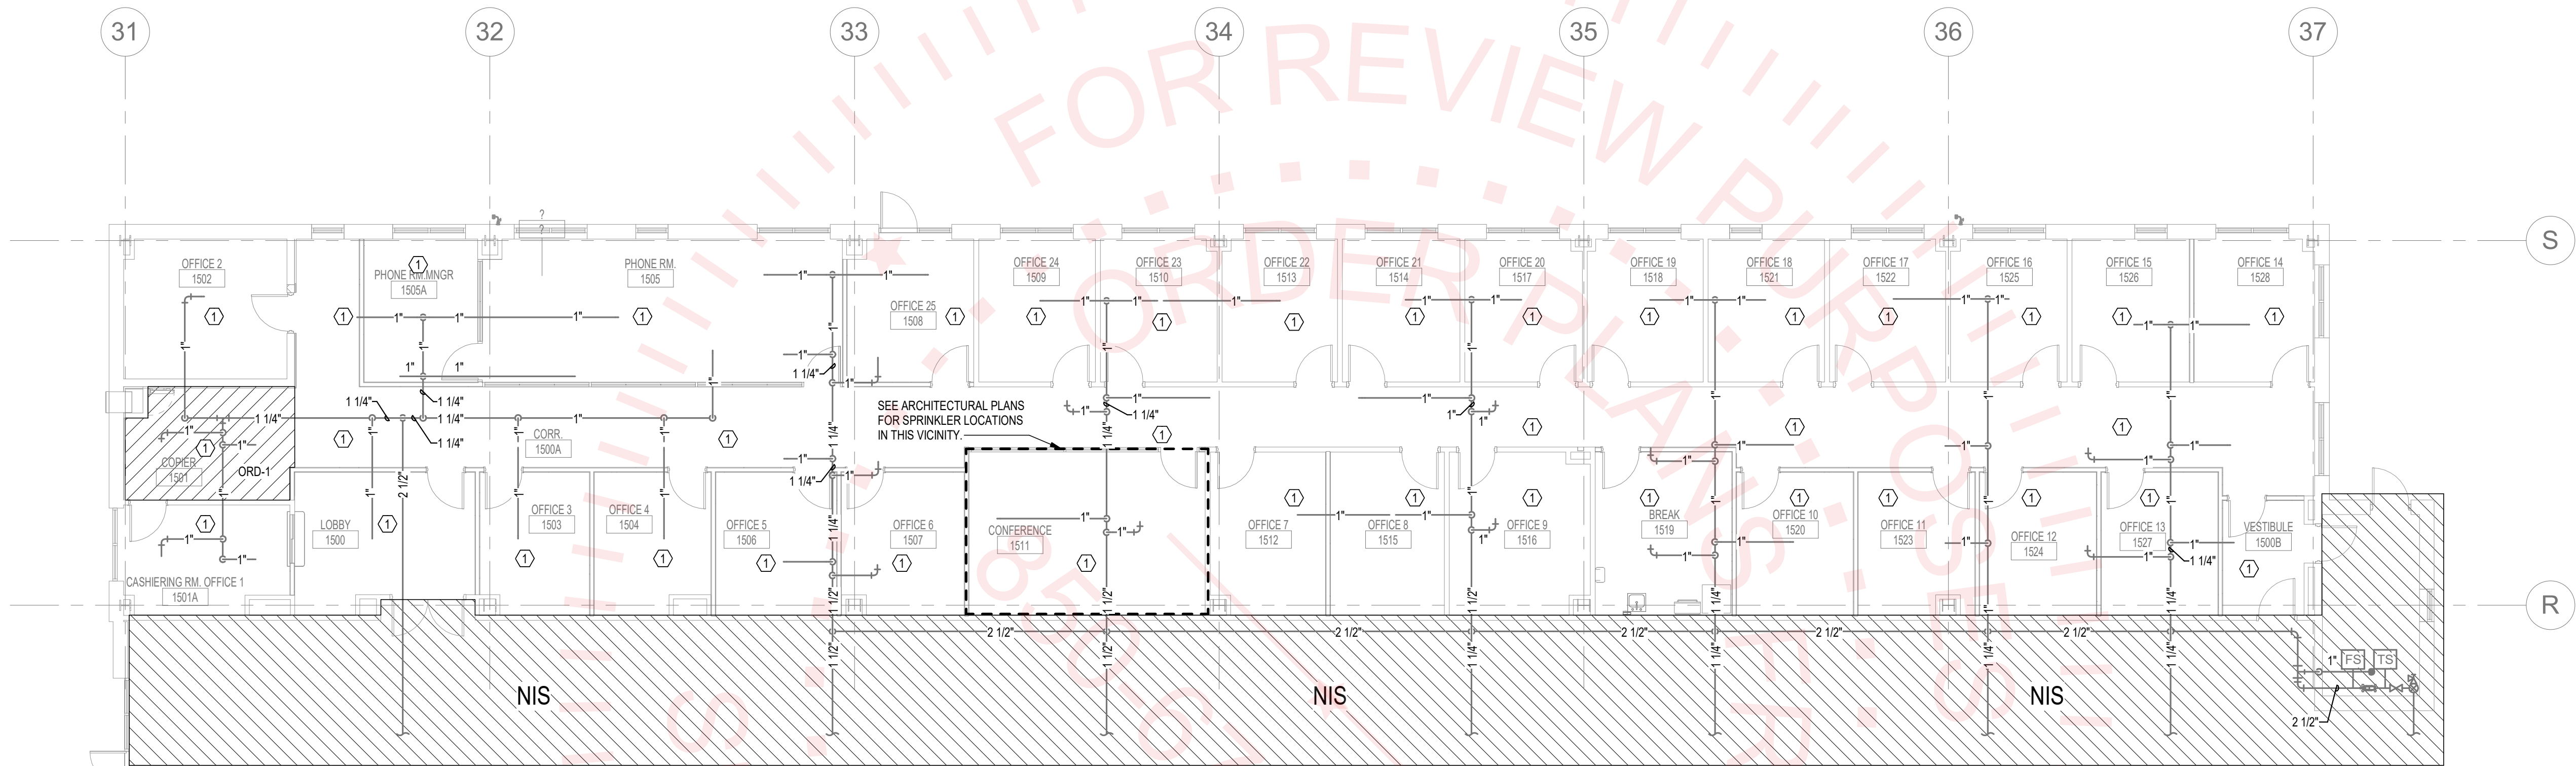

① RENOVATION PLAN - FIRE SPRINKLER
1/8" = 1'-0"

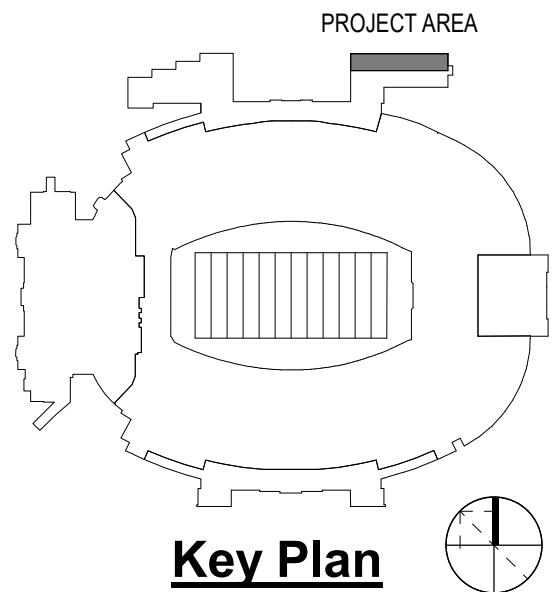

H2

ENGINEERING

114 EAST 5th AVENUE

TALLAHASSEE, FL 32303

PHONE 850.224.7922

www.H2Engineering.com

H2E PROJECT No. 23.178

THIS DOCUMENT IS THE PROPERTY OF H2ENGINEERING AND IS PREPARED AS AN INSTRUMENT OF SERVICE. ITS USE, REUSE OR REPRODUCTION, EXCEPT BY WRITTEN AGREEMENT WITH H2ENGINEERING, INC., IS PROHIBITED.

Florida Registry #2485
Robert D. Richards, P.E. #90648

FIRESTOP SCHEDULE OF STROBING PENETRATION SYSTEMS. BASIS OF DESIGN: HILTI, INC.																
TYPE OF PENETRANT	F-RATING (HR)	CONCRETE FLOORS			CONCRETE OR BLOCK WALLS			GYPSUM WALLS								
		BASIS OF DESIGN UL SYSTEM														
		HILTI PRODUCTS														
CIRCULAR BLANK OPENINGS (0000-0999)	1	F-A-0006, C-AJ-0055, C-AJ-0090			C-AJ-0055, C-AJ-0090			--								
	2	F-A-0006, C-AJ-0055, C-AJ-0090			C-AJ-0055, C-AJ-0090			--								
METAL PIPES OR CONDUIT (1000-1999)	1	C-AJ-1226, F-A-1028, F-A-1017			C-AJ-1226, W-J-1067, W-J-1020			W-L-1054, W-L-1058, W-L-1164, W-L-1506								
	2	C-AJ-1226, F-A-1028, F-A-1017			C-AJ-1226, W-J-1067, W-J-1020, W-J-1248			W-L-1054, W-L-1058, W-L-1164, W-L-1506								
NON-METALLIC PIPE OR CONDUIT (I.E. PVC, CPVC, ABS, FRP, ENT) (2000-2999)	1	F-A-2053, F-A-2025, C-AJ-2109, C-AJ-2098, C-AJ-2271, C-AJ-2167, C-BJ-2021, C-AJ-2342			C-AJ-2109, C-AJ-2098, C-AJ-2167, C-AJ-2371, C-AJ-2342			W-L-2078, W-L-2075, W-L-2128								
	2	F-A-2053, F-A-2025, C-AJ-2109, C-AJ-2098, C-AJ-2271, C-AJ-2167, C-BJ-2021, C-AJ-2371, C-AJ-2342			C-AJ-2109, C-AJ-2098, C-AJ-2167, C-AJ-2371, C-AJ-2342			W-L-2078, W-L-2075, W-L-2128								
INSULATED PIPES (5000-5999)	1	F-A-5015, F-A-5017, C-AJ-5090, C-AJ-5091, C-AJ-5090, C-AJ-5048			C-AJ-5090, C-AJ-5091, C-AJ-5061, W-J-5042			W-L-5028, W-L-5029, W-L-5047								
	2	F-A-5015, F-A-5017, C-AJ-5090, C-AJ-5091, C-AJ-5090			C-AJ-5090, C-AJ-5091, C-AJ-5061, W-J-5042			W-L-5028, W-L-5029, W-L-5047								
MIXED PENETRANTS (8000-8999)	1	C-AJ-8099, C-AJ-8056, C-AJ-8143			C-AJ-8099, C-AJ-8056, W-J-8007, C-AJ-8143			W-L-1095, W-L-8013								
	2	C-AJ-8099, C-AJ-8056, C-AJ-8143, C-AJ-8252			C-AJ-8099, C-AJ-8056, W-J-8007, C-AJ-8143, C-AJ-8252			W-L-1095, W-L-8013								

NOTES:

- JOBSITE CONDITIONS OF EACH THROUGH-PENETRATION FIRESTOP SYSTEM MUST MEET ALL DETAILS OF THE UL-CLASSIFIED SYSTEM SELECTED.
- IF JOBSITE CONDITIONS DO NOT MATCH ANY UL-CLASSIFIED SYSTEMS IN THE SCHEDULES ABOVE, CONTACT FIRESTOP MANUFACTURER FOR ALTERNATIVE SYSTEMS OR ENGINEER JUDGMENT DRAWINGS.
- WHERE MORE THAN ONE APPLICABLE UL-CLASSIFIED SYSTEM IS LISTED IN THE SCHEDULES, CHOOSE THE UL SYSTEM WHICH IS MOST ECONOMICAL FOR EACH THROUGH-PENETRATION FIRESTOP SYSTEM.
- COORDINATE WORK WITH OTHER TRADES TO ENSURE THAT PENETRATION OPENING SIZES ARE APPROPRIATE FOR PENETRANT LOCATIONS, AND VICE-VERSA.
- ALL THROUGH-PENETRATION FIRESTOPS SHALL BE PROVIDED BY ONE MANUFACTURER. APPROVED MANUFACTURES: HILTI, RECTORSEAL, 3M, STL.

WATER HAMMER ARRESTERS

GROUPED FIXTURES TABLE 1 - FOR GROUPED FIXTURES <table> <tr> <th>P.D.I. UNITS</th><th>AA</th><th>A</th><th>B</th><th>C</th><th>D</th><th>E</th><th>F</th></tr> <tr> <td>FIXTURE UNITS</td><td>1-3</td><td>1-11</td><td>12-32</td><td>33-60</td><td>61-113</td><td>114-154</td><td>155-330</td></tr> </table> RULE 1 - MULTIPLE FIXTURES NOT EXCEEDING 20 FT. UP TO 20 FT. MAIN OR RISER POINT OF RELIEF TYPICAL BRANCH LINE SELECTION METHOD: USING TABLE 1, SIZE UNIT "X" FOR THE TOTAL FIXTURE UNITS OF BRANCH LINE. RULE 2 - MULTIPLE FIXTURES EXCEEDING 20 FT. OVER 20 FT. MAIN OR RISER POINT OF RELIEF TYPICAL BRANCH LINE SELECTION METHOD: SIZE UNIT "X" AND UNIT "Y" SO THE SUM OF THE RATINGS IS EQUAL TO OR GREATER THAN TOTAL FIXTURE UNITS OF BRANCH LINE. COMBINATION OF RULE 1 AND RULE 2 MAIN OR RISER UP TO 20 FT. OVER 20 FT. BRANCH 1 POINT OF RELIEF BRANCH 2 SELECTION METHOD: USING TABLE 1, SIZE UNIT "X" FOR BRANCH 1 BASE ON RULE 1. SIZE UNITS "Y" AND "Z" BASED ON RULE 2.	P.D.I. UNITS	AA	A	B	C	D	E	F	FIXTURE UNITS	1-3	1-11	12-32	33-60	61-113	114-154	155-330	LONG RUNS TABLE 2 - WATER PRESSURES UP TO 85 P.S.I.G. <table> <tr> <th colspan="2">P.D.I. WATER HAMMER ARRESTERS</th><th colspan="2">P.D.I. WATER HAMMER ARRESTERS</th></tr> <tr> <th>LENGTH OF PIPE (FT.)</th><th>NOMINAL PIPE DIAMETER</th><th>LENGTH OF PIPE (FT.)</th><th>NOMINAL PIPE DIAMETER</th></tr> <tr> <td>1/2"</td><td>3/4"</td><td>1"</td><td>1-1/4"</td></tr> <tr> <td>1-1/2"</td><td>2"</td><td>2"</td><td>2"</td></tr> <tr> <td>25</td><td>A B C D E F</td><td>25</td><td>B C B C D E F</td></tr> <tr> <td>50</td><td>A B A B C D E F</td><td>50</td><td>B C C C E F CF</td></tr> <tr> <td>75</td><td>B C D D AB F EF</td><td>75</td><td>C D D D F CF FF</td></tr> <tr> <td>100</td><td>C D E E F CF FF</td><td>100</td><td>D E E E CF EF FF</td></tr> <tr> <td>125</td><td>C D F AF EF EFF</td><td>125</td><td>D E E E DF FF BFFF</td></tr> <tr> <td>150</td><td>D E F DF FF FFF</td><td>150</td><td>E F F F FF DFF FFFF</td></tr> </table> NOTE: LOCATE WHA AS CLOSE AS POSSIBLE TO POINT OF CLOSURE LONG RUN OF PIPING POINT OF CLOSURE OUTLET SELECTION METHOD: USING EITHER TABLE 2 OR 2A (BASED ON SYSTEM PRESSURE), SIZE UNIT "X" BASED ON SIZE OF PIPE AND LENGTH OF RUN.	P.D.I. WATER HAMMER ARRESTERS		P.D.I. WATER HAMMER ARRESTERS		LENGTH OF PIPE (FT.)	NOMINAL PIPE DIAMETER	LENGTH OF PIPE (FT.)	NOMINAL PIPE DIAMETER	1/2"	3/4"	1"	1-1/4"	1-1/2"	2"	2"	2"	25	A B C D E F	25	B C B C D E F	50	A B A B C D E F	50	B C C C E F CF	75	B C D D AB F EF	75	C D D D F CF FF	100	C D E E F CF FF	100	D E E E CF EF FF	125	C D F AF EF EFF	125	D E E E DF FF BFFF	150	D E F DF FF FFF	150	E F F F FF DFF FFFF
P.D.I. UNITS	AA	A	B	C	D	E	F																																																		
FIXTURE UNITS	1-3	1-11	12-32	33-60	61-113	114-154	155-330																																																		
P.D.I. WATER HAMMER ARRESTERS		P.D.I. WATER HAMMER ARRESTERS																																																							
LENGTH OF PIPE (FT.)	NOMINAL PIPE DIAMETER	LENGTH OF PIPE (FT.)	NOMINAL PIPE DIAMETER																																																						
1/2"	3/4"	1"	1-1/4"																																																						
1-1/2"	2"	2"	2"																																																						
25	A B C D E F	25	B C B C D E F																																																						
50	A B A B C D E F	50	B C C C E F CF																																																						
75	B C D D AB F EF	75	C D D D F CF FF																																																						
100	C D E E F CF FF	100	D E E E CF EF FF																																																						
125	C D F AF EF EFF	125	D E E E DF FF BFFF																																																						
150	D E F DF FF FFF	150	E F F F FF DFF FFFF																																																						

GENERAL NOTE:
PROVIDE WATER HAMMER ARRESTERS IN ACCORDANCE WITH STANDARD PDH-WH201

PIPING AND FITTINGS			
	CAP		
	ELBOW TURNED UP		
	ELBOW TURNED DOWN		
	TEE, OUTLET UP		
	TEE, OUTLET DOWN		
	NEW PIPE		
	EXISTING PIPE TO REMAIN		
	EXISTING PIPE TO BE REMOVED		
	SANITARY, SOIL OR WASTE PIPING		
	SANITARY VENT PIPING		
	HOT WATER SUPPLY PIPING		
	WATER HAMMER ARRESTER - SEE DETAIL THIS SHEET		
V G •			
VALVES			
	BALL VALVE (WITH QUARTER TURN HANDLE)		
MISCELLANEOUS			
	POINT OF CONNECTION, NEW TO EXISTING		
	POINT INDICATED LIMIT OF DEMOLITION		
ABBREVIATIONS			
AFF	ABOVE FINISHED FLOOR	N/A	NOT APPLICABLE
AHAP	AS HIGH AS POSSIBLE	NIS	NOT IN SCOPE
CWS	COLD WATER SUPPLY	PSAN	SANITARY
EWH	ELECTRIC WATER HEATER	PVENT	VENT
EX	EXISTING	SK	SKIN
HB	HOSE BIBB	TYP	TYPICAL
HP	HORSEPOWER	WCO	WALL CLEANOUT
HWS	HOT WATER SUPPLY	WHA	WATER HAMMER ARRESTER
IMB	ICE MAKER HOOK-UP BOX		

APPLICABLE CODES

PERFORM WORK IN ACCORDANCE WITH THE FOLLOWING CODES AND ANY APPLICABLE STATUTES, ORDINANCES, CODES, AND REGULATIONS OF GOVERNMENTAL AUTHORITIES HAVING JURISDICTION.

- ASHRAE**
 - STANDARD 15 SAFETY STANDARD FOR REFRIGERATION SYSTEMS - 2019
 - STANDARD 55 THERMAL ENVIRONMENTAL CONDITIONS FOR HUMAN OCCUPANCY
 - STANDARD 62.1 VENTILATION STANDARD FOR ACCEPTABLE INDOOR AIR QUALITY - 2016
 - STANDARD 90.1 ENERGY STANDARD FOR BUILDINGS EXCEPT LOW RISE RESIDENTIAL BUILDINGS
- OCCUPATIONAL SAFETY AND HEALTH REGULATIONS (OSHA).
- NATIONAL FIRE CODES**
 - NFPA 1 UNIFORM FIRE CODE - 2021 (FLORIDA EDITION)
STANDARD FOR THE INSTALLATION OF SPRINKLER SYSTEM - 2019
 - NFPA 13 STANDARD FOR THE INSPECTION, TESTING AND MAINTENANCE OF WATER-BASED FIRE PROTECTION SYSTEMS - 2020
 - NFPA 70 NATIONAL ELECTRICAL CODE - 2020
 - NFPA 72 NATIONAL FIRE ALARM AND SIGNALING CODE - 2019
 - NFPA 90A STANDARD FOR THE INSTALLATION OF AIR CONDITIONING AND VENTILATION SYSTEMS - 2021
 - NFPA 90B STANDARD FOR THE INSTALLATION OF WARM AIR HEATING AND AIR CONDITIONING SYSTEMS - 2021
 - NFPA 91 STANDARD FOR THE INSTALLATION OF BLOWER AND EXHAUST SYSTEMS - 2020
 - NFPA 901 LIFE SAFETY CODE - 2021 (FLORIDA EDITION)
- FLORIDA BUILDING CODE, 2023 8th EDITION**
 - BUILDING CODE
 - EXISTING BUILDING CODE
 - ENERGY CONSERVATION CODE
 - MECHANICAL CODE
 - PLUMBING CODE
 - ACCESSIBILITY CODE
- FLORIDA STATUTES**
 - CHAPTER 471 ENGINEERING
 - CHAPTER 533.80 BUILDING CONSTRUCTION STANDARDS; FLORIDA BUILDING CODE - ENFORCEMENT
- FLORIDA ADMINISTRATIVE CODE**
 - CHAPTER 98-7 FLORIDA BUILDING COMMISSION HANDICAPPED ACCESSIBILITY STANDARDS
 - CHAPTER 61G15-34 RESPONSIBILITY RULES OF PROFESSIONAL ENGINEERS CONCERNING THE DESIGN OF MECHANICAL SYSTEMS
 - CHAPTER 69A-3 FIRE PREVENTION - GENERAL PROVISIONS
 - CHAPTER 69A-40 THE FLORIDA FIRE PREVENTION CODE

RESOLVE, IN WRITING, ANY CODE VIOLATION DISCOVERED IN CONTRACT DOCUMENTS WITH THE ENGINEER PRIOR TO BIDDING. AFTER AWARD OF THE CONTRACT, MAKE ANY CORRECTION OR ADDITION NECESSARY FOR COMPLIANCE WITH APPLICABLE CODES AT NO ADDITIONAL COST TO OWNER.

THE CONTRACTOR SHALL INCLUDE IN THE WORK, WITHOUT EXTRA COST TO THE OWNER, ANY LABOR, MATERIALS, SERVICES, APPARATUS, AND DRAWINGS REQUIRED TO COMPLY WITH ALL APPLICABLE LAWS, ORDINANCES, RULES, AND REGULATIONS.

WHERE THERE IS CONFLICT BETWEEN THE CONTRACT DOCUMENTS AND THE APPLICABLE CODES, THE CODES SHALL GOVERN, EXCEPT WHERE THE REQUIREMENTS OF THE CONTRACT DOCUMENTS ARE MORE STRINGENT.

MINIMUM REQUIRED SLOPE

ALL DRAINAGE PIPING	
PIPE SIZES, INCHES	MIN. SLOPE INCHES/FOOT
2" -----	1/4"
3" -----	1/8"
4" -----	1/8"
6" -----	1/8"
8" -----	1/16"
10" -----	1/16"

NOTES:
1. COMBINATION DRAIN AND VENT PIPING SHALL BE RUN AT A MAXIMUM SLOPE OF 1/2" PER FOOT.


PLUMBING NOTES

1. INSTALL ALL WORK IN ACCORDANCE WITH THE FLORIDA PLUMBING CODE AND LOCAL PLUMBING

GENERAL NOTES

1. DRAWINGS ARE DIAGRAMMATIC. INDICATIVE OF THE WORK TO BE FURNISHED AND INSTALLED UNDER THIS CONTRACT. REFER TO ARCHITECTURAL AND STRUCTURAL DRAWINGS FOR ALL DIMENSIONS.
2. FIELD VERIFY ALL DIMENSIONS AND ALL CONDITIONS. IF THE CONTRACTOR IS UNABLE TO INTERPRET THE CONTRACT DOCUMENTS, HE IS RESPONSIBLE TO OBTAIN CLARIFICATION IN WRITING TO THE ARCHITECT. IF HE PROCEEDS WITH ANY WORK BEFORE OBTAINING CLARIFICATION, HE SHALL BE HELD RESPONSIBLE FOR ANY DEFICIENCIES ASSOCIATED THEREWITH.
3. BEFORE SUBMITTING FOR THE WORK, EACH BIDDER WILL BE RESPONSIBLE TO EXAMINE THE PREMISES AND SATISFY HIMSELF AS TO THE EXISTING CONDITIONS UNDER WHICH HE WILL BE OBLIGATED TO OPERATE AND COMPLETE THE WORK UNDER THIS CONTRACT. NO ALLOWANCE WILL SUBSEQUENTLY BE MADE IN THIS CONNECTION ON BEHALF OF THE CONTRACTOR FOR ANY ERROR OR OMISSION ON HIS PART.
4. THE CONTRACTOR SHALL PAY FOR ALL INSPECTION PERMITS, CERTIFICATES, CONNECTION FEES, SYSTEM DEMAND CHARGES AND LICENSE FEES IN CONNECTION WITH HIS WORK.
5. CONSTRUCTION MANAGER/GENERAL CONTRACTOR SHALL BE RESPONSIBLE FOR COORDINATING WORK OF ALL SUBCONTRACTORS TO AVOID INTERFERENCES.
6. ALL WORK SHALL COMPLY WITH APPLICABLE O.S.H.A. AND E.P.A. REGULATIONS AND GUIDELINES.
7. ERECT AND MAINTAIN ALL REASONABLE PRECAUTIONS FOR SAFETY AND HEALTH INCLUDING POSTING DANGER SIGNS AND OTHER WARNINGS AGAINST HAZARDS INCLUDING PROMULGATING SAFETY REGULATIONS. PROVIDE SAFETY PRECAUTIONS AND BARRICADES FOR PEDESTRIANS AT CONSTRUCTION VEHICLE ACCESS AND EGRESS LOCATIONS.
8. COORDINATE AND SEQUENCE ALL DEMOLITION, CLEANING AND CONSTRUCTION WORK. SUBMIT A COMPLETELY DETAILED CONSTRUCTION SCHEDULE PRIOR TO PRE-CONSTRUCTION CONFERENCE. THE CONTRACTOR SHALL SURETIE THE PROJECT SCHEDULE. HE SHALL PROVIDE SUFFICIENT MANPOWER AND EQUIPMENT TO FULLY MOBILIZE, PROCEED WITH AND COMPLETE THE WORK.
9. THE CONTRACTOR SHALL BE RESTRICTED TO AREAS SPECIFIED BY THE OWNER FOR ON-SITE STORAGE OF CONSTRUCTION MATERIALS. THE CONTRACTOR IS RESPONSIBLE FOR THE PROTECTION AND SECURITY OF ALL EQUIPMENT AND MATERIALS.
11. THE CONTRACTOR SHALL MAINTAIN A CLEAN WORK ENVIRONMENT AT ALL TIMES AND SHALL CLEAN CONSTRUCTION SITE OF ALL DEBRIS AT COMPLETION OF THE JOB AND BEFORE FINAL PAYMENT IS MADE.
12. THE CONTRACTOR SHALL FURNISH "AS-BUILT" DRAWINGS TO THE OWNER AT COMPLETION OF CONSTRUCTION.
13. THE CONTRACTOR'S USE OF AN APPROVAL STAMP ON DOCUMENTS SUBMITTED AS SHOP DRAWINGS, PRODUCT DATA, SAMPLES AND SIMILAR SUBMITTALS CERTIFIES THAT THE CONTRACTOR HAS COMPLIED WITH THE CONTRACT DOCUMENT REQUIREMENTS RELATED TO "SHOP DRAWINGS, PRODUCT DATA AND SAMPLES".
14. THE CONTRACTOR SHALL NOT BE RELIEVED OF RESPONSIBILITY FOR DEVIATIONS FROM REQUIREMENTS OF THE CONTRACT DOCUMENTS BY THE ARCHITECT/ENGINEER'S APPROVAL OF SHOP DRAWINGS, PRODUCT DATA, SAMPLES OR SIMILAR SUBMITTALS UNLESS THE CONTRACTOR HAS SPECIFICALLY INFORMED THE ARCHITECT/ENGINEER IN WRITING OF SUCH DEVIATION AT THE TIME OF SUBMITTAL AND THE ARCHITECT/ENGINEER HAS GIVEN WRITTEN APPROVAL TO THE SPECIFIC DEVIATION. THE CONTRACTOR SHALL NOT BE RELIEVED OF RESPONSIBILITY FOR ERRORS OR OMISSIONS IN SHOP DRAWINGS, PRODUCT DATA, SAMPLES OR SIMILAR SUBMITTALS BY THE ARCHITECT/ENGINEER'S APPROVAL THEREOF.
15. PRIOR TO INSTALLATION, COORDINATE AND ADJUST THE FINAL LOCATION OF ALL WALL MOUNTED DEVICES AND EQUIPMENT WITH ALL CASEWORK, SHELVING, MARKER BOARDS, BULLETIN BOARDS OR OTHER WALL MOUNTED FURNISHINGS.
16. SUPPORTS AND HANGERS SHALL PRESENT A NEAT, ORDERLY APPEARANCE. ATTACHMENTS SHALL BE TO THE STRUCTURAL SYSTEM ONLY.
17. CONTRACTOR SHALL MAINTAIN THE INTEGRITY OF ALL FIRE, SMOKE AND ACOUSTICAL WALL ASSEMBLIES.
18. BEAM AND FLOOR PENETRATIONS SHALL BE APPROVED BY THE STRUCTURAL ENGINEER. BEAM SLEEVES AND BEAM REINFORCING APPROVED BY STRUCTURAL ENGINEER SHALL BE FURNISHED AND INSTALLED BY THE CONTRACTOR.
19. CONTRACTOR SHALL FURNISH U.L. APPROVED DRAWINGS FOR EACH TYPE OF FIRE RATED ASSEMBLY PENETRATION BY DUCTS, PIPES OR CONDUTS. THESE DRAWINGS SHALL BE DISPLAYED ON THE JOB SITE AT ALL TIMES DURING CONSTRUCTION. SEE SPECIFICATIONS.
20. CONTRACTOR SHALL GUARANTEE THE WORK AND MATERIALS FOR A PERIOD OF ONE YEAR FROM DATE OF FINAL ACCEPTANCE. THIS GUARANTEE SHALL BE IN ADDITION TO THE WARRANTIES PROVIDED BY MATERIAL SUPPLIERS AND MANUFACTURERS.
21. THE BUILDING WILL REMAIN OCCUPIED DURING CONSTRUCTION. THE OWNER WILL MAKE ALL REASONABLE EFFORTS TO ASSIST THE CONTRACTOR IN COMPLETING THE WORK. COORDINATE ALL WORK WITH THE OWNER'S DESIGNATED REPRESENTATIVE.
22. EXIT WAYS SHALL BE KEPT CLEAR. IF AN EXIT MUST BE TEMPORARILY BLOCKED, PROVIDE THE REQUIRED BARRICADE AND DIRECTIONAL SIGNS FOR TEMPORARY EXITING AND SAFETY.
23. REMOVE AND REPAIR OR RE-INSTALL EXISTING CEILING ASSEMBLIES AS REQUIRED. REPLACE ANY ASSEMBLIES DAMAGED OR SOILED DURING CONSTRUCTION.
24. PROVIDE PROPER PROTECTIVE MEASURES TO PROTECT EXISTING FURNITURE, CARPET AND FINISHES DURING THE COURSE OF CONSTRUCTION. TAKE CARE NOT TO DAMAGE EXISTING SURFACES. REPAIR TO MATCH EXISTING CONDITIONS AS REQUIRED.
25. SEAL ALL HOLES IN WALLS, CEILINGS, FLOORS, ETC. TO MATCH EXISTING ADJACENT SURFACES WHERE EQUIPMENT, CONDUIT AND/OR PIPING ARE REMOVED.
26. ALL EXISTING EQUIPMENT IS THE PROPERTY OF THE OWNER AND SHALL BE DISPOSED OF AS DIRECTED BY THE OWNER. DISPOSE OF ALL MATERIALS AND EQUIPMENT SHOWN TO BE REMOVED IN ACCORDANCE WITH LOCAL REGULATIONS.

DRAWING INDEX	
P.O.2	GENERAL NOTES & LEGENDS
P.O.1	SCHEDULES & DETAILS
P.1.0	RENOVATION PLAN - PLUMBING

 BKJ ARCHITECTURE	
BKJ, Inc., Architecture 1521 Physicians Dr. Tallahassee, Florida 32308 (P) 850.775.8007 (F) 850.546.6150 www.bkjarchitecture.com FL Architecture Corporation AAQ6002280	
SEAL:	
PROJECT TITLE: Interior Renovation for FSU UCA Suite 1500 FSU Project No. 2400665, Tallahassee, Florida 32306	
JOB NO.: 23-178	
DESIGNED: RDR	
DRAWN: MAW	
CHECKED: RDR	
THIS DRAWING AND ANY REPRODUCTIONS ARE THE PROPERTY AND COPYRIGHT OF BKJ, INC. AND MAY NOT BE REPRODUCED, PUBLISHED OR USED IN ANY MANNER WITHOUT WRITTEN PERMISSION OF THE ARCHITECT	
REVISIONS:	
DRAWING PHASE: 100% Construction Documents	
DRAWING TITLE: GENERAL NOTES & LEGENDS	
SHEET NO.:	P0.1
DATE:	April 10, 2024

PLUMBING FIXTURE SCHEDULE

FIXTURE DESIGNATION	FIXTURE DESCRIPTION	A.D.A. COMPLIANT	MOUNTING METHOD	HEIGHT (A.F.F.)	ROUGH-IN PIPE SIZES				MANUFACTURER AND MODEL NUMBER	ACCESSORIES (SEE SCHEDULE)
					COLD WATER SUPPLY	HOT WATER SUPPLY	FIXTURE TRAP	FIXTURE DRAIN		
SK-1	SINGLE COMPARTMENT SINK, SELF-RIMMING, 22"x19-1/2", 18"x14"x5-1/2" DEEP BOWL, 18 GAUGE TYPE 304 STAINLESS STEEL, 4 FAUCET HOLES (ONE CENTERED, TWO 4" FROM CENTER, ONE 8" FROM CENTER), SOUND DEADENING COATING ON BOTTOM OF SINK.	YES	COUNTER TOP	SEE ARCH. PLANS	1/2"	1/2"	1-1/2"	2"	ELKAY: LRAD221955-4 OR APPROVED EQUAL	FCT-SK-1.5-GEN DR-SK-STD TR-SK-STD TMV-SK
IMB	ICE MAKER HOOK-UP BOX, 20 GAUGE STEEL, WHITE POWDER-COATED, ALL WELDED WATER TIGHT CONSTRUCTION, COLD WATER SUPPLY VALVE WITH 1/2" COPPER SWEAT INLET AND 1/4" COMPRESSION OUTLET AND WATER HAMMER ARRESTER.	N/A	WALL RECESSED	--	1/2"	N/A	N/A	N/A	GUY GRAY: MB1HAAB OR APPROVED EQUAL	

NOTES:

- 1
- SUPPLY STOPS: CHROME-PLATED-BRASS, ONE-QUARTER TURN, BALL-TYPE OR COMPRESSION VALVE WITH INLET MATCHING SUPPLY PIPING.
- 2
- FLEXIBLE CONNECTIONS: ASME A112.18.6 BRAIDED- OR CORRUGATED-STAINLESS STEEL, FLEXIBLE HOSE RISER.
- 3
- SUPPORT CARRIERS: ASME A112.6.1M TYPE 1 (URINALS) OR TYPE 2 (CONCEALED ARM FOR LAVATORIES) WITH RECTANGULAR STEEL UPRIGHTS, COUPLING, SEAL, AND MOUNTING HARDWARE.
- 4
- A.D.A. LAVATORIES & SINKS: PROTECT DRAIN AND SUPPLY LINES WITH "TRAP WRAP" OR APPROVED EQUAL.
- 5
- EXTRA MAINTENANCE MATERIALS: FURNISH TWO (2) FLUSHOMETER-VALVE REPAIR KITS FOR EACH TYPE OF FLUSHOMETER VALVE INSTALLED.

PLUMBING FIXTURE ACCESSORY SCHEDULE


ACCESSORY TAG	ACCESSORY DESCRIPTION	MANUFACTURER AND MODEL NUMBER
DR-SK-STD	TYPE 304 STAINLESS STEEL DRAIN, REMOVEABLE CONICAL STRAINER BASKET, 1-1/2" STAINLESS STEEL OFFSET TAILPIECE.	ELKAY: LK35/LK53/LKAD35 OR APPROVED EQUAL
FCT-SK-1.5-GEN	SINGLE LEVER DECK MOUNTED FAUCET, POLISHED CHROME PLATED BRASS, 9" SWING SPOUT, 1.5 GPM AT 80 PSI AERATOR, SOFT-CLOSING VALVE WITH INTEGRAL FLOW CONTROL AND ADJUSTABLE STOP TO RESTRICT EXTREME TEMPERATURES.	T&S BRASS: B-2731 OR APPROVED EQUAL
TMV-SK	EXPOSED ROUGH BRONZE, THERMOSTATIC MIXING VALVE, ADJUSTABLE LIMIT STOP, ASSE 1070, LISTED FOR POINT OF USE APPLICATION. SET OUTLET TEMPERATURE TO 110°F.	LAWLER: 570 OR APPROVED EQUAL
TR-SK-STD	CAST BRASS ADJUSTABLE P-TRAP, TUBING OUTLET, 1-1/2" x 1-1/2", CLEANOUT PLUG, POLISHED CHROME PLATED FINISH.	KOHLER: K-9000-CP OR APPROVED EQUAL

FIXTURE UNIT CALCULATIONS

FIXTURE TYPE	QUANTITY	WASTE		SUPPLY					
		UNIT	TOTAL	COLD		HOT		TOTAL	
				UNIT	TOTAL	UNIT	TOTAL	UNIT	TOTAL
SINK	1	2	2	2	2	2	2	3	3
REFRIGERATOR / ICE MAKER	1			1	1			1	1
TOTAL FIXTURE UNITS			2		3		2		4
DOMESTIC WATER DEMAND (GPM)					6.5		5.2		8.0


INSTANTANEOUS ELECTRIC WATER HEATERS

DESIGNATION		WH-1
	FLOW RATE	GPM 1.5
	HEATING CAPACITY	kW 8.3
	ENTERING WATER TEMPERATURE	°F 65
	LEAVING WATER TEMPERATURE	°F 103
	TEMPERATURE RISE	°F 38
	FULL LOAD CURRENT	AMPS 40
	ELECTRICAL CHARACTERISTICS	V / PH 208 / 1
	MINIMUM CIRCUIT AMPACITY	AMPS 50
	MAXIMUM OVERCURRENT PROTECTION	AMPS 50
MANUFACTURER		CHRONOMITE
MODEL NUMBER		CM-40L
NOTES:		
1	MINIMUM ACTIVATION FLOW = 0.20 GPM	

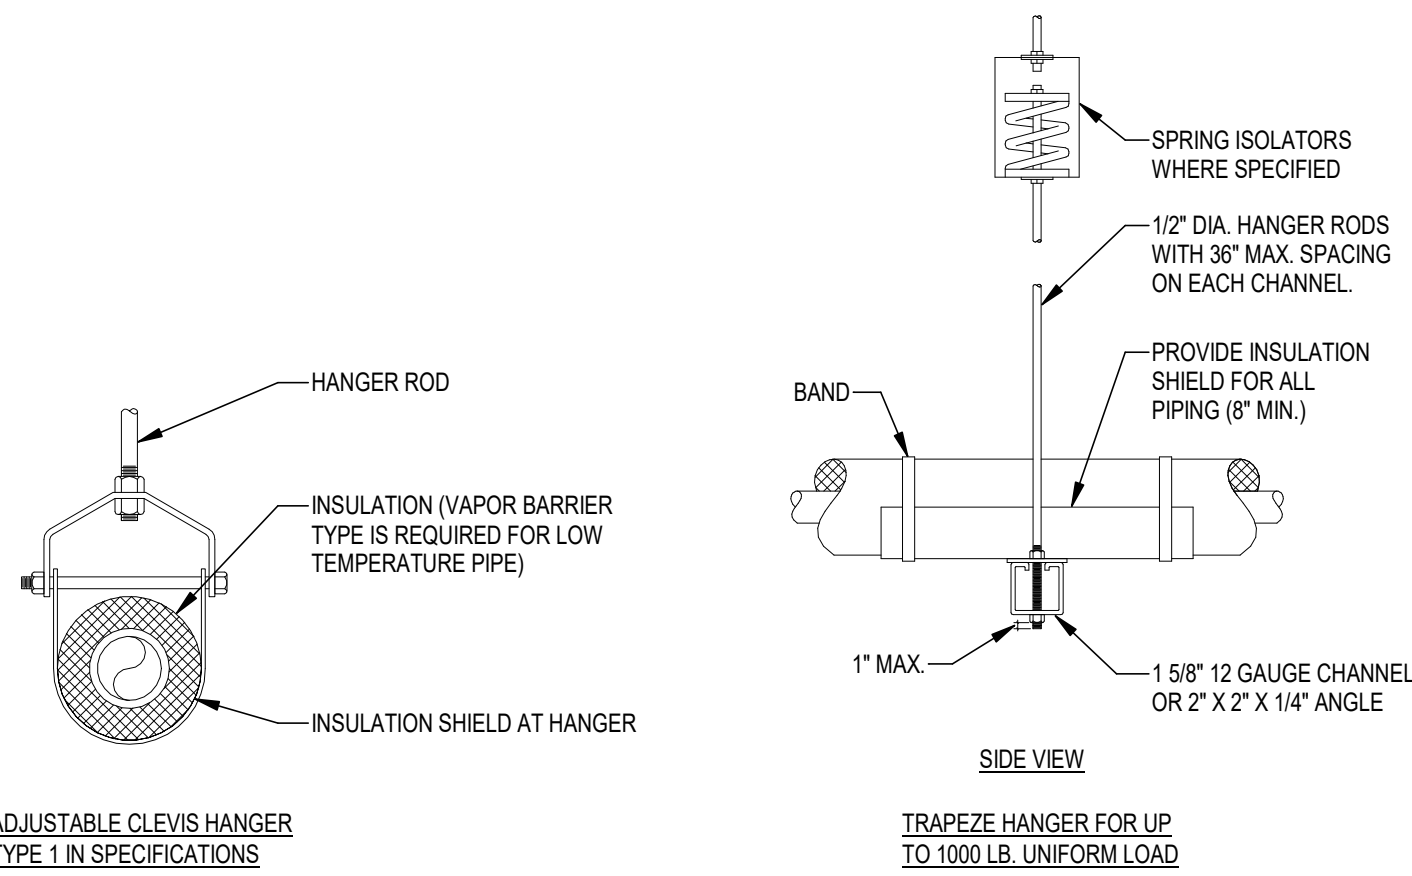

- NOTES:
- 1
- SEE SPECIFICATIONS FOR SPACING OF HANGERS.
- 2
- PROVIDE SPRING ISOLATORS FOR FIRST 3 HANGERS UP TO AND BEYOND EQUIPMENT CONNECTION AND/OR THROUGH OUT MECHANICAL ROOMS OR MEZZANINE AREAS.

A TYPICAL PIPE HANGERS

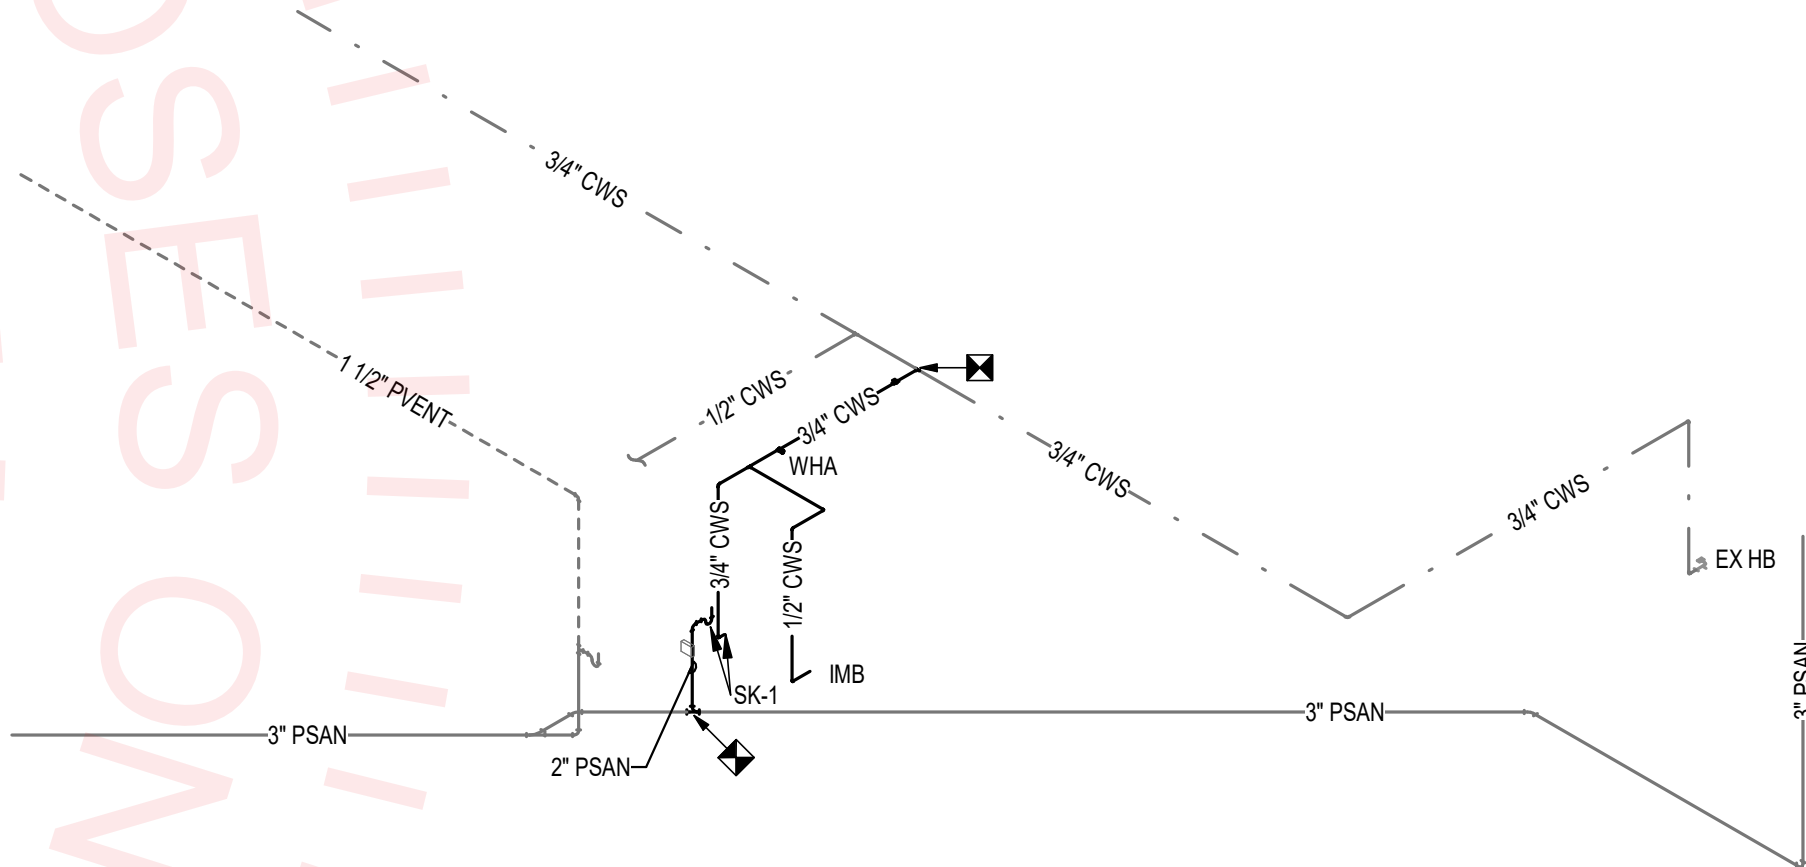

B PLUMBING RISER



**H2
ENGINEERING**

114 EAST 5th AVENUE
TALLAHASSEE, FL 32303
PHONE 850.224.7922
www.H2Engineering.com

H2E PROJECT No. 23-178

THIS DOCUMENT IS THE PROPERTY OF H2Engineering AND IS PREPARED AS AN INSTRUMENT OF SERVICE. ITS USE, REUSE OR REPRODUCTION, EXCEPT BY WRITTEN AGREEMENT WITH H2ENGINEERING, INC., IS PROHIBITED.

Florida Registry #2485
Robert D. Richards, P.E. #90648



**bki
ARCHITECTURE**

BKJ, Inc., Architecture
1621 Physicians Dr.
Tallahassee, Florida 32308
(P) 850.778.8007 | (F) 850.546.6150
www.bkarchitecture.com
FL Architecture Corporation AA00002280

SEAL:

PROJECT TITLE:

Interior Renovation for FSU
UCA Suite 1500
FSU Project No. 2400665,
Tallahassee, Florida 32306

JOB NO.: 23-178

DESIGNED: RDR

DRAWN: MAW

CHECKED: RDR

THIS DRAWING AND ANY REPRODUCTIONS ARE THE PROPERTY AND COPYRIGHT OF BKJ, INC. AND MAY NOT BE REPRODUCED, PUBLISHED, OR USED IN ANY MANNER WITHOUT WRITTEN PERMISSION OF THE ARCHITECT

REVISIONS:

DRAWING PHASE:
100% Construction Documents

DRAWING TITLE:

SCHEDULES & DETAILS

SHEET NO.:


P0.2

DATE:



April 10, 2024

KEYED NOTES:

- ① CONNECT SINK SANITARY PIPING TO EXISTING BELOW FLOOR SANITARY PIPING AS INDICATED. PROVIDE AIR ADMITTANCE VALVE UNDER SINK. INSTALL AIR ADMITTANCE VALVE AT MINIMUM 4" ABOVE SANITARY CONNECTION.
- ② BELOW CABINET INSTANTANEOUS WATER HEATER. INSTALL PER MANUFACTURER'S INSTRUCTIONS.

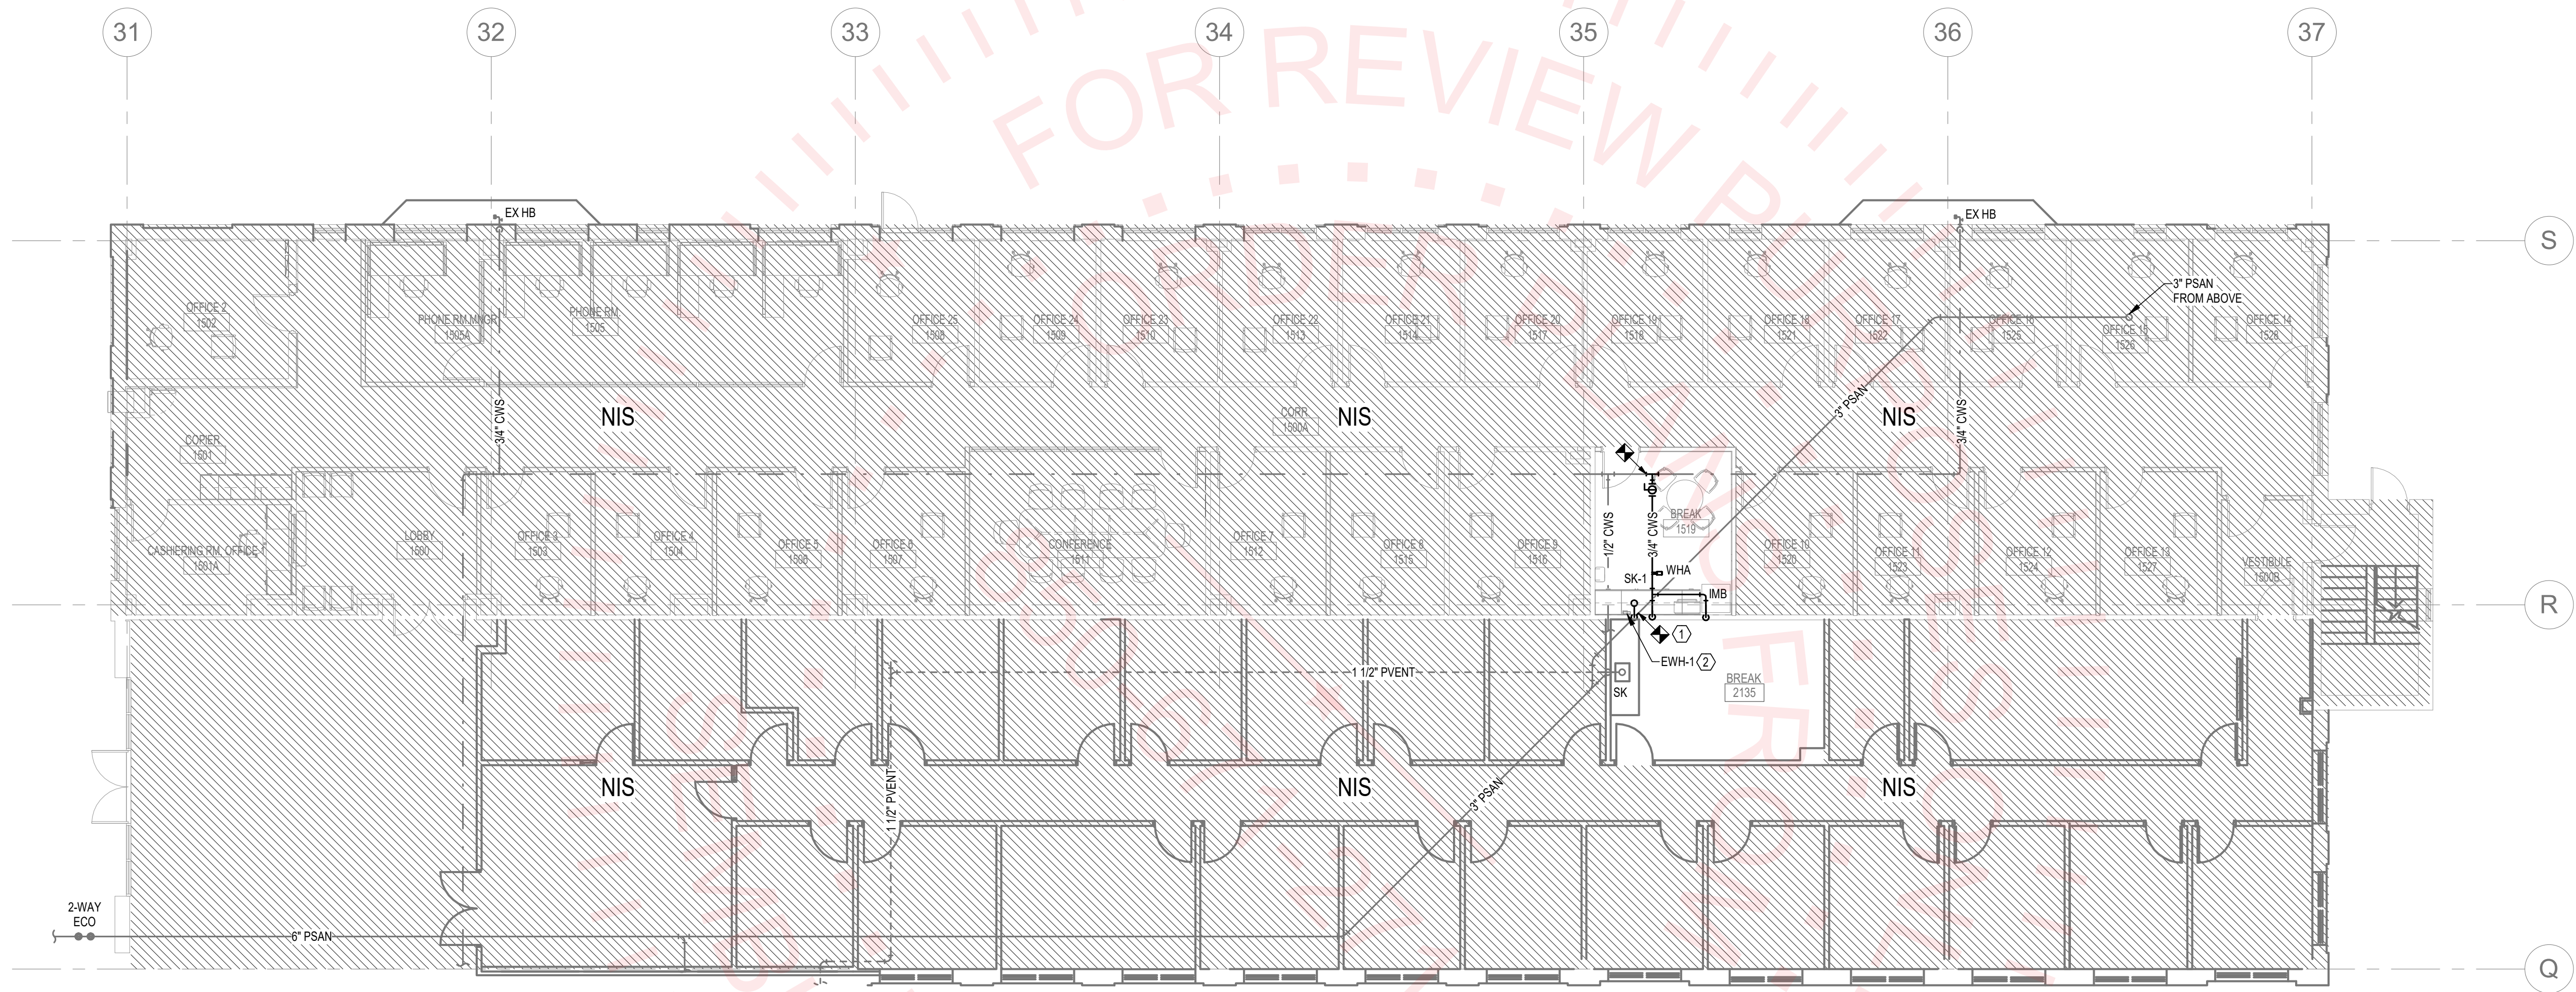

① RENOVATION PLAN - PLUMBING
1/8" = 1'-0"

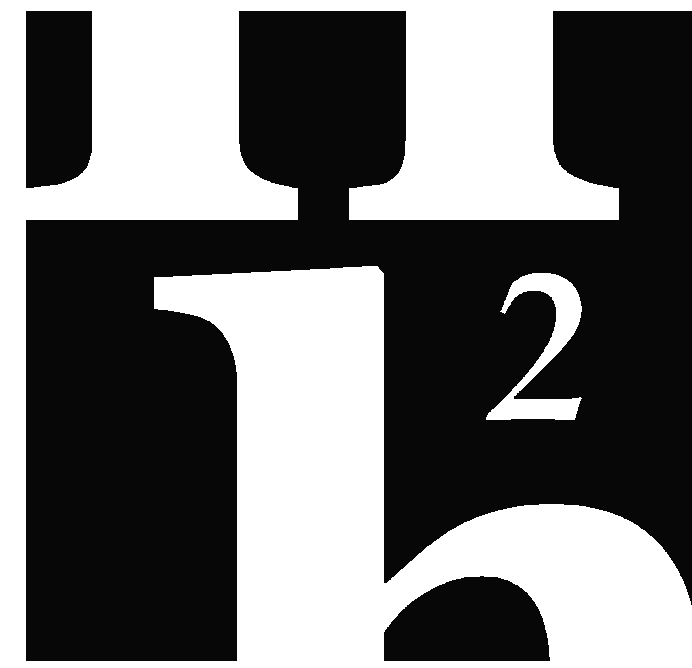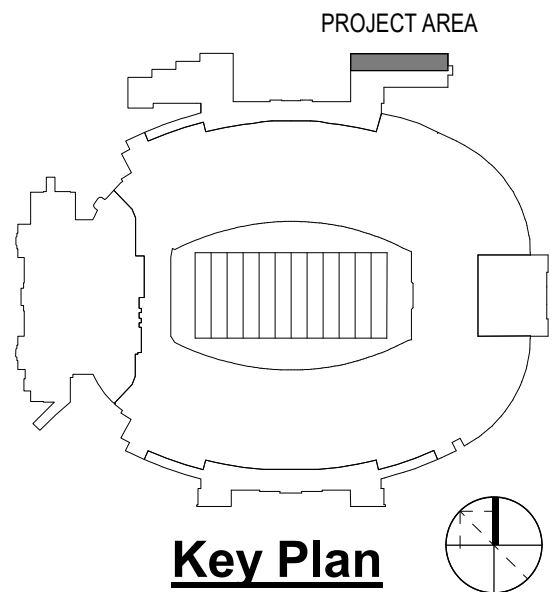

114 EAST 5th AVENUE
TALLAHASSEE, FL 32303
PHONE 850.224.7922
www.H2Engineering.com

H2E PROJECT No. 23-178

THIS DOCUMENT IS THE PROPERTY OF H2ENGINEERING AND IS PREPARED AS AN INSTRUMENT OF SERVICE. ITS USE, REUSE OR REPRODUCTION, EXCEPT BY WRITTEN AGREEMENT WITH H2ENGINEERING, INC., IS PROHIBITED.

Florida Registry #2485
Robert D. Richards, P.E. #90648

bki
ARCHITECTURE

BKJ, Inc., Architecture
1621 Physicians Dr.
Tallahassee, Florida 32308
(P) 850.778.8007 (F) 850.546.6150
www.bkarchitecture.com
FL Architecture Corporation AA00002280

SEAL:

PROJECT TITLE:

**Interior Renovation for FSU
UCA Suite 1500
FSU Project No. 2400665,
Tallahassee, Florida 32306**

JOB NO.: 23-178
DESIGNED: RDR
DRAWN: MAW
CHECKED: RDR

THIS DRAWING AND ANY REPRODUCTIONS ARE THE PROPERTY AND COPYRIGHT OF BKJ, INC. AND MAY NOT BE REPRODUCED, PUBLISHED, OR USED IN ANY MANNER WITHOUT WRITTEN PERMISSION OF THE ARCHITECT

REVISIONS:

DRAWING PHASE:
100% Construction Documents

DRAWING TITLE:
RENOVATION PLAN - PLUMBING

SHEET NO.:
P1.0

DATE:
April 10, 2024

1	REMOVE AIR DEVICE, ASSOCIATED DUCTWORK AND ACCESSORIES AS INDICATED.
2	REMOVE RETURN AIR DEVICE.
3	THERMOSTAT TO BE RELOCATED. REFER TO NEW WORK PLANS.
4	REMOVE TERMINAL UNIT, ASSOCIATED DUCTWORK, PIPING, CONTROLS, AND ACCESSORIES AS INDICATED. CAP REMAINING HEATING WATER PIPING.

BKJ, Inc., Architecture
1621 Physicians Dr.
Tallahassee, Florida 32308
P) 850.778.8007 | (F) 850.546.6150
www.bkjarchitecture.com
Architecture Corporation AA26002280

PROJECT TITLE:

UCA Suite 1500
FSU Project No. 2400665,
Tallahassee, Florida 32306

HECKED: RDR

DRAWING AND ANY REPRODUCTIONS
THE PROPERTY AND COPYRIGHT
OF BKJ, INC. AND MAY NOT BE
DUCE, PUBLISHED, OR USED IN ANY
MANNER WITHOUT WRITTEN
PERMISSION OF THE ARCHITECT

--	--



AWING PHASE:
100% Construction Documents

AWING TITLE:

**PARTIAL FIRST
FLOOR DEMOLITION
PLAN**

MD1.0

April 10, 2024

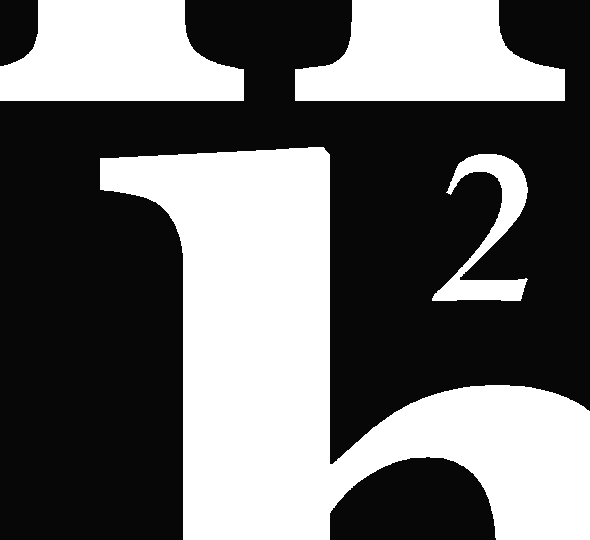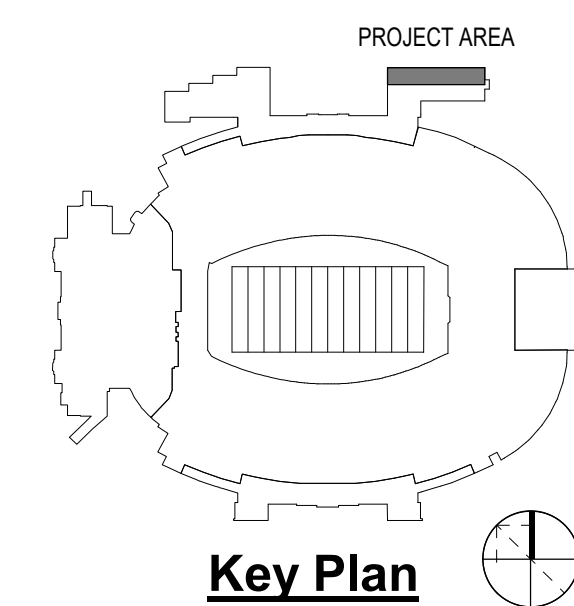The logo for H2ENGINEERING features a large, stylized 'H' and '2' in black. The 'H' is composed of two vertical bars and a horizontal bar at the top. The '2' is a large, bold numeral. Below the 'H2' is the word 'ENGINEERING' in a bold, sans-serif font. Below the company name is the address: '114 EAST 5th AVENUE', 'TALLAHASSEE, FL 32303', 'PHONE 850.224.7922', and the website 'www.H2Engineering.com'. Below this is a horizontal line, followed by the text 'H2E PROJECT No. 23.178'. Another horizontal line follows, and then a paragraph of text: 'THIS DOCUMENT IS THE PROPERTY OF H2ENGINEERING AND IS PREPARED AS AN INSTRUMENT OF SERVICE. ITS USE, REUSE OR REPRODUCTION, EXCEPT BY WRITTEN AGREEMENT WITH H2ENGINEERING, INC., IS PROHIBITED.' At the bottom, there is a section for contact information: 'Florida Registry #2485', 'Robert D. Richards, P.E. #90648'.

H2ENGINEERING

114 EAST 5th AVENUE
TALLAHASSEE, FL 32303
PHONE 850.224.7922
www.H2Engineering.com

H2E PROJECT No. 23.178

THIS DOCUMENT IS THE PROPERTY OF H2ENGINEERING
AND IS PREPARED AS AN INSTRUMENT OF SERVICE. ITS
USE, REUSE OR REPRODUCTION, EXCEPT BY WRITTEN
AGREEMENT WITH H2ENGINEERING, INC., IS PROHIBITED.

Florida Registry #2485
Robert D. Richards, P.E. #90648

GENERAL NOTES:

1. TERMINAL UNIT/TEMPERATURE SENSOR BUILDING AUTOMATION GRAPHICS SHALL BE UPDATED PER THE LATEST FSU STANDARDS. COORDINATE WITH DON PITTMAN (850) 545-4877 AT FSU FACILITIES/BUILDING MANAGEMENT.

RENOVATION KEYNOTES

- ① ADJUST TERMINAL UNIT AND ASSOCIATED AIR DEVICES TO PROVIDE INDICATED CFM.
② EXISTING RELOCATED THERMOSTAT.

bki
ARCHITECTURE

BKJ, Inc., Architecture
1621 Physicians Dr.
Tallahassee, Florida 32308
(P) 850.778.8007 (F) 850.546.6150
www.bkarchitecture.com
FL Architecture Corporation AAB0002280

SEAL:

PROJECT TITLE:

**Interior Renovation for FSU
UCA Suite 1500
FSU Project No. 240065,
Tallahassee, Florida 32306**

JOB NO.: 23-178

DESIGNED: MAW

DRAWN: MAW

CHECKED: RDR

THIS DRAWING AND ANY REPRODUCTIONS ARE THE PROPERTY AND COPYRIGHT OF BKJ, INC. AND MAY NOT BE REPRODUCED, PUBLISHED, OR USED IN ANY MANNER WITHOUT WRITTEN PERMISSION OF THE ARCHITECT


REVISIONS:

DRAWING PHASE:
100% Construction Documents


DRAWING TITLE:
PARTIAL FIRST FLOOR PLAN

SHEET NO.:
M1.0

DATE:
April 10, 2024

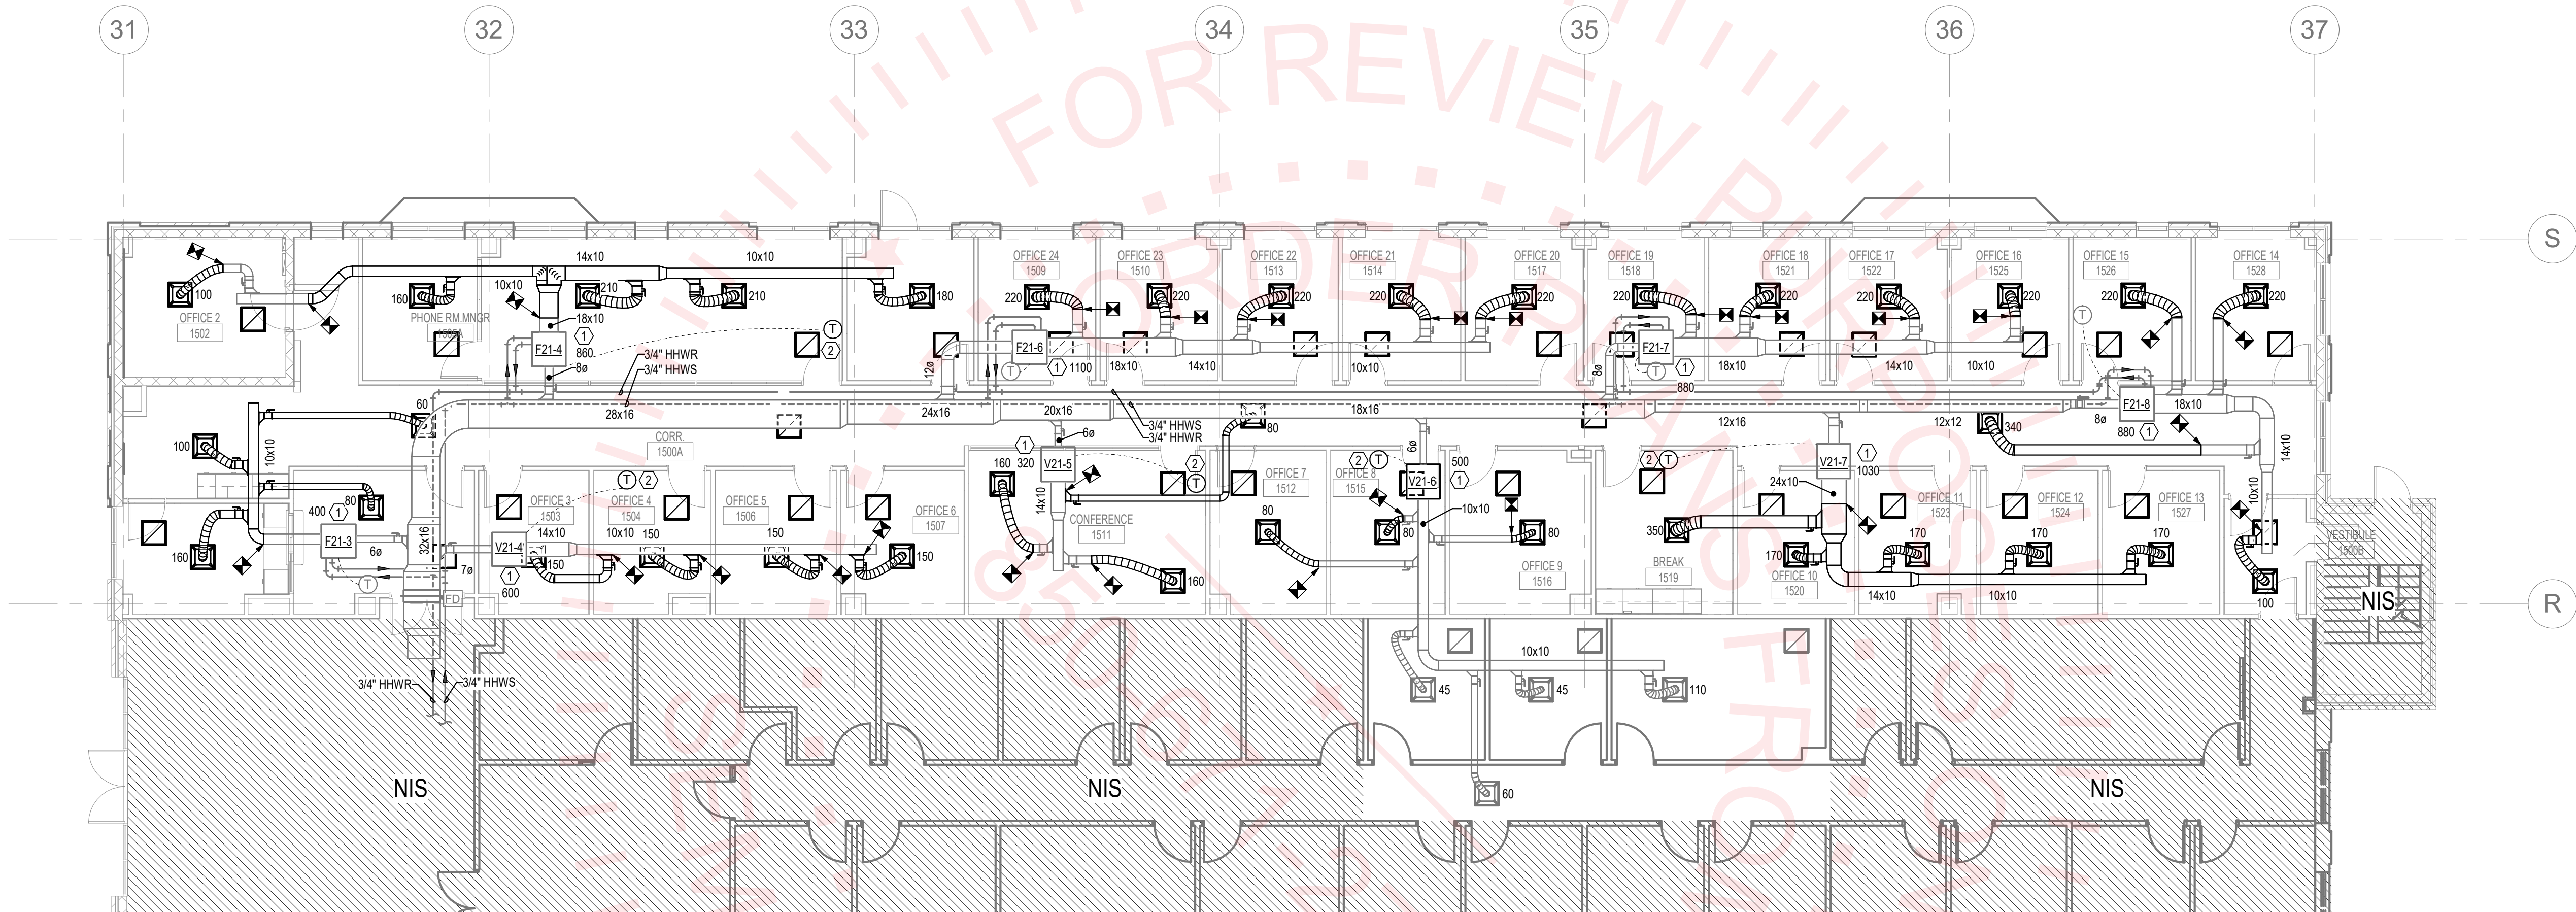

① PARTIAL FIRST FLOOR PLAN
1/8" = 1'-0"

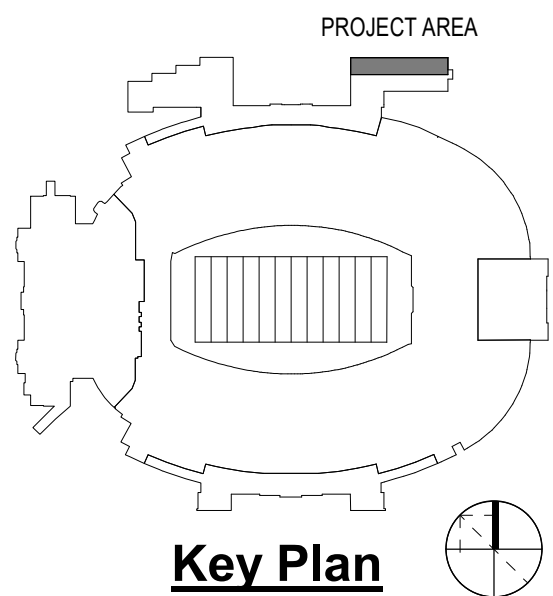


H2 ENGINEERING
114 EAST 5th AVENUE
TALLAHASSEE, FL 32303
PHONE 850.224.7922
www.H2Engineering.com

H2E PROJECT No. 23.178


THIS DOCUMENT IS THE PROPERTY OF H2Engineering AND IS PREPARED AS AN INSTRUMENT OF SERVICE. ITS USE, REUSE OR REPRODUCTION, EXCEPT BY WRITTEN AGREEMENT WITH H2ENGINEERING, INC., IS PROHIBITED.

Florida Registry #2485
Robert D. Richards, P.E. #90648

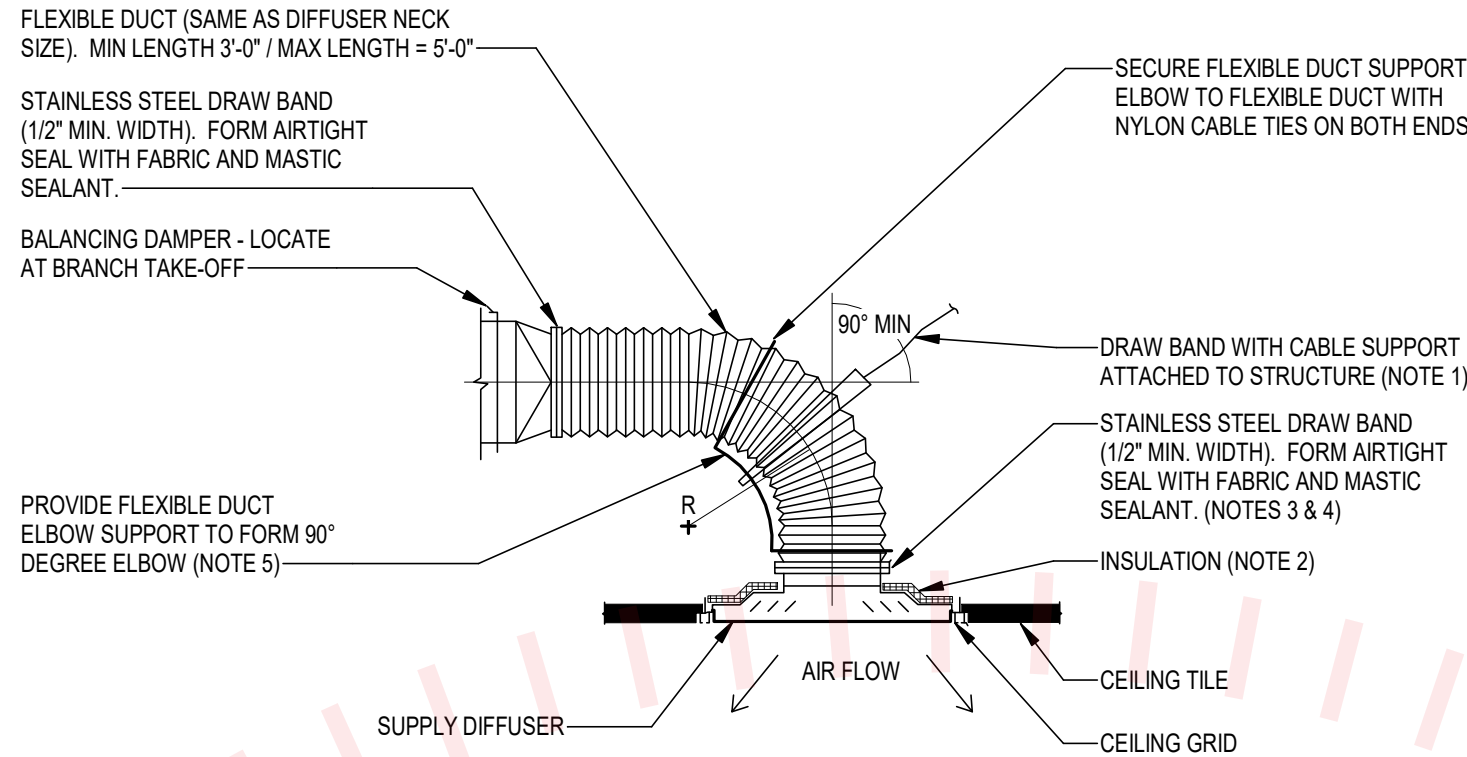


- NOTES:
1. FLEXIBLE DUCT SHALL NOT HAVE MORE THAN 1/2" SAG PER FOOT.
 2. PROVIDE INSULATION ON BACK OF DIFFUSERS (SEE SPECIFICATIONS). SEAL VAPOR TIGHT WITH FABRIC AND MASTIC.
 3. PULL INNER LINER OF FLEXIBLE DUCT OVER DIFFUSER COLLAR AND SECURE WITH DRAW BAND.
 4. SECURE FLEXIBLE DUCT INSULATION AND OUTER JACKET WITH DRAW BAND.
 5. MAINTAIN MINIMUM RADIUS (R) OF 1.5 TIMES THE DUCT DIAMETER.

C FLEXIBLE DUCT CONNECTION TO SUPPLY DIFFUSER

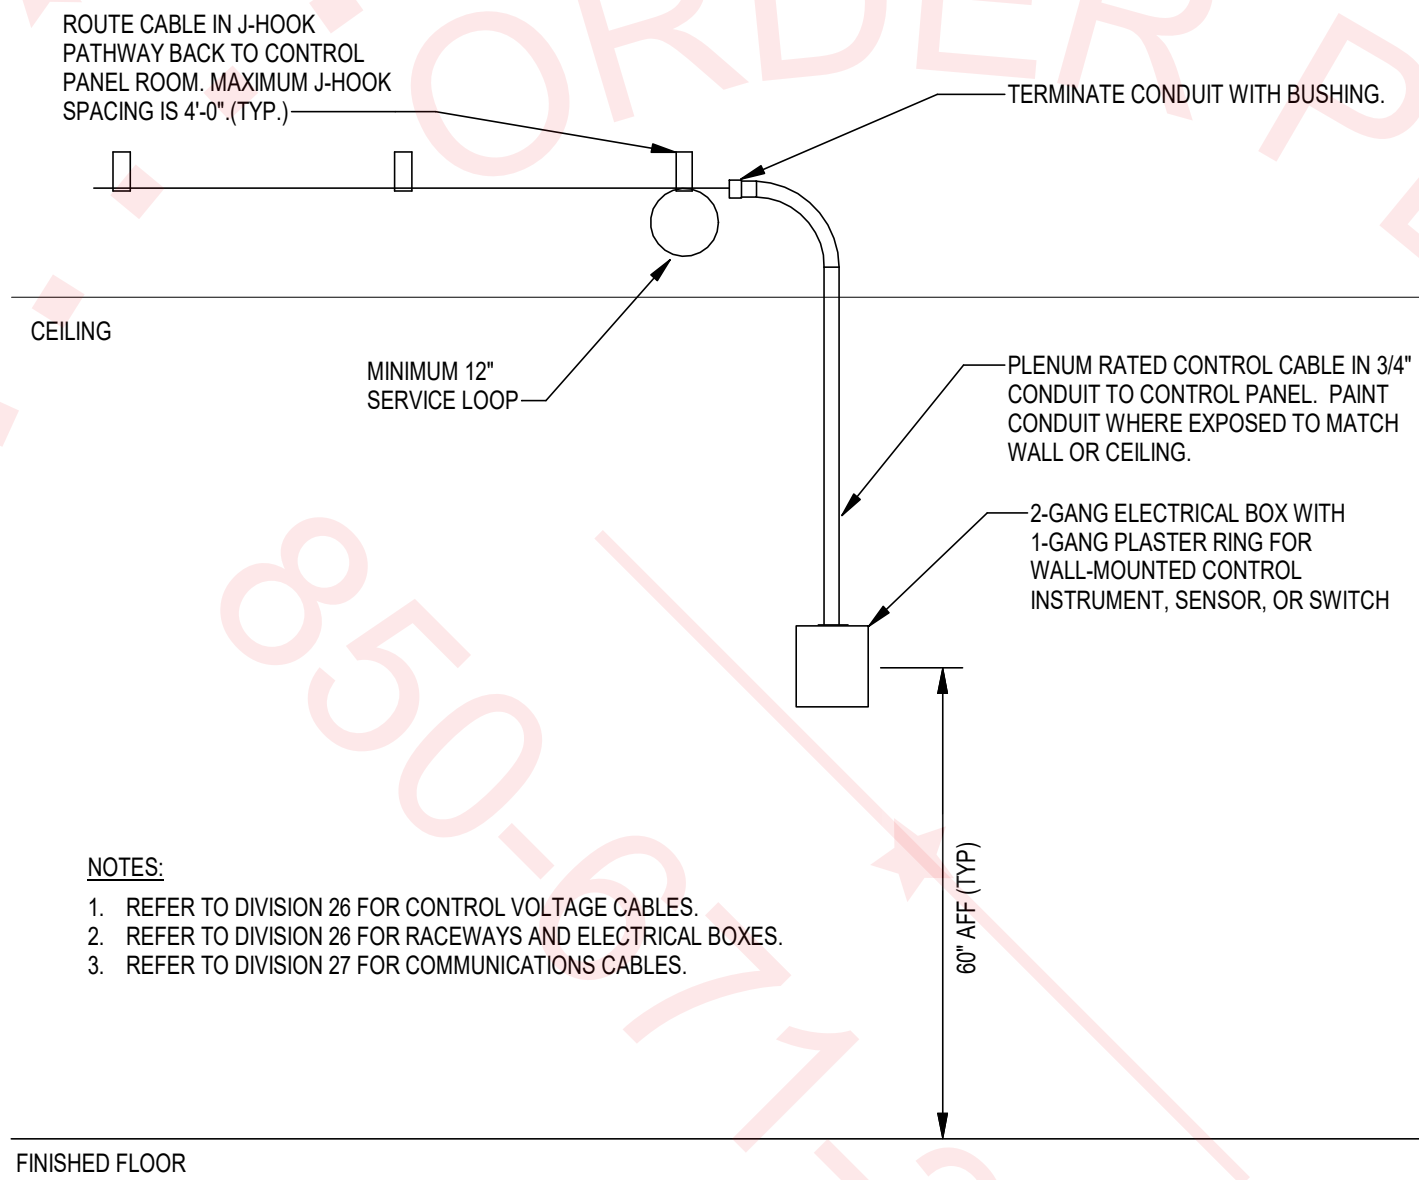


- NOTES:
1. REFER TO DIVISION 26 FOR CONTROL VOLTAGE CABLES.
 2. REFER TO DIVISION 26 FOR RACEWAYS AND ELECTRICAL BOXES.
 3. REFER TO DIVISION 27 FOR COMMUNICATIONS CABLES.

D WALL-MOUNTED CONTROL DEVICE ROUGH-IN

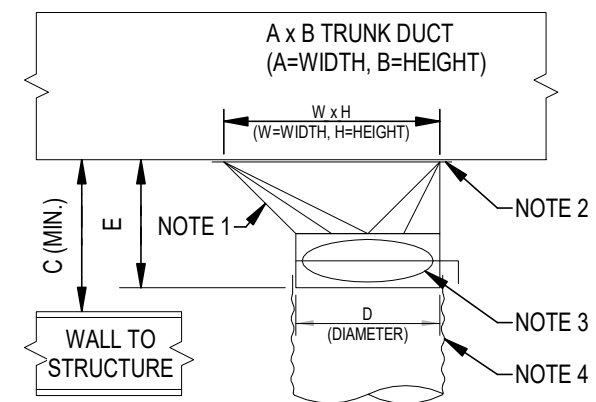

ROUND DUCT

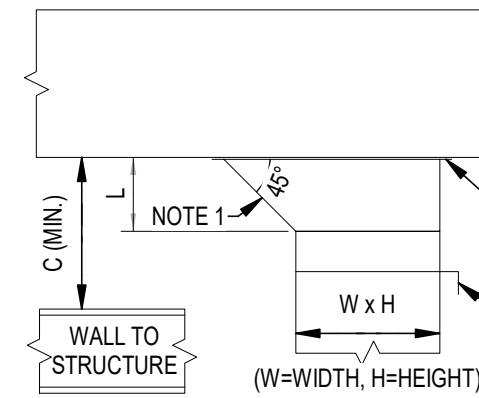

RECTANGULAR DUCT


D	E (NOTE 5)	WxH (NOTE 5)	TRUNK DUCT HEIGHT (B MIN.)	C	
				NO FIRE DAMPER	WITH FIRE DAMPER
6	8.5	12 x 6	8	9	12
8	8.5	12 x 6	8	9	12
10	9.5	16 x 6.75	10	10	13
12	10.5	18 x 8.5	12	11	14
14	10.5	20 x 9.5	12	11	14
16	12	24 x 12	14	13	16

DIMENSIONS BASED ON CROWN PRODUCTS CO., INC.


- NOTES:
1. 45° ENTRY.
 2. 1" WIDE FLANGE WITH GASKET SEAL AROUND ENTIRE PERIMETER.
 3. PROVIDE MANUAL BALANCING DAMPER. OPERATOR SHALL PENETRATE INSULATION.
 4. USE ROUND TYPE TAKE-OFF FOR SUPPLY AIR TO NOT MORE THAN ONE TERMINAL.
 5. USE ROUND TYPE TAKE-OFF FOR SUPPLY AIR TO NOT MORE THAN ONE TERMINAL. DIAMETER, PROVIDE TRANSITION FITTING OF EQUIVALENT AREA TO THE RUNOUT DUCT.

L = W/4 (4" MIN.)
H = B/2 (MAX.)
C = L+4 (WITH FIRE DAMPER)
C = L+2 (WITHOUT FIRE DAMPER)

A TYPICAL DUCT TAKE-OFF FITTINGS

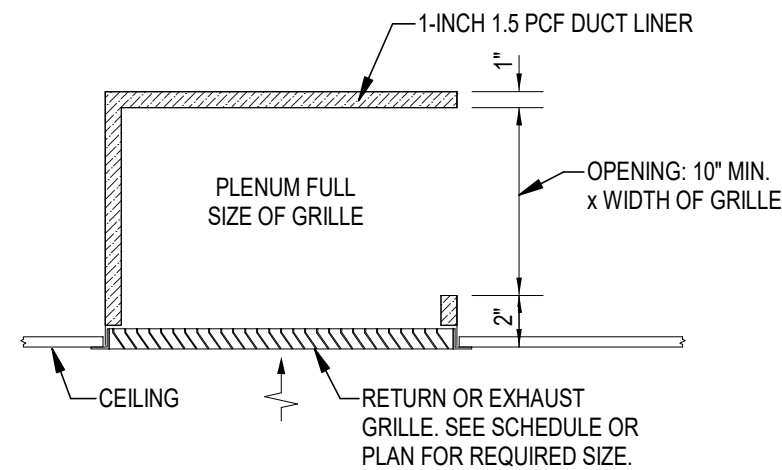

PLENUM RETURN GRILLES

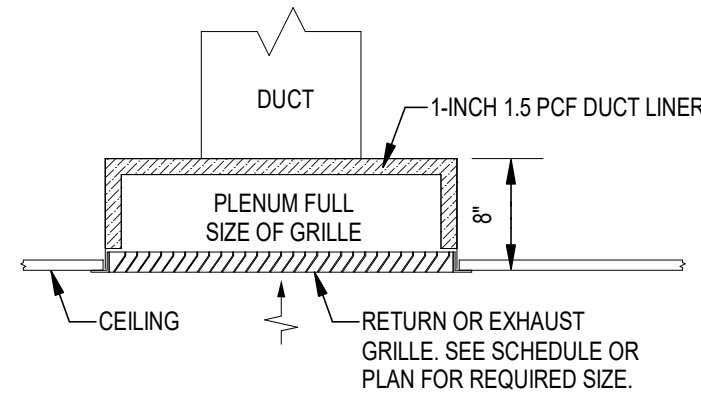

DUCTED TOP ENTRY

- NOTES:
1. INSTALL BLADES OF GRILLE SO SIGHT LINE INTO PLENUM IS OBSCURED FROM ROOM.
 2. PROVIDE APPROPRIATE MOUNTING HARDWARE FOR GRILLE TO ACCOMMODATE CEILING TYPE.

B RETURN OR EXHAUST CEILING GRILLE



114 EAST 5th AVENUE
TALLAHASSEE, FL 32303
PHONE 850.224.7922
www.H2Engineering.com

H2E PROJECT No. 23-178

THIS DOCUMENT IS THE PROPERTY OF H2Engineering
AND IS PREPARED AS AN INSTRUMENT OF SERVICE. ITS
USE, REUSE OR REPRODUCTION, EXCEPT BY WRITTEN
AGREEMENT WITH H2ENGINEERING, INC., IS PROHIBITED.

Florida Registry #2485
Robert D. Richards, P.E. #90648

Interior Renovation for FSU
UCA Suite 1500
FSU Project No. 2400665,
Tallahassee, Florida 32306

JOB NO.: 23-178

DESIGNED: MAW

DRAWN: MAW

CHECKED: RDR

THIS DRAWING AND ANY REPRODUCTIONS
ARE THE PROPERTY AND COPYRIGHT
OF BKJ, INC. AND MAY NOT BE
REPRODUCED, PUBLISHED, OR USED IN ANY
MANNER WITHOUT WRITTEN
PERMISSION OF THE ARCHITECT

REVISIONS:

DRAWING PHASE:
100% Construction
Documents

DRAWING TITLE:

DETAILS

SHEET NO.:

M5.1

DATE:

April 10, 2024

POWER (CONT.)	
	RELOCATE EXISTING DEVICE TO POSITION SHOWN INDICATED FOR DEMOLITION.
	POWER GROUNDING BAR
	ELECTRICAL PANEL - 120/208 VOLT
	ELECTRICAL PANEL - 277/480 VOLT
	JUNCTION BOX - 4" SQUARE (UNO)
	DISCONNECT SWITCH - SEE DRAWING OR MECHANICAL EQUIPMENT SCHEDULE FOR SIZE
* EQUIPMENT SIZES WILL BE INDICATED AS FOLLOWS:	

LIGHTING AND LIGHTING CONTROLS	
	LIGHT FIXTURE - LETTER INDICATES FIXTURE TYPE; # INDICATES ZONE, WHERE SHOWN
	LAY-IN, RECESSED OR SURFACE MOUNT TROFFER
	SHADING OR "EM" INDICATES FIXTURE ON EMERGENCY CIRCUIT
	STRIP FIXTURE
	RECESSED DOWNLIGHT FIXTURE, ROUND OR SQUARE
	LINEAR FIXTURE
	EXIT LIGHT FIXTURE - PROVIDE ARROWS WHERE SHOWN, SHADING INDICATES FACE(S) OF EXIT LIGHT (POWERED EXIT SIGNS SHALL BE WIRED "UNSWITCHED")
	DENOTES WALL MOUNTED DEVICE
	SINGLE-POLE TOGGLE SWITCH - 120/277 VOLT, 20 AMP, MOUNT 48" AFF
	EXISTING SWITCH TO BE REMOVED
	DIGITAL DIMMING WALL SWITCH, # INDICATES CONTROLLED ZONES, MOUNT 48" AFF, PROVIDE PRE-ENGRAVED DIM UP & DIM DN BUTTON FOR EACH CONTROLLED ZONE. WATTSTOPPER, LMSW-10x-ENG2 OR APPROVED EQUAL.
	DIGITAL ON/OFF WALL SWITCH, # INDICATES CONTROLLED ZONES, MOUNT 48" AFF, MATCH QUANTITY OF SWITCHES TO NUMBER OF CONTROLLED ZONES; ENGRAVED ON/OFF. WATTSTOPPER, LMSW-10x-ENG1 OR APPROVED EQUAL.
	DIGITAL 10A, ON/OFF-1-10 VOLT DIMMING ROOM CONTROLLER, # INDICATES CONTROLLED ZONE(S), PROVIDE 1 OR 2 RELAYS AS REQUIRED FOR CONTROLLED ZONES. WATTSTOPPER, 110 SERIES OR APPROVED EQUAL.
	VACANCY SENSOR - WALL MOUNTED, LINE VOLTAGE, DUAL TECHNOLOGY, # INDICATES QUANTITY OF RELAYS, WHERE OMITTED PROVIDE 1 RELAY, MOUNT 48" AFF. WATTSTOPPER, DW-100/200 OR APPROVED EQUAL.
	DIMMING OCCUPANCY SENSOR- WALL MOUNTED, LINE VOLTAGE, DUAL TECHNOLOGY, 1-RELAY, 0-10V DIMMING, MOUNT 48" AFF. (WATTSTOPPER DT-311 OR EQUAL.)
	LINE VOLTAGE OCCUPANCY SENSOR - CEILING MOUNTED, DUAL TECHNOLOGY, # INDICATES CONTROLLED ZONE(S). (WATTSTOPPER, DT-355 OR EQUAL.)
	DIGITAL OCCUPANCY SENSOR - CEILING MOUNTED, DUAL TECHNOLOGY, # INDICATES CONTROLLED ZONES. WATTSTOPPER, LMDC-100 OR APPROVED EQUAL.
	BRANCH CIRCUIT EMERGENCY LIGHTING TRANSFER SWITCH, LV5HEPC-2 OR EQUAL
	EMERGENCY LIGHTING CONTROL RELAY - 20A LOAD RATING WITH STATUS LEADS FOR DIMMING APPLICATIONS, PROVIDE 0-10V CONTROL BYPASS, PROVIDE FIRE ALARM CONTACT INTERFACE, # INDICATES CONTROLLED ZONE. SHALL OPERATE IN CONJUNCTION WITH NORMAL LIGHTING ZONE. (LV5 CONTROLS EPC-2 / EPC-2-D OR NINE24 ELCR-R-FAI / ELCR-Z10-FAI.)
	LIGHTING CONTROL PANEL, RELAY DESIGNATION - DENOTED AS R#, LATTER INDICATES CONTROL TYPE, # INDICATE ZONE E = EMERGENCY R = RELAY D = DIMMING

POWER	
	DUPLX RECEPTACLE - 120 VOLT, 20 AMP, 3 POLE GROUNDING TYPE, MOUNT 18" AFF WITH GROUND PRONG UP UNLESS NOTED OTHERWISE.
	DUPLX RECEPTACLE - GFCI - 120 VOLT, 20 AMP, 3 POLE GROUNDING TYPE, MOUNT 18" AFF WITH GROUND PRONGS UP UNLESS NOTED OTHERWISE.
	DUPLX RECEPTACLE - ABOVE COUNTERTOP - 120 VOLT, 20 AMP, 3 POLE GROUNDING TYPE WITH GROUND PRONGS UP UNLESS NOTED OTHERWISE.
	DUPLX RECEPTACLE - ABOVE COUNTERTOP - GFCI - 120 VOLT, 20 AMP, 3 POLE GROUNDING TYPE WITH GROUND PRONGS UP UNLESS NOTED OTHERWISE.
	DUPLX RECEPTACLE - ABOVE COUNTERTOP - 120VOLT, 20AMP, 3 POLE GROUNDING TYPE WITH 1-USB TYPE A AND 1-USB TYPE C CHARGING PORT, 3.1A CAPACITY, PROVIDE DECORATIVE FACEPLATE TO MATCH OTHER DEVICES IN ROOM. MOUNT ABOVE COUNTERTOP. LEGRAND TR20USBACV OR EQUAL
	DUPLX RECEPTACLE - 120VOLT, 20AMP, 3 POLE GROUNDING TYPE WITH 1-USB TYPE A AND 1-USB TYPE C CHARGING PORTS, 3.1A CAPACITY, PROVIDE DECORATIVE FACEPLATE TO MATCH OTHER DEVICES IN ROOM. MOUNT 42" AFF UNLESS NOTED OTHERWISE. LEGRAND TR20USBACV OR EQUAL
	QUADRAPLEX RECEPTACLE - 120 VOLT, 20 AMP, 3 POLE GROUNDING TYPE, MOUNT 18" AFF WITH GROUND PRONG UP UNLESS NOTED OTHERWISE.
	FLOORBOX, FB# INDICATES TYPE, REFER TO WALL AND FLOOR BOX SCHEDULE FOR MORE INFORMATION. ELECTRICAL CONTRACTOR TO PROVIDE FLOORBOX AND RACEWAY. SEE TELECOMMUNICATION DRAWINGS FOR ASSOCIATED RACEWAY REQUIREMENTS.
	TELECOMMUNICATIONS OUTLET - ELECTRICAL CONTRACTOR TO PROVIDE BACKBOX AND RACEWAY. SEE TELECOMMUNICATION DRAWINGS FOR RACEWAY REQUIREMENTS.
	ELECTRICAL DEVICES TO BE REMOVED
	WALLBOX, WB# INDICATES TYPE, REFER TO WALL AND FLOOR BOX SCHEDULE FOR MORE INFORMATION. ELECTRICAL CONTRACTOR TO PROVIDE WALLBOX AND RACEWAY. SEE TELECOMMUNICATION DRAWINGS FOR ASSOCIATED RACEWAY REQUIREMENTS.
	30A TOGGLE DISCONNECT SWITCH. PROVIDE 1, 2 OR 3 POLE AS NECESSARY TO MATCH CONTROLLED CIRCUIT.
	WIRE IN CONDUIT - CONCEALED IN WALL OR CEILING.
	WIRE IN CONDUIT - CONCEALED IN FLOOR OR UNDERGROUND.
	CONDUIT - STUB OUT AND CAP
	HOMERUN TO PANEL - ARROW INDICATE NUMBER OF CIRCUITS. SHORT SLASH MARK(S) INDICATE NUMBER OF PHASE CONDUCTORS. LONG SLASH MARK(S) INDICATE NEUTRAL CONDUCTOR(S). LONG SLASH MARK WITH HOOK INDICATES GREEN GROUND WIRE, WHERE NOT SHOWN GROUND WIRE IS STILL REQUIRED IN EACH FEEDER, LIGHTING, RECEPTACLE, AND POWER BRANCH CIRCUIT. NO SLASH MARKS INDICATE 2 CURRENT CARRYING CONDUCTORS AND GROUND WIRE. THERE SHALL BE NO SHARED NEUTRALS BETWEEN MULTIPLE CIRCUITS.

WALL AND FLOOR BOX SCHEDULE																						
TYPE	DESCRIPTION	FACEPLATE COVER		GANG #1 MODULES			GANG #2 MODULES			GANG #2/3 MODULES			GANG #4 MODULES			CONDUITS				MANUFACT	MODEL	NOTES
		GANG	COLOR	QTY	TYPE	MODEL	QTY	TYPE	MODEL	QTY	TYPE	MODEL	QTY	TYPE	MODEL	QTY	SIZE	FOR	TO			
WB2	WALL BOX	3	WHITE	1	SPD	NSOKPS	1	DATA	P26W	1	AV PLATE	IMF1W				1	3/4"	POWER	PANEL	HUBBELL	HBL263	POWER, DATA, AV
																1	1"	DATA	ABV CLG			
																1	1 1/4"	AV	ABV CLG			
FB1	FLOOR BOX, ROUND	4	BLACK	1	PLATE	FBMPREC	1	DATA	P26W	1	AV PLATE	IMF1W				1	3/4"	POWER	PANEL	HUBBELL	CFB4G30RCI	POWER, DATA, AV
				1	SPD	HBL360SA							1	1"	DATA	ABV CLG						
													1	1 1/4"	AV	ABV CLG						
NOTES:																						
1 ELECTRICAL CONTRACTOR TO PROVIDE WALL BOX, FLOOR BOX, OR POKE THROUGH UNLESS NOTED OTHERWISE. FACEPLATE SHALL MATCH MATERIAL OF OTHER WIRING DEVICES IN SPACE. PROVIDE BLANK FILLER MODULE FOR ALL UNUSED SPACES.																						
2 TELECOM AND AUDIO/VISUAL CONTRACTOR TO PROVIDE LOW VOLTAGE JACK AND DEVICE.																						
3 PROVIDE LOW VOLTAGE DIVIDER IN BOXES WITH BOTH SYSTEMS AND 120VAC WIRING.																						
4 PROVIDE PRE-POUR TUBE, SUPPORT BRACKETS OR OTHER NECESSARY INSTALLATION ACCESSORIES REQUIRED TO SET FLOOR BOX OR POKE THROUGH FLUSH WITH FINISHED FLOOR. PROTRUSION ABOVE FINISHED FLOOR SURFACE IS UNACCEPTABLE.																						

LIGHTING FIXTURE SCHEDULE									
GENERAL NOTES:									
1.) CONTRACTOR SHALL COORDINATE FIXTURE TYPE WITH ARCHITECTURAL FINISH SCHEDULE(S). ARCHITECT SHALL CONFIRM FINISH OF ALL FIXTURES IN GUEST/PUBLIC AREAS.									
2.) LIGHT FIXTURES DEEMED EQUAL TO THOSE SPECIFIED SHALL BE SUBMITTED FOR APPROVAL IN ACCORDANCE WITH SPECIFICATIONS.									
3.) PROVIDE MOUNTING TRIM REQUIRED FOR CEILING TYPE INSTALLED.									
TYPE	MANUFACTURER (OR EQUAL)	CATALOG NUMBER	LAMP		LUMEN OUTPUT	CRI	COLOR TEMPERATURE	VOLTAGE	DESCRIPTION
			POWER	QTY					
A	HE WILLIAMS	AP-22L40-840-DIM-UNV	36W	LED	4000	80	4000K	120-277V	2' x 2' ARCHITECTURAL CURVED PANEL. DIE FORMED STEEL HOUSING. FROSTED ACRYLIC LENS. 0-10V DIMMING.
C	HE WILLIAMS	2DR-L7-840-DIM-UNV-L-M-OF-WHHW-AD	8.7W	LED	750	80	4000K	120-277V	2" DIAMETER, CYLINDER. 40 DEGREE OPTICS. DIFFUSED ACRYLIC LENS. 0-10V DIMMING.
E	BEGHELLI	OL2-SA-LR_--AT	5W	LED			RED	120-277V	EDGE LIT LED EXIT SIGN - CLEAR ACRYLIC PANEL FOR SINGLE. MIRROR FOR DOUBLE. RED LETTERS. CHEVRON ARROWS AS NEEDED. UNIVERSAL MOUNTING. BRUSHED ALUMINUM HOUSING. SELF-TESTING. SEE EDGE LIT EXIT SIGN DETAIL.
L	FINELITE	HP-4-PJD-10-B-S-840-TG-BG-96LG-120-DC-FC-10-FA50-FE-SW	80W	LED	9700	80	4000K	120V	4" WIDE x 10' LONG. SUSPENDED DIRECT/INDIRECT LINEAR LED FIXTURE. EXTRUDED ALUMINUM HOUSING. FROST WHITE DIFFUSERS. 0-10V DIMMING.

- ### ELECTRICAL DEMOLITION GENERAL NOTES
- UNLESS OTHERWISE NOTED, REMOVE ALL ELECTRICAL MATERIALS AND EQUIPMENT FROM AREAS INDICATED FOR DEMOLITION.
 - REMOVE ALL ELECTRICAL EQUIPMENT (CONDUIT, POWER & CONTROL WIRING, DISCONNECT SWITCHES, STARTERS, ETC.) RELATED TO EQUIPMENT BEING REMOVED OR REPLACED.
 - REMOVE UNUSED CONDUIT TO THE EXTENT NECESSARY TO ACCOMMODATE NEW WORK AND WHERE CONDUIT IS VISIBLE ABOVE THE FLOOR LINE. EXISTING UNUSED CONDUIT WHICH IS CONCEALED AND WHICH DOES NOT INTERFERE WITH THE WORK, MAY REMAIN IN PLACE. SEAL ABANDONED LINES THAT REMAIN IN PLACE BEHIND WALLS OR FLOOR SURFACES. REMOVE EXISTING UNUSED WIRES.
 - WIRING AND CONDUIT TO ELECTRICAL DEVICES BEING REMOVED SHALL BE REMOVED BACK TO NEAREST JUNCTION BOX. ANY DEVICES DOWNSTREAM FROM THESE POINTS SHALL REMAIN OPERABLE.
 - CONTRACTOR SHALL REMOVE ALL ELECTRICAL WORK FROM PARTITIONS AND WALLS BEING REMOVED. CONTRACTOR SHALL REMOVE AND/OR RELOCATE ALL LIGHTING FIXTURES SHOWN REQUIRING WORK. WORK INCLUDES REWIRING TO THE FIXTURES, SWITCHES AND RECEPTACLES. CONNECTION TO EXISTING CIRCUITS SHALL BE MADE EXCEPT WHERE OVERLOADING OCCURS, IN WHICH CASE, CONTRACTOR SHALL PROVIDE A NEW HOMERUN TO CLOSEST AVAILABLE PANEL AND PROVIDE A NEW CIRCUIT BREAKER EQUAL TO EXISTING. THE CIRCUITS TO NEW EQUIPMENT BY OTHER SHALL BE NEW HOMERUNS AND NEW CIRCUIT BREAKERS ADEQUATE FOR THE LOAD CONNECTED.
 - CONTRACTOR SHALL, UPON COMPLETION OF WORK, ENSURE ALL EXISTING CIRCUITS ADJACENT THE REMODELED AREA(S) ARE IN PROPER WORKING CONDITION.
 - CONTRACTOR SHALL MAKE ALL NECESSARY ADJUSTMENTS TO ELECTRICAL DEVICES REQUIRED TO ACCOMMODATE NEW WALLS AND CEILINGS. BECAUSE OF THE NATURE OF THE JOB, UNFORESEEN INTERFERENCES MAY OCCUR. CLOSE COORDINATION BETWEEN TRADES IS REQUIRED. VERIFY ALL CONNECTION REQUIREMENTS BEFORE ROUGH-IN.
 - ALL EXISTING LIGHT FIXTURES BEING REMOVED & REINSTALLED SHALL BE CLEANED AND RELAMPED. PROVIDE NEW BALLASTS AND LAMPS AS NEEDED FOR ALL EXISTING FIXTURES.
 - ALL REMOVED BALLASTS & LAMPS SHALL BE CAREFULLY STORED, PACKAGED, AND DISPOSED OF ACCORDING TO EPA REQUIREMENTS. ALL FEES ASSOCIATED WITH LEGAL DISPOSAL OF LAMPS & BALLASTS SHALL BE PAID FOR BY THE CONTRACTOR.

- ### ELECTRICAL GENERAL NOTES
- WIRING SHALL BE COPPER, TYPE THHN/THWN-2 IN RACEWAY UNLESS NOTED OTHERWISE. RIGID ELECTRICAL NON-METALLIC SCHEDULE 40 PVC SHALL BE USED IN SLABS AND BELOW GRADE; RIGID STEEL CONDUIT (RSC) SHALL BE USED WHERE EXPOSED TO PHYSICAL DAMAGE. ELECTRICAL METALLIC TUBING (EMT) MAY BE USED ELSEWHERE WHERE APPROVED BY N.E.C. AND LOCAL CODES. FLEXIBLE METAL CONDUIT (FMC) SHALL BE STEEL AND SHALL BE USED TO CONNECT MOVEABLE EQUIPMENT AND/OR SUBJECT TO VIBRATION; LIQUID-TIGHT FLEXIBLE METALLIC CONDUIT (LFMC) SHALL BE USED OUTDOORS OR WHERE SUBJECT TO MOISTURE.
 - CONDUIT SHALL BE STRAPPED IN ACCORDANCE WITH REQUIREMENTS OF N.E.C.
 - CONTRACTOR SHALL BOND AND GROUND SYSTEMS AND EQUIPMENT PER ARTICLE 250 OF N.E.C. PROVIDE A GROUNDING CONDUCTOR SIZED IN ACCORDANCE WITH ARTICLE 250-122 N.E.C. ON ALL RECEPTACLES AND POWER BRANCH CIRCUITS.
 - LIGHTING FIXTURES SHALL BE SECURELY FASTENED AND SUPPORTED PER N.E.C.
 - THE CONTRACTOR SHALL COORDINATE THE CIRCUIT REQUIREMENTS WITH THE MANUFACTURER OF THE ACTUAL EQUIPMENT FURNISHED UNDER OTHER DIVISIONS OF WORK. THE CIRCUIT BREAKER, WIRE AND CONDUIT SHALL BE SIZED AS RECOMMENDED BY THE EQUIPMENT MANUFACTURER.
 - CIRCUIT BREAKERS SHALL BE BUILT-IN TYPE.
 - PROVIDE A LAMINATED PLASTIC NAMEPLATE IDENTIFYING EACH NEW PANELBOARD, MOTOR STARTER AND DISCONNECT SWITCH. LETTERING SHALL BE 1/2" MINIMUM AND SHALL IDENTIFY EQUIPMENT SERVED, FEEDER ORIGIN AND CIRCUIT NUMBER. SECURE NAMEPLATE WITH SCREWS TO EQUIPMENT TO BE IDENTIFIED. PLASTIC TAPE IS NOT APPROVED.
 - IN ATTICS AND UNDERLOOR SPACES CONTAINING EQUIPMENT REQUIRING SERVICING SUCH AS HEATING, AIR-CONDITIONING, AND REFRIGERATION EQUIPMENT, PROVIDE AT LEAST ONE LIGHTING OUTLET (FIXTURE) CONTAINING A SWITCH OR CONTROLLED BY A WALL SWITCH. AT LEAST ONE POINT OF CONTROL SHALL BE LOCATED AT THE USUAL POINT OF ENTRY TO THESE SPACES. ALSO PROVIDE RECEPTACLE OUTLET(S) AT READILY ACCESSIBLE LOCATION(S) FOR SERVICING THE EQUIPMENT.
 - A 120V/20A GFI RECEPTACLE SHALL BE INSTALLED AT AN ACCESSIBLE LOCATION FOR THE SERVICING OF HEATING, AIR-CONDITIONING, AND REFRIGERATION EQUIPMENT. THE RECEPTACLE SHALL BE LOCATED ON THE SAME LEVEL AND WITHIN 25 FT OF THE HEATING, AIR-CONDITIONING, AND REFRIGERATION EQUIPMENT. THE OUTLET SHALL NOT BE CONNECTED TO THE LOAD SIDE OF THE EQUIPMENT DISCONNECTING MEANS.
 - DEVICE MOUNTING HEIGHTS INDICATED SHALL BE TO DEVICE CENTER LINE.
 - RELOCATE, AS REQUIRED, ANY EXISTING WIRE AND CONDUIT WHICH INTERFERES WITH INSTALLATION OF THE NEW WORK.
 - EXTERIOR DEVICES SHALL BE WEATHER PROOF ENCLOSURES AND GFI RATED IN ACCORDANCE WITH N.E.C. INSTALLER REQUIRED TO VERIFY PRIOR TO ORDERING MATERIALS.
 - EACH FEEDER, UNGROUNDED CONDUCTOR, AND GROUNDED CONDUCTOR SHALL BE IDENTIFIED BY PHASE OR LINE AND SYSTEM AT ALL TERMINATION, CONNECTION, AND SPLICE POINTS. IDENTIFICATION MEANS SHALL BE PERMANENTLY POSTED AT EACH PANELBOARD OR SIMILAR DISTRIBUTION EQUIPMENT WITH LABEL. LABEL SHALL BE 1/8-INCH THICK PLASTIC WITH BLACK BACKGROUND AND 1/4-INCH HIGH WHITE LETTERS ATTACHED WITH CONTACT TYPE PERMANENT ADHESIVE. SEE FIGURE BELOW FOR TYPICAL LABEL DESIGN.

VOLTAGE 208Y/120V		VOLTAGE 480Y/277V	
PHASE A	BLACK	PHASE A	BROWN
PHASE B	RED	PHASE B	ORANGE
PHASE C	BLUE	PHASE C	YELLOW
NEUTRAL	WHITE	NEUTRAL	GRAY

- ### ABBREVIATIONS
- ACT ABOVE COUNTERTOP
 - AFC AVAILABLE FAULT CURRENT
 - AFCI ARC FAULT CIRCUIT INTERRUPTER
 - AFB ABOVE FINISHED FLOOR
 - AFG ABOVE FINISHED GRADE
 - ATS AUTOMATIC TRANSFER SWITCH
 - BF BELOW RAISE COMPUTER FLOOR
 - C CONDUIT
 - CLG DEVICE LOCATED ON CEILING
 - DNC DISCONNECT
 - DN DOWN
 - EC ELECTRICAL CONTRACTOR
 - EM FIXTURE PROVIDED WITH EMERGENCY BATTERY OR ON EMERGENCY CIRCUIT
 - ER EXISTING ELECTRICAL DEVICE RELOCATED TO NEW POSITION
 - EWC ELECTRIC WATER COOLER
 - EX EXISTING ELECTRICAL DEVICE TO REMAIN
 - GFCI GROUND FAULT CIRCUIT INTERRUPTER
 - GFI GROUND FAULT INTERRUPTER
 - GFB GROUND FAULT INTERRUPTER BREAKER
 - G GROUND
 - GRG GALVANIZED RIGID CONDUIT
 - MSB MAIN SWITCH BOARD
 - NL NIGHT LIGHT (FIXTURE CONNECTED UNSWITCHED)
 - PGB POWER GROUNDING BAR
 - PNL ELECTRICAL PANEL
 - RE REPLACE EXISTING ELECTRICAL DEVICE (AND COVER PLATE) AT THIS LOCATION
 - REL RELOCATE EXISTING ELECTRICAL DEVICE
 - TC TIME CLOCK
 - TGB TELECOMMUNICATIONS GROUNDING BAR
 - TP TAMPER PROOF DEVICE
 - TYP TYPICAL
 - UNO UNLESS NOTED OTHERWISE
 - WP WEATHERPROOF

DRAWING INDEX	
E0.1	GENERAL NOTES & LEGENDS
ED1.0	DEMOLITION PLAN - LIGHTING
ED2.0	DEMOLITION PLAN - POWER
E1.0	RENOVATION PLAN - LIGHTING
E2.0	RENOVATION PLAN - POWER
E3.0	PANEL SCHEDULES
E5.0	DETAILS
E5.1	DETAILS

- ### GENERAL NOTES
- INSTALL ALL WORK IN ACCORDANCE WITH THE FLORIDA BUILDING CODE 2020, THE FLORIDA FIRE PREVENTION CODE, THE NATIONAL ELECTRICAL CODE 2017 EDITION, AND ALL CODES, ORDINANCES, RULES AND REGULATIONS OF AUTHORITIES HAVING JURISDICTION AT THIS SITE. WHERE CONFLICTS OCCUR BETWEEN CODES AND THE CONSTRUCTION DOCUMENTS, THE MOST RESTRICTIVE REQUIREMENTS SHALL GOVERN.
 - DRAWINGS ARE DIAGRAMMATIC, INDICATIVE OF WORK TO BE FURNISHED AND INSTALLED UNDER THIS CONTRACT. REFER TO ARCHITECTURAL AND STRUCTURAL DRAWINGS FOR ALL DIMENSIONS.
 - FIELD VERIFY ALL DIMENSIONS AND ALL CONDITIONS. IF THE CONTRACTOR IS UNABLE TO INTERPRET THE CONTRACT DOCUMENTS, CONTRACTOR IS RESPONSIBLE TO REQUEST CLARIFICATION IN WRITING TO THE ARCHITECT. IF CONTRACTOR PROCEEDS WITH ANY WORK BEFORE OBTAINING CLARIFICATION, CONTRACTOR SHALL BE HELD RESPONSIBLE FOR ALL DEFICIENCIES ASSOCIATED THEREWITH.
 - BEFORE SUBMITTING FOR THE WORK, EACH BIDDER WILL BE RESPONSIBLE TO EXAMINE THE PREMISES AND SATISFY HIMSELF AS TO THE EXISTING CONDITIONS UNDER WHICH CONTRACTOR WILL BE OBLIGED TO OPERATE AND COMPLETE THE WORK UNDER THIS CONTRACT. NO ALLOWANCE WILL SUBSEQUENTLY BE MADE IN THIS CONNECTION ON BEHALF OF THE CONTRACTOR FOR ANY ERROR OR OMISSION ON CONTRACTOR'S PART.
 - THE CONTRACTOR SHALL PAY FOR ALL INSPECTION PERMITS, CERTIFICATES, CONNECTION FEES, SYSTEM DEMAND CHARGES AND LICENSE FEES IN CONNECTION WITH CONTRACTOR'S WORK.
 - CONSTRUCTION MANAGER SHALL BE RESPONSIBLE FOR COORDINATING WORK OF ALL SUBCONTRACTORS TO AVOID INTERFERENCES.
 - ALL WORK SHALL COMPLY WITH APPLICABLE O.S.H.A. AND E.P.A. REGULATIONS AND GUIDELINES.
 - ERECT AND MAINTAIN ALL REASONABLE PRECAUTIONS FOR SAFETY AND HEALTH INCLUDING POSTING DANGER SIGNS AND OTHER WARNINGS AGAINST HAZARDS INCLUDING PROMULGATING SAFETY REGULATIONS. PROVIDE SAFETY PRECAUTIONS AND BARRICADES FOR PEDESTRIANS AT CONSTRUCTION VEHICLE ACCESS AND EGRESS LOCATIONS.
 - COORDINATE AND SEQUENCE ALL DEMOLITION, CLEANING AND CONSTRUCTION WORK. SUBMIT A COMPLETELY DETAILED CONSTRUCTION SCHEDULE PRIOR TO PRE-CONSTRUCTION CONFERENCE.
 - THE CONTRACTOR SHALL STRICTLY BE HELD TO THE PROJECT SCHEDULE. CONTRACTOR SHALL PROVIDE SUFFICIENT MANPOWER AND EQUIPMENT TO FULLY MOBILE, PROCEED WITH AND COMPLETE THE WORK.
 - THE CONTRACTOR SHALL BE RESTRICTED TO AREAS SPECIFIED BY THE OWNER FOR ON-SITE STORAGE OF CONSTRUCTION MATERIALS. THE CONTRACTOR IS RESPONSIBLE FOR THE PROTECTION AND SECURITY OF ALL EQUIPMENT AND MATERIALS.
 - THE CONTRACTOR SHALL MAINTAIN A CLEAN WORK ENVIRONMENT AT ALL TIMES AND SHALL CLEAN CONSTRUCTION SITE OF ALL DEBRIS AT COMPLETION OF THE JOB AND BEFORE FINAL PAYMENT IS MADE.
 - THE CONTRACTOR SHALL FURNISH "AS-BUILT" DRAWINGS TO THE OWNER AT COMPLETION OF CONSTRUCTION.
 - CONTRACTOR SHALL GUARANTEE THE WORK AND MATERIALS FOR A PERIOD OF ONE YEAR FROM DATE OF FINAL ACCEPTANCE. THIS GUARANTEE SHALL BE IN ADDITION TO THE WARRANTIES PROVIDED BY MATERIAL SUPPLIERS AND MANUFACTURERS.
 - CONTRACTOR'S USE OF AN APPROVAL STAMP ON DOCUMENTS SUBMITTED AS SHOP DRAWINGS, PRODUCT DATA, SAMPLES AND SIMILAR SUBMITTALS CERTIFIES THAT THE CONTRACTOR HAS COMPLIED WITH THE CONTRACT DOCUMENT REQUIREMENTS RELATED TO "SHOP DRAWINGS, PRODUCT DATA AND SAMPLES"
 - THE CONTRACTOR SHALL NOT BE RELIEVED OF RESPONSIBILITY FOR DEVIATIONS FROM REQUIREMENTS OF THE CONTRACT DOCUMENTS BY THE ARCHITECT/ENGINEER'S APPROVAL OF SHOP DRAWINGS, PRODUCT DATA, SAMPLES OR SIMILAR SUBMITTALS UNLESS THE CONTRACTOR HAS SPECIFICALLY INFORMED THE ARCHITECT/ENGINEER IN WRITING OF SUCH DEVIATION AT THE TIME OF SUBMITTAL AND THE ARCHITECT/ENGINEER HAS GIVEN WRITTEN APPROVAL TO THE SPECIFIC DEVIATION. THE CONTRACTOR SHALL NOT BE RELIEVED OF RESPONSIBILITY FOR ERRORS OR OMISSIONS IN SHOP DRAWINGS, PRODUCT DATA, SAMPLES OR SIMILAR SUBMITTALS BY THE ARCHITECT/ENGINEER'S APPROVAL THEREOF.
 - PRIOR TO INSTALLATION, COORDINATE AND ADJUST THE FINAL LOCATION OF ALL WALL MOUNTED DEVICES AND EQUIPMENT WITH ALL CASEWORK, SHELVING, MARKER BOARDS, BULLETIN BOARDS OR OTHER WALL MOUNTED FURNISHINGS.
 - NOTE ANY SPECIAL REQUIREMENTS INVOLVED IN INSTALLING THE EQUIPMENT IN THE BUILDING. DISMANTLING AND REASSEMBLING OF ANY EQUIPMENT SHALL BE DONE AS REQUIRED FOR ENTRY INTO THE BUILDING AND EQUIPMENT ROOMS.
 - ENTRY AND REMOVAL OF EQUIPMENT FROM THE BUILDING SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR. CONTRACTOR SHALL REPAIR ANY DAMAGED MATERIALS TO THEIR ORIGINAL CONDITION. SURFACES SHALL BE REPAIRED TO MATCH THE EXISTING ADJACENT UNDAMAGED SURFACES.
 - PROTECT THE ROOF FROM DAMAGE WHENEVER ANY WORK ON THE ROOF IS REQUIRED.
 - SUPPORTS AND HANGERS SHALL PRESENT A NEAT, ORDERLY APPEARANCE.
 - ALL EXTERIOR STRUCTURES INCLUDED, BUT NOT LIMITED TO, THE GENERATOR AND GENERATOR FENCE/WALL SHALL BE INSTALLED TO RESIST 110 MPH WIND LOAD.
 - CONTRACTOR SHALL MAINTAIN THE INTEGRITY OF ALL FIRE AND SMOKE WALL ASSEMBLIES AND ACOUSTICAL WALLS.
 - BEAM AND FLOOR PENETRATIONS SHALL BE APPROVED BY THE STRUCTURAL ENGINEER. BEAM SLEEVES AND BEAM REINFORCING APPROVED BY STRUCTURAL ENGINEER SHALL BE FURNISHED AND INSTALLED BY THIS CONTRACTOR.
 - CONTRACTOR SHALL FURNISH U.L. APPROVED DRAWINGS FOR EACH TYPE OF FIRE RATED ASSEMBLY PENETRATION BY DUCTS, PIPES OR CONDUITS. THESE DRAWINGS SHALL BE DISPLAYED ON THE JOB SITE AT ALL TIMES DURING CONSTRUCTION. SEE SPECIFICATIONS.
 - THE BUILDING WILL REMAIN OCCUPIED DURING CONSTRUCTION. THE OWNER WILL MAKE ALL REASONABLE EFFORTS TO ASSIST THE CONTRACTOR IN COMPLETING THE WORK. COORDINATE ALL WORK WITH THE OWNER'S DESIGNATED REPRESENTATIVE.
 - EXIT WAYS SHALL BE KEPT CLEAR. IF AN EXIT MUST BE TEMPORARILY BLOCKED, PROVIDE THE REQUIRED BARRICADE AND DIRECTIONAL SIGNS FOR TEMPORARY EXITING AND SAFETY.
 - REMOVE AND REPAIR OR RE-INSTALL EXISTING CEILING ASSEMBLIES AS REQUIRED. REPLACE ANY ASSEMBLIES DAMAGED OR SOILED DURING CONSTRUCTION.
 - PROVIDE PROPER PROTECTIVE MEASURES TO PROTECT EXISTING FURNITURE, CARPET AND FINISHES DURING THE COURSE OF CONSTRUCTION. TAKE CARE NOT TO DAMAGE EXISTING SURFACES. REPAIR TO MATCH EXISTING CONDITIONS AS REQUIRED.
 - SEAL ALL HOLES IN WALLS, CEILINGS, FLOORS, ETC. TO MATCH EXISTING ADJACENT SURFACES WHERE EQUIPMENT, CONDUIT AND/OR PIPING ARE REMOVED.
 - EXISTING EQUIPMENT IS THE PROPERTY OF THE OWNER AND SHALL BE DISPOSED OF AS DIRECTED BY THE OWNER. DISPOSE OF ALL MATERIALS AND EQUIPMENT SHOWN TO BE REMOVED IN ACCORDANCE WITH LOCAL REGULATIONS.
 - REPLACE ALL SIDEWALKS DAMAGED BY OR DURING CONSTRUCTION OF THIS PROJECT.
 - REMOVE ALL SHRUBBERY, PLANTS, ETC. WHICH INTERFERE WITH WORK UNDER THIS CONTRACT. REPLANT AND/OR REPLACE ALL PLANTS, SHRUBBERY, ETC. AT COMPLETION OF JOB. ALL DISTURBED AREAS OF SOIL SHALL BE RE-SODED. REPLACEMENT OR REPLANTING TO BE GUARANTEED FOR ONE YEAR.
 - ITEMS REMOVED AND SAVED FOR REUSE SHALL BE PROTECTED FROM DAMAGE DURING CONSTRUCTION. CONTRACTOR SHALL IDENTIFY ANY DEFECTIVE MATERIALS PRIOR TO DEMOLITION. CONTRACTOR SHALL BE RESPONSIBLE FOR ALL DAMAGE TO MATERIALS AT PROJECT COMPLETION NOT IDENTIFIED PRIOR TO DEMOLITION.
 - CONTRACTOR SHALL COMPLY WITH "TRENCH SAFETY ACT" (FLORIDA STATUTE 553 PART III) AND OSHA STANDARD 29 CFR 1926.650 SUBPART P FOR ALL UTILITY TRENCHES IN EXCESS OF 5 FEET DEEP. CONTRACTOR SHALL INDICATE WITHIN HIS BID RESPONSE A REFERENCE TO THE TRENCH SAFETY STANDARD AND A SEPARATE LINE ITEM COST OF COMPLIANCE WITH STANDARD.

114 EAST 5th AVENUE
TALLAHASSEE, FL 32303
PHONE 850.224.7922
www.H2Engineering.com

H2E PROJECT No. 23.178

THIS DOCUMENT IS THE PROPERTY OF H2Engineering AND IS PREPARED AS AN INSTRUMENT OF SERVICE. ITS USE, REUSE OR REPRODUCTION, EXCEPT BY WRITTEN AGREEMENT WITH H2ENGINEERING, INC., IS PROHIBITED.

Florida Registry #2485
Anthony D. Wyrick, P.E. #98346

BKI, Inc., Architecture
1621 Physicians Dr.
Tallahassee, Florida 32308
(P) 850.778.8007 (F) 850.546.6150
www.bkiarchitecture.com
FL Architecture Corporation AAB0002280

SEAL:

PROJECT TITLE:
Interior Renovation for FSU
UCA Suite 1500
FSU Project No. 240065,
Tallahassee, Florida 32306

JOB NO.: 23-178
DESIGNED: ADW
DRAWN: AA
CHECKED: ADW

THIS DRAWING AND ANY REPRODUCTIONS ARE THE PROPERTY AND COPYRIGHT OF BKI, INC. AND MAY NOT BE REPRODUCED, PUBLISHED, OR USED IN ANY MANNER WITHOUT WRITTEN PERMISSION OF THE ARCHITECT

REVISIONS:


DRAWING PHASE:
100% Construction Documents

DRAWING TITLE:


GENERAL NOTES & LEGENDS

SHEET NO.:
E0.1

DATE:
April 12, 2024

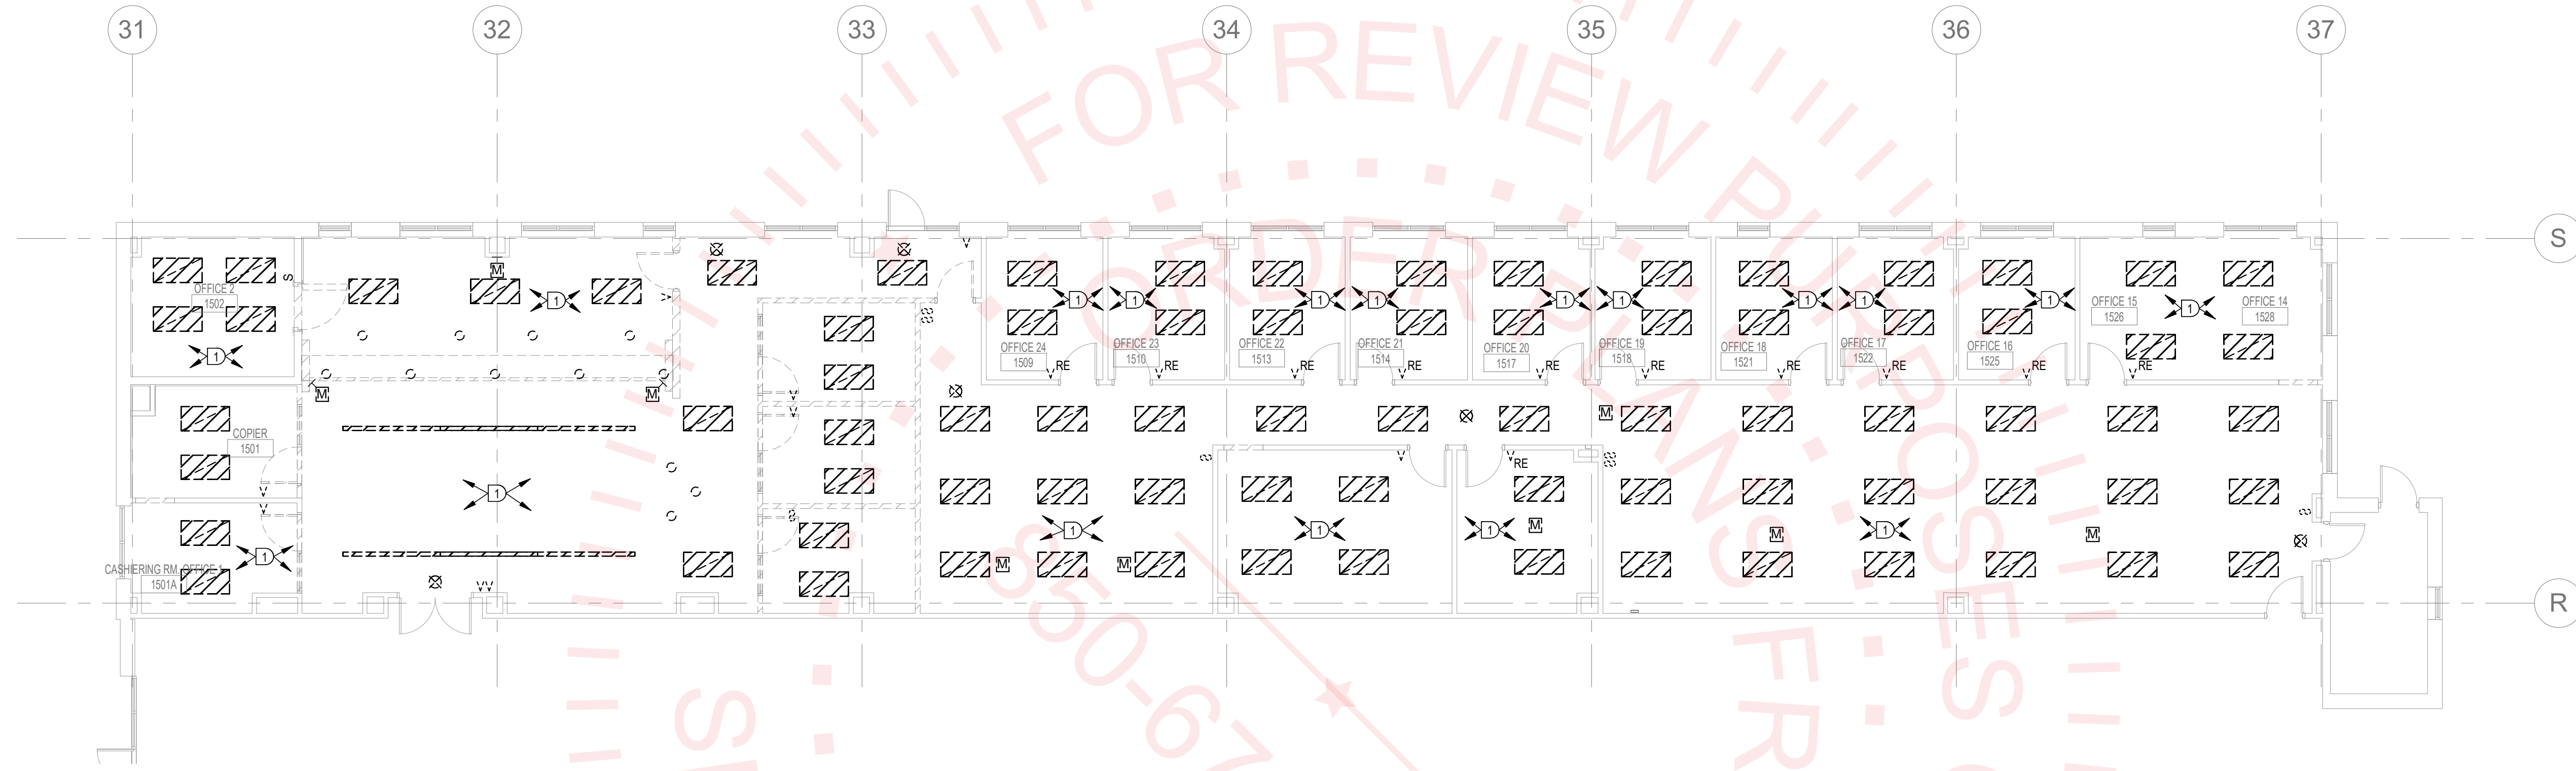

1 DEMOLITION PLAN - LIGHTING
1/8" = 1'-0"

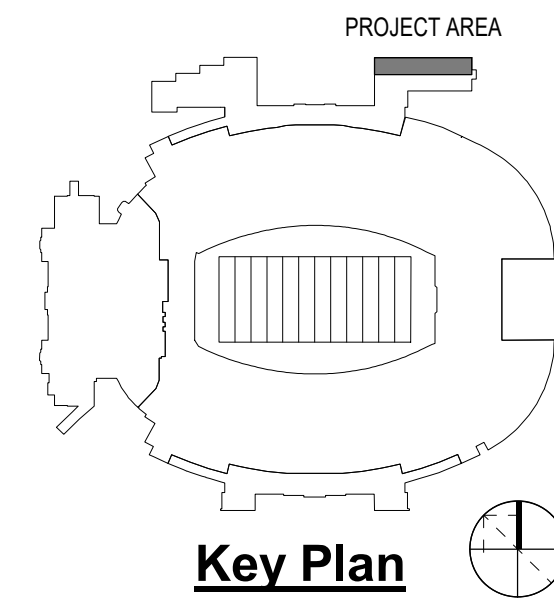

DEMOLITION GENERAL NOTES

1. WHERE DEVICE IS SHOWN TO BE REMOVED IN EXISTING WALL TO REMAIN , REMOVE BACK BOX AND FINISH WALL / FLOOR / CEILING TO MATCH SURROUNDING AREA.
2. DISCONNECT WIRING AT PANEL OR NEAREST DEVICE OR JUNCTION BOX TO REMAIN ON SAME CIRCUIT.
3. WHERE SURFACE RACEWAYS EXISTS TO DEVICE , REMOVE RACEWAY BACK TO POINT BEHIND FINISHED SURFACE , INCLUDING BACK BOX RECESS IN SURFACE'S PATCH SURFACE.
4. ALL DEVICES SHOWN DASHED ARE TO BE DEMOLISHED. ALL OTHER DEVICES ARE EXISTING TO REMAIN.

DEMOLITION KEYNOTES

- 1 PRESERVE EXISTING CIRCUIT FOR RE-USE DURING RENOVATION

bki
ARCHITECTURE

BKJ, Inc., Architecture
1621 Physicians Dr.
Tallahassee, Florida 32308
(P) 850.778.8007 (F) 850.546.6150
www.bkjarchitecture.com
FL Architecture Corporation AA00002280

SEAL:

PROJECT TITLE:

**Interior Renovation for FSU
UCA Suite 1500
FSU Project No. 2400665,
Tallahassee, Florida 32306**

JOB NO.: 23-178

DESIGNED: ADW

DRAWN: AA

CHECKED: ADW

THIS DRAWING AND ANY REPRODUCTIONS
ARE THE PROPERTY AND COPYRIGHT
OF BKJ, INC. AND MAY NOT BE
REPRODUCED, PUBLISHED, OR USED IN ANY
MANNER WITHOUT WRITTEN
PERMISSION OF THE ARCHITECT

REVISIONS:

DRAWING PHASE:
**100% Construction
Documents**

DRAWING TITLE:
**DEMOLITION PLAN -
LIGHTING**

SHEET NO.:
ED1.0


DATE:
April 12, 2024

H2
ENGINEERING


114 EAST 5th AVENUE
TALLAHASSEE, FL 32303
PHONE 850.224.7922
www.H2Engineering.com

H2E PROJECT No. 23.178
THIS DOCUMENT IS THE PROPERTY OF H2Engineering
AND IS PREPARED AS AN INSTRUMENT OF SERVICE. ITS
USE, REUSE OR REPRODUCTION, EXCEPT BY WRITTEN
AGREEMENT WITH H2ENGINEERING, INC., IS PROHIBITED.

Florida Registry #2485
Anthony D. Wyrick, P.E. #98346

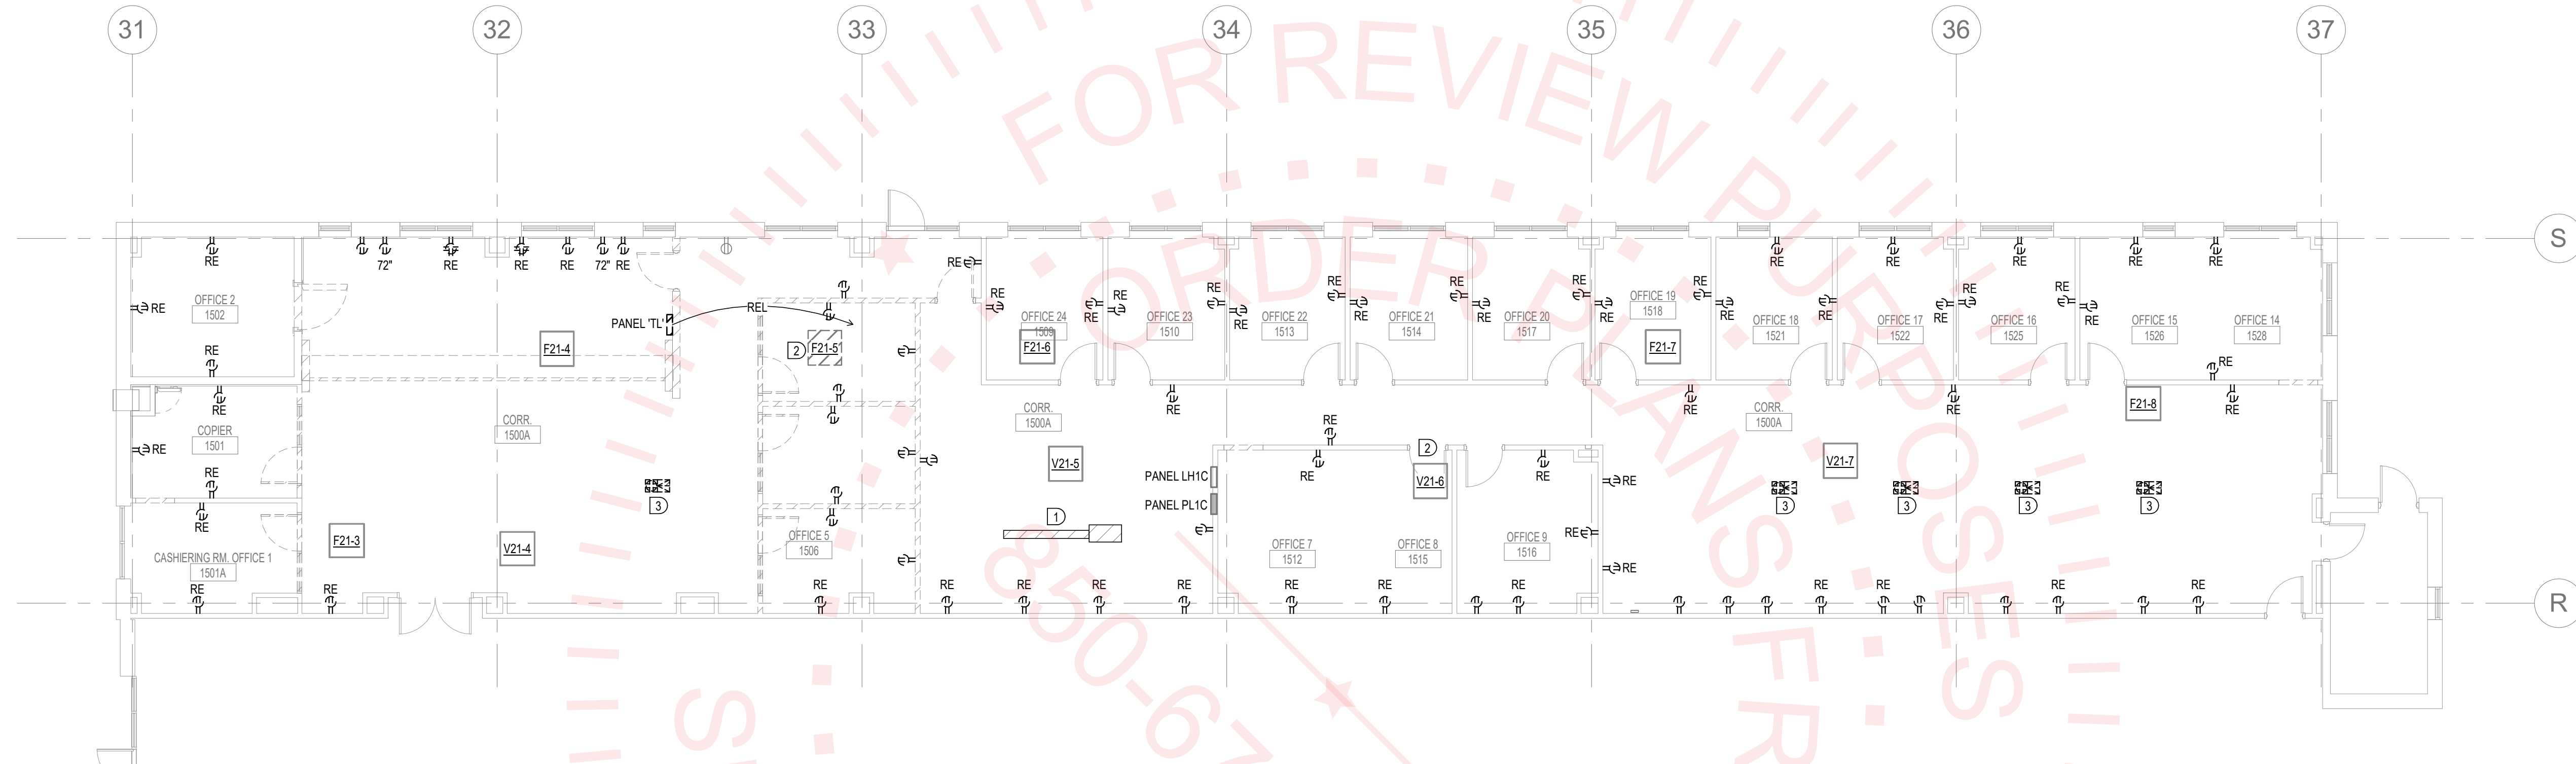

1 DEMOLITION PLAN - POWER
1/8" = 1'-0"

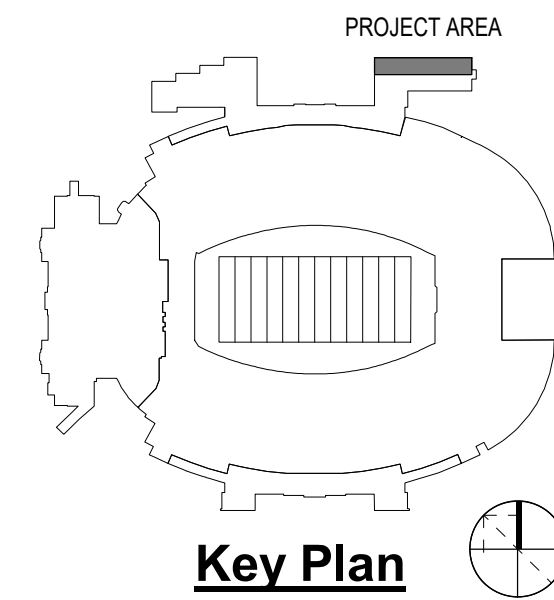

DEMOLITION GENERAL NOTES

- WHERE DEVICE IS SHOWN TO BE REMOVED IN EXISTING WALL TO REMAIN , REMOVE BACK BOX AND FINISH WALL / FLOOR / CEILING TO MATCH SURROUNDING AREA.
- DISCONNECT WIRING AT PANEL OR NEAREST DEVICE OR JUNCTION BOX TO REMAIN ON SAME CIRCUIT.
- WHERE SURFACE RACEWAYS EXISTS TO DEVICE , REMOVE RACEWAY BACK TO POINT BEHIND FINISHED SURFACE , INCLUDING BACK BOX RECESS IN SURFACE'S PATCH SURFACE.
- ALL DEVICES SHOWN DASHED ARE TO BE DEMOLISHED. ALL OTHER DEVICES ARE EXISTING TO REMAIN.

DEMOLITION KEYNOTES

- CUT SLAB FOR FLOOR BOX AND CONDUITS TO BE INSTALLED DURING RENOVATION.
- DISCONNECT AND PRESERVE EXISTING ELECTRICAL CIRCUIT FOR FUTURE USE.
- DEMOLISH CIRCUIT BACK TO PANEL AND MARK BREAKER AS SPARE. FOR DEVICES ON CIRCUITS TO REMAIN DEMOLISH CIRCUIT BACK TO NEAREST JUNCTION BOX. PATCH AND LEVEL FLOOR. UNUSED CONDUIT ENCASED IN CONCRETE MAY BE ABANDONED IN PLACE.

SEAL:

PROJECT TITLE:

**Interior Renovation for FSU
UCA Suite 1500
FSU Project No. 2400665,
Tallahassee, Florida 32306**

JOB NO.: 23-178

DESIGNED: ADW

DRAWN: AA

CHECKED: ADW

THIS DRAWING AND ANY REPRODUCTIONS ARE THE PROPERTY AND COPYRIGHT OF BKJ, INC. AND MAY NOT BE REPRODUCED, PUBLISHED, OR USED IN ANY MANNER WITHOUT WRITTEN PERMISSION OF THE ARCHITECT


REVISIONS:

DRAWING PHASE:
100% Construction Documents

DRAWING TITLE:
DEMOLITION PLAN - POWER

SHEET NO.:
ED2.0

DATE:
April 12, 2024

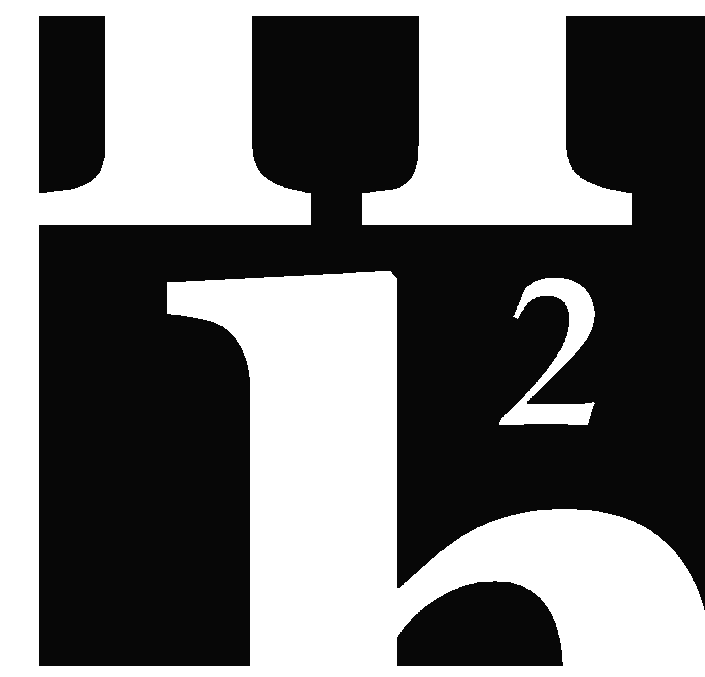


114 EAST 5th AVENUE
TALLAHASSEE, FL 32303
PHONE 850.224.7922
www.H2Engineering.com

H2E PROJECT No. 23.178

THIS DOCUMENT IS THE PROPERTY OF H2Engineering AND IS PREPARED AS AN INSTRUMENT OF SERVICE. ITS USE, REUSE OR REPRODUCTION, EXCEPT BY WRITTEN AGREEMENT WITH H2ENGINEERING, INC., IS PROHIBITED.

Florida Registry #2485
Anthony D. Wyrick, P.E. #98346

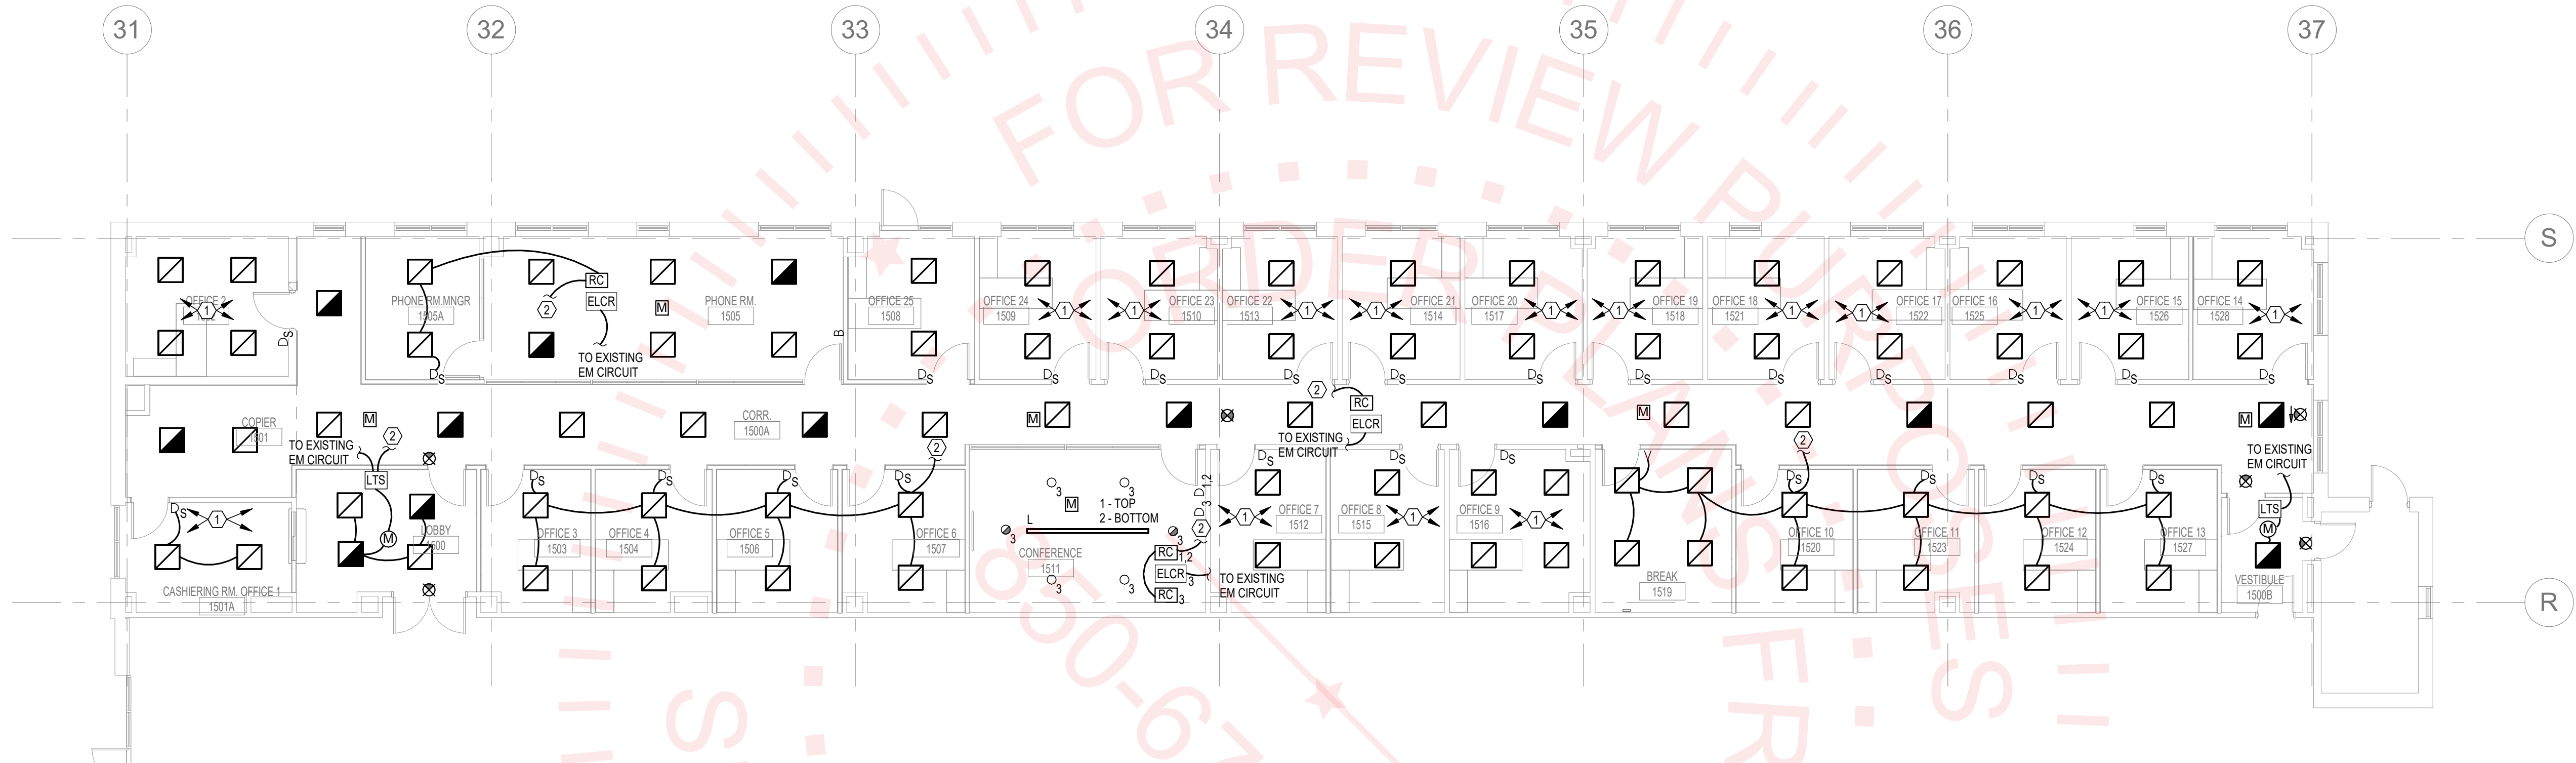

① RENOVATION PLAN - LIGHTING
1/8" = 1'-0"

RENOVATION GENERAL NOTES

1. ALL 2x2 FIXTURES SHALL BE TYPE 'A', U.N.O.
2. ALL CAN DOWNLIGHT FIXTURES SHALL BE TYPE 'C' U.N.O.
3. ALL EXIT SIGNS SHALL BE TYPE 'E' U.N.O.
4. ALL DEVICES SHOWN SHADED ARE EXISTING. ALL OTHER DEVICES ARE NEW.
5. PROVIDE UNSWITCHED EMERGENCY LIGHTING CIRCUIT TO EMERGENCY BATTERY PACKS AND EXIT SIGNS. UNSWITCHED LEG MAY RUN IN SAME CONDUIT AS SWITCHED EMERGENCY CIRCUIT.

RENOVATION KEYNOTES

- ① CONNECT LIGHTS IN THIS ROOM TO EXISTING LIGHTING CIRCUIT
- ② CONNECT TO NEARBY LIGHTING CIRCUIT

bki
ARCHITECTURE

BKJ, Inc., Architecture
1621 Physicians Dr.
Tallahassee, Florida 32308
(P) 850.778.8007 (F) 850.546.6150
www.bkarchitecture.com
FL Architecture Corporation AA00002280

SEAL:

PROJECT TITLE:

**Interior Renovation for FSU
UCA Suite 1500
FSU Project No. 2400665,
Tallahassee, Florida 32306**

JOB NO.: 23-178

DESIGNED: ADW

DRAWN: AA

CHECKED: ADW

THIS DRAWING AND ANY REPRODUCTIONS
ARE THE PROPERTY AND COPYRIGHT
OF BKJ, INC. AND MAY NOT BE
REPRODUCED, PUBLISHED, OR USED IN ANY
MANNER WITHOUT WRITTEN
PERMISSION OF THE ARCHITECT

REVISIONS:

DRAWING PHASE:
**100% Construction
Documents**

DRAWING TITLE:
**RENOVATION PLAN -
LIGHTING**

SHEET NO.:
E1.0

DATE:
April 12, 2024

PROJECT AREA

Key Plan


H2
ENGINEERING

114 EAST 5th AVENUE
TALLAHASSEE, FL 32303
PHONE 850.224.7922
www.H2Engineering.com


H2E PROJECT No. 23.178

THIS DOCUMENT IS THE PROPERTY OF H2Engineering
AND IS PREPARED AS AN INSTRUMENT OF SERVICE. ITS
USE, REUSE OR REPRODUCTION, EXCEPT BY WRITTEN
AGREEMENT WITH H2ENGINEERING, INC., IS PROHIBITED.

Florida Registry #2485
Anthony D. Wyrick, P.E. #98346

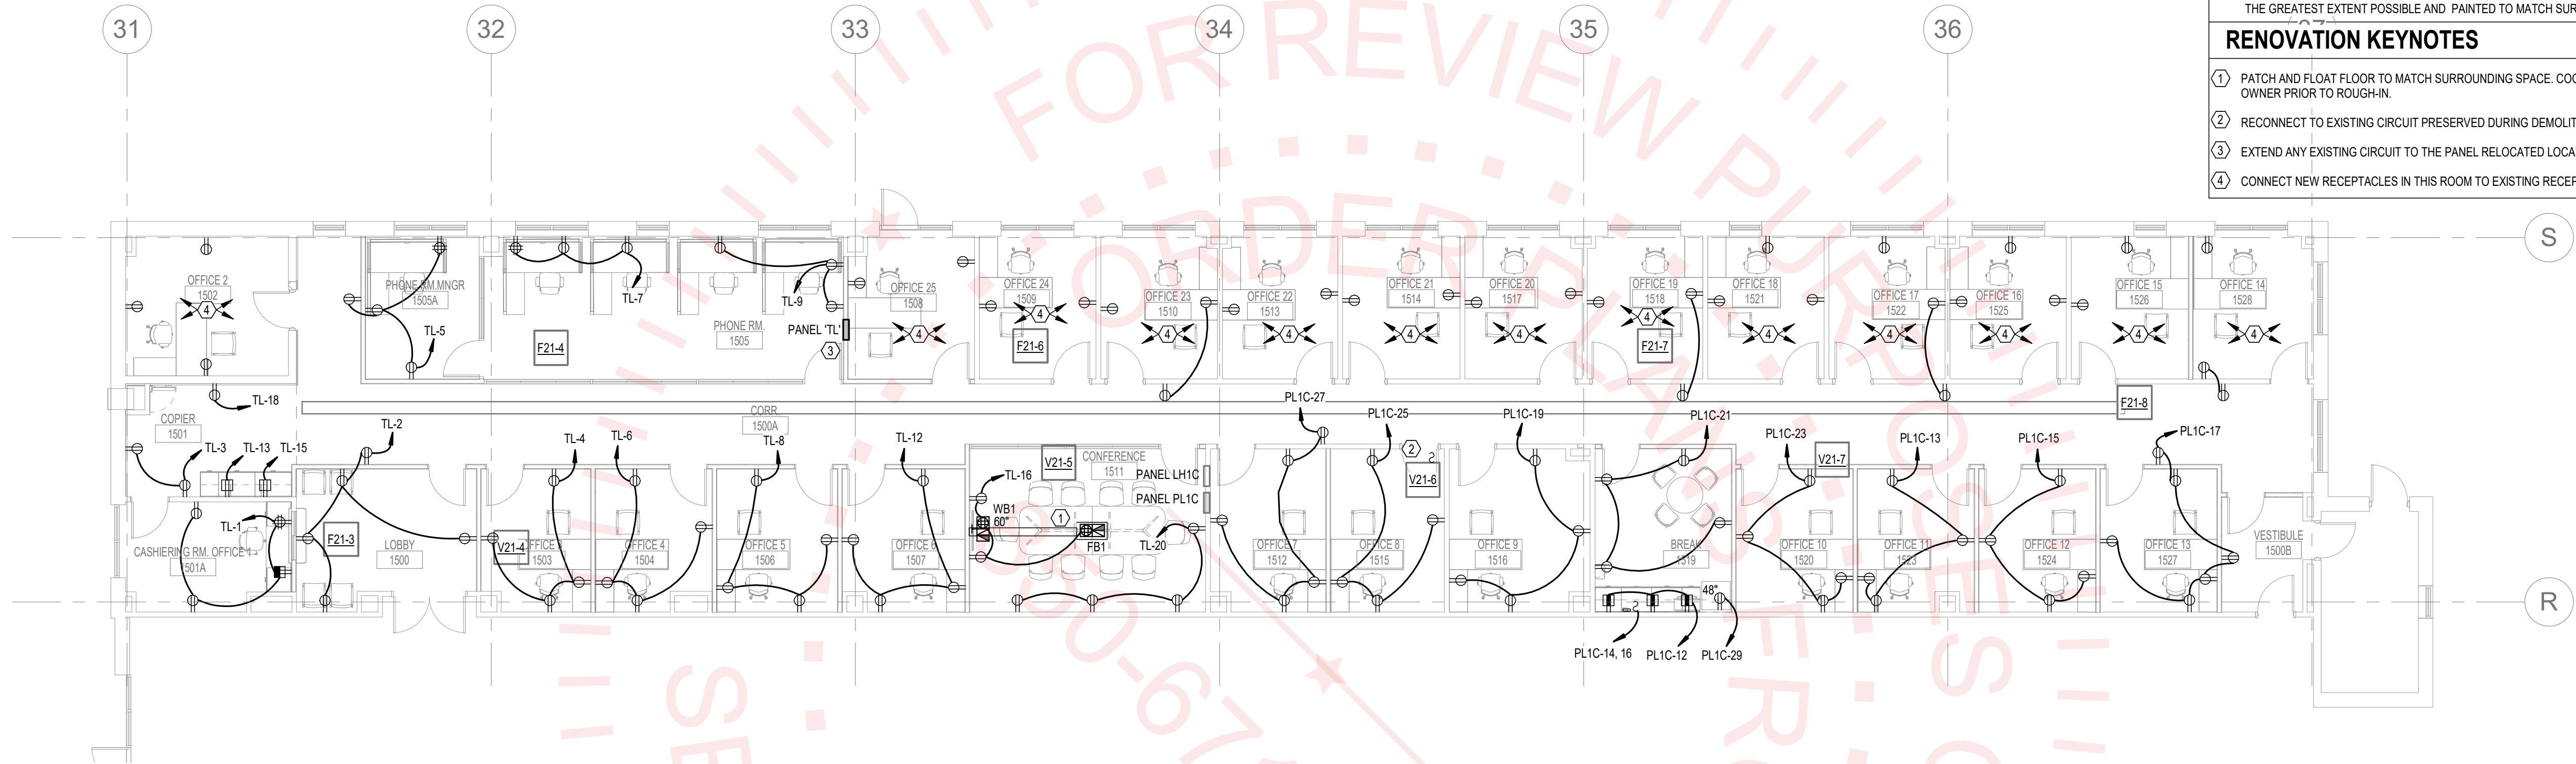

1 RENOVATION PLAN - POWER
1/8" = 1'-0"

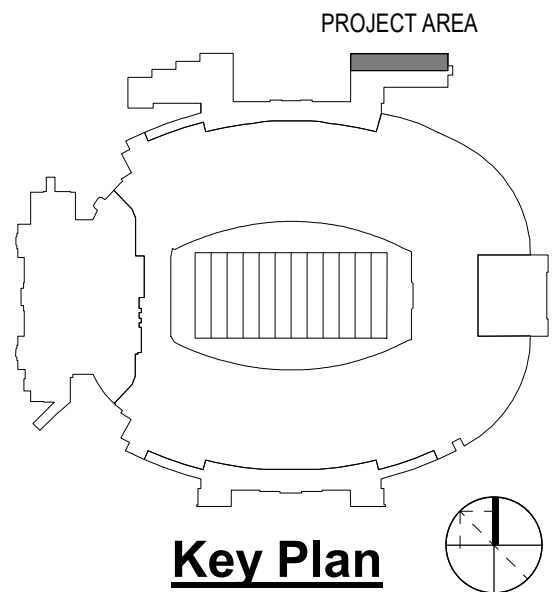

RENOVATION GENERAL NOTES

1. LOCATIONS OF FLOOR BOXES ON PLANS IS DIAGRAMMATIC AND SHOWN FOR CLARITY. COORDINATE EXACT LOCATION WITH ARCHITECT PRIOR TO ROUGH IN.
2. LOCATIONS OF PULL BOXES AND CONTROLLERS ON PLANS (DRC, RC, PC, ELOR, LTS, ETC.) IS DIAGRAMMATIC AND SHOWN FOR CLARITY. COORDINATE EXPOSED LOCATIONS WITH ARCHITECT. GENERALLY LAYOUT SHALL BE NEAT, ORGANIZED AND IN LINE WITH EXPOSED RACEWAYS AND BUILDING LINES. IN ROOMS/AREAS WITH INACCESSIBLE CEILINGS LOCATE DEVICES IN ADJACENT ACCESSIBLE SPACE OR PROVIDE CEILING WITH ACCESS PANEL; COORDINATE LOCATION OF ACCESS PANEL WITH ARCHITECT.
3. LOCATION OF CEILING MOUNT AND WALL MOUNT DEVICES IS DIAGRAMMATIC AND SHOWN FOR CLARITY. REFER TO ARCHITECTURAL RCP PLAN FOR EXACT LOCATION OF ALL CEILING MOUNT DEVICES. WHERE NOT INDICATED ON ARCHITECT'S RCP PLAN COORDINATE WITH ARCHITECT PRIOR TO INSTALLATION. COORDINATE WITH ARCHITECT FOR FINAL LOCATION OF ALL EXTERIOR AND INTERIOR WALL MOUNT DEVICES.
4. BACK BOXES AND CONDUIT TO ALL WALL MOUNT DEVICES SHALL BE CONCEALED IN WALL EXCEPT IN ELECTRICAL, TELECOM, AV AND MECHANICAL ROOMS. COORDINATE EXACT LOCATION OF DEVICES WITH ARCHITECT.
5. ELECTRICAL CONTRACTOR SHALL REFER TO COMMUNICATIONS, AUDIOVISUAL AND ACCESS CONTROL SYSTEM PLANS FOR ADDITIONAL SCOPE OF WORK REQUIRED BY ELECTRICAL CONTRACTOR. EC SHALL PROVIDE CONDUIT ROUGH-IN AS INDICATED ON THOSE PLANS AS WELL AS ANY POWER REQUIREMENTS IDENTIFIED ON THOSE PLANS AS BY ELECTRICAL CONTRACTOR. COORDINATE WITH RESPECTIVE TRADE CONTRACTORS ON APPLICABLE SCOPE OF WORK.
6. MECHANICAL EQUIPMENT DISCONNECTS SHOWN ON PLANS ARE DIAGRAMMATIC AND SHOWN FOR CLARITY. LOCATE DISCONNECTS SO ACCESSIBLE WITH WORKING CLEARANCE PER NEC.
7. SURFACE MOUNTED RACEWAYS AND CONDUIT, WHERE REQUIRED, SHALL BE MOUNTED HORIZONTALLY TO THE GREATEST EXTENT POSSIBLE AND PAINTED TO MATCH SURROUNDING SURFACES.

RENOVATION KEYNOTES

- 1 PATCH AND FLOAT FLOOR TO MATCH SURROUNDING SPACE. COORDINATE LOCATION WITH ARCHITECT AND OWNER PRIOR TO ROUGH-IN.
- 2 RECONNECT TO EXISTING CIRCUIT PRESERVED DURING DEMOLITION.
- 3 EXTEND ANY EXISTING CIRCUIT TO THE PANEL RELOCATED LOCATION.
- 4 CONNECT NEW RECEPTACLES IN THIS ROOM TO EXISTING RECEPTACLE CIRCUIT.

bki
ARCHITECTURE

BKJ, Inc., Architecture
1621 Physicians Dr.
Tallahassee, Florida 32308
(P) 850.778.8007 (F) 850.546.6150
www.bkarchitecture.com
FL Architecture Corporation AA00002280

SEAL:

PROJECT TITLE:
**Interior Renovation for FSU
UCA Suite 1500
FSU Project No. 2400665,
Tallahassee, Florida 32306**

JOB NO.: 23-178
DESIGNED: ADW
DRAWN: AA
CHECKED: ADW

THIS DRAWING AND ANY REPRODUCTIONS ARE THE PROPERTY AND COPYRIGHT OF BKJ, INC. AND MAY NOT BE REPRODUCED, PUBLISHED, OR USED IN ANY MANNER WITHOUT WRITTEN PERMISSION OF THE ARCHITECT

REVISIONS:

DRAWING PHASE:
100% Construction Documents

DRAWING TITLE:
RENOVATION PLAN - POWER

SHEET NO.:
E2.0

DATE:
April 12, 2024

H2 ENGINEERING
114 EAST 5th AVENUE
TALLAHASSEE, FL 32303
PHONE 850.224.7922
www.H2Engineering.com

H2E PROJECT No. 23-178

THIS DOCUMENT IS THE PROPERTY OF H2Engineering AND IS PREPARED AS AN INSTRUMENT OF SERVICE. ITS USE, REUSE OR REPRODUCTION, EXCEPT BY WRITTEN AGREEMENT WITH H2ENGINEERING, INC., IS PROHIBITED.

Florida Registry #2485
Anthony D. Wyrick, P.E. #98346

225 AMP RATING

225 MCB TRIP: SPECIAL:

208 /120 V, 3 PH, 4W

10 KA AIR

EXISTING

LIGHTING AND APPLIANCE PANEL: PL1C

CIRCUIT	LOAD TYPE	CKT BREAKER			SEE I-LINE	CONDUIT SIZE	PHASE & NEUTRAL SIZE	EGG SIZE	CONNECTED LOAD (VA)			CONNECTED LOAD (VA)			EGG SIZE	PHASE & NEUTRAL SIZE	CONDUIT SIZE	SEE I-LINE	CKT BREAKER			LOAD TYPE	CIRCUIT	
		TRIP	SPECIAL	POLE					A	B	C	A	B	C					POLE	SPECIAL	TRIP			
																								SERVING
1	R	RECEPTS - OFFICES	20		1	3/4"	#12	#12	900				900			#12	#12	3/4"	1		20	RECEPT - COPY	R 2	
3	R	RECEPT - OFFICES	20		1	3/4"	#12	#12					900			#12	#12	3/4"	1		20	FLOOR BOX RECEPT RM A1421	R 4	
5	R	RECEPTS - OFFICES	20		1	3/4"	#12	#12		900				900		#12	#12	3/4"	1		20	RECEPT - RM A1421	R 6	
7	R	RECEPTS - OFFICES	20		1	3/4"	#12	#12	900					900		#12	#12	3/4"	1		20	RECEPT - RM A1418, A1420	R 8	
9	R	RECEPTS - OFFICES	20		1	3/4"	#12	#12		900				900		#12	#12	3/4"	1		20	RECEPT - RM A1422, A1424	R 10	
11	R	RECEPTS - OFFICES	20		1	3/4"	#12	#12			900				720	#12	#12	3/4"	1		20	RECEPT RM 1519	R 12	
13	R	RECEPT RM 1523	20		1	3/4"	#12	#12	720					4200		#10	#6	3/4"	2		60	RECEPT RM 1519 WH-1	O 14	
15	R	RECEPT RM 1524	20		1	3/4"	#12	#12		720				4200									O 16	
17	R	RECEPT RM 1527	20		1	3/4"	#12	#12			720				900	#12	#12	3/4"	1		20	RECEPTS - OPEN OFFICE	R 18	
19	R	RECEPT RM 1516	20		1	3/4"	#12	#12	720					900		#12	#12	3/4"	1		20	RECEPTS - OPEN OFFICE	R 20	
21	R	RECEPT RM 1519	20		1	3/4"	#12	#12		720				900		#12	#12	3/4"	1		20	RECEPTS - OPEN OFFICE	R 22	
23	R	RECEPT RM 1520	20		1	3/4"	#12	#12			720				900	#12	#12	3/4"	1		20	RECEPT - OFFICE	R 24	
25	R	RECEPT RM 1515	20		1	3/4"	#12	#12	720					900		#12	#12	3/4"	1		20	RECEPT - LOUNGE	R 26	
27	R	RECEPT RM 1512	20		1	3/4"	#12	#12		720				900		#12	#12	3/4"	1		20	RECEPT - OFFICE	R 28	
29	R	RECEPT RM 1513 REFRIG	20		1	3/4"	#12	#12			1200				900	#12	#12	3/4"	1		20	RECEPT - OFFICE	R 30	
31	R	RECEPTS - OFFICE	20		1	3/4"	#12	#12	900					900		#12	#12	3/4"	1		20	RECEPT - OFFICE	R 32	
33	R	RECEPTS - OFFICE	20		1	3/4"	#12	#12		900				900		#12	#12	3/4"	1		20	RECEPT - OFFICE	R 34	
35	R	RECEPTS - OFFICE	20		1	3/4"	#12	#12			900				900	#12	#12	3/4"	1		20	RECEPT - OFFICE	R 36	
37	R	RECEPT RM 1418A	20		1	3/4"	#12	#12		900				900		#12	#12	3/4"	1		20	RECEPT - OFFICE	R 38	
39	R	RECEPT RM 1418A	20		1	3/4"	#12	#12			900				900	#12	#12	3/4"	1		20	REFRIGERATOR	R 40	
41	R	RECEPT RM 1418A	20		1	3/4"	#12	#12				900				900	#12	#12	3/4"	1		20	- HOT DOG STAND	R 42

1. ALL NEW CIRCUITS AND BREAKERS ARE SHOWN BOLD. ALL OTHERS ARE EXISTING.

LOAD CLASSIFICATION	DEMAND	KVA (THIS PANEL)			KVA (SUB-PANELS)			KVA CONNECTED			KVA DEMAND			CONNECTED (AMPS)	CONNECTED (KVA)	DEMAND (AMPS)	DEMAND (KVA)
		A	B	C	A	B	C	A	B	C	A	B	C				
M MOTOR	100%	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
K KITCHEN	100%	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
R RECEPTACLES	10KVA+50%	11	11	12	0	0	0	11	11	12	7	7	8				
L LIGHTING	100%	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
H HVAC	100%	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
N N+1 REDUNDANT LOAD	50%	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
O OTHER	100%	4	4	0	0	0	0	4	4	0	4	4	0	4	0	0	
TOTAL LOAD (KVA)		15	15	12	0	0	0	15	15	12	11	11	8				
TOTAL LOAD (AMPS)		128	128	103	0	0	0	128	128	103	95	95	65				

100 AMP RATING

MLO TRIP: SPECIAL:

208 /120 V, 3 PH, 4W

10 KA AIR

EXISTING

LIGHTING AND APPLIANCE PANEL: TL

CIRCUIT	LOAD TYPE	CKT BREAKER			SEE I-LINE	CONDUIT SIZE	PHASE & NEUTRAL SIZE	EGG SIZE	CONNECTED LOAD (VA)			CONNECTED LOAD (VA)			EGG SIZE	PHASE & NEUTRAL SIZE	CONDUIT SIZE	SEE I-LINE	CKT BREAKER			LOAD TYPE	CIRCUIT
		TRIP	SPECIAL	POLE					A	B	C	A	B	C					POLE	SPECIAL	TRIP		
1	R	RECEPT RM 1501A	20		1	3/4"	#12	#12	900				900			#12	#12	3/4"	1		20	RECEPT RM 1500	R 2
3	R	RECEPT RM 1501	20		1	3/4"	#12	#12		360			720			#12	#12	3/4"	1		20	RECEPT RM 1503	R 4
5	R	RECEPT RM 1505A	20		1	3/4"	#12	#12			900			720		#12	#12	3/4"	1		20	RECEPT RM 1504	R 6
7	R	RECEPT RM 1505	20		1	3/4"	#12	#12	720				720			#12	#12	3/4"	1		20	RECEPT RM 1506	R 8
9	R	RECEPT RM 1505	20		1	3/4"	#12	#12		540				900		#12	#12	3/4"	1		20	Power Doors	R 10
11	R	Lobby Doors	20		1	3/4"	#12	#12			900				720	#12	#12	3/4"	1		20	RECEPT RM 1507	R 12
13	R	RECEPT RM 1501	20		1	3/4"	#12	#12	1200						720	#12	#12	3/4"	1		20	Roll up Door	R 14
15	R	RECEPT RM 1501	20		1	3/4"	#12	#12		1200				720		#12	#12	3/4"	1		20	RECEPT RM 1511	R 16
17	SPACE				1									1200		#12	#12	3/4"	1		20	RECEPT RM 1501 COPIER	R 18
19	SPACE				1									720		#12	#12	3/4"	1		20	RECEPT RM 1511	R 20
21	SPACE				1														1			SPACE	R 22
23	SPACE				1														1			SPACE	R 24

1. ALL NEW CIRCUITS AND BREAKERS ARE SHOWN BOLD. ALL OTHERS ARE EXISTING.

LOAD CLASSIFICATION	DEMAND	KVA (THIS PANEL)			KVA (SUB-PANELS)			KVA CONNECTED			KVA DEMAND			CONNECTED (AMPS)	CONNECTED (KVA)	DEMAND (AMPS)	DEMAND (KVA)
		A	B	C	A	B	C	A	B	C	A	B	C				
M MOTOR	100%	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
K KITCHEN	100%	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
R RECEPTACLES	10KVA+50%	6	4	4	0	0	0	6	4	4	5	4	4				
L LIGHTING	100%	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
H HVAC	100%	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
N N+1 REDUNDANT LOAD	50%	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
O OTHER	100%	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
TOTAL LOAD (KVA)		6	4	4	0	0	0	6	4	4	5	4	4				
TOTAL LOAD (AMPS)		50	37	37	0	0	0	50	37	37	39	32	32				

225 AMP RATING

225 MCB TRIP: SPECIAL:




208 /120 V, 3 PH, 4W

10 KA AIR

EXISTING

LIGHTING AND APPLIANCE PANEL: PL1C

CIRCUIT	LOAD TYPE	CKT BREAKER			SEE I-LINE	CONDUIT SIZE	PHASE & NEUTRAL SIZE	EGG SIZE	CONNECTED LOAD (VA)			CONNECTED LOAD (VA)			EGG SIZE	PHASE & NEUTRAL SIZE	CONDUIT SIZE	SEE I-LINE	CKT BREAKER			LOAD TYPE	CIRCUIT
		TRIP	SPECIAL	POLE					A	B	C	A	B	C					POLE	SPECIAL	TRIP		
1	R	RECEPTS - OFFICES	20		1	3/4"	#12	#12	900				900			#12	#12	3/4"	1		20	RECEPT - COPY	R 2
3	R	RECEPT - OFFICES	20		1	3/4"	#12	#12					900			#12	#12	3/4"	1		20	FLOOR BOX RECEPT RM A1421	R 4
5	R	RECEPTS - OFFICES	20		1	3/4"	#12	#12		900				900		#12	#12	3/4"	1		20	RECEPT - RM A1421	R 6
7	R	RECEPTS - OFFICES	20		1	3/4"	#12	#12	900					900		#12	#12	3/4"	1		20	RECEPT - RM A1418, A1420	R 8
9	R	RECEPTS - OFFICES	20		1	3/4"	#12	#12		900				900		#12	#12	3/4"	1		20	RECEPT - RM A1422, A1424	R 10
11	R	RECEPTS - OFFICES	20		1	3/4"	#12	#12			900				720	#12	#12	3/4"	1		20	RECEPT RM 1519	R 12
13	R	RECEPT RM 1523	20		1	3/4"	#12	#12	720					4200		#10	#6	3/4"	2		60	RECEPT RM 1519 WH-1	O 14
15	R	RECEPT RM 1524	20		1	3/4"	#12	#12		720				4200									O 16
17	R	RECEPT RM 1527	20		1	3/4"	#12	#12			720				900	#12	#12	3/4"	1		20	RECEPTS - OPEN OFFICE	R 18
19	R	RECEPT RM 1516	20		1	3/4"	#12	#12	720					900		#12	#12	3/4"	1		20	RECEPTS - OPEN OFFICE	R 20
21	R	RECEPT RM 1519	20		1	3/4"	#12	#12		720				900		#12	#12	3/4"	1		20	RECEPTS - OPEN OFFICE	R 22
23	R	RECEPT RM 1520	20		1	3/4"	#12	#12			720				900	#12	#12	3/4"	1		20	RECEPT - OFFICE	R 24
25	R	RECEPT RM 1515	20		1	3/4"	#12	#12	720					900		#12	#12	3/4"	1		20	RECEPT - LOUNGE	R 26
27	R	RECEPT RM 1512	20		1	3/4"	#12	#12		720				900		#12	#12	3/4"	1		20	RECEPT - OFFICE	R 28
29	R	RECEPT RM 1513 REFRIG	20		1	3/4"	#12	#12			1200				900	#12	#12	3/4"	1		20	RECEPT - OFFICE	R 30
31	R	RECEPTS - OFFICE	20		1	3/4"	#12	#12	900					900		#12	#12	3/4"	1		20	RECEPT - OFFICE	R 32
33	R	RECEPTS - OFFICE	20		1	3/4"	#12	#12		900				900		#12	#12	3/4"	1		20	RECEPT - OFFICE	R 34
35	R	RECEPTS - OFFICE	20		1	3/4"	#12	#12			900				900	#12	#12	3/4"	1		20	RECEPT - OFFICE	R 36
37	R	RECEPT RM 1418A	20		1	3/4"	#12	#12		900				900		#12	#12	3/4"	1		20	RECEPT - OFFICE	R 38
39	R	RECEPT RM 1418A	20		1	3/4"	#12	#12			900				900	#12	#12	3/4"	1		20	REFRIGERATOR	R 40

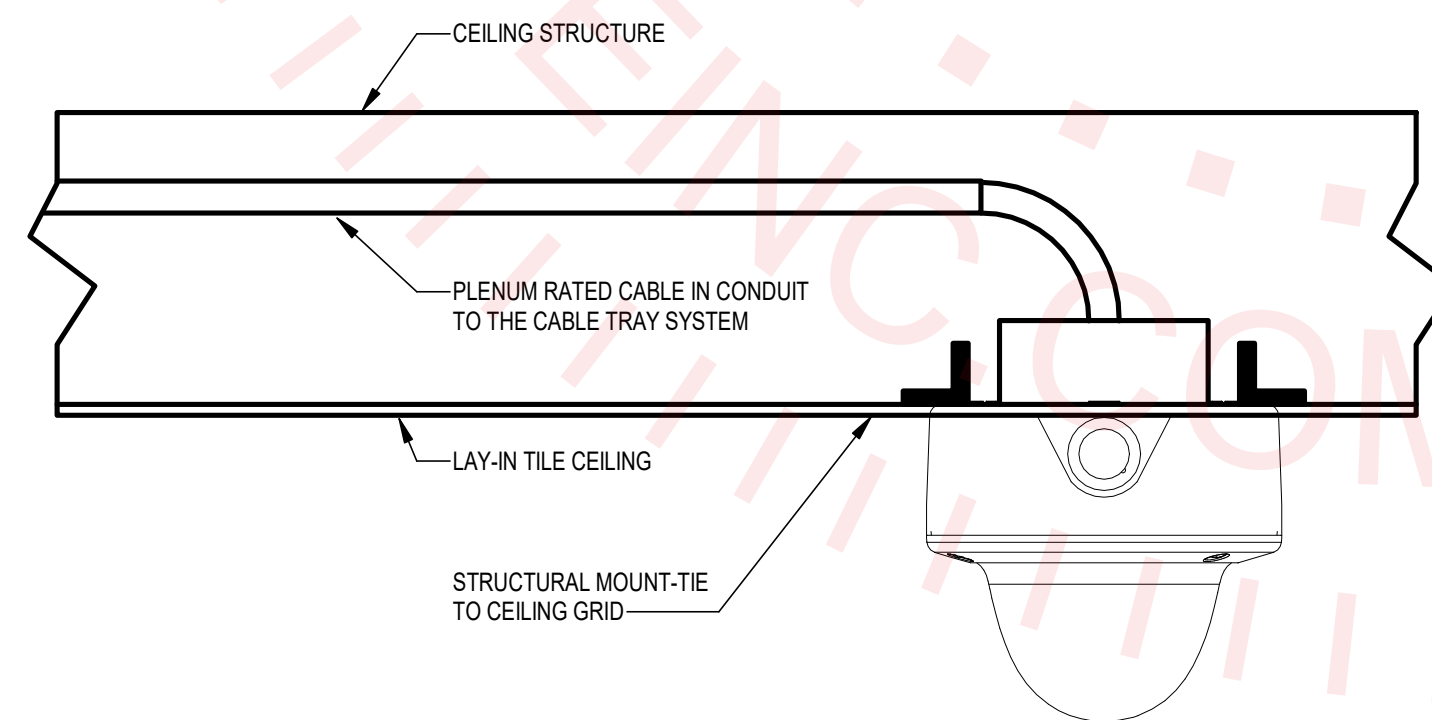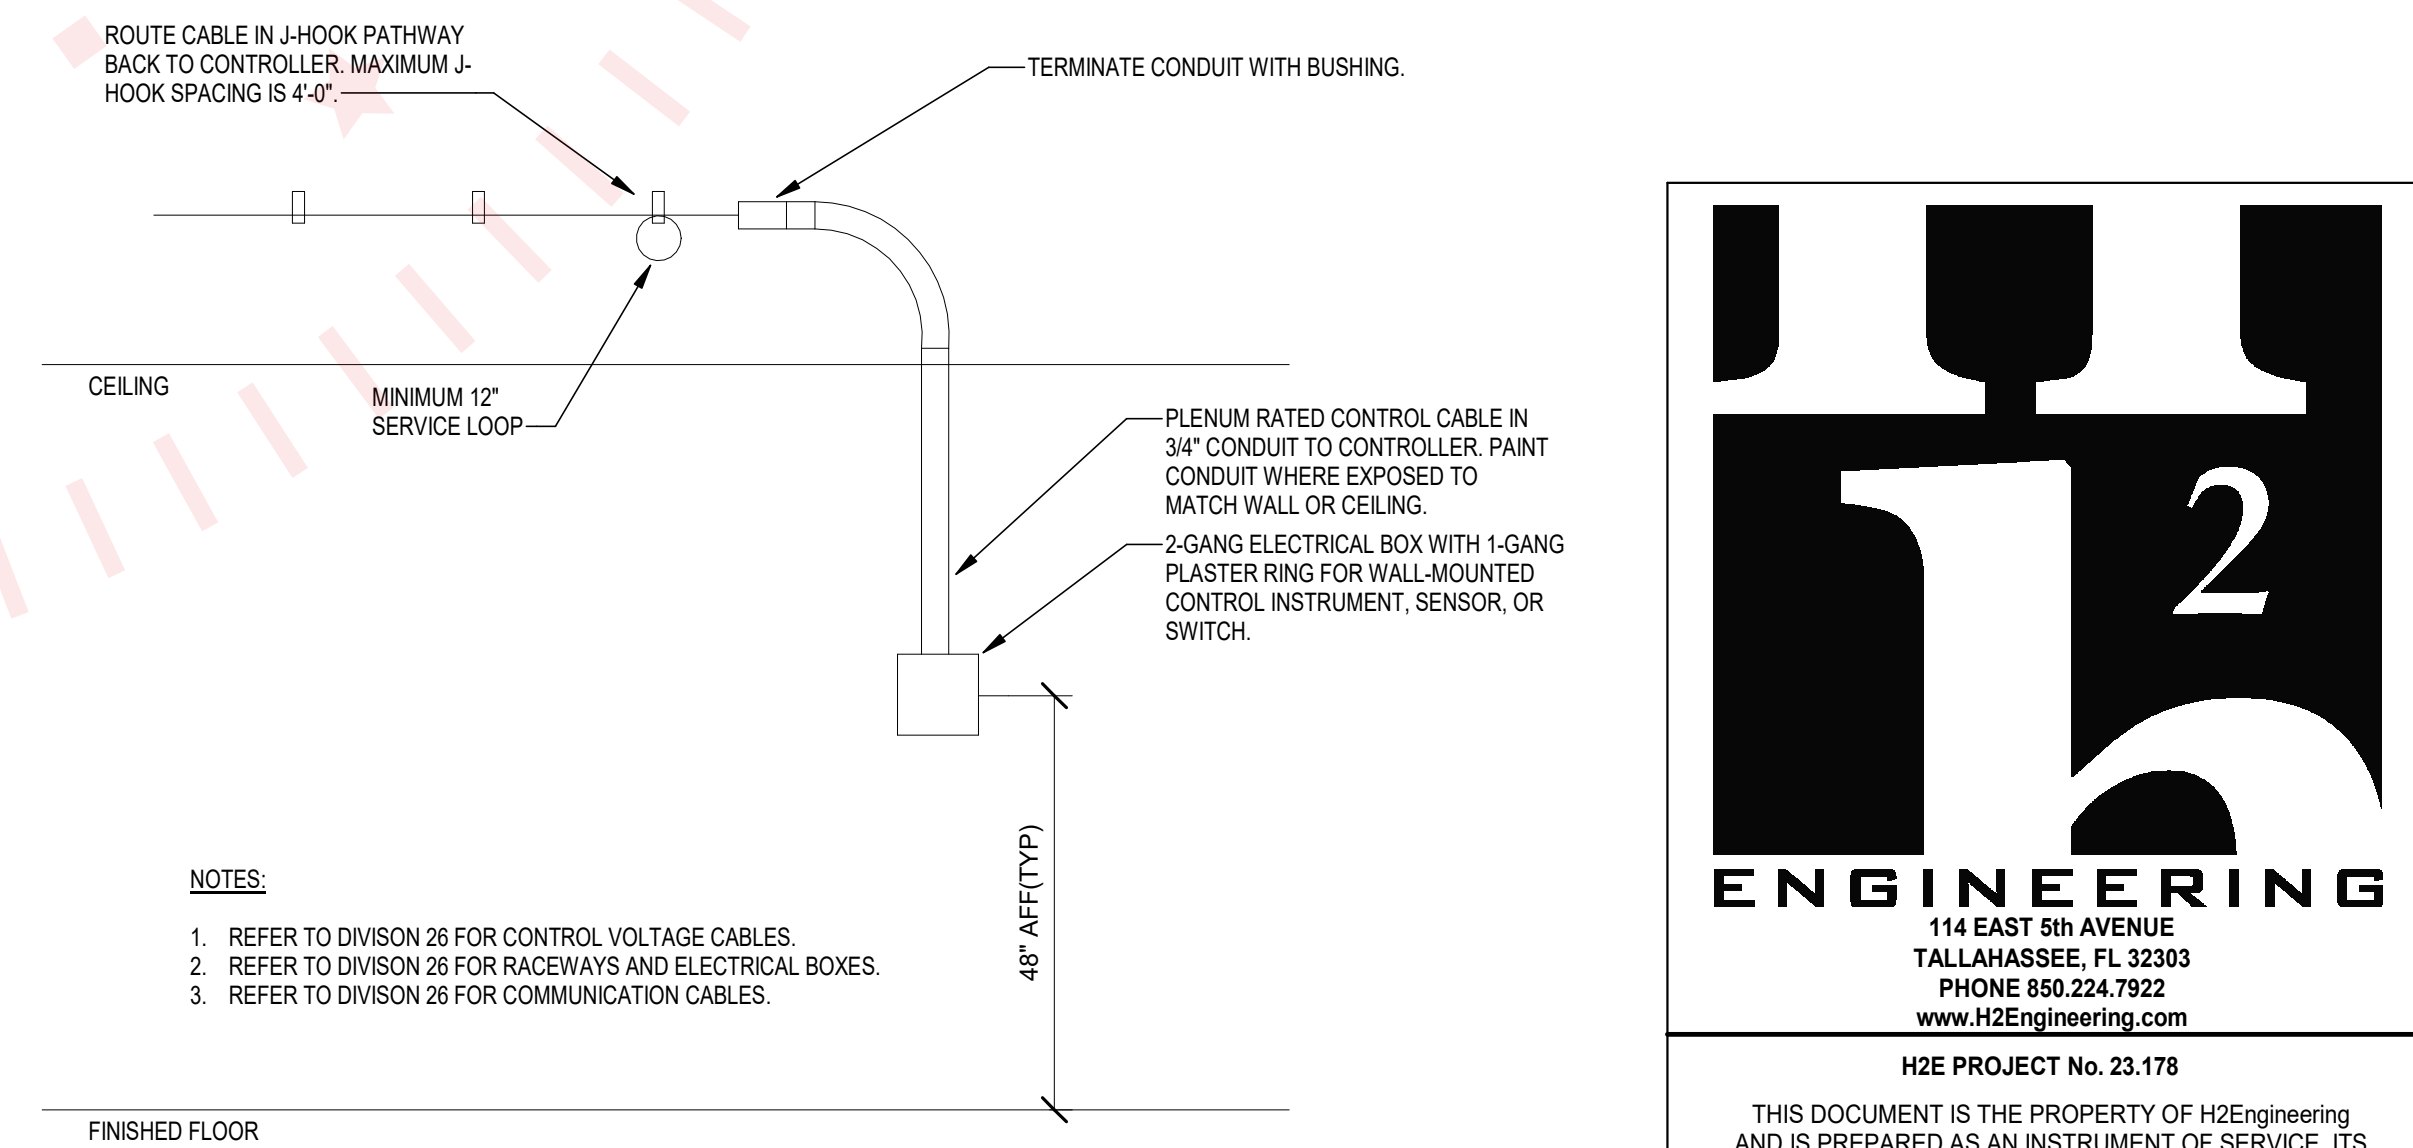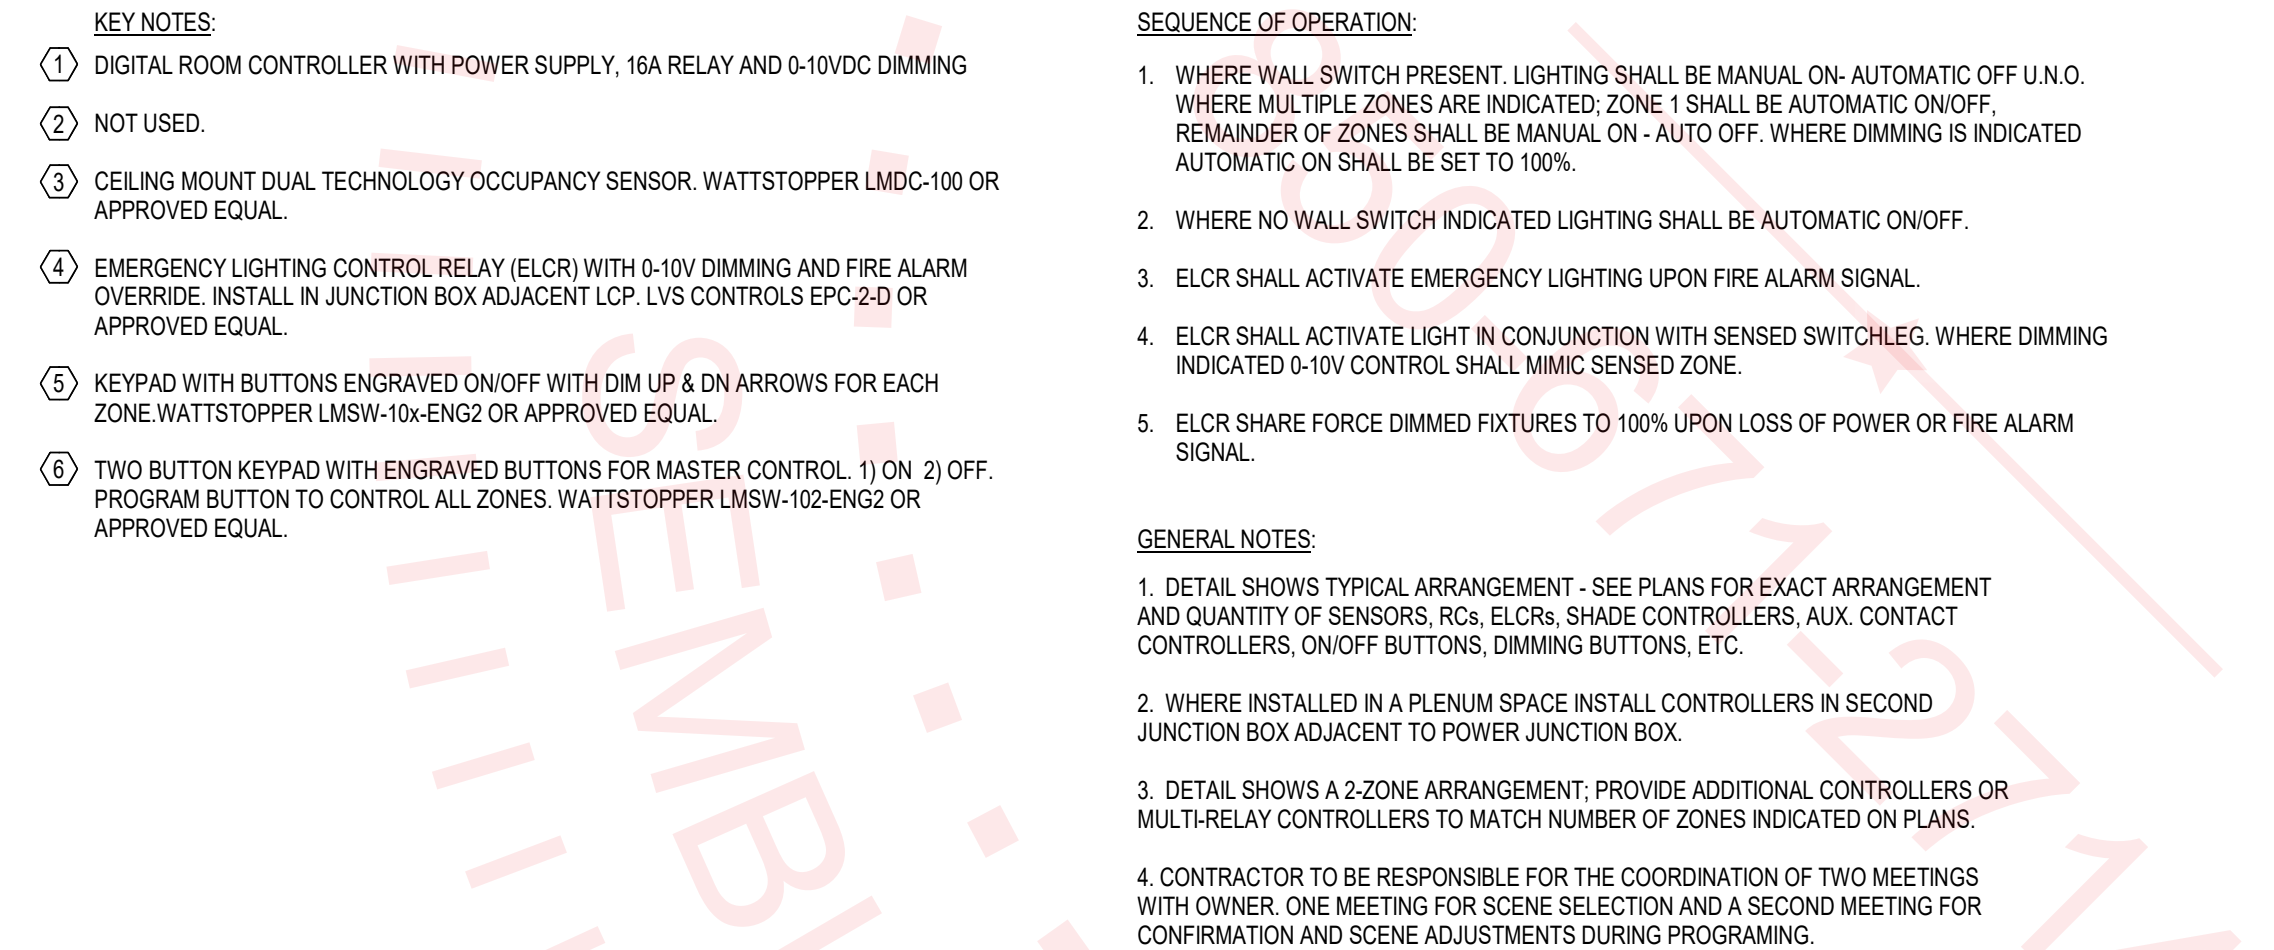

H2E PROJECT No. 23.178

THIS DOCUMENT IS THE PROPERTY OF H2Engineering
AND IS PREPARED AS AN INSTRUMENT OF SERVICE. ITS
USE, REUSE OR REPRODUCTION, EXCEPT BY WRITTEN
AGREEMENT WITH H2ENGINEERING, INC., IS PROHIBITED.

Florida Registry #2485
Anthony D. Wyrick, P.E. #98346

Interior Renovation for FSU
UCA Suite 1500
FSU Project No. 2400665,
Tallahassee, Florida 32306

THIS DRAWING AND ANY REPRODUCTIONS
ARE THE PROPERTY AND COPYRIGHT
OF BKJ, INC. AND MAY NOT BE
REPRODUCED, PUBLISHED, OR USED IN ANY
MANNER WITHOUT WRITTEN
PERMISSION OF THE ARCHITECT

REVISIONS:

DRAWING PHASE:
100% Construction Documents

DRAWING TITLE:


DETAILS

SHEET NO.:

E5.0

DATE:


April 12, 2024

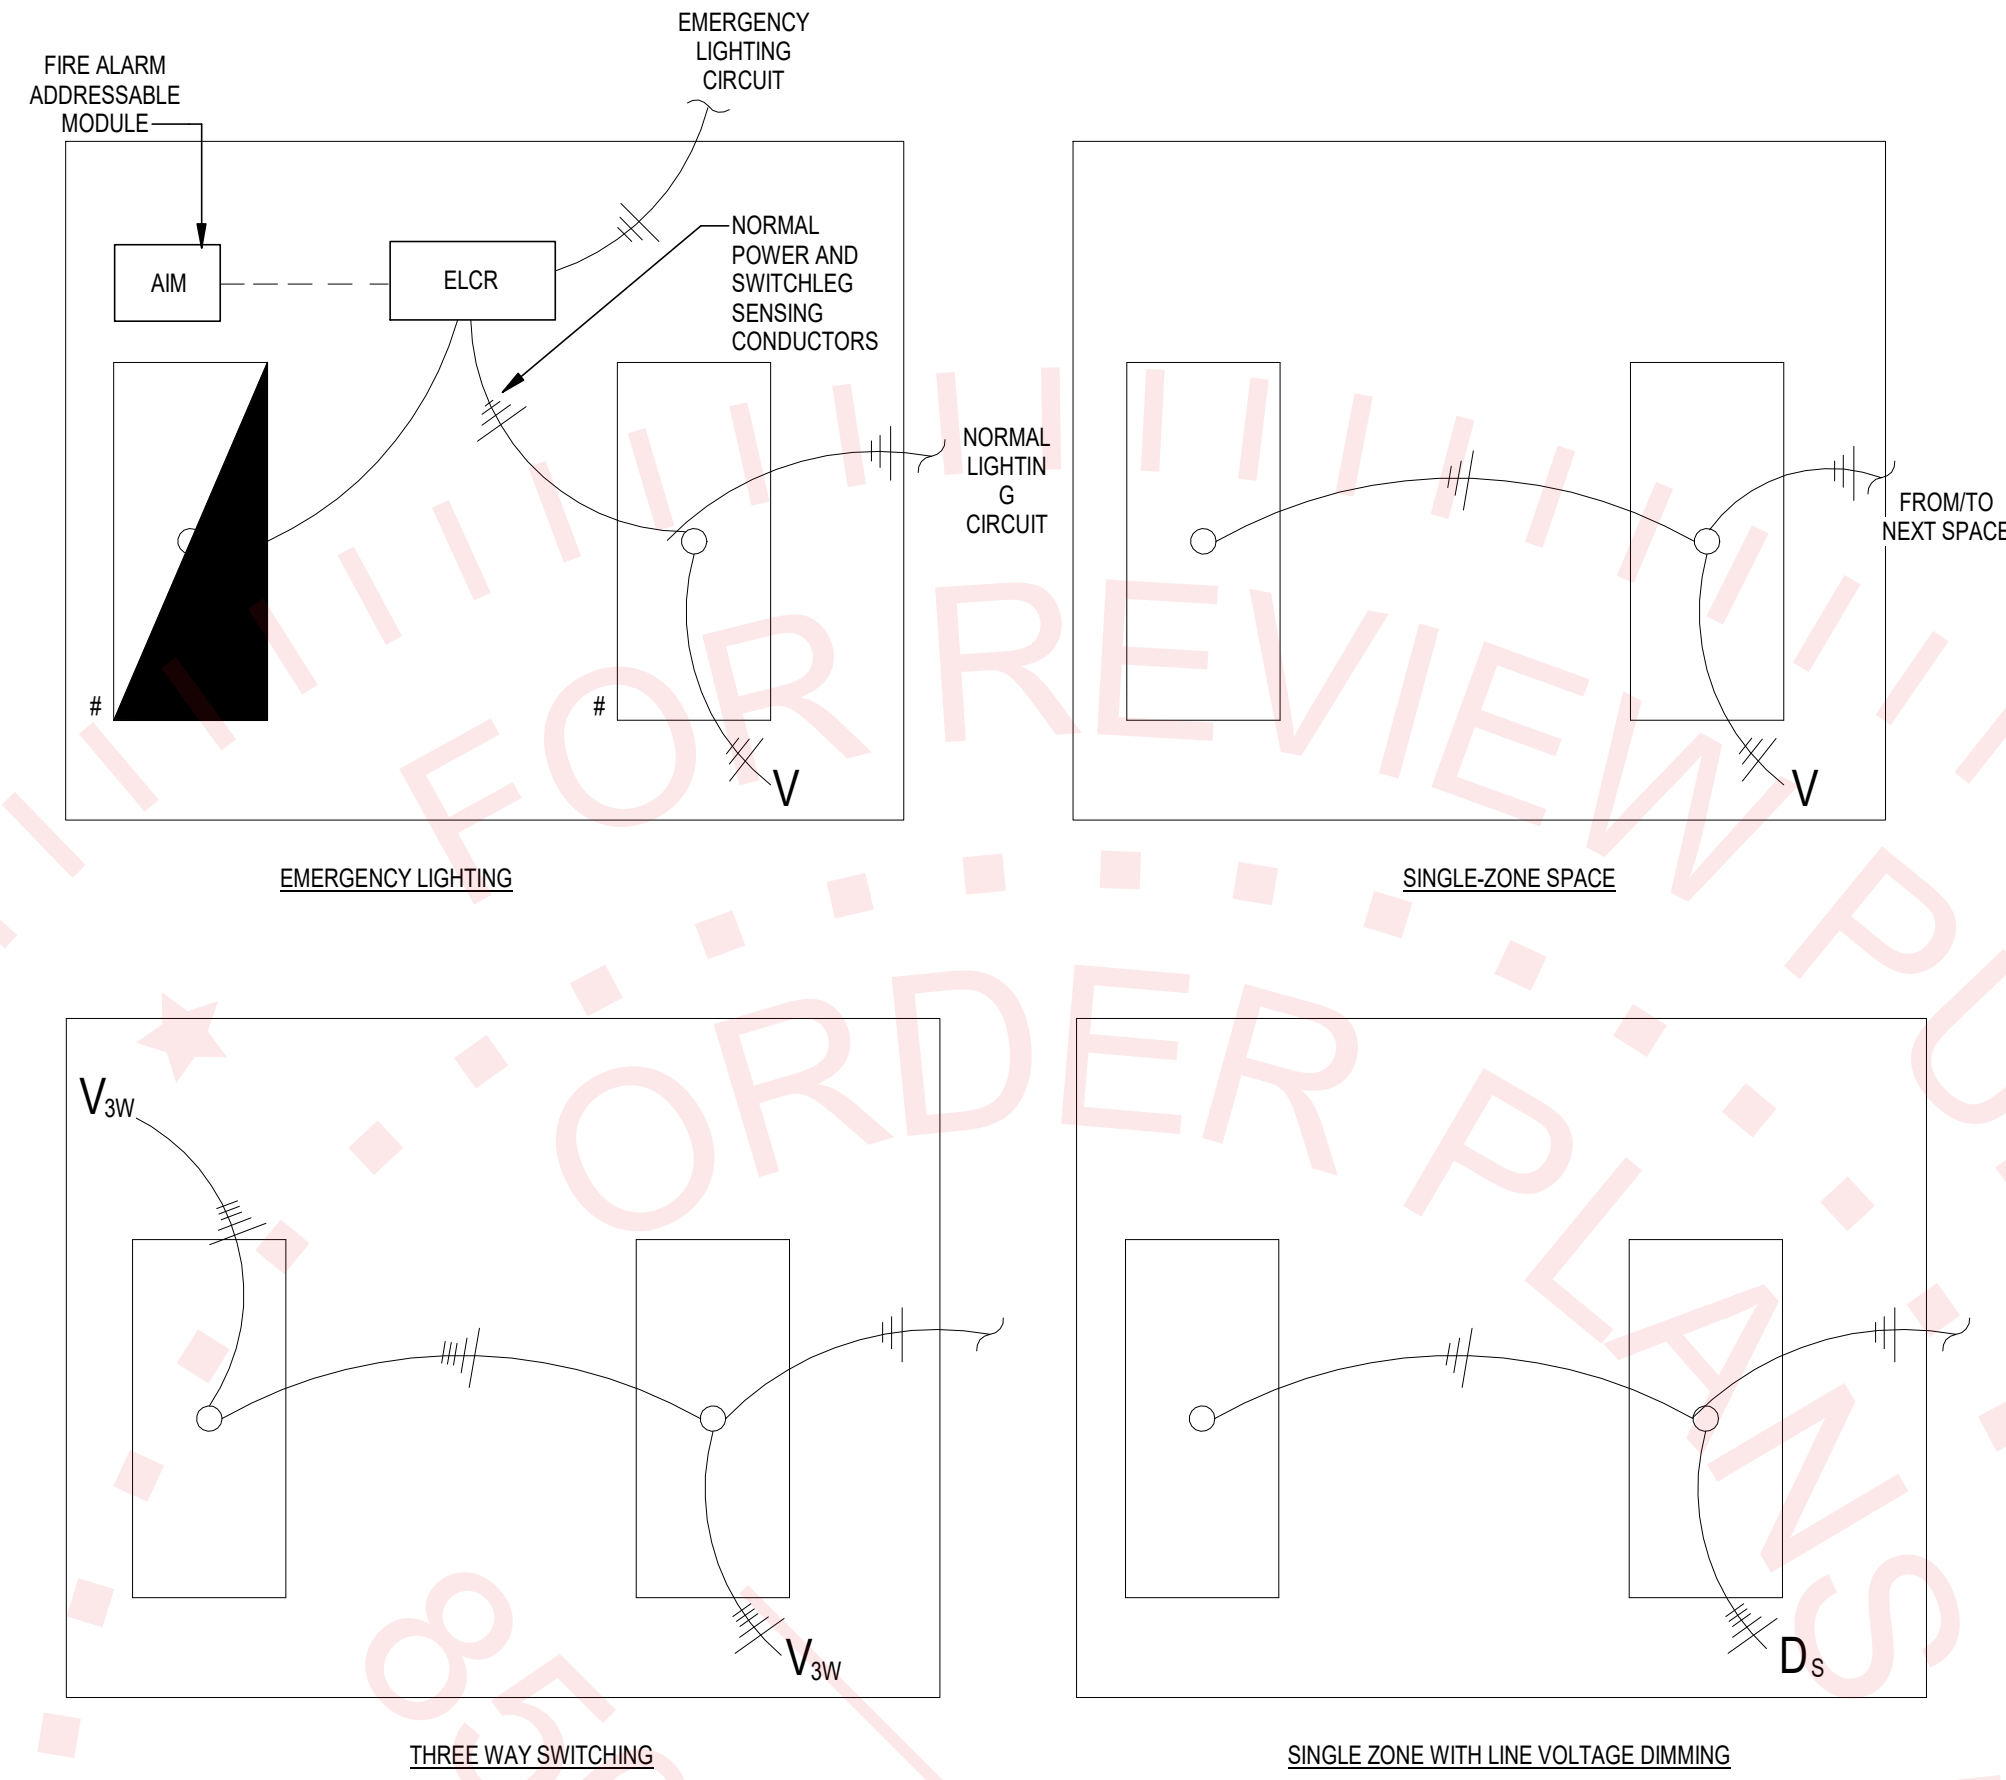


- NOTES:
1. CARRY SWITCH LEG FOR EACH ZONE TO CORRESPONDING ZONE FIXTURES.
 2. CONTRACTOR MAY CARRY UNSWITCHED CONDUCTOR WITH SWITCHED CONDUCTORS FOR ADJACENT AREAS OR UNSWITCHED DEVICES.
 3. EMERGENCY CONDUCTORS SHALL NOT SHARE PATHWAY WITH NON-EMERGENCY CONDUCTORS, EXCEPT WITHIN ELCR JUNCTION BOX.
 4. ELCR SHALL SWITCH WITH ROOM LIGHTING, WHERE MULTI-ZONE SPACE INDICATED ELCR SHALL SWITCH WITH INDICATED ZONE #.
 5. ARRANGEMENT TYPICAL FOR SWITCHES WHERE MANUAL SWITCHES INDICATED.

B TYPICAL LINE VOLTAGE LIGHTING CONTROL SWITCHING DIAGRAM

NO SCALE

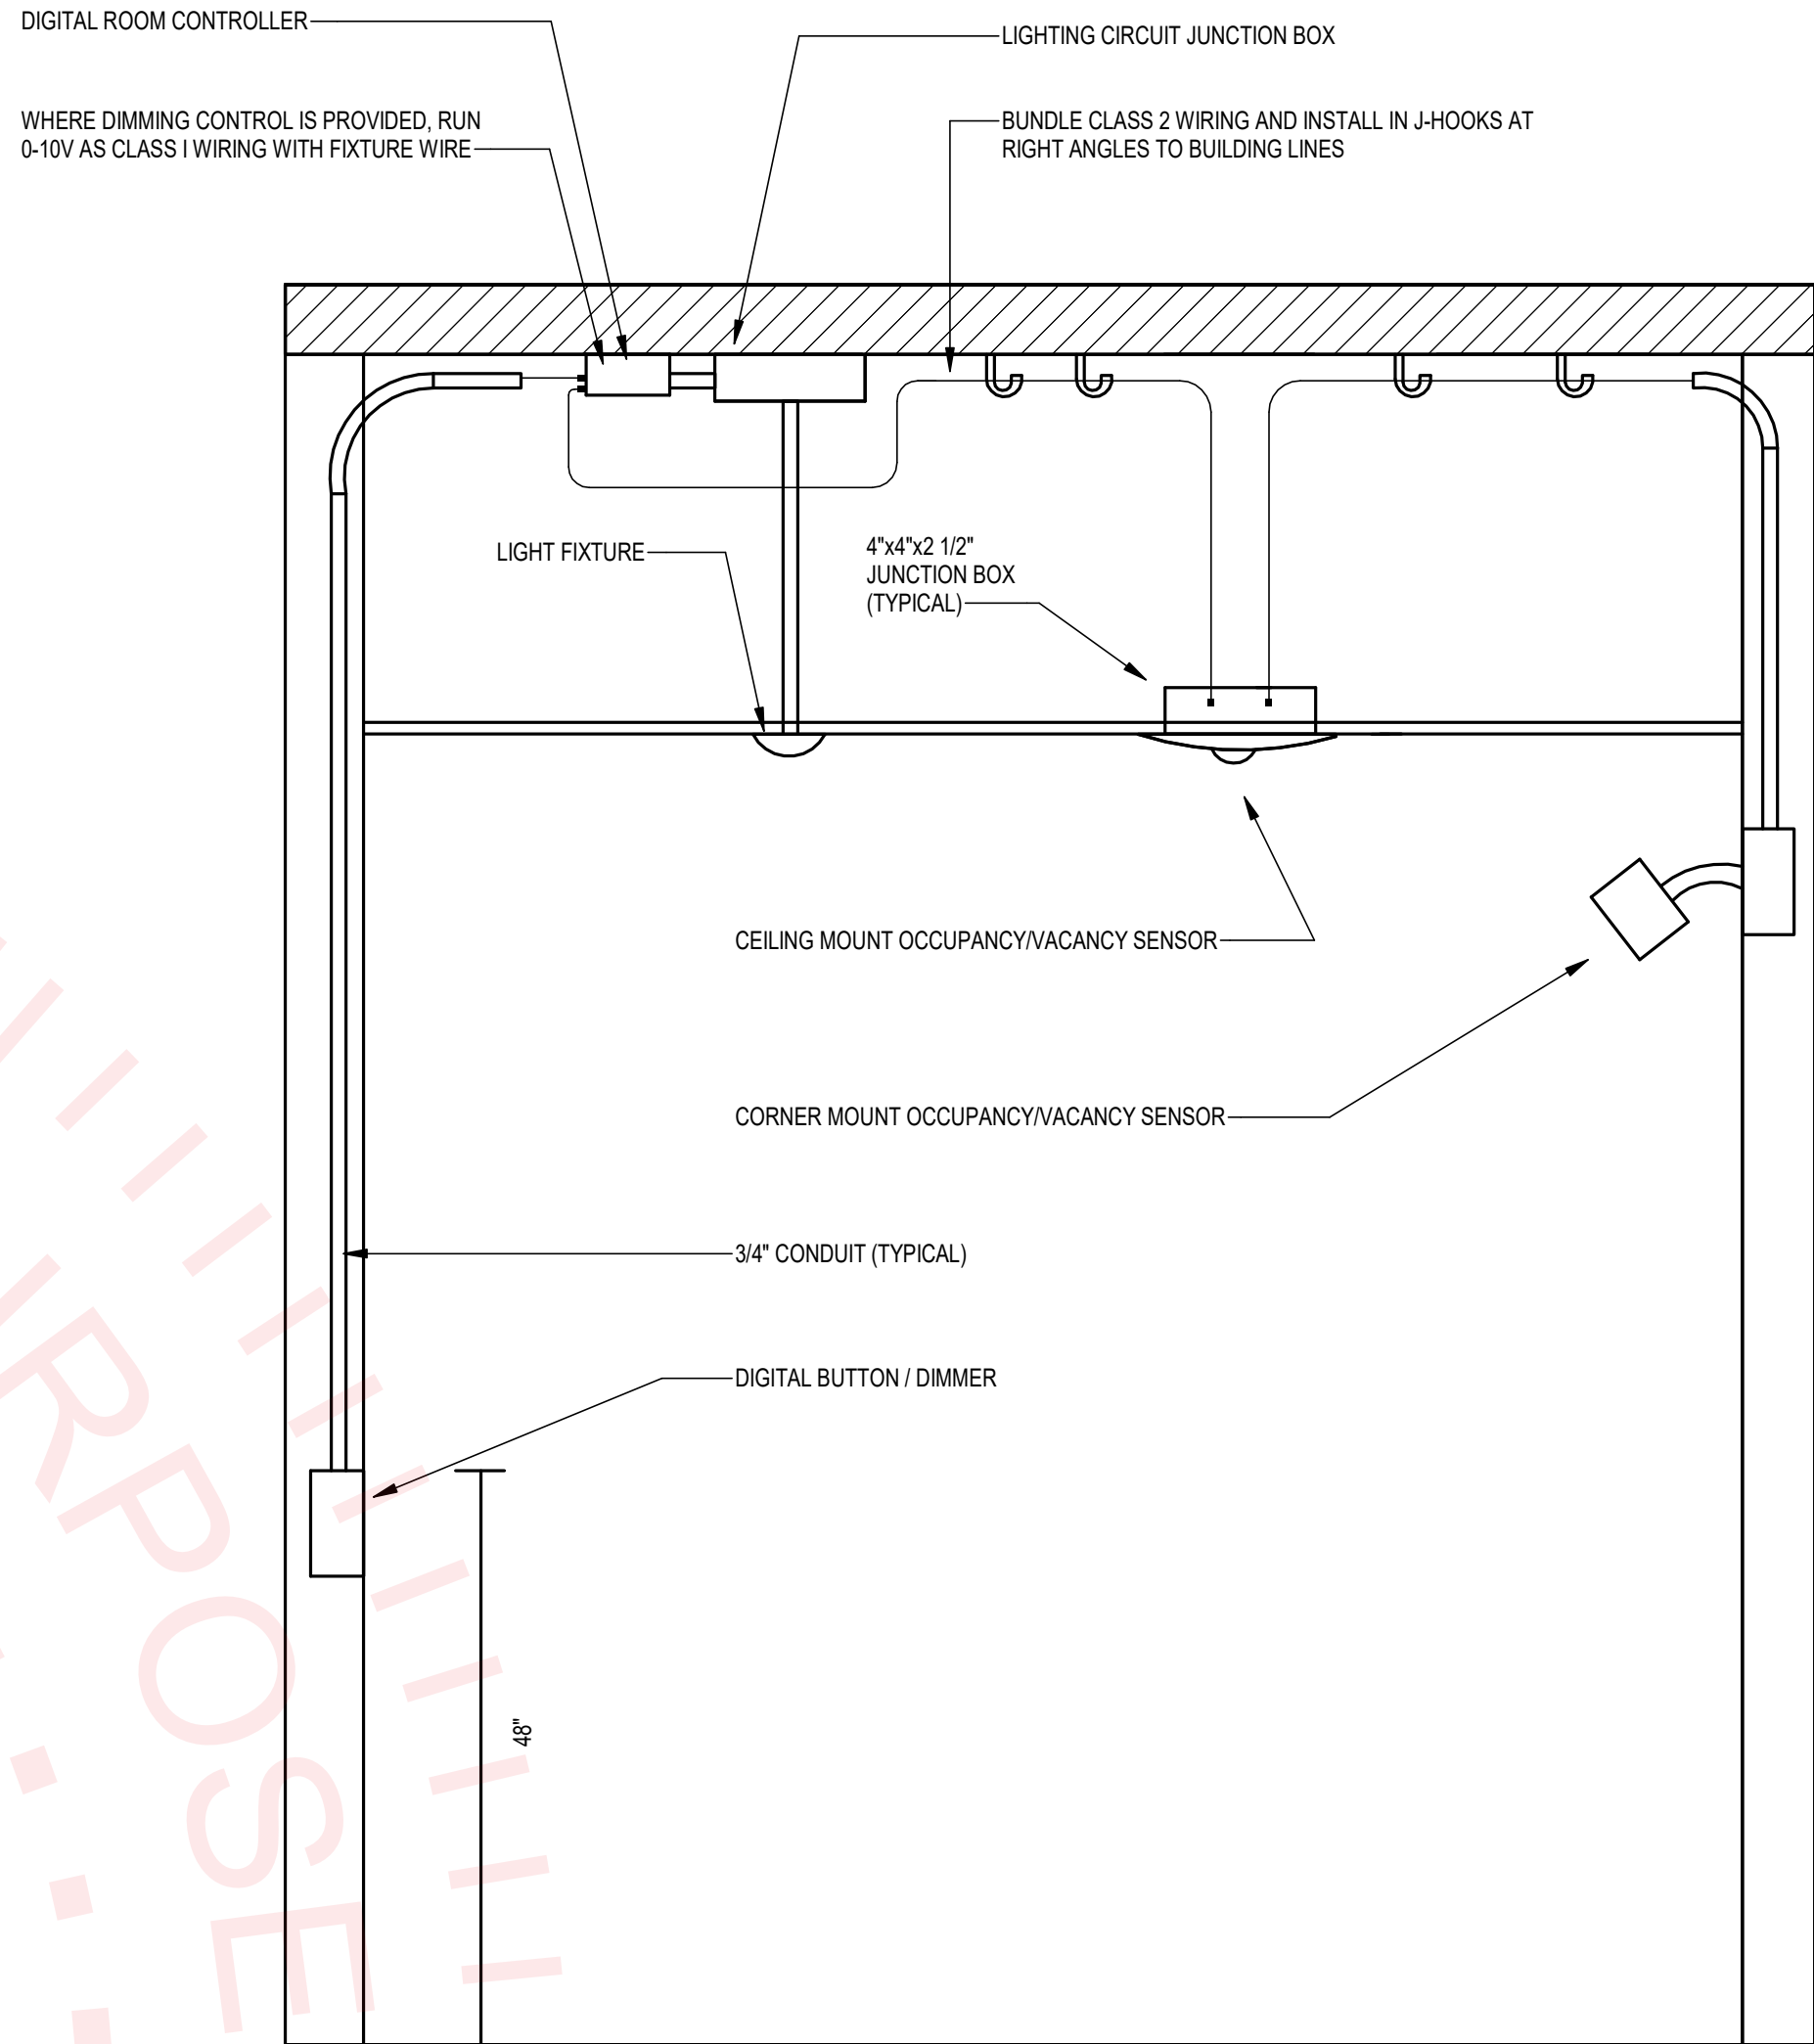

A TYPICAL LIGHTING ROOM CONTROL - CONCEALED CONDITION

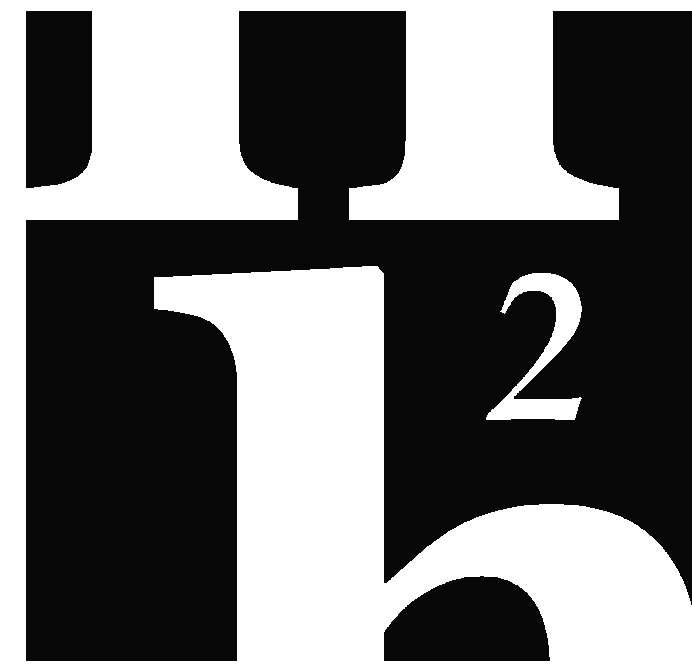

H2 ENGINEERING
114 EAST 5th AVENUE
TALLAHASSEE, FL 32303
PHONE 850.224.7922
www.H2Engineering.com

H2E PROJECT No. 23-178

THIS DOCUMENT IS THE PROPERTY OF H2Engineering AND IS PREPARED AS AN INSTRUMENT OF SERVICE. ITS USE, REUSE OR REPRODUCTION, EXCEPT BY WRITTEN AGREEMENT WITH H2ENGINEERING, INC., IS PROHIBITED.

Florida Registry #2485
Anthony D. Wyrick, P.E. #98346



bki
ARCHITECTURE

BKJ, Inc., Architecture
1621 Physicians Dr.
Tallahassee, Florida 32308
(P) 850.778.8007 (F) 850.546.6150
www.bkarchitecture.com
FL Architecture Corporation AA00002280

SEAL:

PROJECT TITLE:

**Interior Renovation for FSU
UCA Suite 1500
FSU Project No. 2400665,
Tallahassee, Florida 32306**

JOB NO.: 23-178

DESIGNED: ADW

DRAWN: AA

CHECKED: ADW

THIS DRAWING AND ANY REPRODUCTIONS ARE THE PROPERTY AND COPYRIGHT OF BKJ, INC. AND MAY NOT BE REPRODUCED, PUBLISHED, OR USED IN ANY MANNER WITHOUT WRITTEN PERMISSION OF THE ARCHITECT

REVISIONS:

DRAWING PHASE:
100% Construction Documents

DRAWING TITLE:


DETAILS

SHEET NO.:

E5.1

DATE:

April 12, 2024

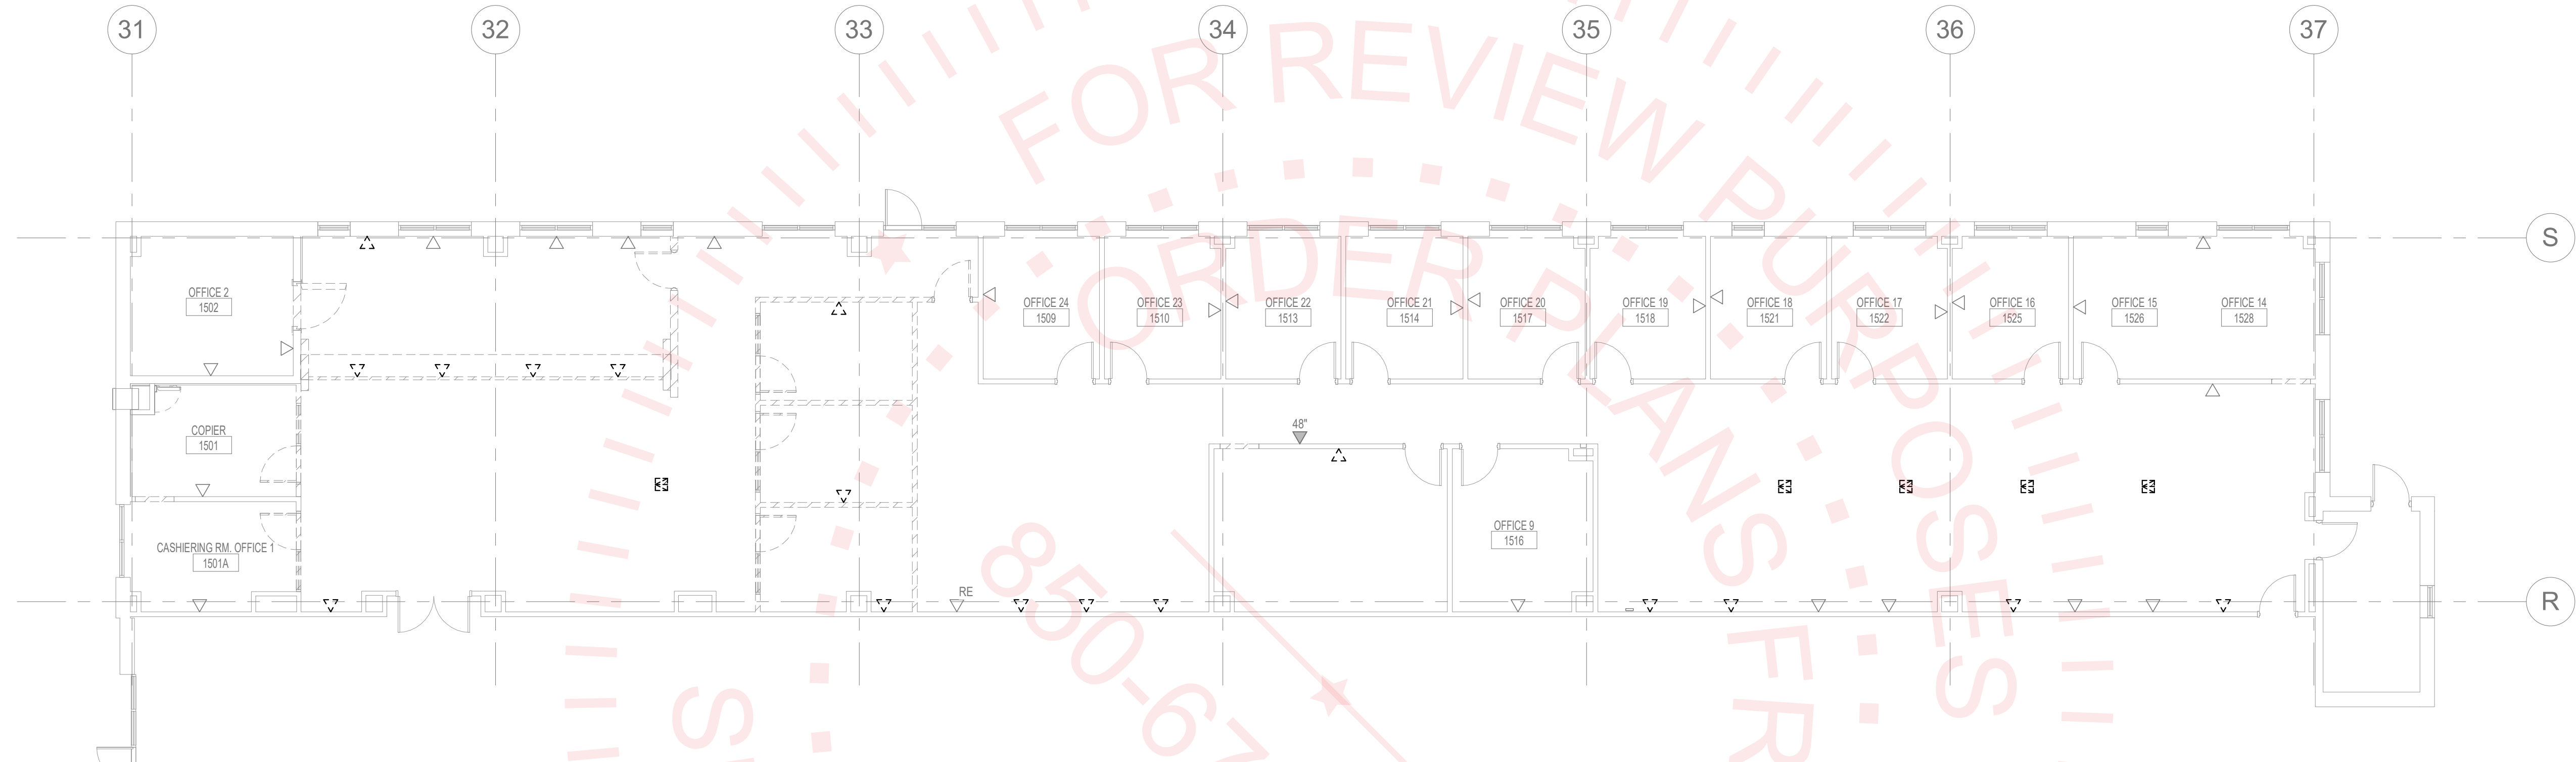

1 DEMOLITION PLAN - TELECOM
1/8" = 1'-0"

DEMOLITION GENERAL NOTES

- WHERE DEVICE IS SHOWN TO BE REMOVED IN EXISTING WALL TO REMAIN, REMOVE BACK BOX AND FINISH WALL / FLOOR / CEILING TO MATCH SURROUNDING AREA.
- WHERE SURFACE RACEWAYS EXISTS TO DEVICE, REMOVE RACEWAY BACK TO POINT BEHIND FINISHED SURFACE, INCLUDING BACK BOX RECESS IN SURFACE'S PATCH SURFACE.
- ALL DEVICES SHOWN DASHED ARE TO BE DEMOLISHED. ALL OTHER DEVICES ARE EXISTING TO REMAIN.
- CURRENT CONDITIONS FOR EXISTING IN WALL DEVICES ARE FREE WIRE ABOVE CEILING. PART OF THIS PROJECT SCOPE IS TO BRING CONDITIONS UP TO CURRENT FSU STANDARDS. FOR EXISTING DEVICES TO REMAIN, COORDINATE WITH FSU ITS FOR EXISTING CABLE REMOVAL.



BKI, Inc., Architecture
1621 Physicians Dr.
Tallahassee, Florida 32308
(P) 850.778.8007 (F) 850.546.6150
www.bkarchitecture.com
FL Architecture Corporation AA00002280

SEAL:

PROJECT TITLE:

**Interior Renovation for FSU
UCA Suite 1500
FSU Project No. 2400665,
Tallahassee, Florida 32306**

JOB NO.: 23-178

DESIGNED: ADW

DRAWN: AA

CHECKED: ADW

THIS DRAWING AND ANY REPRODUCTIONS
ARE THE PROPERTY AND COPYRIGHT
OF BKJ, INC. AND MAY NOT BE
REPRODUCED, PUBLISHED, OR USED IN ANY
MANNER WITHOUT WRITTEN
PERMISSION OF THE ARCHITECT

REVISIONS:

DRAWING PHASE:
**100% Construction
Documents**

DRAWING TITLE:


**DEMOLITION PLAN -
TELECOM**

SHEET NO.:

TD1.0

DATE:

April 12, 2024

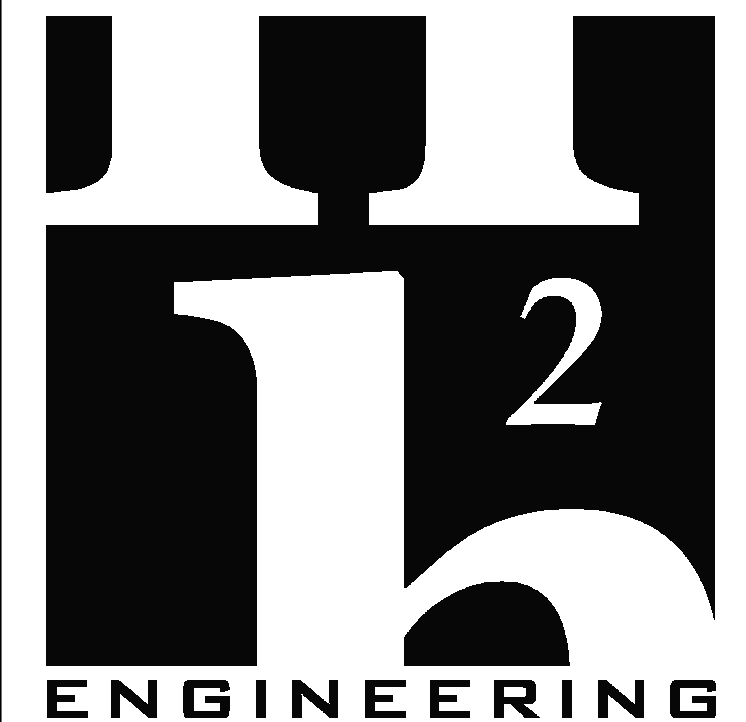


114 EAST 5th AVENUE
TALLAHASSEE, FL 32303
PHONE 850.224.7922
www.H2Engineering.com

H2E PROJECT No. 23-178
THIS DOCUMENT IS THE PROPERTY OF H2Engineering
AND IS PREPARED AS AN INSTRUMENT OF SERVICE. ITS
USE, REUSE OR REPRODUCTION, EXCEPT BY WRITTEN
AGREEMENT WITH H2ENGINEERING, INC., IS PROHIBITED.

Florida Registry #2485
Anthony D. Wyrick, P.E. #98346

1. ALL DEVICES SHOWN SHADED ARE EXISTING TO REMAIN. DEVICES SHOWN BOLD ARE NEW.
2. FOR EXISTING DEVICES TO REMAIN, EXTEND CONDUIT FROM STUB OUT ABOVE CEILING TO NEW CABLE TRAY. PROVIDE BUSING AND GROUNDING BOND AT CABLE TRAY.
3. ELECTRICAL CONTRACTOR SHALL PROVIDE ALL BACK BOX, RACEWAY, CABLE TRAY, LADDER RACK.

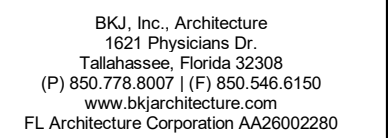

PROJECT TITLE:

**Interior Renovation for FSU
UCA Suite 1500
FSU Project No. 2400665,
Tallahassee, Florida 32306**

THIS DRAWING AND ANY REPRODUCTIONS
ARE THE PROPERTY AND COPYRIGHT
OF BKJ, INC. AND MAY NOT BE
REPRODUCED, PUBLISHED, OR USED IN ANY
MANNER WITHOUT WRITTEN
PERMISSION OF THE ARCHITECT


REVISIONS:

DRAWING PHASE:
100% Construction Documents


**RENOVATION PLAN -
TELECOM**

T1.0

April 12, 2024

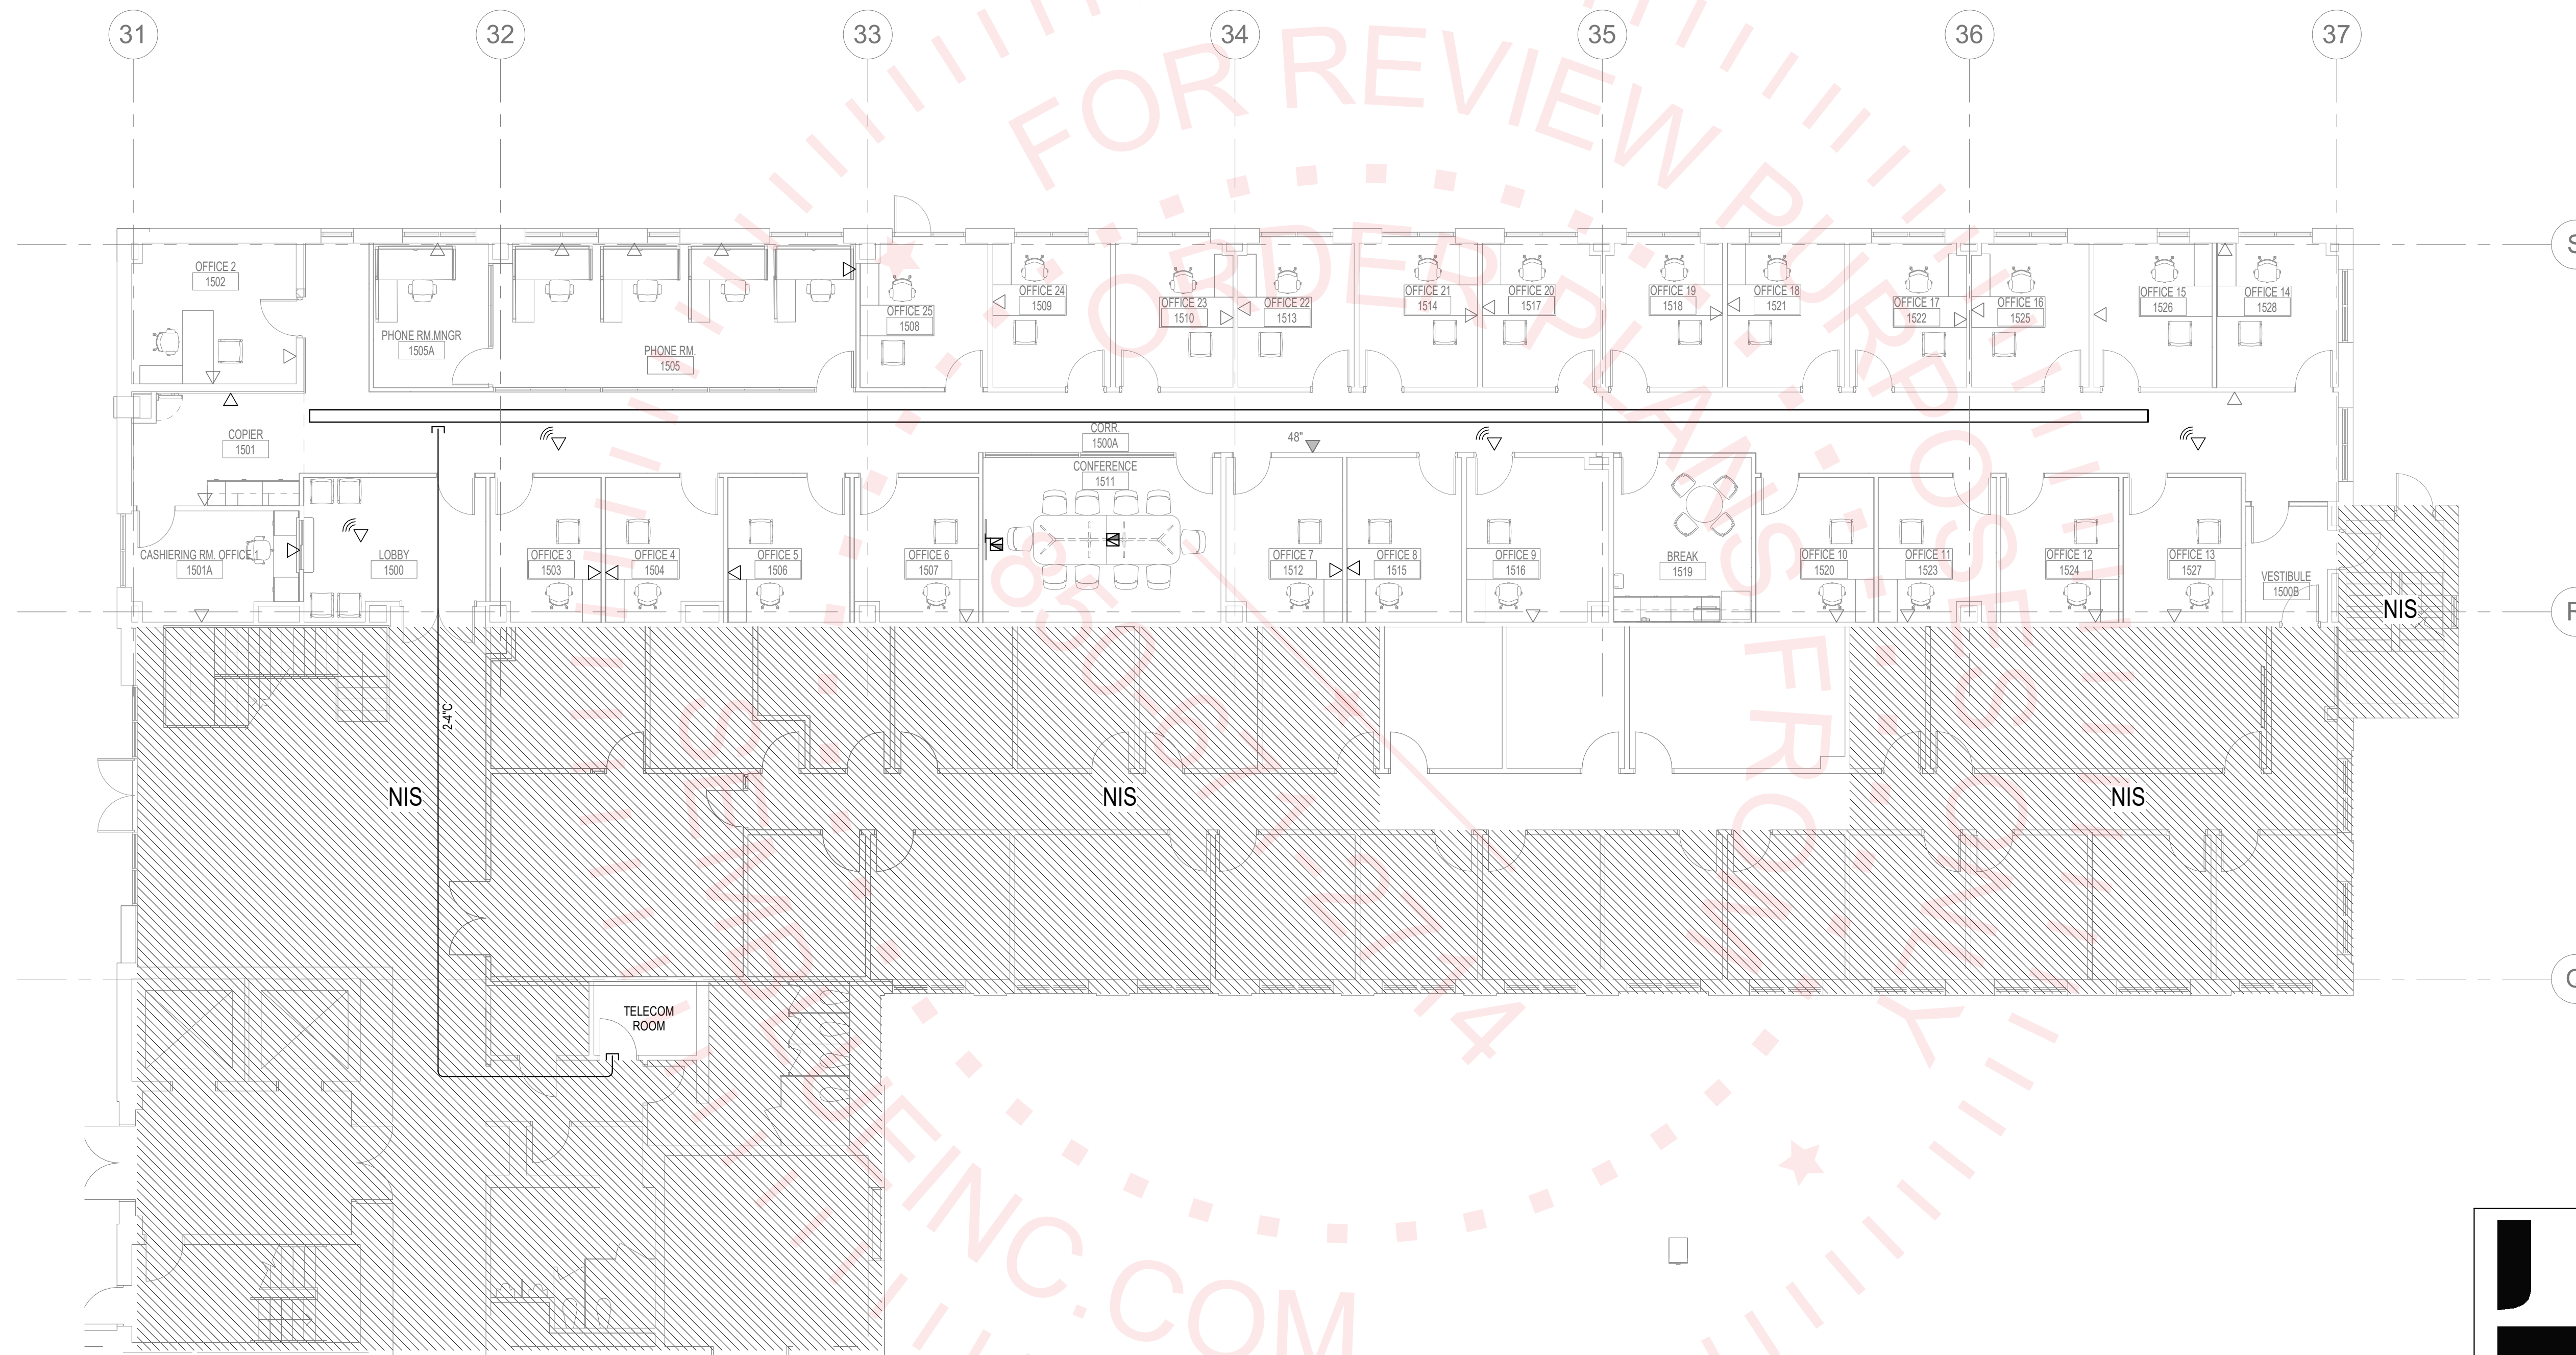


① RENOVATION PLAN - TELECOM
1/8" = 1'-0"

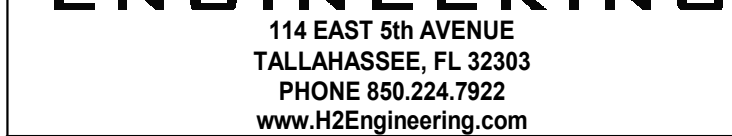

H2E PROJECT No. 23.178

THIS DOCUMENT IS THE PROPERTY OF H2Engineering
AND IS PREPARED AS AN INSTRUMENT OF SERVICE. ITS
USE, REUSE OR REPRODUCTION, EXCEPT BY WRITTEN
AGREEMENT WITH H2ENGINEERING, INC., IS PROHIBITED.

Florida Registry #2485
Anthony D. Wyrick, P.E. #98346

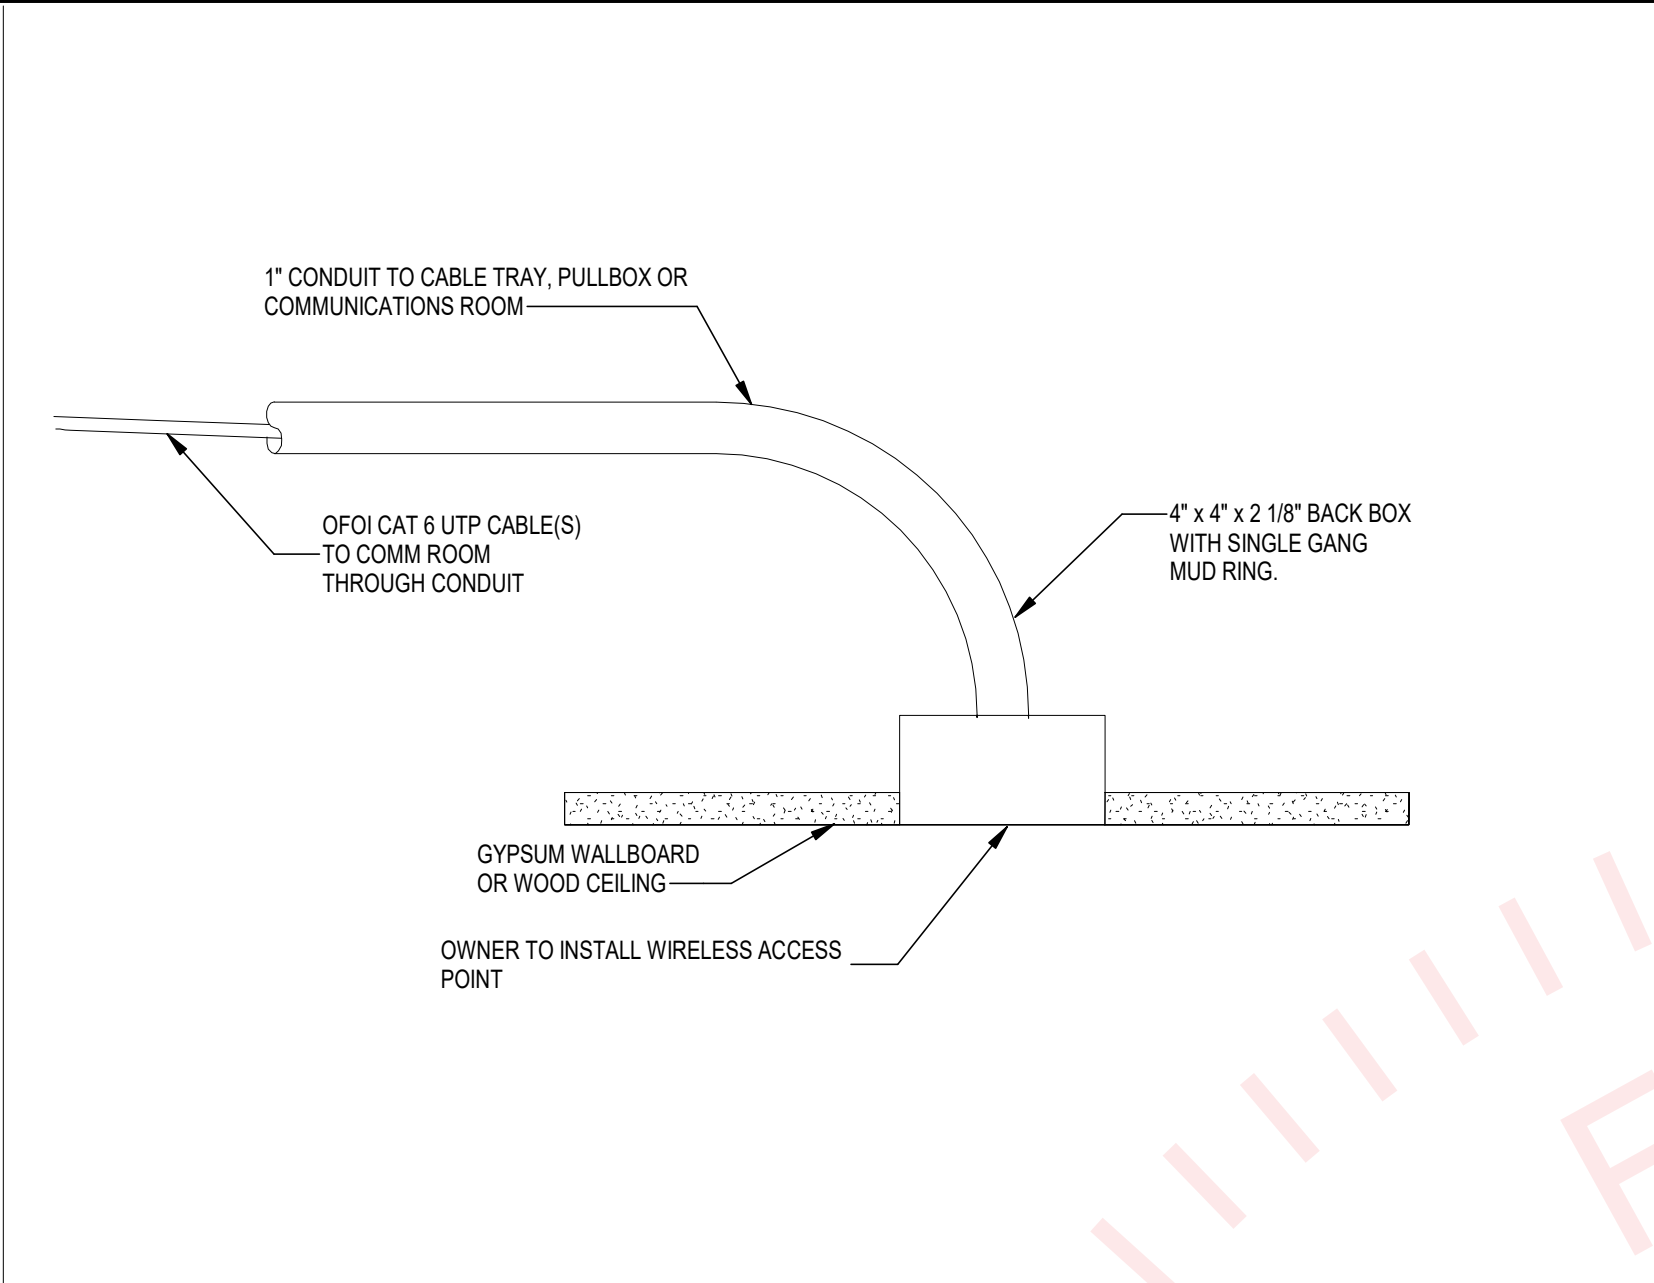

1" CONDUIT TO CABLE TRAY, PULLBOX OR COMMUNICATIONS ROOM

OFOI CAT 6 UTP CABLE(S) TO COMM ROOM THROUGH CONDUIT


4" x 4" x 2 1/8" BACK BOX WITH SINGLE GANG MUD RING.

GYPSUM WALLBOARD OR WOOD CEILING

OWNER TO INSTALL WIRELESS ACCESS POINT

GENERAL PULLBOX REQUIREMENTS:

- PULLBOXES SHALL BE INSTALLELD IN EASILY ACCESSIBLE LOCATIONS.
- CONDUITS SHALL ENTER AND EXIT FROM OPPOSITE ENDS. ENTERING AND EXITING CONDUITS SHALL BE ALIGNED.
- BENDS SHALL NOT BE MADE INSIDE THE PULLBOX.
- PROVIDE HINGED BOTTOMS.

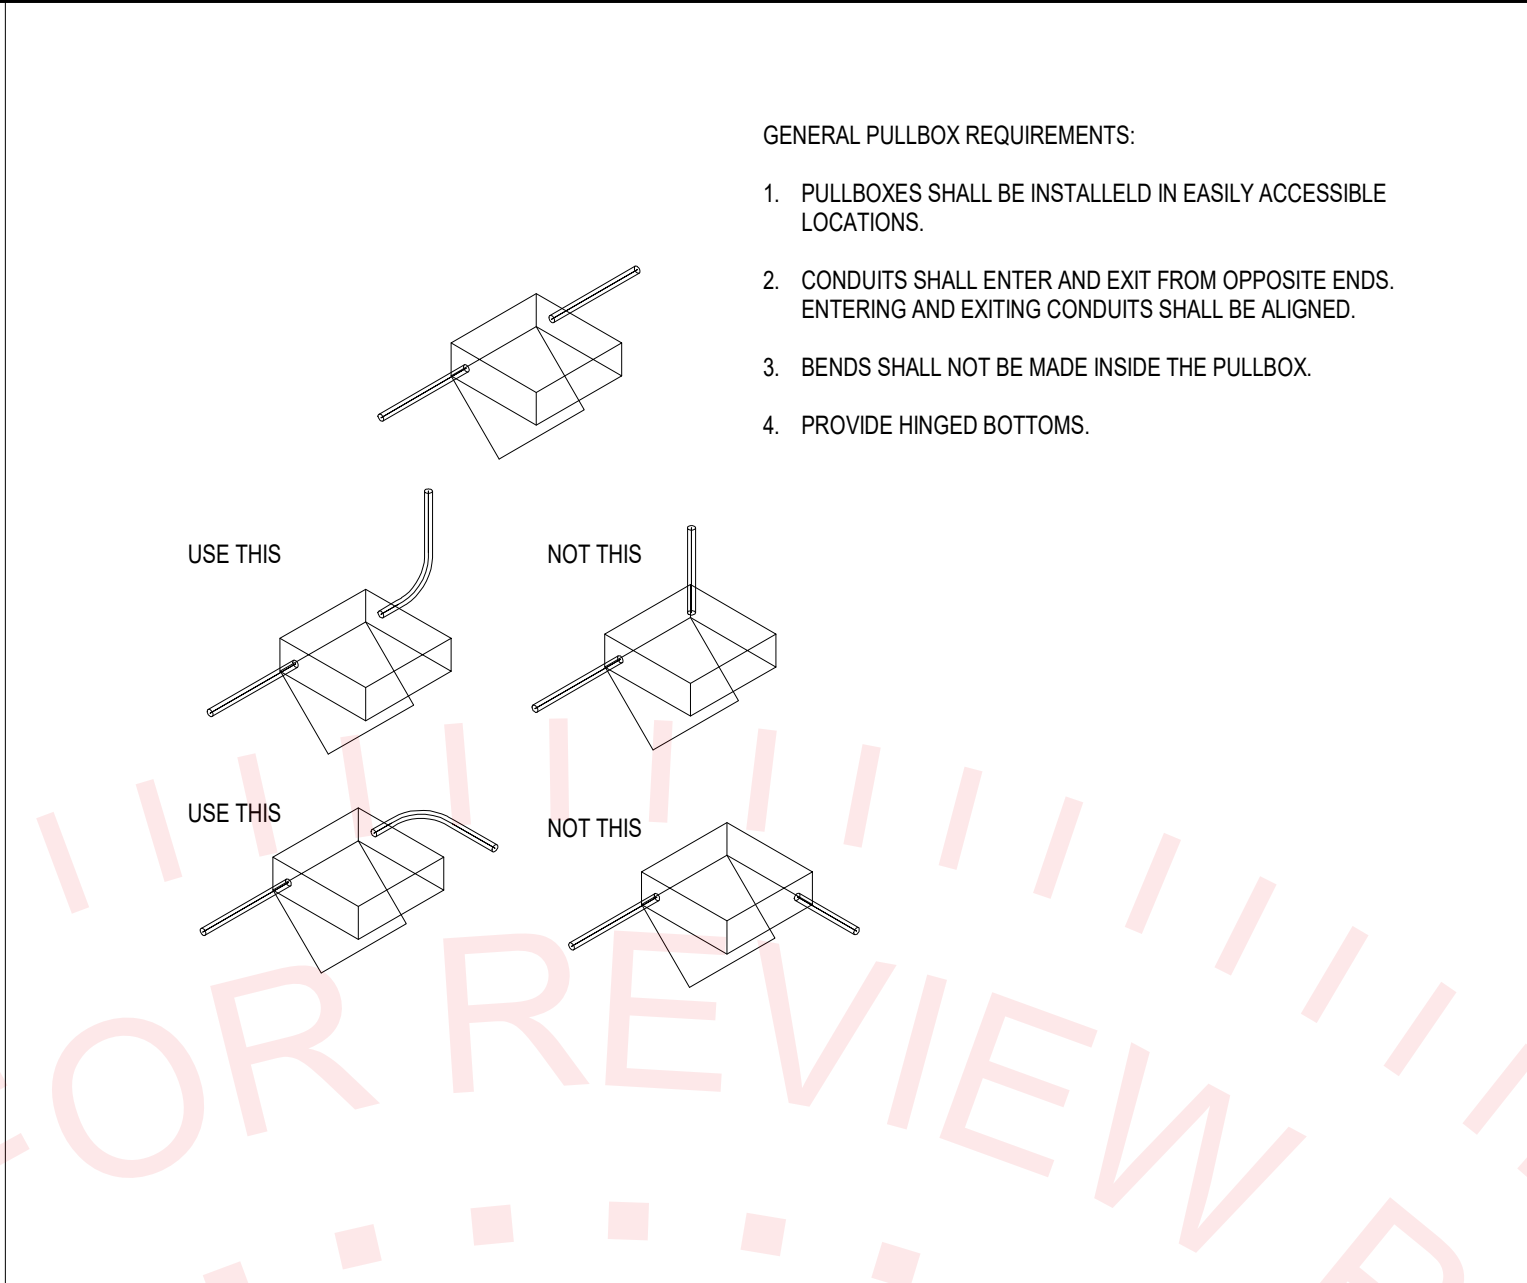


USE THIS

NOT THIS

USE THIS

NOT THIS

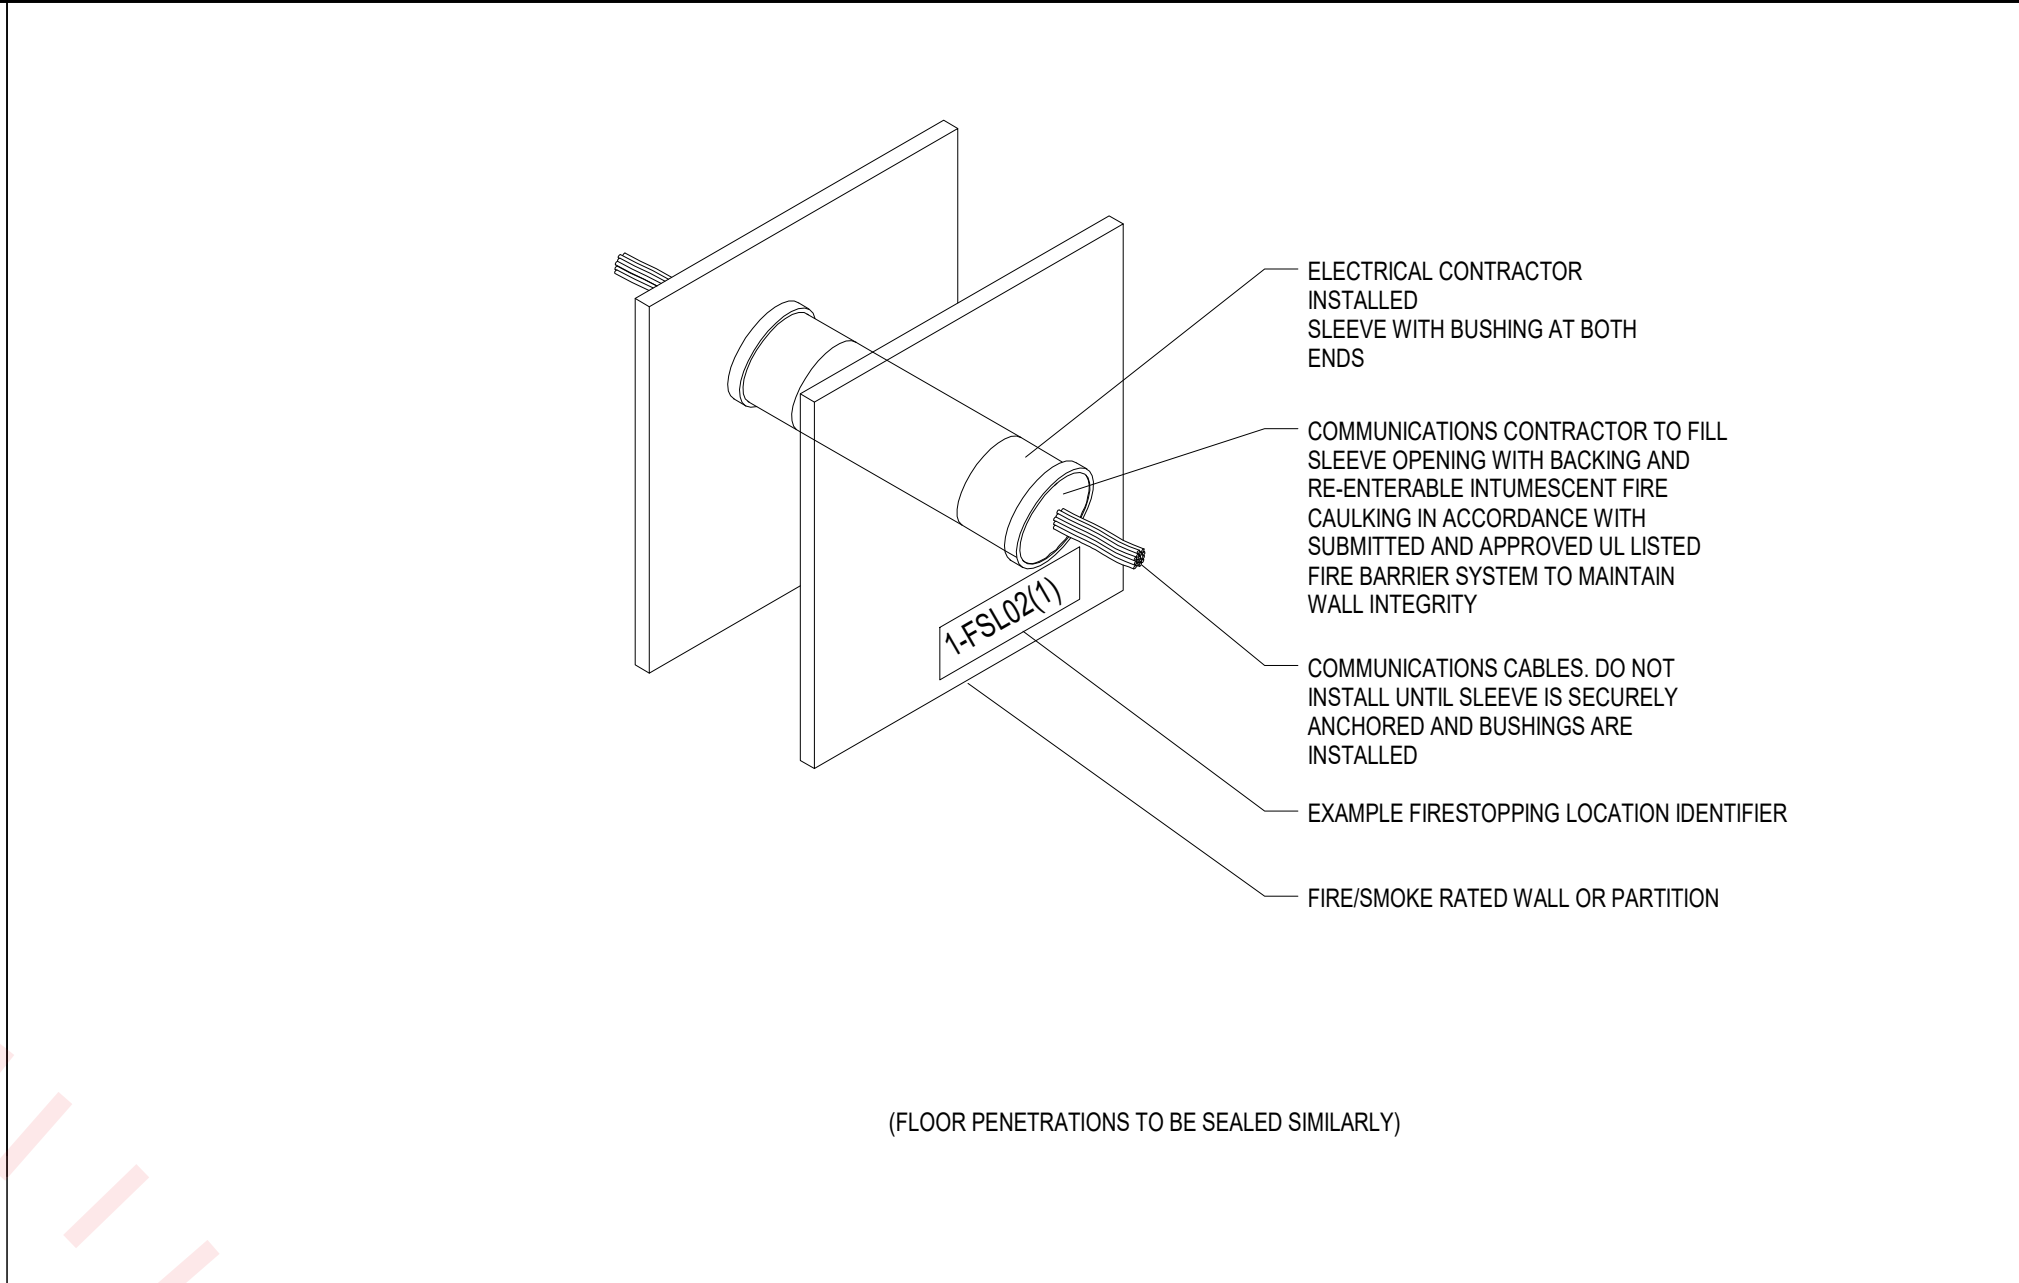

ELECTRICAL CONTRACTOR INSTALLED SLEEVE WITH BUSHING AT BOTH ENDS

COMMUNICATIONS CONTRACTOR TO FILL SLEEVE OPENING WITH BACKING AND RE-ENTERABLE INTUMESCENT FIRE CAULKING IN ACCORDANCE WITH SUBMITTED AND APPROVED UL LISTED FIRE BARRIER SYSTEM TO MAINTAIN WALL INTEGRITY

COMMUNICATIONS CABLES. DO NOT INSTALL UNTIL SLEEVE IS SECURELY ANCHORED AND BUSHINGS ARE INSTALLED


EXAMPLE FIRESTOPPING LOCATION IDENTIFIER

FIRE/SMOKE RATED WALL OR PARTITION

(FLOOR PENETRATIONS TO BE SEALED SIMILARLY)

C	CEILING MOUNT WAP IN HARD OR LAY-IN CEILING	N.T.S.	B	TELECOMMUNICATIONS PULLBOX INSTALLATION	N.T.S.	A	PENETRATION DETAIL THRU FIRE/SMOKE RATED AND FULL HEIGHT PARTITIONS	N.T.S.
---	---	--------	---	---	--------	---	---	--------

FOR REVIEW PURPOSES ONLY
ORDER PLANS FROM
850-671-2714
SEMBLUEINC.COM

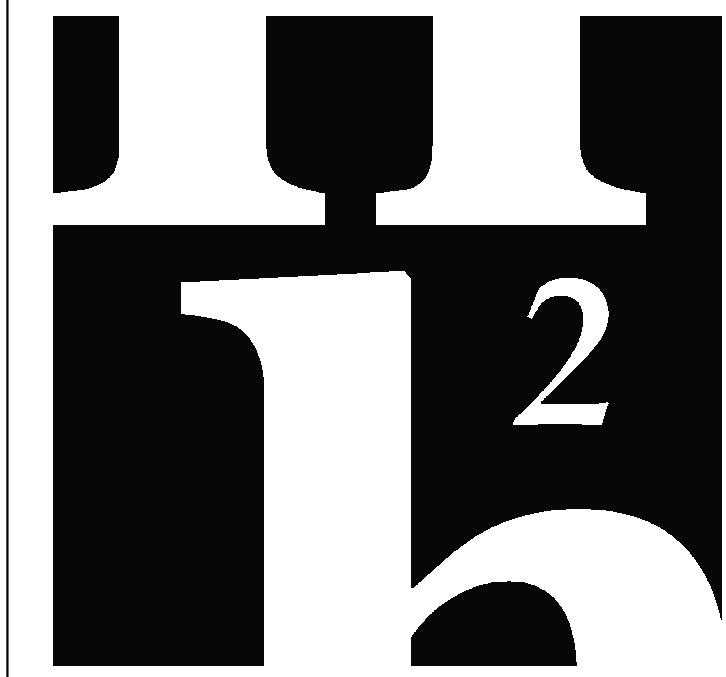

H2
ENGINEERING

114 EAST 5th AVENUE
TALLAHASSEE, FL 32303
PHONE 850.224.7922
www.H2Engineering.com

H2E PROJECT No. 23-178

THIS DOCUMENT IS THE PROPERTY OF H2Engineering AND IS PREPARED AS AN INSTRUMENT OF SERVICE. ITS USE, REUSE OR REPRODUCTION, EXCEPT BY WRITTEN AGREEMENT WITH H2ENGINEERING, INC., IS PROHIBITED.

Florida Registry #2485
Anthony D. Wyrick, P.E. #98346



bki
ARCHITECTURE

BKJ, Inc., Architecture
1621 Physicians Dr.
Tallahassee, Florida 32308
(P) 850.778.8007 | (F) 850.546.6150
www.bkjarchitecture.com
FL Architecture Corporation AA00002280

SEAL:

PROJECT TITLE:

Interior Renovation for FSU
UCA Suite 1500
FSU Project No. 2400665,
Tallahassee, Florida 32306

JOB NO.: 23-178

DESIGNED: ADW

DRAWN: AA

CHECKED: ADW

THIS DRAWING AND ANY REPRODUCTIONS ARE THE PROPERTY AND COPYRIGHT OF BKJ, INC. AND MAY NOT BE REPRODUCED, PUBLISHED, OR USED IN ANY MANNER WITHOUT WRITTEN PERMISSION OF THE ARCHITECT

REVISIONS:

DRAWING PHASE:

100% Construction Documents

DRAWING TITLE:


DETAILS

SHEET NO.:

T5.0

DATE:

April 12, 2024

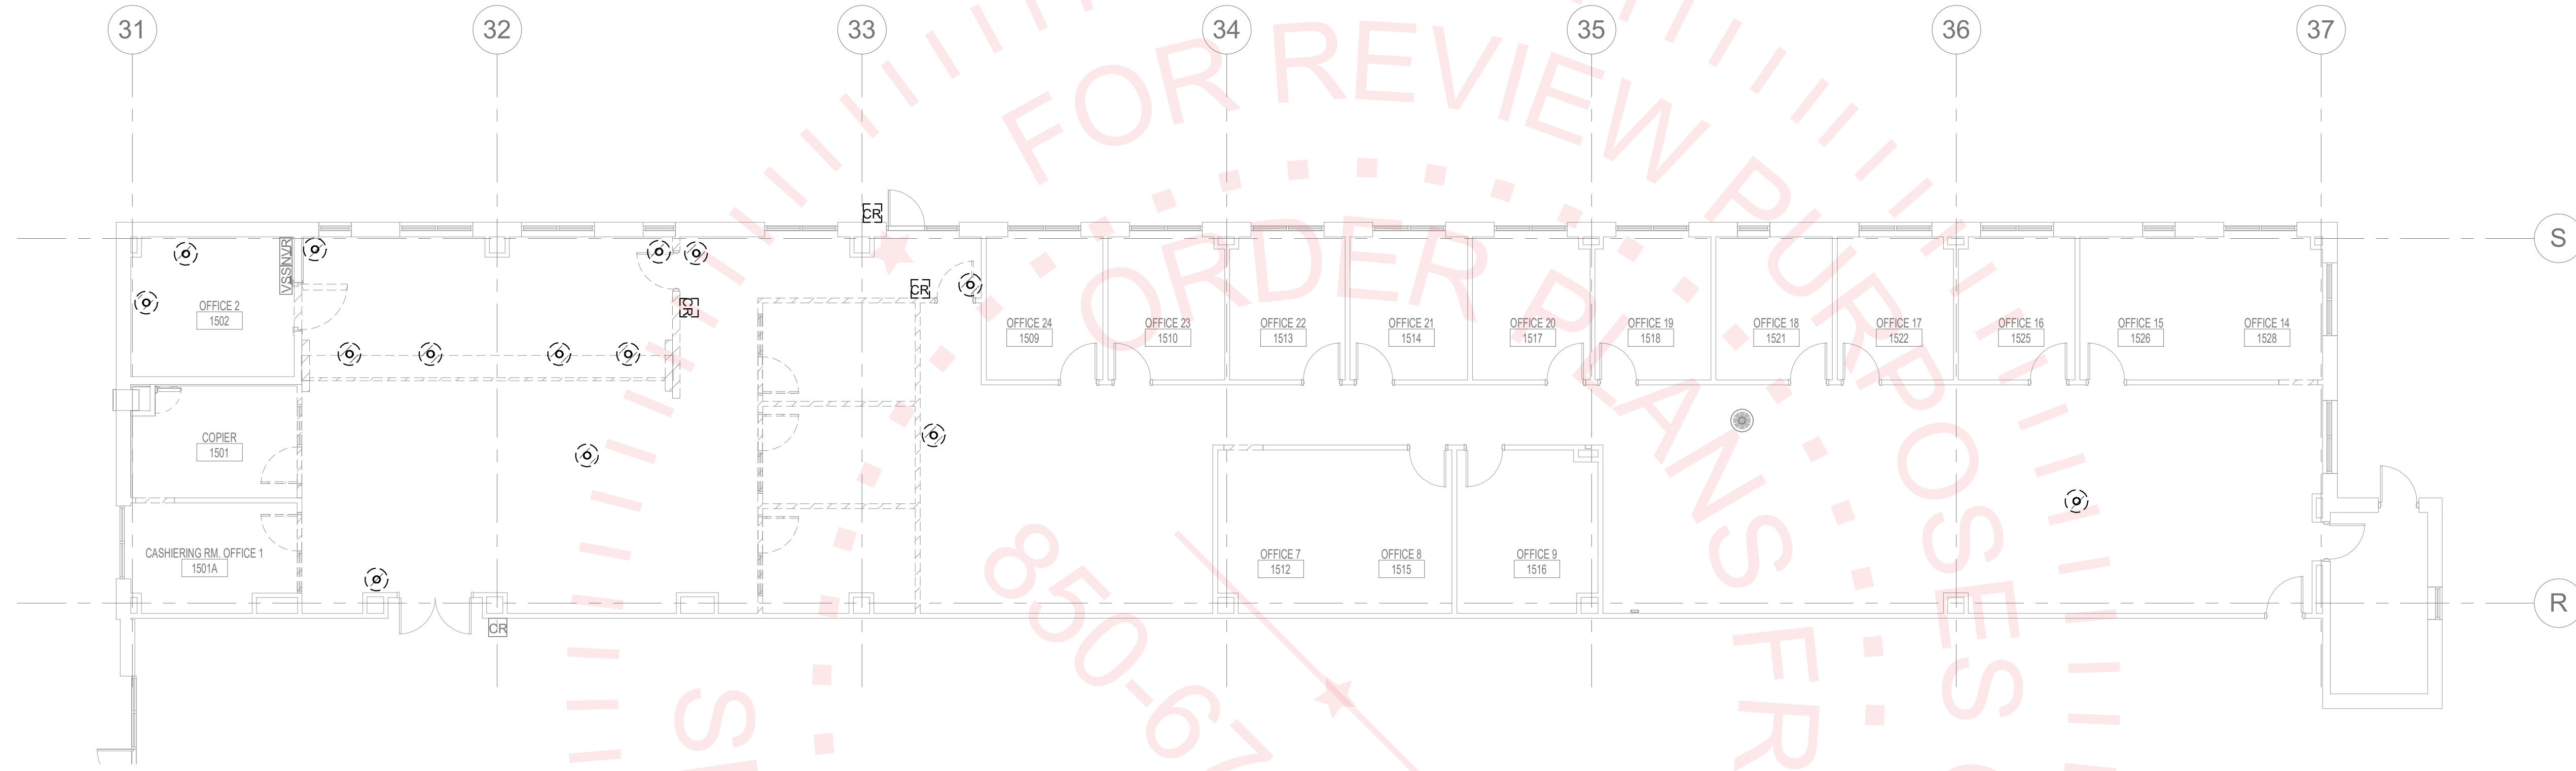

1 DEMOLITION PLAN - SECURITY
1/8" = 1'-0"

DEMOLITION GENERAL NOTES

1. WHERE DEVICE IS SHOWN TO BE REMOVED IN EXISTING WALL TO REMAIN, REMOVE BACK BOX AND FINISH WALL / FLOOR / CEILING TO MATCH SURROUNDING AREA.
2. WHERE SURFACE RACEWAYS EXISTS TO DEVICE, REMOVE RACEWAY BACK TO POINT BEHIND FINISHED SURFACE, INCLUDING BACK BOX RECESS IN SURFACE'S PATCH SURFACE.
3. ALL DEVICES SHOWN DASHED ARE TO BE DEMOLISHED. ALL OTHER DEVICES ARE EXISTING TO REMAIN.
4. DEVICES BEING REMOVED SHALL BE STORED FOR REUSE

bki

ARCHITECTURE

BKJ, Inc., Architecture

1621 Physicians Dr.

Tallahassee, Florida 32308

(P) 850.778.8007 | (F) 850.546.6150

www.bkjarchitecture.com

FL Architecture Corporation AA00002280

SEAL:

PROJECT TITLE:

Interior Renovation for FSU
UCA Suite 1500
FSU Project No. 2400665,
Tallahassee, Florida 32306

JOB NO.: 23-178

DESIGNED: ADW

DRAWN: AA

CHECKED: ADW

THIS DRAWING AND ANY REPRODUCTIONS ARE THE PROPERTY AND COPYRIGHT OF BKJ, INC. AND MAY NOT BE REPRODUCED, PUBLISHED, OR USED IN ANY MANNER WITHOUT WRITTEN PERMISSION OF THE ARCHITECT

REVISIONS:

DRAWING PHASE:
100% Construction Documents

DRAWING TITLE:

DEMOLITIONN PLAN -
ELECTRONIC SAFETY

SHEET NO.:

ESD1.0

DATE:

April 12, 2024

H2

ENGINEERING

114 EAST 5th AVENUE

TALLAHASSEE, FL 32303

PHONE 850.224.7922

www.H2Engineering.com

H2E PROJECT No. 23.178

THIS DOCUMENT IS THE PROPERTY OF H2Engineering AND IS PREPARED AS AN INSTRUMENT OF SERVICE. ITS USE, REUSE OR REPRODUCTION, EXCEPT BY WRITTEN AGREEMENT WITH H2ENGINEERING, INC., IS PROHIBITED.

Florida Registry #2485
Anthony D. Wyrick, P.E. #98346

RENOVATION GENERAL NOTES

1. ALL DEVICES SHOWN SHADED ARE EXISTING TO REMAIN. DEVICES SHOWN BOLD ARE NEW.
2. FOR EXISTING DEVICES TO REMAIN, EXTEND CONDUIT FROM STUB OUT ABOVE CEILING TO NEW CABLE TRAY. PROVIDE BUSING AND GROUNDING BOND AT CABLE TRAY.
3. ELECTRICAL CONTRACTOR SHALL PROVIDE ALL BACK BOX, RACEWAY, CABLE TRAY, LADDER RACK.

bki

ARCHITECTURE

BKJ, Inc., Architecture
1621 Physicians Dr.
Tallahassee, Florida 32308
(P) 850.778.8007 (F) 850.546.6150
www.bkjarchitecture.com
FL Architecture Corporation AA00002280

SEAL:

PROJECT TITLE:

Interior Renovation for FSU
UCA Suite 1500
FSU Project No. 2400665,
Tallahassee, Florida 32306

JOB NO.: 23-178

DESIGNED: ADW

DRAWN: AA

CHECKED: ADW

THIS DRAWING AND ANY REPRODUCTIONS ARE THE PROPERTY AND COPYRIGHT OF BKJ, INC. AND MAY NOT BE REPRODUCED, PUBLISHED, OR USED IN ANY MANNER WITHOUT WRITTEN PERMISSION OF THE ARCHITECT

REVISIONS:

DRAWING PHASE:
100% Construction Documents


DRAWING TITLE:
RENOVATION PLAN -
ELECTRONIC SAFETY

SHEET NO.:

ES1.0

DATE:

April 12, 2024

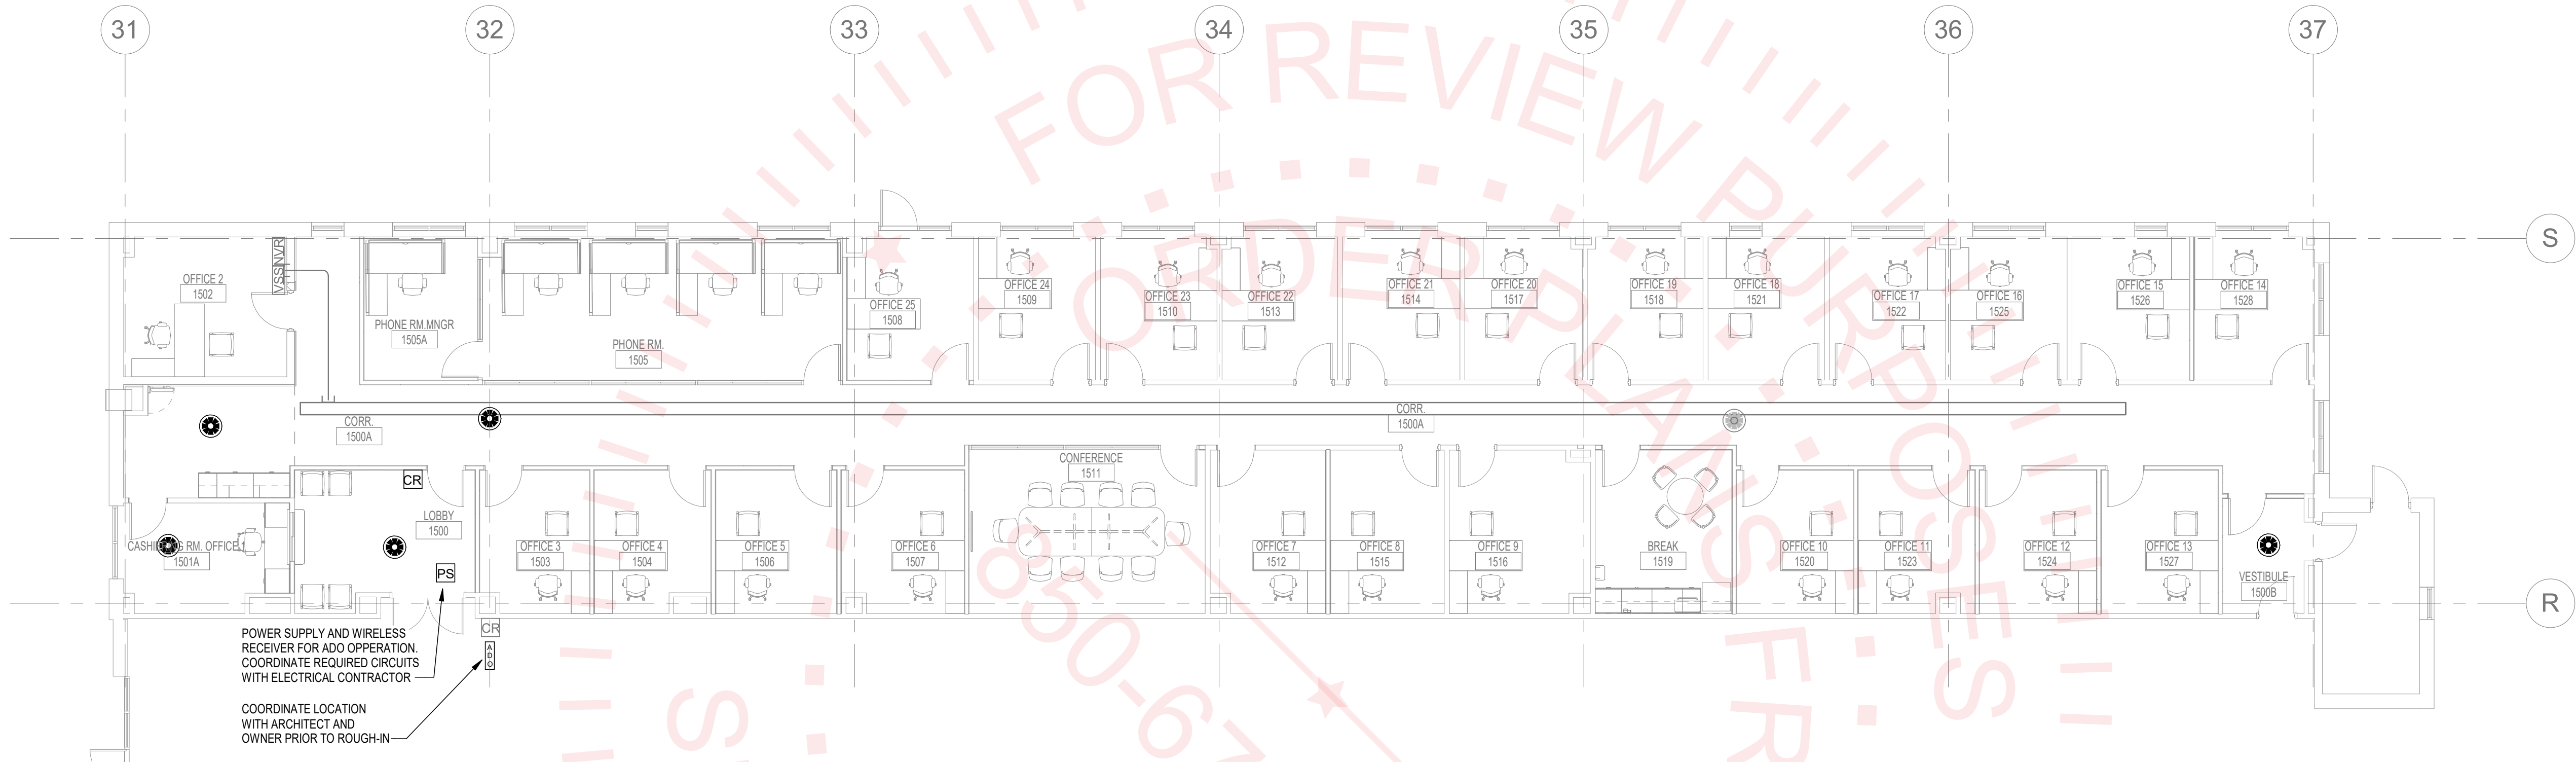

① RENOVATION PLAN - SECURITY
1/8" = 1'-0"

H2

ENGINEERING

114 EAST 5th AVENUE
TALLAHASSEE, FL 32303
PHONE 850.224.7922
www.H2Engineering.com

H2E PROJECT No. 23-178

THIS DOCUMENT IS THE PROPERTY OF H2Engineering AND IS PREPARED AS AN INSTRUMENT OF SERVICE. ITS USE, REUSE OR REPRODUCTION, EXCEPT BY WRITTEN AGREEMENT WITH H2ENGINEERING, INC., IS PROHIBITED.

Florida Registry #2485
Anthony D. Wyrick, P.E. #98346

SEAL:

PROJECT TITLE:
Interior Renovation for FSU
UCA Suite 1500
FSU Project No. 240065,
Tallahassee, Florida 32306

JOB NO.: 23-178
DESIGNED: ADW
DRAWN: AA
CHECKED: ADW

THIS DRAWING AND ANY REPRODUCTIONS ARE THE PROPERTY AND COPYRIGHT OF BKI, INC. AND MAY NOT BE REPRODUCED, PUBLISHED, OR USED IN ANY MANNER WITHOUT WRITTEN PERMISSION OF THE ARCHITECT											
REVISIONS:											

DRAWING PHASE:
100% Construction Documents

DRAWING TITLE:

GENERAL NOTES & LEGENDS

SHEET NO.:
FE0.1

DATE:
April 12, 2024

GENERAL NOTES

- DRAWINGS ARE DIAGRAMMATIC, INDICATIVE OF WORK TO BE FURNISHED AND INSTALLED UNDER THIS CONTRACT. REFER TO ARCHITECTURAL AND STRUCTURAL DRAWINGS FOR DIMENSIONS.
- FIELD VERIFY DIMENSIONS AND CONDITIONS. IF THE CONTRACTOR IS UNABLE TO INTERPRET THE CONTRACT DOCUMENTS, HE IS RESPONSIBLE TO REQUEST CLARIFICATION IN WRITING TO THE ARCHITECT. IF HE PROCEEDS WITH ANY WORK BEFORE OBTAINING CLARIFICATION, HE SHALL BE HELD RESPONSIBLE FOR DEFICIENCIES ASSOCIATED THEREWITH.
- BEFORE SUBMITTING FOR THE WORK, EACH BIDDER WILL BE RESPONSIBLE TO EXAMINE THE PREMISES AND SATISFY HIMSELF AS TO THE EXISTING CONDITIONS UNDER WHICH HE WILL BE OBLIGATED TO OPERATE AND COMPLETE THE WORK UNDER THIS CONTRACT. NO ALLOWANCE WILL, SUBSEQUENTLY BE MADE IN THIS CONNECTION ON BEHALF OF THE CONTRACTOR FOR ANY ERROR OR OMISSION ON HIS PART.
- THE CONTRACTOR SHALL PAY FOR INSPECTION PERMITS, CERTIFICATES, CONNECTION FEES, SYSTEM DEMAND CHARGES AND LICENSE FEES IN CONNECTION WITH HIS WORK.
- CONSTRUCTION MANAGER/GENERAL CONTRACTOR SHALL BE RESPONSIBLE FOR COORDINATING WORK OF SUBCONTRACTORS TO AVOID INTERFERENCES.
- WORK SHALL COMPLY WITH APPLICABLE O.S.H.A. AND E.P.A. REGULATIONS AND GUIDELINES.
- ERECT AND MAINTAIN REASONABLE PRECAUTIONS FOR SAFETY AND HEALTH INCLUDING POSTING DANGER SIGNS AND OTHER WARNINGS AGAINST HAZARDS INCLUDING PROMULGATING SAFETY REGULATIONS. PROVIDE SAFETY PRECAUTIONS AND BARRICADES FOR PEDESTRIANS AT CONSTRUCTION VEHICLE ACCESS AND EGRESS LOCATIONS.
- COORDINATE AND SEQUENCE DEMOLITION, CLEANING AND CONSTRUCTION WORK. SUBMIT A COMPLETELY DETAILED CONSTRUCTION SCHEDULE PRIOR TO PRE-CONSTRUCTION CONFERENCE.
- THE CONTRACTOR SHALL STRICTLY BE HELD TO THE PROJECT SCHEDULE. HE SHALL PROVIDE SUFFICIENT MANPOWER AND EQUIPMENT TO FULLY MOBILIZE, PROCEED WITH AND COMPLETE THE WORK.
- THE CONTRACTOR SHALL BE RESTRICTED TO AREAS SPECIFIED BY THE OWNER FOR ON-SITE STORAGE OF CONSTRUCTION MATERIALS. THE CONTRACTOR IS RESPONSIBLE FOR THE PROTECTION AND SECURITY OF EQUIPMENT AND MATERIALS.
- THE CONTRACTOR SHALL MAINTAIN A CLEAN WORK ENVIRONMENT AT ALL TIMES AND SHALL CLEAN CONSTRUCTION SITE OF DEBRIS AT COMPLETION OF THE JOB AND BEFORE FINAL PAYMENT IS MADE.
- THE CONTRACTOR SHALL FURNISH "AS-BUILT" DRAWINGS TO THE ARCHITECT AT COMPLETION OF CONSTRUCTION.
- CONTRACTOR'S USE OF AN APPROVAL STAMP ON DOCUMENTS SUBMITTED AS SHOP DRAWINGS, PRODUCT DATA, SAMPLES AND SIMILAR SUBMITTALS CERTIFIES THAT THE CONTRACTOR HAS COMPLIED WITH THE CONTRACT DOCUMENT REQUIREMENTS RELATED TO "SHOP DRAWINGS, PRODUCT DATA AND SAMPLES".
- THE CONTRACTOR SHALL NOT BE RELIEVED OF RESPONSIBILITY FOR DEVIATIONS FROM REQUIREMENTS OF THE CONTRACT DOCUMENTS BY THE ARCHITECT/ENGINEER'S APPROVAL OF SHOP DRAWINGS, PRODUCT DATA, SAMPLES OR SIMILAR SUBMITTALS UNLESS THE CONTRACTOR HAS SPECIFICALLY INFORMED THE ARCHITECT/ENGINEER IN WRITING OF SUCH DEVIATION AT THE TIME OF SUBMITTAL AND THE ARCHITECT/ENGINEER HAS GIVEN WRITTEN APPROVAL TO THE SPECIFIC DEVIATION. THE CONTRACTOR SHALL NOT BE RELIEVED OF RESPONSIBILITY FOR ERRORS OR OMISSIONS IN SHOP DRAWINGS, PRODUCT DATA, SAMPLES OR SIMILAR SUBMITTALS BY THE ARCHITECT/ENGINEER'S APPROVAL THEREOF.
- PRIOR TO INSTALLATION, COORDINATE AND ADJUST THE FINAL LOCATION OF WALL MOUNTED DEVICES AND EQUIPMENT WITH ALL CASEWORK, SHELVING, MARKER BOARDS, BULLETIN BOARDS OR OTHER WALL MOUNTED FURNISHINGS.
- NOTE ANY SPECIAL REQUIREMENTS INVOLVED IN INSTALLING THE EQUIPMENT IN THE BUILDING. DISMANTLING AND REASSEMBLING OF ANY EQUIPMENT SHALL BE DONE AS REQUIRED FOR ENTRY INTO THE BUILDING AND EQUIPMENT ROOMS.
- PROTECT THE ROOF FROM DAMAGE WHENEVER ANY WORK ON THE ROOF IS REQUIRED.
- SUPPORTS AND HANGERS SHALL PRESENT A NEAT, ORDERLY APPEARANCE.
- ROOF MOUNTED EQUIPMENT SHALL BE SECURED TO STRUCTURE TO RESIST A 130 MPH WIND LOAD.
- CONTRACTOR SHALL MAINTAIN THE INTEGRITY OF ALL FIRE, SMOKE, AND ACOUSTICAL WALL ASSEMBLIES.
- BEAM AND FLOOR PENETRATIONS SHALL BE APPROVED BY THE STRUCTURAL ENGINEER. BEAM SLEEVES AND BEAM REINFORCING APPROVED BY STRUCTURAL ENGINEER SHALL BE FURNISHED AND INSTALLED BY THIS CONTRACTOR.
- CONTRACTOR SHALL FURNISH U.L. APPROVED DRAWINGS FOR EACH TYPE OF FIRE RATED ASSEMBLY PENETRATION BY DUCTS, PIPES OR CONDUITS. THESE DRAWINGS SHALL BE DISPLAYED ON THE JOB SITE AT ALL TIMES DURING CONSTRUCTION. SEE SPECIFICATIONS.
- CONTRACTOR SHALL GUARANTEE THE WORK AND MATERIALS FOR A PERIOD OF ONE YEAR FROM DATE OF FINAL ACCEPTANCE. THIS GUARANTEE SHALL BE IN ADDITION TO THE WARRANTIES PROVIDED BY MATERIAL SUPPLIERS AND MANUFACTURERS.
- THE BUILDING WILL REMAIN OCCUPIED DURING CONSTRUCTION. THE OWNER WILL MAKE REASONABLE EFFORTS TO ASSIST THE CONTRACTOR IN COMPLETING THE WORK. COORDINATE WORK WITH THE OWNER'S DESIGNATED REPRESENTATIVE.
- EXIT WAYS SHALL BE KEPT CLEAR. IF AN EXIT MUST BE TEMPORARILY BLOCKED, PROVIDE THE REQUIRED BARRICADE AND DIRECTIONAL SIGNS FOR TEMPORARY EXITING AND SAFETY.
- REMOVE AND RE-INSTALL EXISTING CEILING TILE AS REQUIRED. REPLACE ANY TILE DAMAGED OR SOILED DURING CONSTRUCTION.
- PROVIDE PROPER PROTECTIVE MEASURES TO PROTECT EXISTING FURNITURE, CARPET AND FINISHES DURING THE COURSE OF CONSTRUCTION. TAKE CARE NOT TO DAMAGE EXISTING SURFACES. REPAIR TO MATCH EXISTING CONDITIONS AS REQUIRED.
- SEAL HOLES IN WALLS, CEILINGS, FLOORS, ETC. TO MATCH EXISTING ADJACENT SURFACES WHERE EQUIPMENT, CONDUIT AND/OR PIPING ARE REMOVED.
- EXISTING EQUIPMENT IS THE PROPERTY OF THE OWNER AND SHALL BE DISPOSED OF AS DIRECTED BY THE OWNER. DISPOSE OF ALL MATERIALS AND EQUIPMENT SHOWN TO BE REMOVED IN ACCORDANCE WITH LOCAL REGULATIONS.
- ITEMS REMOVED AND SAVED FOR REUSE SHALL BE PROTECTED FROM DAMAGE DURING CONSTRUCTION. CONTRACTOR SHALL IDENTIFY ANY DEFECTIVE MATERIALS PRIOR TO DEMOLITION. CONTRACTOR SHALL BE RESPONSIBLE FOR ALL DAMAGE TO MATERIALS AT PROJECT COMPLETION NOT IDENTIFIED PRIOR TO DEMOLITION.
- RELOCATE, AS REQUIRED, ANY EXISTING WIRE AND CONDUIT WHICH INTERFERES WITH INSTALLATION OF THE NEW WORK.
- HAZARDOUS MATERIALS (ASBESTOS, PCBs, MERCURY, ETC.) MAY BE ENCOUNTERED ON SITE. CONTRACTOR SHALL BE RESPONSIBLE TO IDENTIFY, ABATE, AND DISPOSE OF ALL HAZARDOUS MATERIALS IN A SAFE AND APPROVED MANNER IN ACCORDANCE WITH LOCAL REGULATIONS.

H2

ENGINEERING

114 EAST 5th AVENUE
TALLAHASSEE, FL 32303
PHONE 850.224.7922
www.H2Engineering.com

H2E PROJECT No. 23.178

THIS DOCUMENT IS THE PROPERTY OF H2Engineering AND IS PREPARED AS AN INSTRUMENT OF SERVICE. ITS USE, REUSE OR REPRODUCTION, EXCEPT BY WRITTEN AGREEMENT WITH H2ENGINEERING, INC., IS PROHIBITED.

Florida Registry #2485
Anthony D. Wyrick, P.E. #98346

APPLICABLE CODES

PERFORM WORK IN ACCORDANCE WITH THE FOLLOWING CODES AND ANY APPLICABLE STATUTES, ORDINANCES, CODES, AND REGULATIONS OF GOVERNMENTAL AUTHORITIES HAVING JURISDICTION.

1. OCCUPATIONAL SAFETY AND HEALTH REGULATIONS (OSHA).

2. NATIONAL FIRE CODES

a. NFPA 1 UNIFORM FIRE CODE - 2021 (FLORIDA EDITION)

b. NFPA 70 NATIONAL ELECTRICAL CODE - 2020

c. NFPA 72 NATIONAL FIRE ALARM AND SIGNALING GUIDE - 2019

d. NFPA 75 STANDARD FOR THE FIRE PROTECTION OF INFORMATION TECHNOLOGY EQUIPMENT - 2020

e. NFPA 101 LIFE SAFETY CODE - 2021 (FLORIDA EDITION)

3. FLORIDA BUILDING CODE, 2021 EDITION

a. BUILDING CODE

b. EXISTING BUILDING CODE

c. ENERGY CONSERVATION CODE

d. MECHANICAL CODE

e. PLUMBING CODE

f. FUEL GAS CODE

g. ACCESSIBILITY CODE

4. FLORIDA STATUTES

a. CHAPTER 471, BUILDING

b. CHAPTER 330.80 ENGINEERING CONSTRUCTION STANDARDS; FLORIDA BUILDING CODE ENFORCEMENT

5. FLORIDA ADMINISTRATIVE CODE

a. CHAPTER 6A-2 EDUCATIONAL FACILITIES

b. CHAPTER 9B-7 FLORIDA BUILDING COMMISSION HANDICAPPED ACCESSIBILITY STANDARDS

c. CHAPTER 61G15-33 RESPONSIBILITY RULES OF PROFESSIONAL ENGINEERS CONCERNING THE DESIGN OF ELECTRICAL SYSTEMS

d. CHAPTER 88A-3 FIRE PREVENTION - GENERAL PROVISIONS

e. CHAPTER 69A-58 FIRE SAFETY IN EDUCATIONAL FACILITIES

f. CHAPTER 69A-60 THE FLORIDA FIRE PREVENTION CODE

6. ADA ACCESSIBILITY GUIDELINES FOR BUILDINGS (ADAAG)

FIRE ALARM NOTES

1. INSTALL ALL WORK IN ACCORDANCE WITH ALL CODES, ORDINANCES, RULES, AND REGULATIONS OF THE AUTHORITY HAVING JURISDICTION AT THIS SITE. WHERE CONFLICTS OCCUR BETWEEN CODES AND THE CONSTRUCTION DOCUMENTS, THE MOST RESTRICTIVE REQUIREMENTS SHALL GOVERN.

2. THE CONTRACTOR SHALL SUBMIT A SEPARATE PERMIT APPLICATION AND PLANS FOR REVIEW PER NFPA 1, §1.14.1 AND §1.13.2, FLORIDA 2015 EDITION.

3. LIGHT FIXTURES AND HVAC DIFFUSERS TAKE PRECEDENCE. ADD ADDITIONAL DETECTORS AND NOTIFICATION APPLIANCES AS REQUIRED TO MAINTAIN COVERAGE REQUIREMENTS.

4. VISIBLE NOTIFICATION APPLIANCES WITHIN THE SAME ROOM OR WITHIN THE SAME FIELD OF VIEW SHALL FLASH IN SYNCHRONIZATION PER NFPA 72.

5. ALL EXTERIOR DEVICES SHALL HAVE WEATHERPROOF ENCLOSURES AND BE RATED IN ACCORDANCE WITH N.E.C., WHETHER INDICATED ON THE PLANS OR NOT. THE INSTALLER SHALL VERIFY ALL EXTERIOR DEVICES PRIOR TO ORDERING MATERIALS.

6. ALARM, SUPERVISORY, AND TROUBLE SIGNALS SHALL BE AUTOMATICALLY TRANSMITTED TO AN APPROVED CENTRAL STATION, REMOTE SUPERVISING STATION, OR PROPRIETARY SUPERVISING STATION AS DEFINED BY NFPA 72 OR, WHEN APPROVED BY THE BUILDING OFFICIAL, SHALL SOUND AN AUDIBLE SIGNAL AT A CONSTANTLY ATTENDED LOCATION.

7. PROVIDE SURGE PROTECTIVE DEVICES IN THE FAC FOR ALL SUPERVISED CIRCUITS.

8. ALL FIRE ALARM JUNCTION BOX COVERS SHALL BE PAINTED RED.

9. ALL SPLICES SHALL BE MADE WITH CRIMP CONNECTORS. NO WIRE NUTS SHALL BE USED.

10. ALL MAIN JUNCTION BOXES AND TERMINAL CABINETS SHALL BE PROVIDED WITH TERMINAL BLOCKS.

11. PROVIDE A HINGED, CLEAR PLASTIC SHIELD FOR EACH PULL STATION. LIFTING SHIELD SHALL INITIATE LOCAL AUDIBLE ALARM.

12. PROVIDE PROTECTION FOR FIRE ALARM DEVICES SUBJECT TO PHYSICAL DAMAGE. LOCATIONS INCLUDE MECHANICAL ROOMS, ELECTRICAL ROOMS, EQUIPMENT ROOMS AND STORAGE ROOMS.

13. MINIMUM CONDUIT SIZE SHALL BE 3/4" UNLESS NOTED OTHERWISE.

14. THE CONSTRUCTORS SHALL CERTIFY AND TAG THE SYSTEM AFTER ALL MODIFICATIONS ARE MADE AND PRIOR TO SUBSTANTIAL COMPLETION.

15. THE CONTRACTOR AND THE PPD SYSTEMS ELECTRONICS SHOP SHALL TEST THE FIRE ALARM SYSTEM BEFORE ANY RENOVATION OR MODIFICATION IS MADE. ANY PART OF THE SYSTEM NOT WORKING PROPERLY SHALL BE NOTED OR REPAIRED BEFORE ANY CONSTRUCTION BEGINS.

ABBREVIATIONS

ADS	ACOUSTICALLY DISTINGUISHED SPACE	EX	EXISTING DEVICE TO REMAIN
AFF	ABOVE FINISHED FLOOR	G	GROUND
AFG	ABOVE FINISHED GRADE	GRC	GALVANIZED RIGID CONDUIT
AHJ	AUTHORITY HAVING JURISDICTION	IMC	INTERMEDIATE METALLIC CONDUIT
AM	ADDRESSABLE INPUT MODULE	LAN	LOCAL AREA NETWORK
AIO	ADDRESSABLE INPUT/OUTPUT MODULE	LC	LUCENT CONNECTOR
ANSI	AMERICAN NATIONAL STANDARDS INSTITUTE	NEC	NATIONAL ELECTRICAL CODE
AOM	ADDRESSABLE OUTPUT MODULE	NFPA	NATIONAL FIRE PROTECTION ASSOCIATION
ATS	AUTOMATIC TRANSFER SWITCH	PNL	ELECTRICAL PANEL
AWG	AMERICAN WIRE GAUGE	RE	REPLACE EXISTING DEVICE (AND COVER PLATE) AT THIS LOCATION
BCSI	BUILDING INDUSTRY CONSULTING SERVICE INTERNATIONAL	REL	RELOCATE EXISTING DEVICE
CBB	COMMUNICATIONS BACKBOARD	RSC	RIGID STEEL CONDUIT
CD	CANDELA	STI	SURGE PROTECTIVE DEVICE
CIS	COMMON INTELLIGIBILITY SCALE	STP	SPEECH TRANSMISSION INDEX
CLG	DEVICE LOCATED ON CEILING	STPA	SPEECH TRANSMISSION INDEX FOR PUBLIC ADDRESS
CNT	CONTRACTOR	TIA	TELECOMMUNICATIONS INDUSTRY ASSOCIATION
dB	DECIBELS	TP	TAMPER PROOF DEVICE
dBa	DECIBEL AMPS	TYP	TYPICAL
DISC	DISCONNECT	UNO	UNLESS NOTED OTHERWISE
EIA	ELECTRONIC INDUSTRIES ALLIANCE	UTP	UNSHIELDED TWISTED-PAIR
EMT	ELECTRICAL METALLIC TUBING	WP	WEATHER PROOF
EC	ELECTRICAL CONTRACTOR		
ER	EXISTING DEVICE SHOWN AT RELOCATED POSITION		

SYSTEM LAYOUT DOCUMENT REQUIREMENTS (BELOW MINIMUM THRESHOLD)

- THESE FIRE PROTECTION SYSTEM ENGINEERING DOCUMENTS ARE INTENDED TO BE COMPLIANT WITH RULE 61G15-32.008, FLORIDA ADMINISTRATIVE CODE, AND REPRESENT THE DESIGN INTENT FOR THE FIRE ALARM SYSTEM.
- THE SCOPE OF THE PROJECT IS BELOW THE THRESHOLD REQUIREMENTS FOR MANDATORY USE OF PROFESSIONAL ENGINEERING SERVICES, AS DEFINED IN FLORIDA BUILDING CODE 105.3.1.2. THEREFORE, THESE DOCUMENTS ARE INTENDED TO SPECIFY THE MINIMUM SYSTEM REQUIREMENTS ONLY, AS PERMITTED BY RULE 61G15-32.008(3), F.A.C., AND DO NOT INCLUDE ALL INFORMATION LISTED IN 61G15-32.004(4) "A" THROUGH "D", F.A.C.
- A CONTRACTOR CERTIFIED UNDER CHAPTER 633, FLORIDA STATUTES, SHALL DESIGN AND PROVIDE THE FIRE ALARM SYSTEMS APPROVED BY THE APPLICABLE NFPA CODES AND BY THE AUTHORITY HAVING JURISDICTION.
- THE PROJECT INVOLVES THE ALTERATION OF A TOTAL OF 20 OR FEWER INITIATION AND NOTIFICATION DEVICES CONNECTED TO AN EXISTING FIRE ALARM CONTROL PANEL.
- PRIOR TO INSTALLATION, THE FIRE ALARM CONTRACTOR SHALL PROVIDE FIRE PROTECTION SYSTEM LAYOUT DOCUMENTS, INCLUDING DESIGN CALCULATIONS, SUBMITTED TO THE ENGINEER OF RECORD AND AUTHORITY HAVING JURISDICTION, INCLUDING THE FOLLOWING AS APPLICABLE, BUT NOT LIMITED TO:
 - FIRE ALARM SYSTEM WORKING PLANS, INCLUDING FIRE ALARM SYSTEM LAYOUT, DEVICE IDENTIFICATION, AND MOUNTING HEIGHT ELEVATIONS.
 - FIRE ALARM SYSTEM RISER DIAGRAM.
 - SEQUENCE OF OPERATION IN AN INPUT/OUTPUT MATRIX FORM OR NARRATIVE.
 - BATTERY CAPACITY AND DE-RATING CALCULATIONS.
 - VOLTAGE DROP CALCULATIONS FOR NOTIFICATION APPLIANCE CIRCUITS.
 - LINE RESISTANCE CALCULATIONS.
 - DESIGN CALCULATIONS FOR SELECTING THE SPACING AND SENSITIVITY OF DETECTION DEVICES.
 - DESIGN CALCULATIONS FOR SELECTING THE SPACING AND AUDIBLE/VISIBLE CHARACTERISTICS OF NOTIFICATION APPLIANCES.
 - PRODUCT DATA WITH SPECIFIC SYSTEM COMPONENTS IDENTIFIED.
 - ANY ADDITIONAL INFORMATION REQUIRED TO COMPLY WITH CHAPTER 7 "DOCUMENTATION" IN NFPA 72.
- SIZE BATTERIES TO PROVIDE A MINIMUM MARGIN OF SAFETY OF 20% ABOVE THE CALCULATED AMP-HOUR CAPACITY REQUIRED.

FIRE ALARM NOTIFICATION APPLIANCES				
	#	FIRE ALARM VISUAL NOTIFICATION DEVICE - CEILING MOUNT. ("F" INDICATES CANDELA RATING. 95 CD IF OMITTED). COLOR: WHITE		
	#	FIRE ALARM VISUAL NOTIFICATION DEVICE - WALL MOUNT. ("F" INDICATES CANDELA RATING. 95 CD IF OMITTED). COLOR: WHITE		
		FIRE ALARM AUDIBLE NOTIFICATION DEVICE - WALL MOUNT. COLOR: WHITE		
		FIRE ALARM AUDIBLE / VISUAL NOTIFICATION DEVICE - CEILING MOUNT. ("F" INDICATES CANDELA RATING. 95 CD IF OMITTED). COLOR: WHITE		
		FIRE ALARM AUDIBLE / VISUAL NOTIFICATION DEVICE - WALL MOUNT. ("F" INDICATES CANDELA RATING. 95 CD IF OMITTED). COLOR: WHITE		

AUDIBLE NOTIFICATION REQUIREMENTS				
SPACE TYPE	SOUND LEVEL ABOVE AMBIENT (dB)	SOUND LEVEL ABOVE MAX. SOUND LEVEL (dB)	MINIMUM SOUND LEVEL (dBA)	SIGNAL TYPE
GENERAL (EXCEPT AS LISTED BELOW)	15	5	N/A	5 FT. AFF. 3-PULSE TEMPORAL
NOTES: 1. TOTAL SOUND PRESSURE LEVEL SHALL NOT EXCEED 110 dB. 2. SEE TABLE "AVERAGE AMBIENT SOUND LEVELS" FOR TYPICAL AMBIENT SOUND LEVELS.				

AVERAGE AMBIENT SOUND LEVELS	
	AVERAGE AMBIENT SOUND LEVEL (dBA)
BUSINESS OCCUPANCIES	55
EDUCATIONAL OCCUPANCIES	45
INSTITUTIONAL OCCUPANCIES	50
MERCANTILE OCCUPANCIES	40
MECHANICAL ROOMS	85
PLACES OF ASSEMBLY	55
NOTES: 1. THE SOUND LEVELS ABOVE ARE INTENDED FOR DESIGN GUIDANCE PURPOSES. 2. ACTUAL SOUND LEVEL MEASUREMENTS SHALL BE USED FOR TESTING AND COMPLIANCE.	

SPEECH INTELLIGIBILITY REQUIREMENTS		
SPACE TYPE	MINIMUM INTELLIGIBILITY VALUE	AVERAGE INTELLIGIBILITY VALUE
GENERAL (EXCEPT AS LISTED BELOW)	0.45 STI (0.65 CIS)	0.50 STI (0.70 CIS)
ELECTRICAL ROOMS	N / A	N / A
INDIVIDUAL OFFICES	N / A	N / A
PRIVATE RESTROOM / TOILET	N / A	N / A
MECHANICAL ROOMS	N / A	N / A
MISC. EQUIPMENT ROOMS	N / A	N / A
STAIRWAYS	N / A	N / A
STORAGE ROOMS	N / A	N / A
NOTES: 1. 90% OF ALL MEASUREMENT LOCATIONS WITHIN EACH ACOUSTICALLY DISTINGUISHED SPACE SHALL MEET THE MINIMUM AND AVERAGE INTELLIGIBILITY VALUE.		

CEILING-MOUNTED VISIBLE APPLIANCE SPACING		
MAXIMUM ROOM SIZE (FT. x FT.)	MAXIMUM LENS HEIGHT (FT.)	
20 x 20	10	15
30 x 30		30
40 x 40		60
44 x 44		75
20 x 20	20	30
30 x 30		45
44 x 44		75
46 x 46		80


NOTES:
1. MINIMUM REQUIRED LIGHT OUTPUT BASED ON ONE LIGHT PER ROOM.
2. MAXIMUM LENS HEIGHT DOES NOT PRECLUDE MOUNTING LENS AT LOWER HEIGHTS.

WALL-MOUNTED VISIBLE APPLIANCE SPACING	
MAXIMUM ROOM SIZE (FT. x FT.)	MINIMUM REQUIRED LIGHT OUTPUT (CD)
20 x 20	15
28 x 28	30
30 x 30	34
40 x 40	60
45 x 45	75
50 x 50	94
54 x 54	110
55 x 55	115
60 x 60	135
63 x 63	150
68 x 68	177
70 x 70	184
80 x 80	240
90 x 90	304
NOTES: 1. MINIMUM REQUIRED LIGHT OUTPUT BASED ON ONE LIGHT PER ROOM.	

FIRESTOP SCHEDULE OF THROUGH PENETRATION SYSTEMS. BASIS OF DESIGN: HILTI, INC.					
TYPE OF PENETRANT	F-RATING (HR)	CONCRETE FLOORS	CONCRETE OR BLOCK WALLS	GYPSUM WALLS	HILTI PRODUCTS
		BASIS OF DESIGN UL SYSTEM			
CIRCULAR BLANK OPENINGS (0000-0999)	1	F-A-0006, C-AJ-0055, C-AJ-0090	C-AJ-0055, C-AJ-0090	--	CP 680, CP 618, FS-ONE MAX, CFS-BL
	2	F-A-0006, C-AJ-0055, C-AJ-0090	C-AJ-0055, C-AJ-0090	--	
METAL PIPES OR CONDUIT (1000-1999)	1	C-AJ-1226, F-A-1028, F-A-1017	C-AJ-1226, W-J-1067, W-J-1020	W-L-1054, W-L-1058, W-L-1164, W-L-1506	CP 680, FS-ONE MAX, CP 606, CFS-S SIL GG, CFS-D, MINERAL WOOL
	2	C-AJ-1226, F-A-1028, F-A-1017	C-AJ-1226, W-J-1067, W-J-1020, W-J-1248	W-L-1054, W-L-1058, W-L-1164, W-L-1506	
NON-METALLIC PIPE OR CONDUIT (I.E. PVC, CPVC, ABS, FRP, ENT) (2000-2999)	1	F-A-2053, F-A-2025, C-AJ-2109, C-AJ-2098, C-AJ-2271, C-AJ-2167, C-BJ-2021, C-AJ-2342	C-AJ-2109, C-AJ-2098, C-AJ-2167, C-AJ-2371, C-AJ-2342	W-L-2078, W-L-2075, W-L-2128	CP 680, CP 643N, MINERAL WOOL, CP 644, FS-ONE MAX, CFS-S SIL SL, CFS-S SIL CG, CP 648
	2	F-A-2053, F-A-2025, C-AJ-2109, C-AJ-2098, C-AJ-2271, C-AJ-2167, C-BJ-2021, C-AJ-2371, C-AJ-2342	C-AJ-2109, C-AJ-2098, C-AJ-2167, C-AJ-2371, C-AJ-2342	W-L-2078, W-L-2075, W-L-2128	
SINGLE OR BUNDLED CABLES (3000-3999)	1	F-A-3007, C-AJ-3095, C-AJ-3180, C-AJ-3283	W-J-3036, C-AJ-3095, C-AJ-3180, W-J-3060, W-J-3167	W-L-3065, W-L-3111, W-L-3112, W-L-3334, W-L-3414, W-L-3396	CP 680, CP 653, FS-ONE MAX, CP 618, CP 606, CFS-D, CFS-CC
	2	F-A-3007, C-AJ-3095, C-AJ-3334, F-A-3060	W-J-3036, C-AJ-3095, C-AJ-3180, W-J-3060, W-J-3167, W-J-3189	W-L-3065, W-L-3111, W-L-3112, W-L-3334, W-L-3414, W-L-3396	
CABLE TRAY (4000-4999)	1	C-AJ-4034, C-AJ-4035	W-J-4027, C-AJ-4034, C-AJ-4035	W-L-4011, W-L-4019, W-L-4081	CFS-BL, FS-ONE MAX, CP 620, CP 618
	2	C-AJ-4034, C-AJ-4035	W-J-4027, C-AJ-4034, C-AJ-4035	W-L-4011, W-L-4019, W-L-4081	
ELECTRICAL BUSWAY (6000-6999)	1	C-AJ-6006, C-AJ-6017, F-A-6002, C-AJ-6036	C-AJ-6006, C-AJ-6017, C-AJ-6036	--	CP 637, FS-ONE MAX, CP 620, CFS-BL, MINERAL WOOL, CFS-S SIL GG, CFS-S SIL SL
	2	C-AJ-6006, C-AJ-6017, F-A-6042, C-AJ-6036	C-AJ-6006, C-AJ-6017, C-AJ-6036	--	
NOTES:					
1. JOBSITE CONDITIONS OF EACH THROUGH-PENETRATION FIRESTOP SYSTEM MUST MEET ALL DETAILS OF THE UL-CLASSIFIED SYSTEM SELECTED.					
2. IF JOBSITE CONDITIONS DO NOT MATCH ANY UL-CLASSIFIED SYSTEMS IN THE SCHEDULES ABOVE, CONTACT FIRESTOP MANUFACTURER FOR ALTERNATIVE SYSTEMS OR ENGINEER JUDGMENT DRAWINGS.					
3. WHERE MORE THAN ONE APPLICABLE UL-CLASSIFIED SYSTEM IS LISTED IN THE SCHEDULES, CHOOSE THE UL SYSTEM WHICH IS MOST ECONOMICAL FOR EACH THROUGH-PENETRATION FIRESTOP SYSTEM.					
4. COORDINATE WORK WITH OTHER TRADES TO ENSURE THAT PENETRATION OPENING SIZES ARE APPROPRIATE FOR PENETRANT LOCATIONS, AND VICE-VERSA.					
5. ALL THROUGH-PENETRATION FIRESTOPS SHALL BE PROVIDED BY ONE MANUFACTURER. APPROVED MANUFACTURERS: HILTI, RECTORESEAL, 3M, STI.					

FIRE ALARM GENERAL NOTES

1. DEVICES TO BE RELOCATED ARE PART OF AN EXISTING FIRE ALARM SYSTEM. REMOVE AND PRESERVE DEVICES UNTIL RE-INSTALLTION DURING RENOVATION. ADJUST THE RELOCATED DEVICES TO THE SUITABLE LEVELS FOR THE NEW SPACES BEING SERVED. IF THE EXISTING DEVICE IS NOT ADJUSTABLE TO A SUITABLE RANGE, PROVIDE NEW DEVICE COMPATIBLE WITH EXISTING FIRE ALARM SYSTEM.
2. PROVIDE AUDIBLE NOTIFICATION FOR ALL REGULARLY OCCUPIED SPACES IN ACCORDANCE WITH "AUDIBLE NOTIFICATION REQUIREMENTS", "SPEECH INTELLIGIBILITY REQUIREMENTS", AND "SYSTEM LAYOUT DOCUMENT REQUIREMENTS" SECTIONS ON SHEET FED.1
3. WHERE VISUAL ONLY NOTIFICATION DEVICES ARE INDICATED, CONTRACTOR MAY SUBSTITUTE AUDIBLE/VISUAL NOTIFICATION DEVICES INSTEAD TO MEET BOTH AUDIBLE AND VISUAL NOTIFICATION REQUIREMENTS IN ACCORDANCE WITH LAYOUT DOCUMENTS AND CALCULATIONS.
4. PROVIDE CEILING MOUNTED DEVICES IN ALL SPACES WITH FINISHED CEILINGS, UNLESS NOTED OTHERWISE. PROVIDE WALL MOUNTED DEVICES IN SPACES WITH NO CEILING. COORDINATE DEVICES WITH OTHER DEVICES ON CEILINGS AND WALLS.

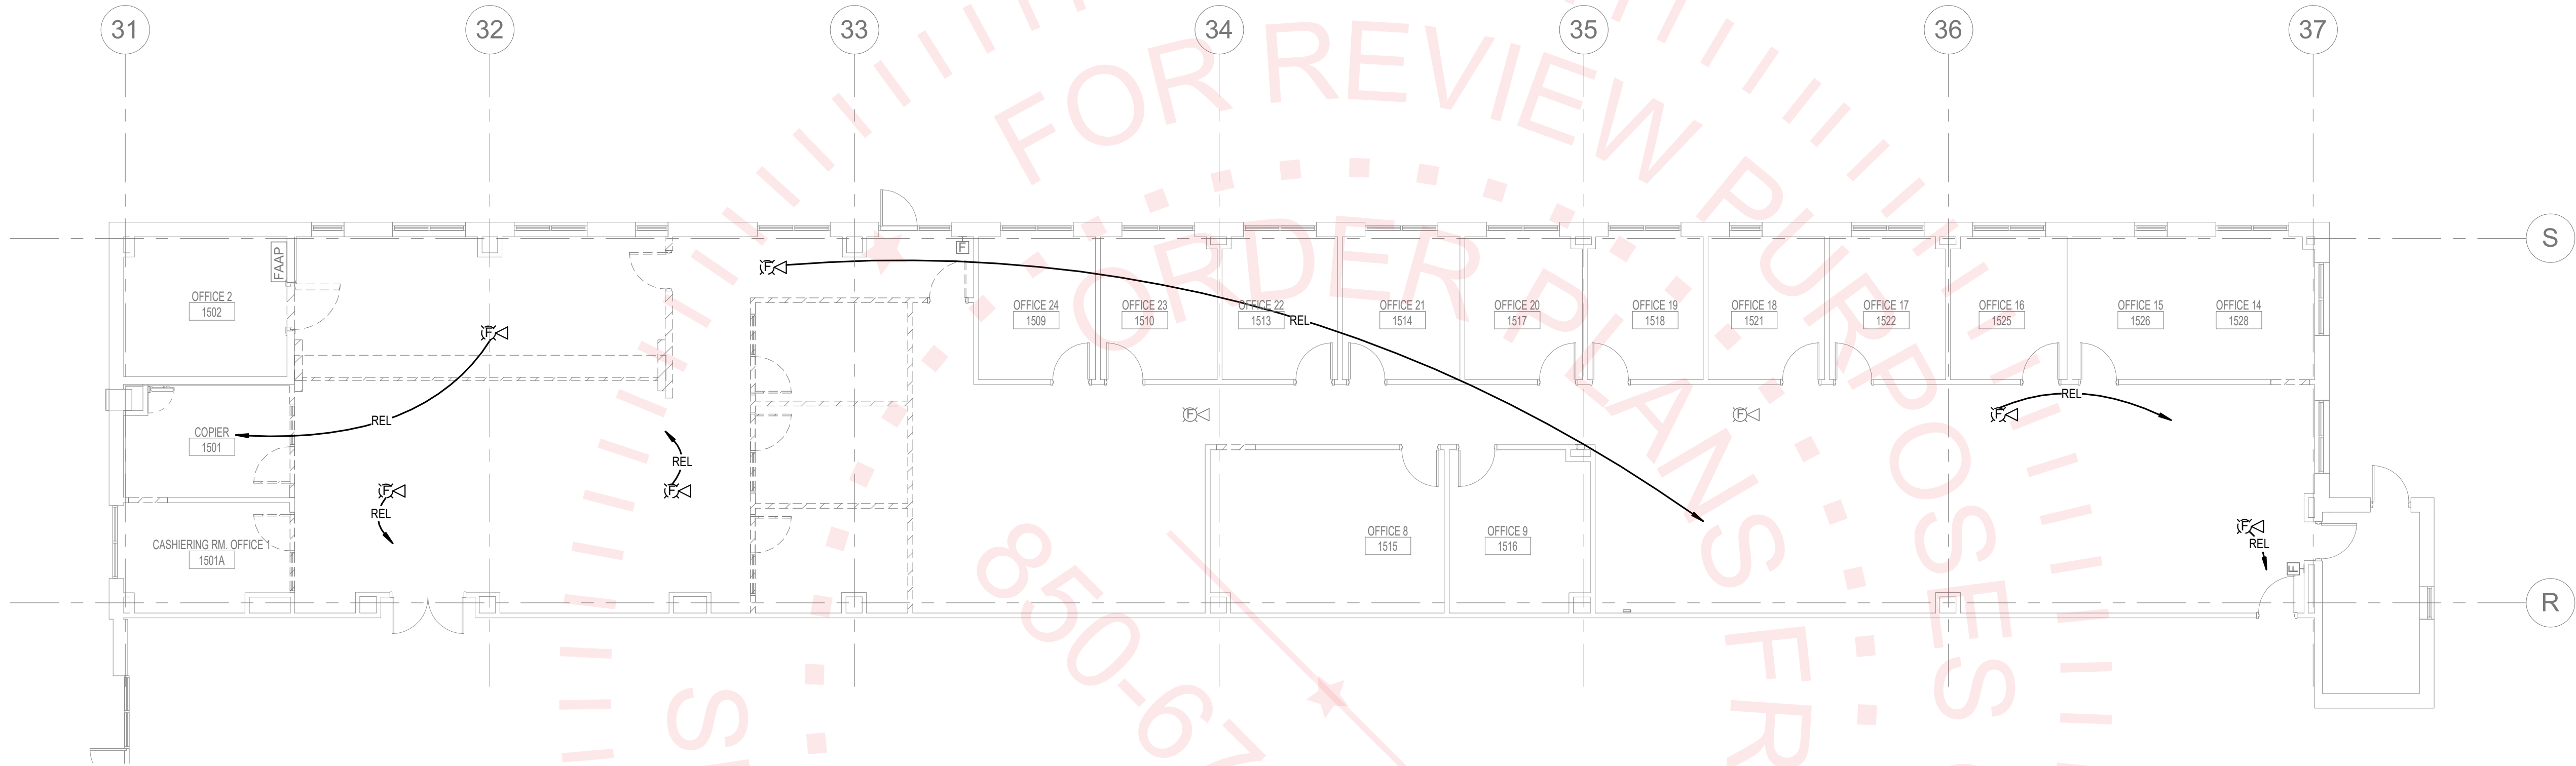

1 DEMOLITION PLAN - FIRE ALARM
1/8" = 1'-0"

bki
ARCHITECTURE

BKJ, Inc., Architecture
1621 Physicians Dr.
Tallahassee, Florida 32308
(P) 850.778.8007 | (F) 850.546.6150
www.bkarchitecture.com
FL Architecture Corporation AA00002280

SEAL:

PROJECT TITLE:

**Interior Renovation for FSU
UCA Suite 1500
FSU Project No. 2400665,
Tallahassee, Florida 32306**

JOB NO.: 23-178

DESIGNED: ADW

DRAWN: AA

CHECKED: ADW

THIS DRAWING AND ANY REPRODUCTIONS
ARE THE PROPERTY AND COPYRIGHT
OF BKJ, INC. AND MAY NOT BE
REPRODUCED, PUBLISHED, OR USED IN ANY
MANNER WITHOUT WRITTEN
PERMISSION OF THE ARCHITECT

REVISIONS:

DRAWING PHASE:
**100% Construction
Documents**

DRAWING TITLE:

**DEMOLITION PLAN -
FIRE ALARM**

SHEET NO.:

FED1.0

DATE:

April 12, 2024

H2
ENGINEERING

114 EAST 5th AVENUE
TALLAHASSEE, FL 32303
PHONE 850.224.7922
www.H2Engineering.com


H2E PROJECT No. 23-178

THIS DOCUMENT IS THE PROPERTY OF H2Engineering
AND IS PREPARED AS AN INSTRUMENT OF SERVICE. ITS
USE, REUSE OR REPRODUCTION, EXCEPT BY WRITTEN
AGREEMENT WITH H2ENGINEERING, INC., IS PROHIBITED.

Florida Registry #2485
Anthony D. Wyrick, P.E. #98346

FIRE ALARM GENERAL NOTES

1. DEVICES TO BE RELOCATED ARE PART OF AN EXISTING FIRE ALARM SYSTEM. REMOVE AND PRESERVE DEVICES UNTIL REINSTALLTION DURING RENOVATION. ADJUST THE RELOCATED DEVICES TO THE SUITABLE LEVELS FOR THE NEW SPACES BEING SERVED. IF THE EXISTING DEVICE IS NOT ADJUSTABLE TO A SUITABLE RANGE, PROVIDE NEW DEVICE COMPATIBLE WITH EXISTING FIRE ALARM SYSTEM.
2. PROVIDE AUDIBLE NOTIFICATION FOR ALL REGULARLY OCCUPIED SPACES IN ACCORDANCE WITH "AUDIBLE NOTIFICATION REQUIREMENTS", "SPEECH INTELLIGIBILITY REQUIREMENTS", AND "SYSTEM LAYOUT DOCUMENT REQUIREMENTS" SECTIONS ON SHEET FE0.1
3. WHERE VISUAL ONLY NOTIFICATION DEVICES ARE INDICATED, CONTRACTOR MAY SUBSTITUTE AUDIBLE/VISUAL NOTIFICATION DEVICES INSTEAD TO MEET BOTH AUDIBLE AND VISUAL NOTIFICATION REQUIREMENTS IN ACCORDANCE WITH LAYOUT DOCUMENTS AND CALCULATIONS.
4. PROVIDE CEILING MOUNTED DEVICES IN ALL SPACES WITH FINISHED CEILINGS, UNLESS NOTED OTHERWISE. PROVIDE WALL MOUNTED DEVICES IN SPACES WITH NO CEILING. COORDINATE DEVICES WITH OTHER DEVICES ON CEILINGS AND WALLS.

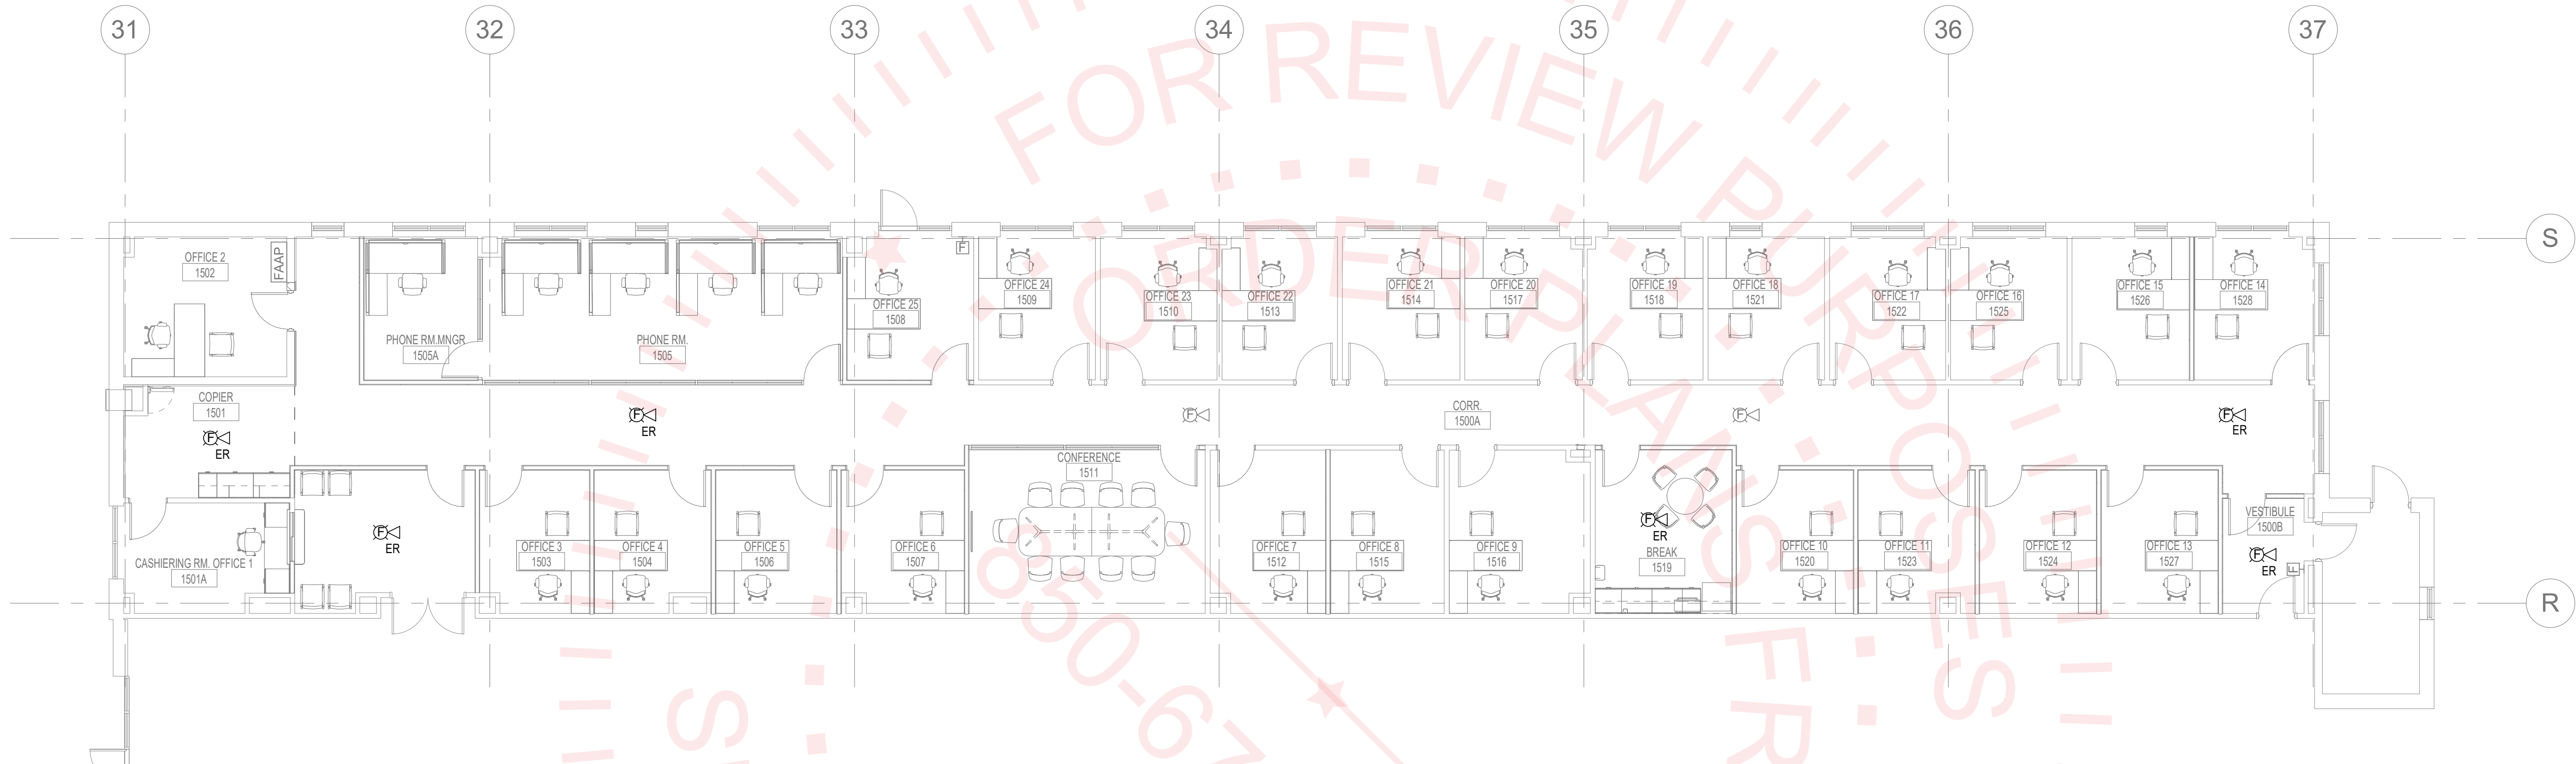

1 RENOVATION PLAN - FIRE ALARM
1/8" = 1'-0"



BKJ, Inc., Architecture
1621 Physicians Dr.
Tallahassee, Florida 32308
(P) 850.778.8007 (F) 850.546.6150
www.bkjarchitecture.com
FL Architecture Corporation AA00002280

SEAL:

PROJECT TITLE:

Interior Renovation for FSU
UCA Suite 1500
FSU Project No. 2400665,
Tallahassee, Florida 32306

JOB NO.: 23-178

DESIGNED: ADW

DRAWN: AA

CHECKED: ADW

THIS DRAWING AND ANY REPRODUCTIONS
ARE THE PROPERTY AND COPYRIGHT
OF BKJ, INC. AND MAY NOT BE
REPRODUCED, PUBLISHED, OR USED IN ANY
MANNER WITHOUT WRITTEN
PERMISSION OF THE ARCHITECT

REVISIONS:

DRAWING PHASE:
100% Construction
Documents

DRAWING TITLE:


RENOVATION PLAN -
FIRE ALARM

SHEET NO.:

FE1.0

DATE:

April 12, 2024

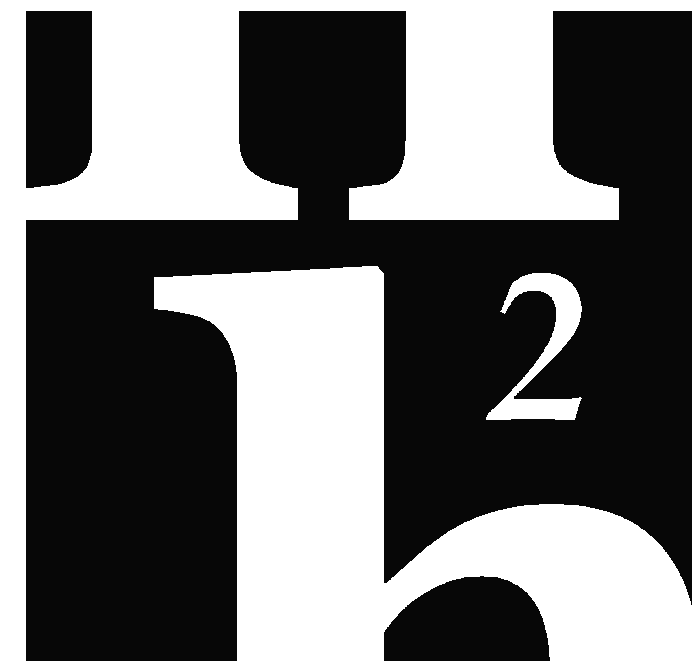

114 EAST 5th AVENUE
TALLAHASSEE, FL 32303
PHONE 850.224.7922
www.H2Engineering.com

H2E PROJECT No. 23-178

THIS DOCUMENT IS THE PROPERTY OF H2Engineering
AND IS PREPARED AS AN INSTRUMENT OF SERVICE. ITS
USE, REUSE OR REPRODUCTION, EXCEPT BY WRITTEN
AGREEMENT WITH H2ENGINEERING, INC., IS PROHIBITED.

Florida Registry #2485
Anthony D. Wyrick, P.E. #98346