



FLORIDA STATE UNIVERSITY
FACILITIES PLANNING, DESIGN and CONSTRUCTION
FACILITIES DESIGN OFFICE
125 MENDENHALL BUILDING A
TALLAHASSEE, FLORIDA 32306-4153
(850)-644-6801

100% Construction Documents


May 13th, 2024

VAP Suite Modifications

University Center - Building A



FSU Project No.:2400757

Department of Student Support and Transitions

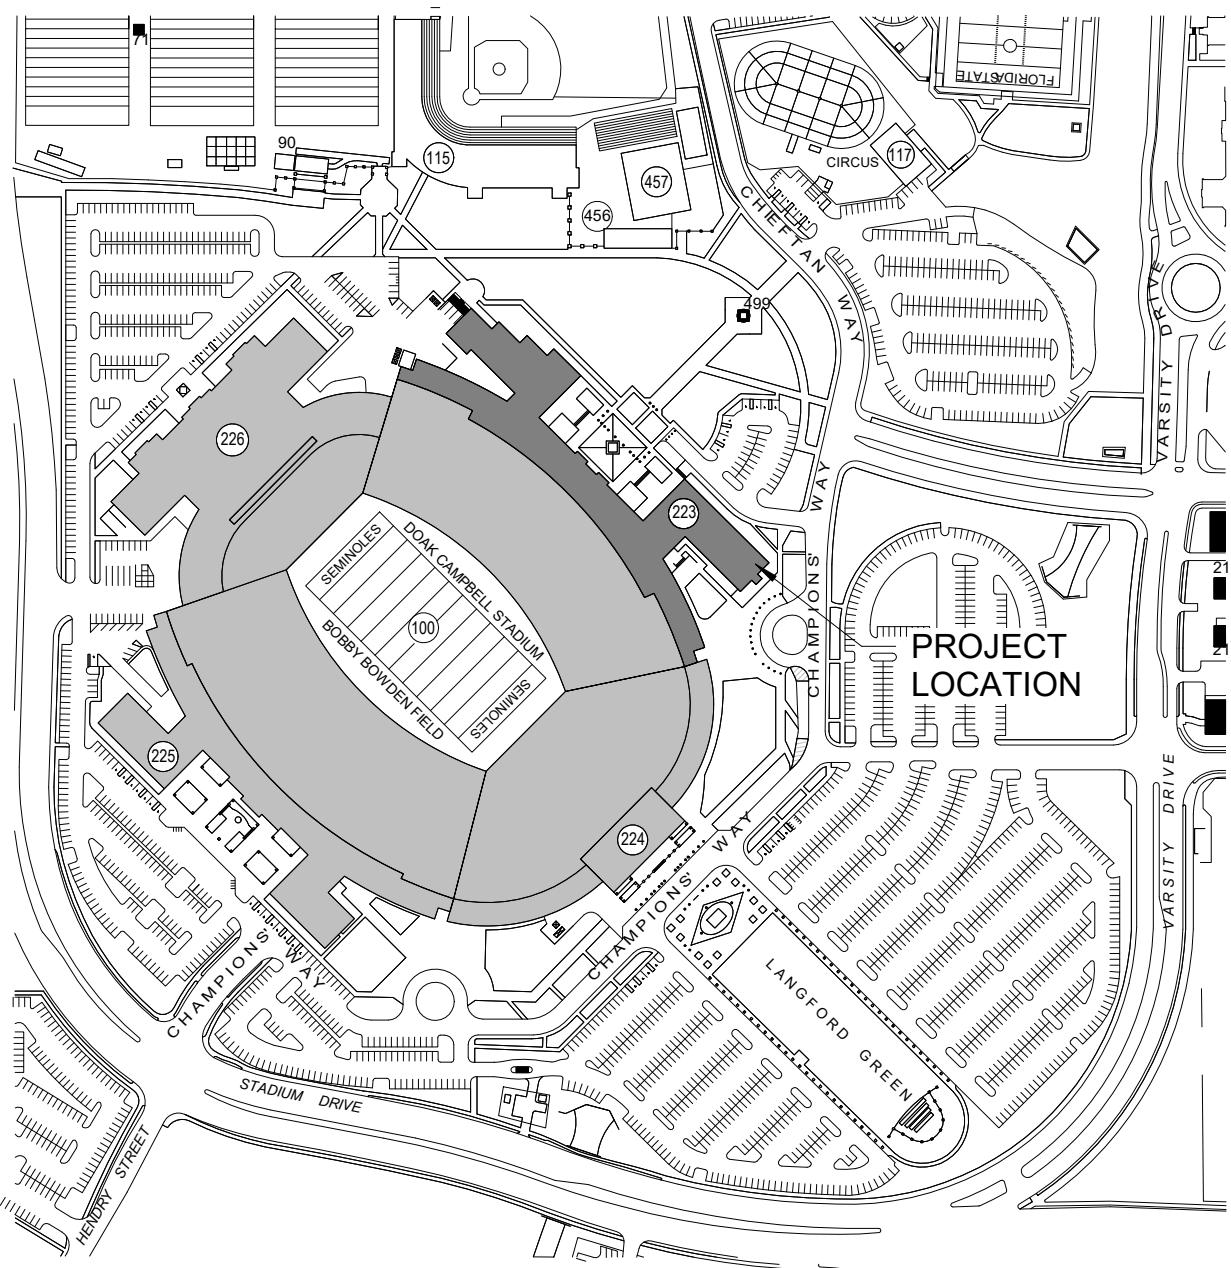


LOCATION PLAN

SCALE: N.T.S.

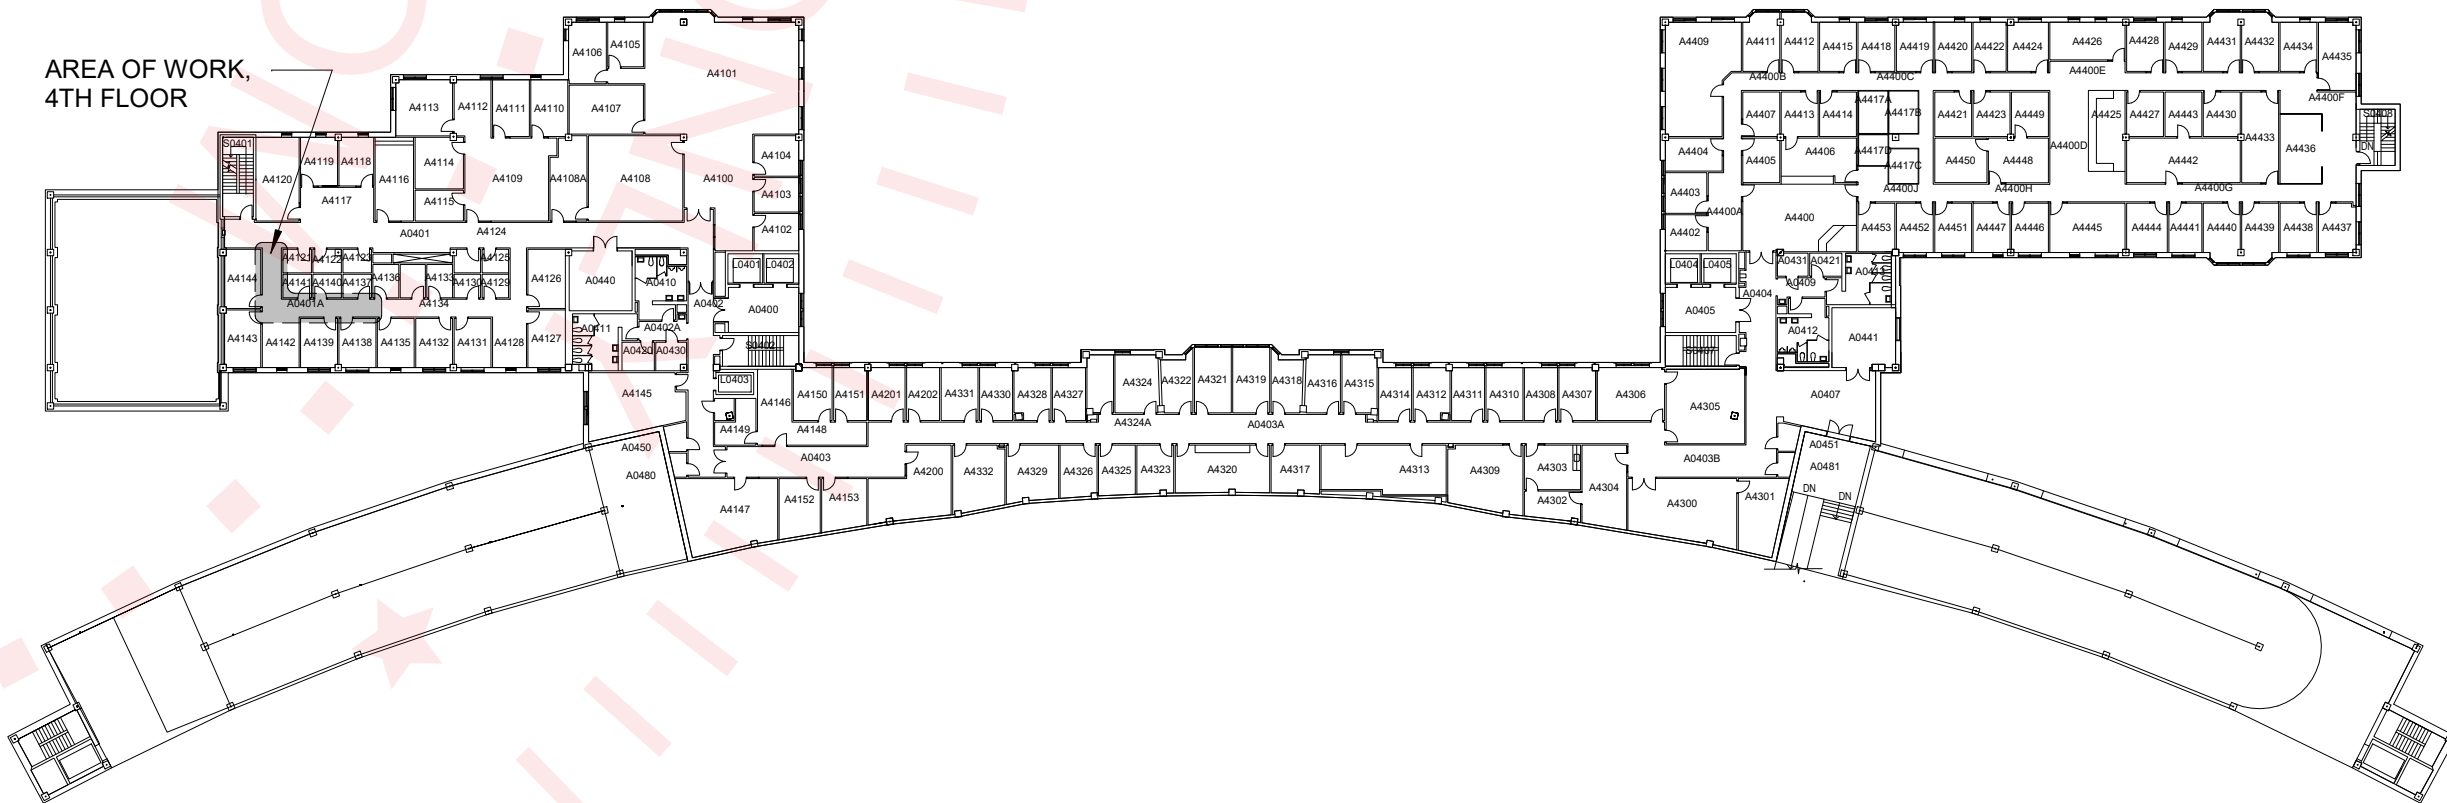

KEY PLAN (4TH FLOOR)

SCALE: N.T.S.



G001

2400757_UCA_VAP_Suite_Modifications\
01_DesignModel.rvt

01 GENERAL REQUIREMENTS:

1) COMPLY WITH THE REQUIREMENTS OF THE FLORIDA STATE UNIVERSITY INSTRUCTIONS TO BIDDERS, "FLORIDA STATE UNIVERSITY GENERAL TERMS AND CONDITIONS OF THE CONTRACT FOR CONSTRUCTION" AGREEMENT IN EFFECT FOR CONSTRUCTION SERVICES FOR MINOR PROJECTS AT FLORIDA STATE UNIVERSITY, SPECIAL CONDITIONS AND ANY APPLICABLE SUPPLEMENTS.

2) SUMMARY OF WORK: **PROVIDE AN ENTRANCE DOOR ASSEMBLY & WALL PARTITIONS TO PROVIDE ACOUSTIC & VISUAL PRIVACY FOR VICTIM ADVOCATE PROGRAM AT UNIVERSITY CENTER BUILDING A - FOURTH FLOOR.**

3) COMPLY WITH REQUIREMENTS OF APPLICABLE PRODUCT OR TRADE STANDARDS, EXCEPT WHEN MORE RIGID REQUIREMENTS ARE SPECIFIED OR ARE REQUIRED BY APPLICABLE CODES.

4) WHETHER LISTED OR NOT, PROVIDE SUBMITTALS AS REQUIRED BY THE PROJECT SCOPE TO ENSURE ACCEPTANCE OF THE SPECIFIED OR INDICATED PRODUCT(S). SUBMITTALS ARE TO INCLUDE THE MANUFACTURER'S INFORMATION WITH PROJECT SPECIFIC PROPERTY SELECTIONS INDICATED. DO NOT INCLUDE UNRELATED MANUFACTURER CATALOG PRODUCT INFORMATION. ALLOW ENOUGH TIME FOR SUBMITTAL REVIEW, INCLUDING TIME FOR RESUBMITTALS. NO EXTENSION OF THE CONTRACT TIME WILL BE AUTHORIZED BECAUSE OF FAILURE TO TRANSMIT SUBMITTALS ENOUGH IN ADVANCE OF THE WORK TO PERMIT APPROVAL PROCESSING. PROVIDE SUBMITTALS IN ELECTRONIC FORMAT. WHERE ACTUAL PRODUCT SAMPLES ARE REQUIRED, PROVIDE MINIMUM OF TWO (2) SAMPLES, ONE OF WHICH WILL BE RETURNED TO THE CONTRACTOR.

5) SUBSTITUTIONS: ALL PRODUCTS SPECIFIED MAY BE SUBSTITUTED WITH AN APPROVED EQUAL UNLESS SPECIFICALLY NOTED OTHERWISE. APPROVAL MUST BE IN WRITING PRIOR TO BID SUBMITTAL, UPON REVIEW OF SUBMITTAL CONTAINING COMPLETE DOCUMENTATION.

6) SHOP DRAWINGS: PREPARE PROJECT-SPECIFIC INFORMATION, DRAWN ACCURATELY TO SCALE. DO NOT BASE SHOP DRAWINGS ON REPRODUCTIONS OF THE CONTRACT DOCUMENTS OR STANDARD PRINTED DATA.

7) COMPLY WITH THE REQUIREMENTS OF THE FSU DESIGN GUIDELINES AND SPECIFICATIONS. REFER TO: HTTP://WWW.FACILITIES.FSU.EDU/DEPTS/DESIGNCONSTR/GUIDELINES.PHP

8) THE CONTRACTOR SHALL FIELD VERIFY ALL EXISTING CONDITIONS. IF CONFLICTS OR DISCREPANCIES BETWEEN BUILDING SYSTEMS ARE OBSERVABLE HE SHALL NOTIFY THE FACILITIES DESIGN & CONSTRUCTION PROJECT MANAGER IN WRITING FOR RESOLUTION PRIOR TO COMMENCING CONSTRUCTION OR INSTALLATION.

9) THE CONTRACTOR SHALL LIMIT THE IMPACT OF HIS WORK ON ALL SYSTEMS, EQUIPMENT AND SECURITY OF ALL AREAS WITHIN THE SCOPE OF THIS WORK. COORDINATE PROTECTION AND SECURITY OF AREAS WITH THE DEPARTMENT. THE FOLLOWING SPECIFICATIONS ARE GENERAL IN NATURE AND APPLY ONLY WHERE APPLICABLE, AS SHOWN ON THE DRAWINGS.

02 EXISTING CONDITIONS:

PROTECTION OF EXISTING WORK: PROVIDE NEW VISQUEEN DUST SEPARATION WALLS PROTECTING EXISTING AREAS AS NEEDED. COORDINATE LOCATION AND TYPE OF PROTECTION WITH DEPARTMENT. COORDINATE ACCESS TO THE WORK AREA AND TIME OF WORK WITH THE DEPARTMENT. MAINTAIN FUNCTIONALITY OF EXISTING BUILDING AND INFRASTRUCTURE SYSTEMS TO REMAIN UNLESS OTHERWISE NOTED. IF NEW WORK DEMOLITION OR CONSTRUCTION INTERFERES WITH EXISTING SYSTEM TO REMAIN - PROTECT OR SALVAGE SYSTEM FOR SUBSEQUENT REINSTALLATION TO PROPER FUNCTIONALITY.

SELECTIVE DEMOLITION: COORDINATE DEMOLITION AND SHORING WITH FLOOR/CEILING FRAMING ABOVE AND BELOW. SET UP TEMPORARY SHORING AS NEEDED UNTIL COMPLETION OF NEW WALL FRAMING. REPAIR AREAS DAMAGED BY RELATED DEMOLITION AND CONSTRUCTION TO MATCH EXISTING ADJACENT CONDITIONS.

CUTTING AND PATCHING: DO NOT CUT AND PATCH STRUCTURAL ELEMENTS IN A MANNER THAT COULD CHANGE THEIR LOAD-CARRYING CAPACITY OR LOAD-DEFLECTION RATIO. DO NOT CUT AND PATCH MECHANICAL, ELECTRICAL, PLUMBING, OR LIFE SAFETY SYSTEMS (RATED WALLS ETC.) IN A MANNER THAT RESULTS IN REDUCING THEIR CAPACITY TO PERFORM AS INTENDED OR THAT RESULTS IN INCREASED MAINTENANCE OR DECREASED OPERATIONAL LIFE OR SAFETY. WHEN LOCATION OF ALL EXISTING SERVICES, MECHANICAL, OR ELECTRICAL SYSTEMS ARE REQUIRED TO BE REMOVED, RELOCATED, OR ABANDONED, BYPASS SUCH SERVICES/SYSTEMS BEFORE CUTTING TO MINIMIZE INTERRUPTION TO OCCUPIED AREAS. ALL INTERRUPTIONS ARE TO BE SCHEDULED IN ADVANCE WITH THE OWNER. DO NOT CUT AND PATCH IN A MANNER THAT RESULTS IN VISUAL EVIDENCE OF CUTTING AND PATCHING. REMOVE, REPLACE, PATCH AND REPAIR MATERIALS AND SURFACES BY METHODS AND WITH MATERIALS SO AS NOT TO VOID EXISTING WARRANTIES. USE MATERIALS IDENTICAL TO IN-PLACE MATERIALS. FOR EXPOSED SURFACES, USE MATERIALS THAT VISUALLY MATCH IN-PLACE ADJACENT SURFACES TO THE FULLEST EXTENT POSSIBLE. IF IDENTICAL MATERIALS ARE UNAVAILABLE OR CANNOT BE USED, USE MATERIALS THAT WHEN INSTALLED, WILL MATCH THE VISUAL AND FUNCTIONAL PERFORMANCE OF IN-PLACE MATERIALS. BEFORE PATCHING, VERIFY COMPATIBILITY WITH AND SUITABILITY OF SUBSTRATES, INCLUDING COMPATIBILITY WITH IN-PLACE FINISHES OR PRIMERS. PROVIDE TEMPORARY SUPPORT OF WORK TO BE CUT. PROTECT IN-PLACE CONSTRUCTION DURING CUTTING AND PATCHING TO PREVENT DAMAGE. REMOVE AND REPLACE ANY ITEMS DAMAGED DURING CONSTRUCTION PROCESS. TAKE ALL PRECAUTIONS NECESSARY TO AVOID ACCIDENTALLY CUTTING EXISTING PIPE, CONDUIT OR DUCTWORK SERVING THE BUILDING. FIELD VERIFY LOCATION OF ALL EXISTING BUILDING AND INFRASTRUCTURE SYSTEMS AND REMOVE OR RELOCATE IF TO REMAIN SO AS TO NOT INTERFERE WITH PROPOSED BUILDING SYSTEMS. REMOVE IN-PLACE FLOOR AND WALL COVERINGS AND REPLACE WITH NEW MATERIALS, IF NECESSARY, TO ACHIEVE UNIFORM COLOR AND APPEARANCE. WHERE PATCHING OCCURS IN A PAINTED SURFACE, APPLY PRIMER AND INTERMEDIATE PAINT COATS OVER THE PATCH AND APPLY FINAL PAINT COAT OVER ENTIRE UNBROKEN SURFACE CONTAINING THE PATCH. PROVIDE ADDITIONAL COATS UNTIL PATCH BLENDS WITH ADJACENT SURFACES. PATCH, REPAIR, OR REHANG IN-PLACE CEILINGS AS NECESSARY TO PROVIDE AN EVEN-PLANE SURFACE OF UNIFORM APPEARANCE. CLEAN AREAS AND SPACES WHERE CUTTING AND PATCHING ARE PERFORMED, COMPLETELY REMOVING PAINT, MORTAR, OILS, PUTTY, DUST, ETC.

06 WOOD, PLASTICS AND COMPOSITES:

FINISH CARPENTRY: INSTALL WORK IN ACCORDANCE WITH AWI CUSTOM QUALITY STANDARD PER AWI P-200 - ARCHITECTURAL WOODWORK QUALITY STANDARDS; ARCHITECTURAL WOODWORK INSTITUTE. MAXIMUM VARIATION FROM TRUE: 1/32 INCH. FOR ALL INTERIOR AND EXTERIOR WORK. FILL GAPS IN ADJOINING NEW AND EXISTING CONSTRUCTION; PROVIDE CONTINUOUS COLOR-MATCHED SEALANT BEAD FOR STAINED SURFACES - PAINTABLE SEALANT WHERE ADJACENT SURFACE IS PAINTED. EXTERIOR JOINERY SHALL NOT ALLOW WATER INFILTRATION WHERE EXPOSED TO WEATHER.

07 THERMAL AND MOISTURE PROTECTION:

ACOUSTIC FIBERGLASS BATT INSULATION: FIBERS MANUFACTURED FROM GLASS OR SLAG COMPLYING WITH ASTM C665 AND PASSING ASTM E84 TEST. MAX. FLAME SPREAD OF 25. MAX SMOKE DEVELOPMENT OF 50. R22 (U.O.N.) IN ALL EXTERIOR WALLS & 2x6 (6" METAL) STUD CONSTRUCTION. R11 (U.O.N.) IN 2x4 (OR 3-5/8" METAL) STUD CONSTRUCTION. R30 (U.O.N.) AT ALL CEILING/HORIZONTAL APPLICATIONS. INSULATION TO FIT TIGHTLY BETWEEN FRAMING TO ALLOW FOR FRICTION FIT INSTALLATION. PROVIDE TEMPORARY SUPPORT AS REQUIRED BY MFR WHERE ONE SIDE OF WALL CAVITY IS OPEN OR PARTITION IS GREATER THAN 8' HIGH. BASIS OF DESIGN: OWENS CORNING, ECOTOUGH UNFACED SOUND ATTENUATION BATTS.

08 OPENINGS:

STEEL DOORS AND FRAMES: COMPLYING WITH STEEL DOOR INSTITUTE "RECOMMENDED SPECIFICATIONS FOR STANDARD STEEL DOORS AND FRAMES" ANSI/SI-100, GRADE II FOR INTERIOR DOORS. FRAMES SHALL BE MIN. 16 GA. WITH MITERED, WELDED CORNERS; KNOCK-DOWN UNITS ARE ALLOWED ONLY IN EXISTING WALLS. GLAZING IN INTERIOR LIGHTS TO BE CLEAR, HIGH PERFORMANCE, TEMPERED IN DOORS AND SIDE LIGHTS AS REQUIRED BY CODE. SUBMIT SHOP DRAWINGS AND PRODUCT DATA FOR ARCHITECT'S REVIEW AND APPROVAL. COORDINATE HINGE LOCATION AND BACKSETS WITH FRAME MANUFACTURER. PROVIDE PRODUCTS BY STEELCRAFT, CECO, CURRIES OR ARCHITECT APPROVED EQUAL.

FLUSH WOOD DOORS (**NON-RATED OR FOR DOORS REQUIRING FIRE RATING OF 1/3 HR**): COMPLY WITH THE "ARCHITECTURAL WOODWORK QUALITY STANDARDS." PROVIDE 1-3/4" 5-PLY STRUCTURAL COMPOSITE LUMBER CORE (WHERE 1/3 HR FIRE RATING REQUIRED, PROVIDE 5-PLY STRUCTURAL COMPOSITE LUMBER CORE, 1/3 HR RATED), WDMA EXTRA HEAVY DUTY, SCLC-5, SLIP-MATCH **PLAIN SLICED - BIRCH VENEER- WDMA PAINT GRADE BIRCH WHERE PAINTED**. GLAZING IN INTERIOR LIGHTS TO BE CLEAR, HIGH PERFORMANCE, TEMPERED IN DOORS AND SIDE LIGHTS AS REQUIRED BY CODE. COORDINATE HINGE LOCATION AND BACKSETS WITH FRAME MANUFACTURER. SUBMIT SHOP DRAWINGS AND/OR PRODUCT DATA FOR ARCHITECT'S REVIEW AND APPROVAL. PROVIDE PRODUCTS BY MASONITE ARCHITECTURAL: ASPIRO SERIES.

A1 SPECIFICATIONS

09 FINISHES:

GYPSUM BOARD: REFER TO STRUCTURAL NOTES AND TO DRAWINGS FOR METAL FRAMING REQUIREMENTS. PROVIDE GYPSUM BOARD IN MAXIMUM LENGTHS AND WIDTHS AVAILABLE THAT WILL MINIMIZE JOINTS IN EACH AREA. PROVIDE THICKNESSES AS INDICATED ON DRAWINGS. ALL GYPSUM WALLBOARD TO COMPLY WITH ASTM C 1396. USE RATED GYPSUM BOARD WITH UL LABEL WHERE INDICATED IN DRAWINGS AND WHERE REQUIRED BY CODE. UL LABEL SHOULD REMAIN VISIBLE ABOVE FINISHED CEILINGS. UNLESS OTHERWISE INDICATED, USE MOISTURE RESISTANT GYPSUM BOARD THAT COMPLIES WITH ASTM C630 WHERE INDICATED ON DRAWINGS. IN RESTROOMS AND SHOWERTALLS, AND BEHIND WALL TILE. INSTALL GYPSUM BOARD AS RECOMMENDED BY MANUFACTURER. PROVIDE ALL MATERIALS NECESSARY FOR A COMPLETE INSTALLATION. TRIMS TO COMPLY WITH ASTM C 1047. EXTERIOR TRIMS TO BE HOT-DIPPED GALVANIZED STEEL OR ROLLED ZINC. ALUMINUM TRIMS TO COMPLY WITH ASTM B 221. ALLOY 6063-T5. PROVIDE FACTORY FABRICATED REVEALS AT ALL INSIDE & OUTSIDE CORNERS AND INTERSECTING HORIZONTAL/VERTICAL REVEAL CONDITIONS. TAPE AND FILL W/ APPROPRIATE COMPOUND ALL JOINTS PER ASTM C 475. UNLESS OTHERWISE NOTED, USE STEEL DRILL SCREWS PER ASTM C 1002. USE SCREWS COMPLYING WITH ASTM C 954 FOR FASTENING PANELS TO STEEL MEMBERS THAT ARE BETWEEN 0.033 AND 0.112 INCHES THICK. PROVIDE LEVEL 4 FINISH.

PAINTING: TEST ALL EXISTING SURFACES. PREP WALLS PRIOR TO PAINTING FOR CONSISTENT APPEARANCE: **REPAIR ANY EXISTING MINOR SURFACE DEFECTS TO MATCH ADJACENT CONDITIONS - INCLUDE DEFECTS SUCH AS EXCESS DRYWALL MUD, DINGS, DAMAGE DUE TO WALL BASE REMOVAL, SCRAPES AND HOLES.** PROVIDE PRIMING AND ANY OTHER SURFACE PREPARATION RECOMMENDED BY THE PAINT MANUFACTURER FOR THE FINISH SPECIFIED. AT EXISTING DOOR FRAMES TO BE REPAINTED: REMOVE EXISTING DOOR FRAME SILENCERS AND REPLACE WITH NEW AFTER REPAINTING. **REMOVE ANY EXISTING WALL ESCUTCHEON AND INFRASTRUCTURE PLATES PRIOR TO PAINTING. CLEAN AND REINSTALL PLATES AFTER PAINTING.** PROVIDE NUMBER OF COATS AS REQUIRED TO ACHIEVE UNIFORM COVERAGE AND APPEARANCE AS DETERMINED BY THE FSU DESIGN PROJECT MANAGER. PAINT CORNER TO CORNER WHERE REQUIRED FOR UNIFORM APPEARANCE ALONG A WALL, CEILING OR OTHER SURFACE. PROVIDE SUBMITTAL LISTING ALL PAINT SYSTEMS WITH REQUIRED SURFACE MILLAGES AND RELATED PRODUCTS FOR REVIEW AND APPROVAL. AT PROJECT COMPLETION TURN OVER ALL REMAINING PAINT TO DEPARTMENT - LABEL EACH CAN WITH AREA USED AND ROOM NUMBERS WHERE APPLIED.

PAINT SYSTEMS: **SHERWIN-WILLIAMS.** ALTERNATE MANUFACTURER COMPUTER COLOR MATCHES NOT ALLOWED FOR SPECIFIED COLOR SELECTIONS.

GYPSUM BOARD PARTITIONS: PROVIDE 1 COAT PRIMER & 2 COATS LOW-VOC EGGSHELL LATEX ENAMEL.

1ST COAT: S-W PROMAR 200 ZERO VOC LATEX PRIMER, B28W2600 (4 MILS W, 1.5 MILS D)
2ND COAT: S-W PROMAR 200 ZERO VOC LATEX EGG-SHELL, B20-2600 SERIES
3RD COAT: S-W PROMAR 200 ZERO VOC LATEX EGG-SHELL, B20-2600 SERIES (4 MILS W, 1.6 MILS D PER COAT)

* AT GYPSUM BOARD PARTITIONS - PREVIOUSLY PAINTED, PRIMER NOT REQUIRED & PROVIDE 2 COATS LOW VOC EGGSHELL LATEX ENAMEL.

HOLLOW METAL FRAMES: PROVIDE 1 COAT PRIMER & 2 COATS ACRYLIC SEMI-GLOSS ENAMEL.


1ST COAT: S-W PRO INDUSTRIAL PRO-CRYL UNIVERSAL PRIMER, B66-310 SERIES (5 MILS W, 2 MILS D)
2ND COAT: S-W PRO INDUSTRIAL ACRYLIC SEMI-GLOSS, B66-650 SERIES
3RD COAT: S-W PRO INDUSTRIAL ACRYLIC SEMI-GLOSS, B66-650 SERIES (6 MILS W, 2.1 MILS D PER COAT)

WOOD TRIM/ MILLWORK (PAINTED): SCUFF, SAND AND PROVIDE PRIMER AS REQUIRED AND 2 COATS WATERBASED SEMI-GLOSS ENAMEL.

1ST COAT: S-W PREMIUM WALL & WOOD PRIMER, B28W8111 (4.0 MILS WET, 1.6 MILS DRY)
2ND COAT: S-W PRO INDUSTRIAL ACRYLIC SEMI-GLOSS, B66-650 SERIES
3RD COAT: S-W PRO INDUSTRIAL ACRYLIC SEMI-GLOSS, B66-650 SERIES (6.0 MILS WET, 2.2 MILS DRY PER COAT)

SEALANTS: FOR INTERIOR CONDITIONS PROVIDE SEALANTS WHEREVER REQUIRED TO FILL GAPS IN CONSTRUCTION JOINERY FOR CONSISTENT FINISH APPEARANCE PRIOR TO PAINTING. SEE ALSO FINISH CARPENTRY SPEC SECTION REQUIREMENTS. PROVIDE SEALANTS COMPATIBLE WITH SUBSTRATES AND EXTENDED PERFORMANCE INTERIOR APPLICATION: SILICONIZED ACRYLIC LATEX COMPLYING WITH ASTM C834, PECORA AC-20. WHERE APPLICATION IS TO BE PAINTED: SILICONIZED URETHANE, SHERWIN WILLIAMS SHERMAX. PROVIDE PRODUCT SUBMITTAL FOR ARCHITECT'S REVIEW AND APPROVAL. FOR EXTERIOR APPLICATION SEE DIVISION 07 THERMAL AND MOISTURE PROTECTION.

ACOUSTICAL SEALANTS: PROVIDE SEALANTS COMPATIBLE WITH SUBSTRATES AND EXTENDED PERFORMANCE WHICH COMPLY WITH ASTM C-919. SEALANT TO BE NON-HARDENING, NON-DRYING, NON-STAINING, AND NON-MIGRATING AND REMAIN PERMANENTLY FLEXIBLE. BASIS OF DESIGN: PECORA CHEMICAL CORPORATION, AC-20 FTR ACOUSTICAL SEALANT. PROVIDE SEALANTS WHERE INDICATED ON DRAWINGS. PROVIDE PRODUCT SUBMITTAL FOR ARCHITECT'S REVIEW AND APPROVAL.

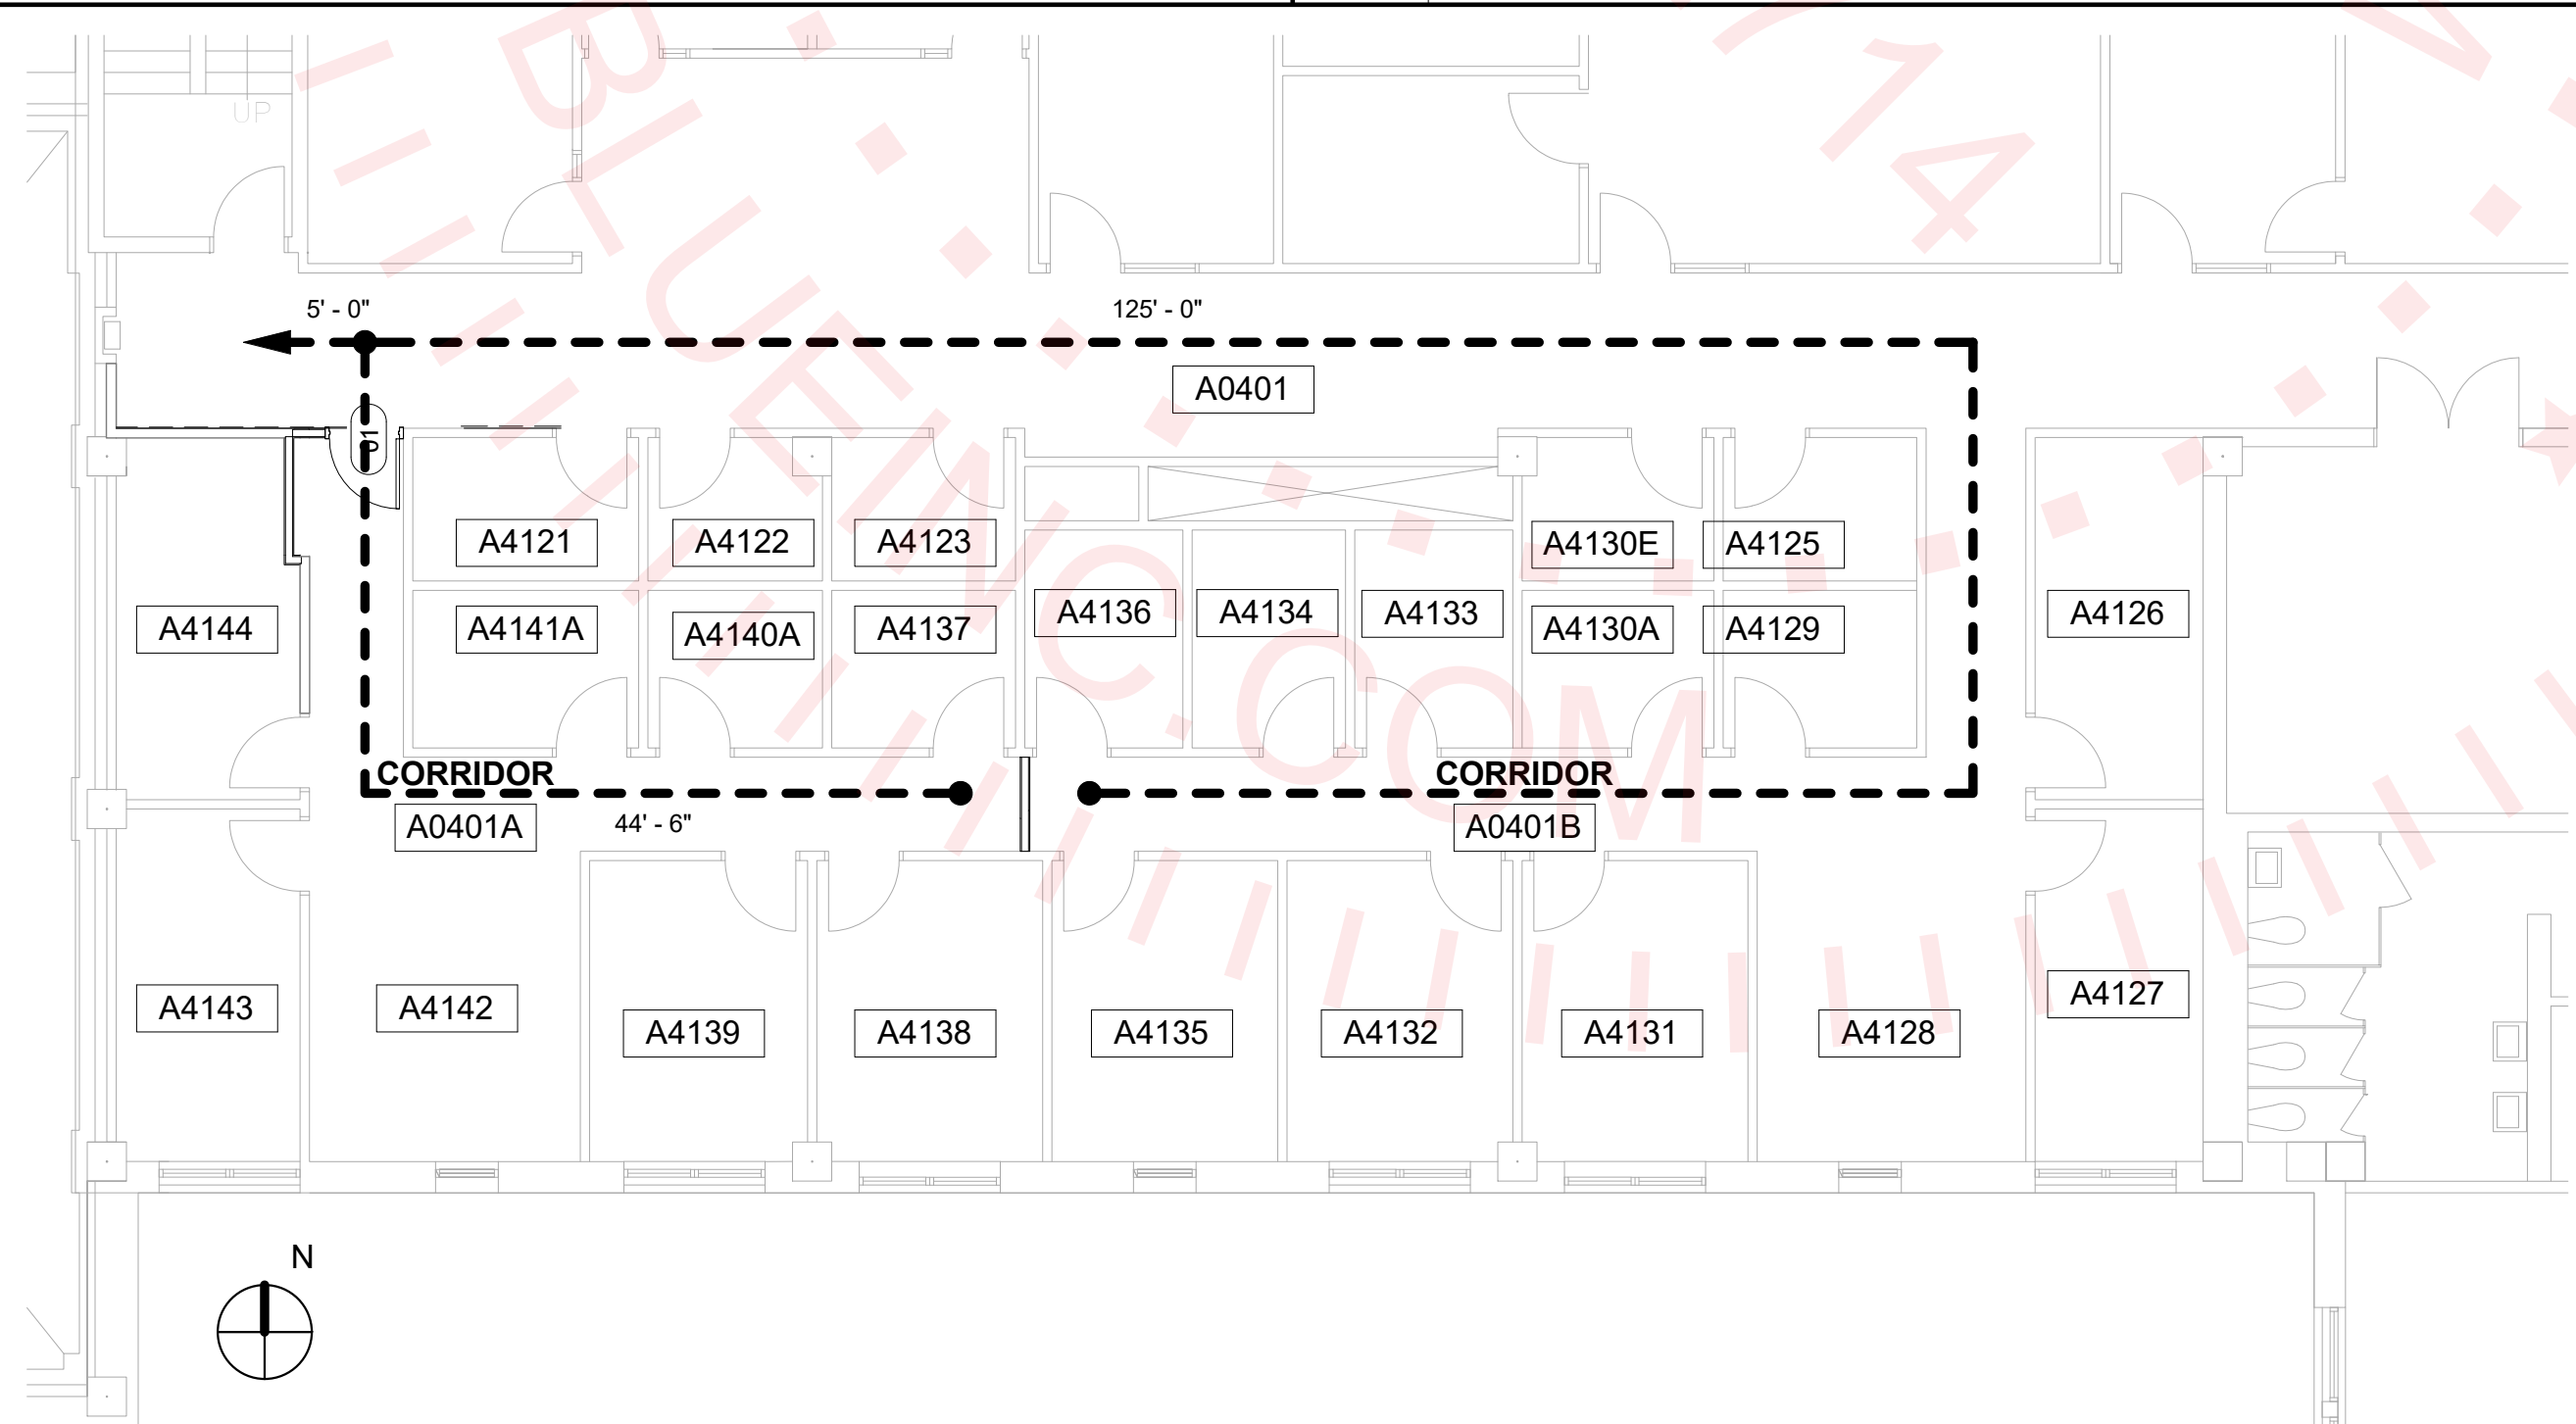

A5 LIFE SAFETY PLAN

MEANS OF EGRESS:

OCCUPANT LOAD:

SPACE AREA	AREA/ OCCUPANT	OCCUPANTS
VICTIM ADVOCATE PROGRAM RMS. 4126 - 4136	1041 SF/150 GROSS 1350 SF/150 GROSS	7 9

COMMON PATH OF EGRESS TRAVEL: MAX. 100' W/ SPRINKLER SYSTEM TABLE 1006.2.1

BLDG. EXIT ACCESS TRAVEL DISTANCE: MAX. 300' W/ SPRINKLER SYSTEM TABLE 1017.2

ACTUAL: FROM VAP SUITE (RMS. 4137 - 4144): 44' - 6" + 5' - 0" = **49' - 6"**
ACTUAL: FROM (RMS. 4126 - 4136): 125' - 0" + 5' - 0" = **130' - 0"**

MIN. CORRIDOR WIDTH REQ'D.: TABLE 1020.2

ACTUAL: **44"**

DEAD END CORRIDOR LENGTH: 1020.4 EXCEPTION 2


ACTUAL: **50"**

J9 CODE ANALYSIS


FLORIDA BUILDING CODE, ACCESSIBILITY - 202.3 ALTERATIONS

1. ALTERATIONS ARE PROVIDED AT OFFICE A4144 (WALL MODIFICATIONS) TO PROVIDE ACCESSIBLE CLEARANCES TO A NEW SUITE ENTRANCE DOOR WITH ADA COMPLIANT LEVER LOCKSET.

F9 ACCESSIBILITY

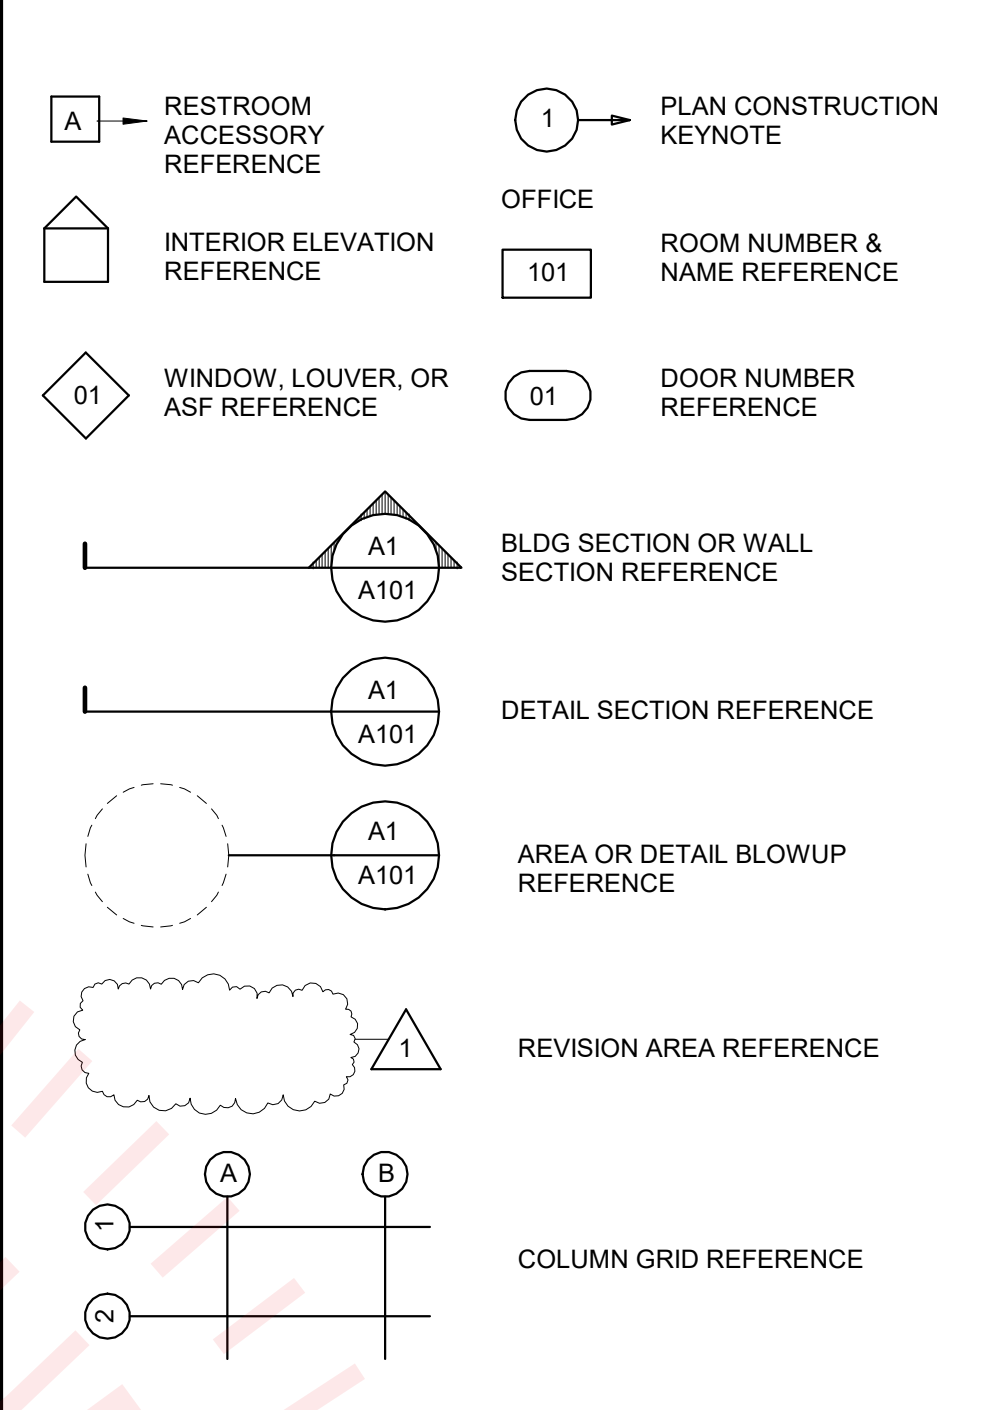

J13 GRAPHIC SYMBOLS

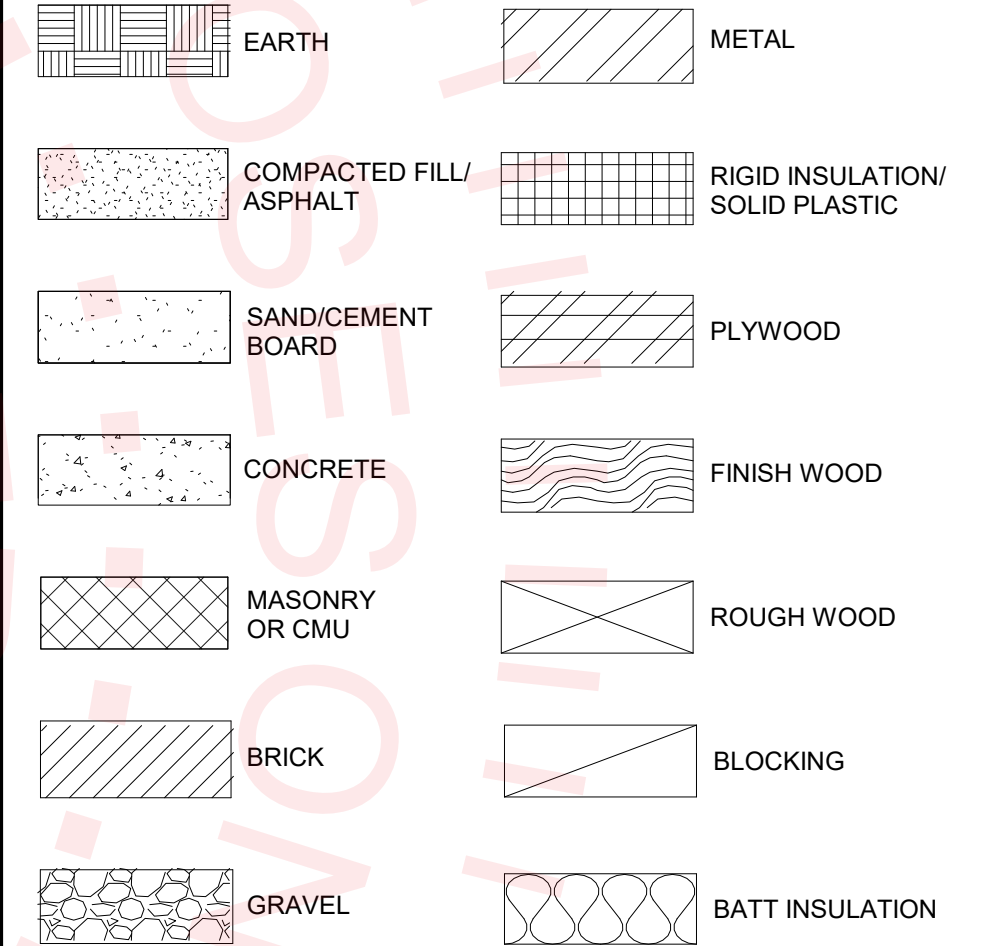

E13 MATERIAL LEGEND

DRAWING LIST	
Sheet No.	Sheet Name
G001	TITLE SHEET
G002	GENERAL INFORMATION & SPECIFICATIONS
A101	FLOOR PLANS, REFLECTED CEILING PLAN & NOTES

A13 DRAWING LIST

1. THESE PLANS ARE THE PROPERTY OF FLORIDA STATE UNIVERSITY. USE OR COPY IS PERMITTED BY CONTRACT ONLY. ANY UNAUTHORIZED USE OF, OR REVISIONS TO THESE PLANS, REGARDLESS OF SCOPE, WITHOUT WRITTEN PERMISSION OF THE ARCHITECTURAL DESIGN OFFICE, FACILITIES DESIGN AND CONSTRUCTION, FLORIDA STATE UNIVERSITY, IS PROHIBITED.

2. THE CONTRACTOR SHALL FIELD VERIFY ALL DIMENSIONS, CONDITIONS AND BUILDING SYSTEMS RELATED TO THE WORK INDICATED IN THE CONSTRUCTION DRAWINGS AS OPERATIONAL. IF THE CONTRACTOR FINDS ANY DISCREPANCIES IN THE STATUS OF THE BUILDING CONDITIONS OR SYSTEMS OR IS UNABLE TO INTERPRET THE CONSTRUCTION DOCUMENTS, THE CONTRACTOR IS RESPONSIBLE FOR REQUESTING CLARIFICATION IN WRITING TO THE ARCHITECT. IF THE CONTRACTOR PROCEEDS WITH ANY WORK BEFORE OBTAINING CLARIFICATION, THE CONTRACTOR SHALL BE HELD RESPONSIBLE FOR ALL ASSOCIATED DEFICIENCIES AND RELATED COSTS.

3. PRIOR TO COMMENCEMENT OF THE WORK, THE CONTRACTOR SHALL VISIT THE SITE TO EXAMINE THE PREMISES & BECOME FAMILIAR WITH EXIST. CONDITIONS UNDER WHICH HE WILL BE OBLIGED TO OPERATE AND COMPLETE THE WORK UNDER THIS CONTRACT. THE CONTRACTOR SHALL ALSO PREVIEW & COORDINATE THE WORK OF ALL SUBTRADES TO AVOID CONFLICTS IN BUILDING SYSTEMS CONSTRUCTION. NO ALLOWANCE WILL BE MADE SUBSEQUENTLY IN THIS CONNECTION ON BEHALF OF THE CONTRACTOR FOR ANY ERROR, NEGLIGENCE OR LACK OF COORDINATION ON HIS PART.

4. THE CONTRACTOR SHALL COORDINATE THE WORK WITH ALL SUBCONTRACTORS AND SEQUENCE DEMOLITION AND CONSTRUCTION TO MINIMIZE INTERRUPTIONS TO THE NORMAL OPERATIONS OF THE BUILDINGS. THIS COORDINATION SHALL ALSO BE REVIEWED AND APPROVED BY THE BUILDING FACILITY MANAGER AND THE OWNER'S USER REPRESENTATIVE.

5. THE CONTRACTOR SHALL MAINTAIN ALL EGRESS PATHS CLEAR. WHERE AN EGRESS PATH MUST BE TEMPORARILY BLOCKED, THE CONTRACTOR SHALL PROVIDE BARRICADES AND DIRECTIONAL SIGNS AS NEEDED TO MAINTAIN EXITING AND SAFETY.

6. THE CONTRACTOR SHALL ERECT AND MAINTAIN ALL REASONABLE SAFEGUARDS FOR SAFETY AND HEALTH INCLUDING POSTING DANGER SIGNS, AND OTHER WARNING AGAINST HAZARDS, AS WELL AS PROMULGATING SAFETY REGULATIONS.

7. THE CONTRACTOR SHALL BE RESTRICTED TO AREAS SPECIFIED BY OWNER FOR ON SITE STORAGE OF CONSTRUCTION MATERIALS.

8. THE CONTRACTOR SHALL MAINTAIN A CLEAN WORK PREMISE AT ALL TIMES AND SHALL CLEAN CONSTRUCTION SITE OF ALL DEBRIS DAILY. THE WORK PREMISE SHALL BE CLEAN AT COMPLETION OF THE JOB AND BEFORE FINAL PAYMENT IS MADE.

9. ALL WORK SHALL COMPLY WITH APPLICABLE OSHA AND E.P.A. REGULATIONS AND GUIDELINES.

10. ARCHITECTURAL LAYOUTS TAKE PRECEDENT OVER DIAGRAMMATIC DRAWINGS BY THE ENGINEER. ANY CONFLICTS BETWEEN ENGINEER'S AND ARCHITECT'S DRAWING SHOULD BE RESOLVED IN WRITING PRIOR TO CONSTRUCTION.

11. ALL NEW WORK TO BE IN ACCORDANCE WITH THE BUILDING CODES LISTED BELOW, BEING THE LATEST EDITION AS ADOPTED BY THE BUILDING AUTHORITIES HAVING JURISDICTION. WHERE CONFLICTS OCCUR BETWEEN ENGINEER'S AND BETWEEN CONSTRUCTION DOCUMENTS AND CODES, THE MOST RESTRICTIVE REQUIREMENTS SHALL GOVERN.

FLORIDA BUILDING CODE, BUILDING	2023, 8TH EDITION
FLORIDA BUILDING CODE, MECHANICAL	2023, 8TH EDITION
FLORIDA BUILDING CODE, FUEL GAS	2023, 8TH EDITION
FLORIDA BUILDING CODE, PLUMBING	2023, 8TH EDITION
FLORIDA BUILDING CODE, ACCESSIBILITY	2023, 8TH EDITION
FLORIDA FIRE PREVENTION CODE	2023, 8TH EDITION
NATIONAL ELECTRICAL CODE	2020 EDITION

12. CODE COMPLIANCE NOTES:

OCCUPANCY TYPE: BUSINESS
EXIST. SQ. FOOTAGE: 1045 SF
ALL INTERIOR FINISHES: CLASS C MINIMUM FLAME SPREAD RATING
CLASS A OR B AT EXITS & EXIT ACCESS PER TABLE 803.9

CONSTRUCTION TYPE: TYPE IIB (ASSUMED) PER FBC
NONBEARING WALLS, INTERIOR: GYPSUM BOARD & STEEL STUD
FLOOR CONSTRUCTION: CONCRETE SLAB

COMPLIANCE METHOD: LEVEL II, FLORIDA EXISTING BUILDING CODE, 8TH EDITION, 2023, SECT. 801

FIRE ALARM SYSTEM STATUS: EXISTENT
FIRE SPRINKLER SYSTEM STATUS: EXISTENT

F16 GENERAL INFORMATION

No.	Submissions:	Drawn:	Checked:	Date:
1	95% CONSTRUCTION DOCUMENTS		SM	04/30/24
2	100% CONSTRUCTION DOCUMENTS		SM	05/13/24

No.	Revision Description	Drawn by/Checked by	Date

FLORIDA STATE UNIVERSITY
FACILITIES PLANNING, DESIGN and CONSTRUCTION
FACILITIES DESIGN OFFICE
125 MENDEHALL BUILDING A
TALLAHASSEE, FLORIDA 32306-4153
(850)-644-6801




Project Name:
VAP Suite Modifications
Department of Student Support and Transitions

Sheet Title:
GENERAL INFORMATION & SPECIFICATIONS

Subconsultant:

5/13/2024 | 10:54 AM EDT

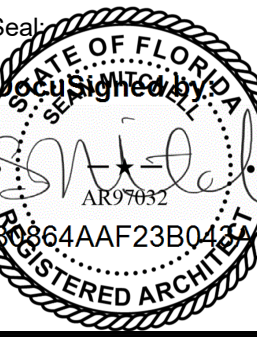

Printed copies of this drawing are not considered signed and sealed and the signature must be verified on any electronic copies.

Project Folder Name:
2400757_UCA_VAP_Suite_Modifications\01_DesignModel.rvt

FSU Project No:
2400757


Building Name & No.:
University Center Building A, No. 0223

Drawing No:
G002

$\frac{1}{8}" = 1'-0"$	
------------------------	--



H10	DOOR & HARDWARE SCHEDULE
-----	--------------------------

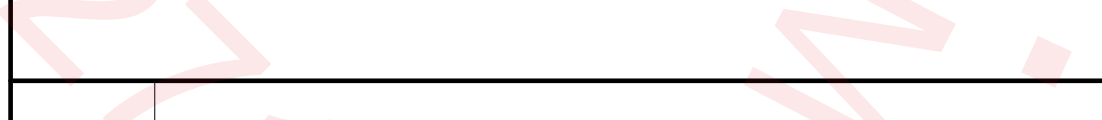[illegible]

A13 COLOR SCHEDULE

GENERAL NOTES:

- ALL FIXTURES SHOWN IN HALFTONE ARE EXISTING TO REMAIN, UNLESS NOTED OTHERWISE.
- ALL FIXTURES SHOWN IN DASHED OUTLINE ARE TO BE SALVAGED & RELOCATED FOR REUSE IN NEW CONSTRUCTION, UNLESS NOTED OTHERWISE.

$1/4'' = 1'-0''$	
------------------	--

QUESTIONS

NO SCALE	

[illegible]

Project Name: _____

Sheet Title:

Subconsultant: _____

Seal: 	Project Folder Name: 2400757_LICA_VAB_Suite_Modifications\	Drawing No:
---	---	-------------

FSU Project No: A101

	University Center Building A, No. 0223		