



FLORIDA STATE UNIVERSITY
FACILITIES PLANNING, DESIGN and CONSTRUCTION
FACILITIES DESIGN OFFICE
125 MENDENHALL BUILDING A
TALLAHASSEE, FLORIDA 32306-4153
(850)-644-6801

100% Construction Documents

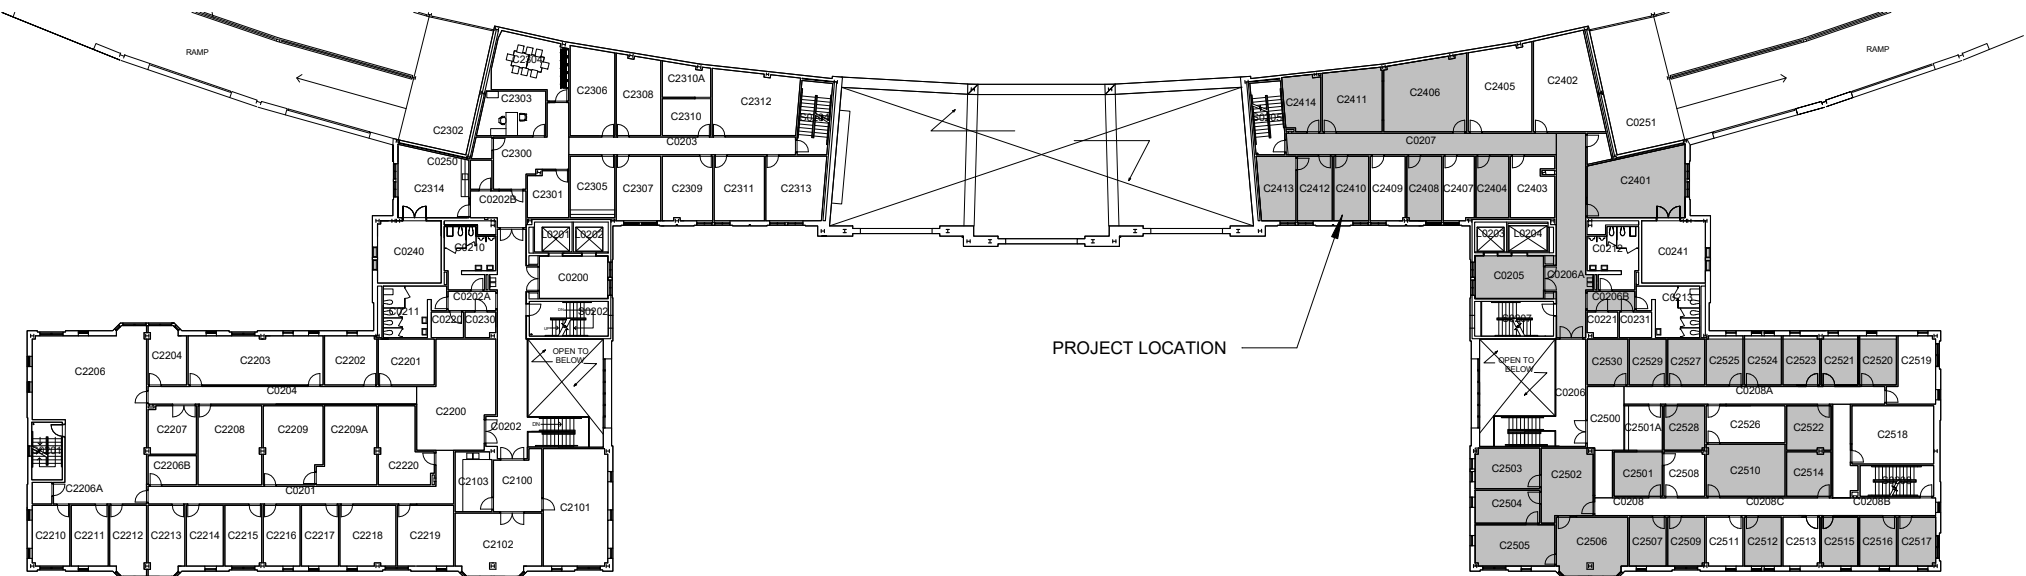
April 22nd, 2024

2nd & 3rd Floor Interior Improvements

University Center Building C


FSU Project No.:2400689

College of Social Work




KEY PLAN

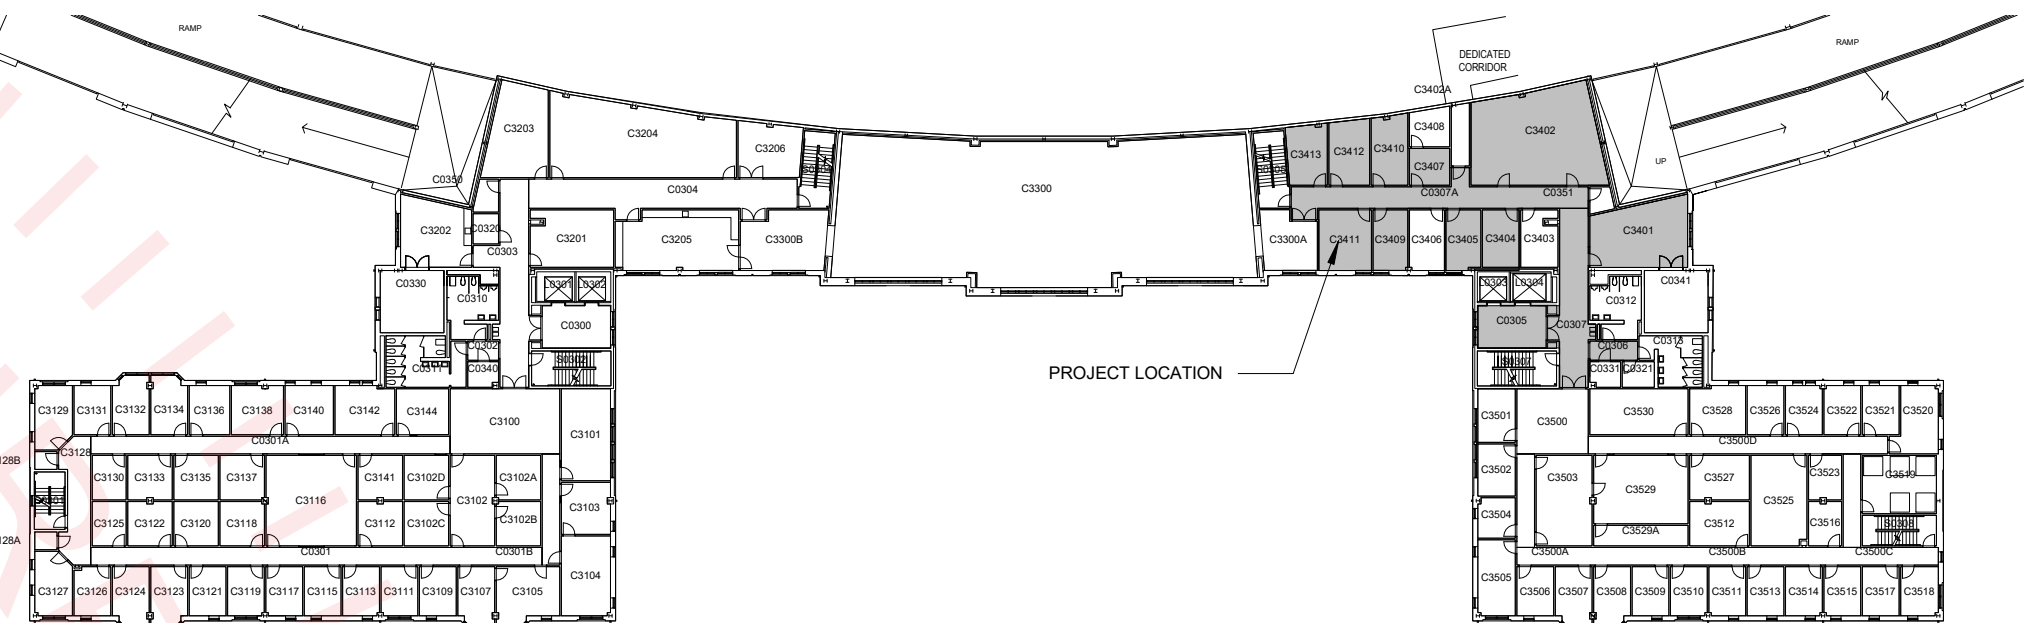2ND FL.



KEY PLAN

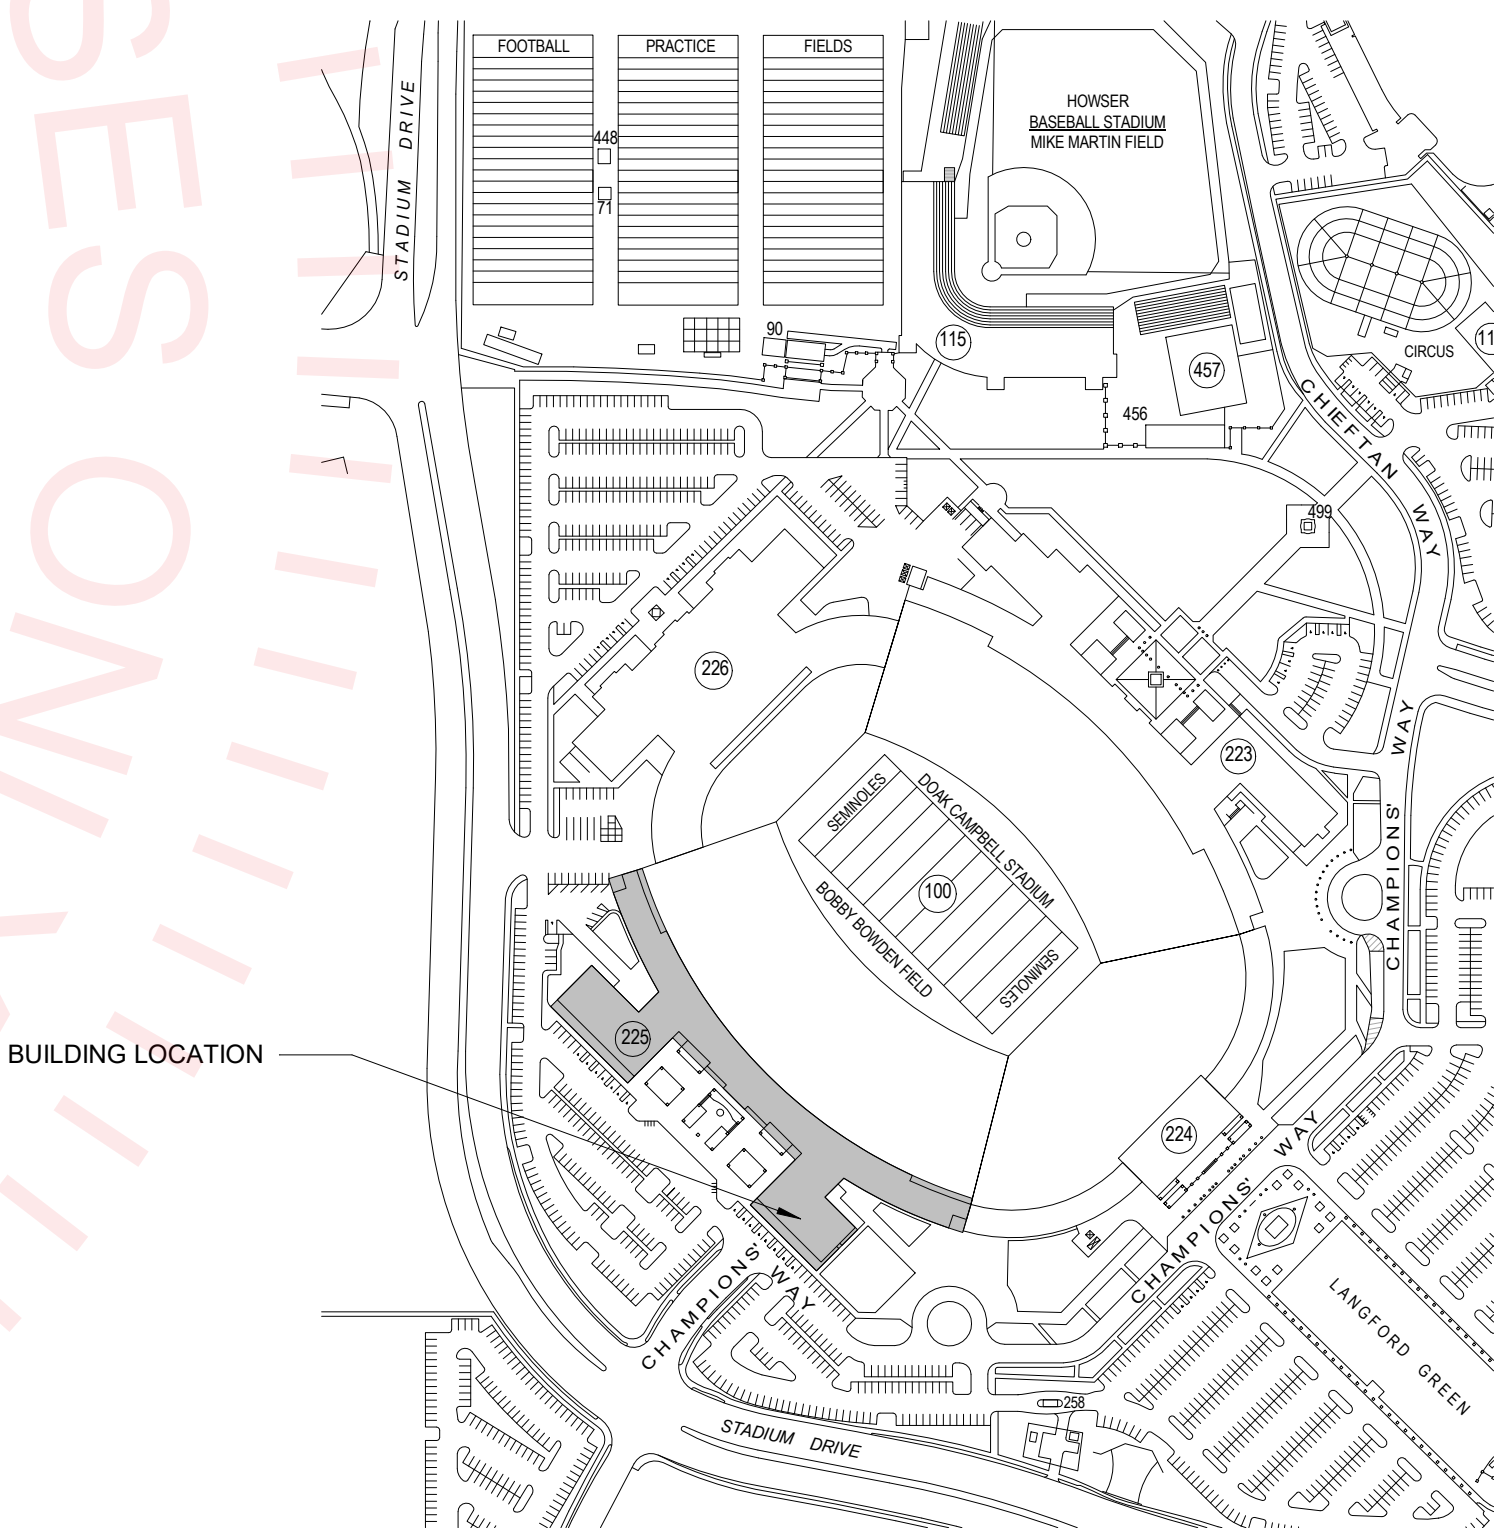3RD FL.






LOCATION PLAN

G001

2400689_UCC_2nd_3rd_FI_Interior_Improvements\
01_DesignUCCModel.rvt

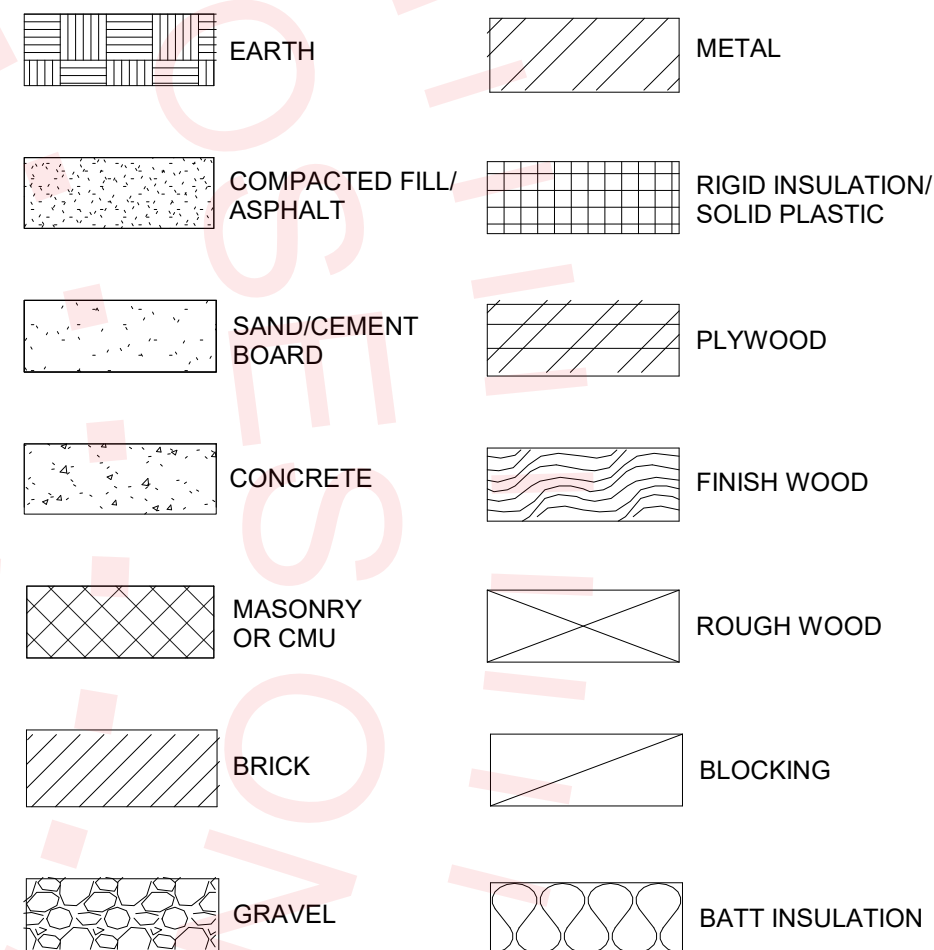2400689_UCC_2nd_3rd_FI_Interior_Improvements 01_DesignUCCModel.rvt

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19										
01 GENERAL REQUIREMENTS: 1) COMPLY WITH THE REQUIREMENTS OF THE "AGREEMENT BETWEEN OWNER AND CONSTRUCTION MANAGER" IN EFFECT FOR CONSTRUCTION MANAGEMENT SERVICES FOR MINOR PROJECTS AT FLORIDA STATE UNIVERSITY. 2) SUMMARY OF WORK: BASE BID SCOPE TO INCLUDE: NEW CEILINGS, RETROFIT LIGHTS, & CONTROLS IN ROOMS 2401, 2502 - 2506, & 3401, NEW ELECTRICAL MODIFICATIONS FOR CONFERENCE ROOM SCHEDULERS, FLOOR POWER/COMMUNICATION, AND MICROWAVE, NEW FLOORING, WALL BASE AND PAINT IN 2ND & 3RD FL CORRIDORS, ELEVATOR LOBBIES, CONFERENCE ROOMS, AND ROOMS 2502 - 2506, NEW CORNER GUARDS IN 2ND & 3RD FL CORRIDORS, NEW ROLLER SHADES IN 2401 & 3401, NEW DEDICATION PLAQUE AT 2401 DOOR. ADD ALTERNATE NO. 1 SCOPE TO INCLUDE: NEW FLOORING, WALL BASE, AND PAINT IN OFFICES INDICATED ON THE 2ND & 3RD FL. 3) COMPLY WITH REQUIREMENTS OF APPLICABLE PRODUCT OR TRADE STANDARDS, EXCEPT WHEN MORE RIGID REQUIREMENTS ARE SPECIFIED OR ARE REQUIRED BY APPLICABLE CODES. 4) WHETHER LISTED OR NOT, PROVIDE SUBMITTALS AS REQUIRED BY THE PROJECT SCOPE TO ENSURE ACCEPTANCE OF THE SPECIFIED OR INDICATED PRODUCT(S). SUBMITTALS ARE TO INCLUDE THE MANUFACTURER'S INFORMATION WITH PROJECT SPECIFIC PROPERTY SELECTIONS INDICATED. DO NOT INCLUDE UNRELATED MANUFACTURER CATALOG PRODUCT INFORMATION. ALLOW ENOUGH TIME FOR SUBMITTAL REVIEW, INCLUDING TIME FOR RESUBMITTALS. NO EXTENSION OF THE CONTRACT TIME WILL BE AUTHORIZED BECAUSE OF FAILURE TO TRANSMIT SUBMITTALS ENOUGH IN ADVANCE OF THE WORK TO PERMIT APPROVAL PROCESSING. PROVIDE SUBMITTALS IN ELECTRONIC FORMAT, WHERE ACTUAL PRODUCT SAMPLES ARE REQUIRED, PROVIDE MINIMUM OF TWO (2) SAMPLES, ONE OF WHICH WILL BE RETURNED TO THE CONTRACTOR. 5) SUBSTITUTIONS: ALL PRODUCTS SPECIFIED MAY BE SUBSTITUTED WITH AN APPROVED EQUAL UNLESS SPECIFICALLY NOTED OTHERWISE. APPROVAL MUST BE IN WRITING PRIOR TO BID SUBMITTAL, UPON REVIEW OF SUBMITTAL CONTAINING COMPLETE DOCUMENTATION. 6) SHOP DRAWINGS: PREPARE PROJECT-SPECIFIC INFORMATION, DRAWN ACCURATELY TO SCALE. DO NOT BASE SHOP DRAWINGS ON REPRODUCTIONS OF THE CONTRACT DOCUMENTS OR STANDARD PRINTED DATA. 7) COMPLY WITH THE REQUIREMENTS OF THE FSU DESIGN GUIDELINES AND SPECIFICATIONS. REFER TO: HTTP://WWW.FACILITIES.FSU.EDU/DEPTS/DESIGNCONSTR/GUIDELINES.PHP 8) THE CONTRACTOR SHALL FIELD VERIFY ALL EXISTING CONDITIONS. IF CONFLICTS OR DISCREPANCIES BETWEEN BUILDING SYSTEMS ARE OBSERVABLE HE SHALL NOTIFY THE FACILITIES DESIGN & CONSTRUCTION PROJECT MANAGER IN WRITING FOR RESOLUTION PRIOR TO COMMENCING CONSTRUCTION OR INSTALLATION. 9) THE CONTRACTOR SHALL LIMIT THE IMPACT OF HIS WORK ON ALL SYSTEMS, EQUIPMENT AND SECURITY OF ALL AREAS WITHIN THE SCOPE OF THIS WORK. COORDINATE PROTECTION AND SECURITY OF AREAS WITH THE DEPARTMENT. THE FOLLOWING SPECIFICATIONS ARE GENERAL IN NATURE AND APPLY ONLY WHERE APPLICABLE, AS SHOWN ON THE DRAWINGS.					09 FINISHES CONT'D: PAINTING: TEST ALL EXISTING SURFACES. PREP WALLS PRIOR TO PAINTING FOR CONSISTENT APPEARANCE: REPAIR ANY EXISTING MINOR SURFACE DEFECTS TO MATCH ADJACENT CONDITIONS – INCLUDE DEFECTS SUCH AS EXCESS DRYWALL MUD, DINGS, DAMAGE DUE TO WALL BASE REMOVAL, SCRAPES AND HOLES. PROVIDE PRIMING AND ANY OTHER SURFACE PREPARATION RECOMMENDED BY THE PAINT MANUFACTURER FOR THE FINISH SPECIFIED, AT EXISTING DOOR FRAMES TO BE REPAINTED; REMOVE EXISTING DOOR FRAME SILENCERS AND REPLACE WITH NEW AFTER REPAINTING. REMOVE ANY EXISTING WALL ESCUTCHEON AND INFRASTRUCTURE PLATES PRIOR TO PAINTING, CLEAN AND REINSTALL PLATES AFTER PAINTING. PROVIDE NUMBER OF COATS AS REQUIRED TO ACHIEVE UNIFORM COVERAGE AND APPEARANCE AS DETERMINED BY THE FSU DESIGN PROJECT MANAGER; PAINT CORNER TO CORNER WHERE REQUIRED FOR UNIFORM APPEARANCE ALONG A WALL, CEILING OR OTHER SURFACE. PROVIDE SUBMITTAL LISTING ALL PAINT SYSTEMS WITH REQUIRED SURFACE MILLAGES AND RELATED PRODUCTS FOR REVIEW AND APPROVAL. AT PROJECT COMPLETION TURN OVER ALL REMAINING PAINT TO DEPARTMENT – LABEL EACH CAN WITH AREA USED AND ROOM NUMBERS WHERE APPLIED PAINT SYSTEMS: SHERWIN-WILLIAMS. ALTERNATE MANUFACTURER COMPUTER COLOR MATCHES NOT ALLOWED FOR SPECIFIED COLOR SELECTIONS. GYPSUM BOARD PARTITIONS & CEILINGS: PROVIDE 1 COAT PRIMER & 2 COATS LOW-VOC EGGSHELL LATEX ENAMEL. 1ST COAT: S-W PROMAR 200 ZERO VOC LATEX PRIMER, B28W2600 (4 MILS WET, 1.5 MILS DRY) 2ND COAT: S-W PROMAR 200 ZERO VOC LATEX EG-SHEL, B20-2600 SERIES 3RD COAT: S-W PROMAR 200 ZERO VOC LATEX EG-SHEL, B20-2600 SERIES (4 MILS WET, 1.6 MILS DRY PER COAT) * AT GYPSUM BOARD PARTITIONS & CEILINGS - PREVIOUSLY PAINTED, PRIMER NOT REQUIRED & PROVIDE 2 COATS LOW VOC EGGSHELL LATEX ENAMEL. MASONRY - CMU: PROVIDE 1 COAT PRIMER AND 2 COATS ZERO-VOC EG-SHEL LATEX ENAMEL. 1ST COAT: S-W LOXON® BLOCK SURFACER, A24W200 (50-100 SQ FT/GAL) 2ND COAT: S-W PROMAR 200 ZERO VOC LATEX EG-SHEL, B20-2600 SERIES 3RD COAT: S-W PMMAR 200 ZERO VOC LATEX EG-SHEL, B20-2600 SERIES (4.0 MILS WET, 1.7 MILS DRY PER COAT) HOLLOW METAL FRAMES: PROVIDE 1 COAT PRIMER & 2 COATS ACRYLIC SEMI-GLOSS ENAMEL. 1ST COAT: S-W PRO INDUSTRIAL PRO-CRYL UNIVERSAL PRIMER, B66-310 SERIES (5 MILS WET, 2 MILS DRY) 2ND COAT: S-W PRO INDUSTRIAL ACRYLIC, SEMI-GLOSS, B66-650 SERIES 3RD COAT: S-W PRO INDUSTRIAL ACRYLIC, SEMI-GLOSS, B66-650 SERIES (6 MILS WET, 2.1 MILS DRY PER COAT) * AT HOLLOW METAL FRAMES - PREVIOUSLY PAINTED: SAND EXISTING METAL SURFACES SMOOTH, PROVIDE PRIMER TOUCH-UP AS NEEDED AND 2 COATS ACRYLIC SEMI-GLOSS ENAMEL. WOOD DOORS & CHAIR RAIL (PAINTED): PROVIDE PRIMER AS REQUIRED AND 2 COATS SEMIGLOSS ENAMEL. 1ST COAT: S-W PREMIUM WALL & WOOD PRIMER, B28W8111 (4.0 MILS WET, 1.6 MILS DRY) 2ND COAT: S-W PRO INDUSTRIAL ACRYLIC SEMI-GLOSS, B66-650 SERIES 3RD COAT: S-W PRO INDUSTRIAL ACRYLIC SEMI-GLOSS, B66-650 SERIES (6.0 MILS WET, 2.2 MILS DRY PER COAT) *AT DOORS - PREVIOUSLY PAINTED, SCUFF SAND & RE-FINISH DOOR/TRIM WITH PRIMER AND 2 COATS SEMI-GLOSS ENAMEL.					12 FURNISHINGS: WINDOW TREATMENT: PROVIDE WINDOW TREATMENT ON INTERIOR WINDOWS INDICATED ON PLANS. BASIS OF DESIGN: DRAPER SHEERWEAVE SW2500, COLOR: OYSTER/BEIGE, DRAPER STANDARD MANUAL FLEXSHADE ROLLING MECHANISM WITH IVORY FASCIA. FIELD VERIFY ALL REQUIRED DIMENSIONS. PROVIDE SUBMITTALS FOR ARCHITECTS REVIEW AND APPROVAL. 26 ELECTRICAL: FIRE STROBES: EXISTING FIRE STROBES TO BE SALVAGED AND RELOCATED ARE TO BE COORDINATED WITH FSU'S EHS FIRE SHOP. SAM SEVOR: 850-443-7050.					09 FINISHES: RESILIENT TILE FLOORING, COMPLY WITH ASTM E648- CLASS 1, ASTM E 662 LESS THAN 450. PREP SUBSTRATE AS REQUIRED BY MANUFACTURER; PROVIDE UNDERLAYMENT AND PATCHING COMPOUND AS NEEDED FOR EVEN SURFACE. PROVIDE ADHESIVE BY MANUFACTURER FOR INTENDED USE AND CONDITION. INSTALL IN ACCORDANCE WITH CURRENT INSTALLATION GUIDE. CONDITION SPACE AND TEST & PREPARE SUBSURFACES AS RECOMMENDED BY MANUFACTURER INCLUDING MOISTURE/PH TESTS - PROVIDE PRODUCTS TO MITIGATE EXCESSIVE MOISTURE CONDITIONS IF REQUIRED. PROVIDE SUBMITTALS OF ALL RELATED PRODUCTS AND ACCESSORIES. PROVIDE TO THE DEPARTMENT 10% OF INSTALLED AREA FOR USEABLE OVERSTOCK OF EACH FLOORING TYPE. CONDUCT PRE-INSTALLATION CONFERENCE WITH REPRESENTATIVES FOR THE DESIGNER, INSTALLER AND FSU BUILDING SERVICES. REVIEW EXISTING CONDITIONS AND INSTALLATION REQUIREMENTS FINISH FLOORING ACCESSORIES: FIELD VERIFY AND PROVIDE RESILIENT REDUCERS OR TRANSITIONS WHERE NEEDED TO ABUT DISSIMILAR OR UNEVEN FLOOR FINISHES; MATCH MANUFACTURE AND COLOR OF RESILIENT WALL BASE WHERE EXISTING, OR AS SPECIFIED BY DESIGNER. PROVIDE SUBMITTAL(S) OF EACH TYPE, COLOR, AND PATTERN FOR ARCHITECTS REVIEW. POWER TAPE INSTALLATION METHOD NOT ALLOWED FOR STAIR NOSING INSTALLATION. WHERE STAIRS ARE INDICATED, ALSO PROVIDE TREADS, RISERS AND SKIRTS. FOR OVERSTOCK USE: PROVIDE TO THE DEPARTMENT 5 YARDS OF EACH TYPE, COLOR, AND PATTERN INSTALLED, DELIVERED, WRAPPED, AND LABELED. RESILIENT BASE: SEE COLOR SCHEDULE ON DRAWINGS FOR MANUFACTURER. RUBBER COVE BASE, 1/8" THICK MINIMUM, TYPE TS, COMPLYING WITH ASTM PERFORMANCE TEST ASTM F1861. PRECUT 4 FT SECTIONS ARE NOT ACCEPTABLE IN RENOVATION PROJECTS. THE WORK SCOPE SHALL INCLUDE REPAIR OF DAMAGE TO THE EXISTING WALLS CAUSED BY REMOVAL OF EXISTING WALL BASE AS REQUIRED TO MATCH ADJACENT CONDITIONS. PROVIDE TO THE DEPARTMENT 2% OF INSTALLED LINEAR FOOTAGE FOR USEABLE OVERSTOCK OF EACH BASE TYPE. CARPET: CARPET SHALL BE VINYL BACKED, DIRECT GLUE DOWN MODULAR OR APPROVED EQUAL. ALL CARPET SHALL WITHSTAND A MINIMUM CRITICAL RADIANT FLUX OF 9.22 WATTS PER SQUARE CENTIMETER TESTED PER NFPA 253. COMPLY WITH FSU DESIGN GUIDELINES. THE CARPET CONTRACTOR SHALL BE RESPONSIBLE FOR THE INSTALLATION OF RESILIENT BASE IF REQUIRED BY THE PROJECT SCOPE. PROVIDE VINYL REDUCERS OR TRANSITIONS WHERE NEEDED TO ABUT DISSIMILAR OR UNEVEN FLOOR FINISHES; MATCH COLOR OF RUBBER BASE IF PROVIDED OR AS DIRECTED BY THE PROJECT DESIGNER. PROVIDE SUBMITTALS FOR ARCHITECTS REVIEW. PROVIDE PRODUCTS TO MITIGATE EXCESSIVE MOISTURE CONDITIONS IF REQUIRED. SUBMIT SAMPLE(S) FOR APPROVAL. PROVIDE TO THE DEPARTMENT 5% OF INSTALLED AREA FOR USEABLE OVERSTOCK OF EACH CARPET TYPE. CONDUCT PRE-INSTALLATION CONFERENCE WITH REPRESENTATIVES FOR THE DESIGNER, INSTALLER AND FSU BUILDING SERVICES. REVIEW EXISTING CONDITIONS AND INSTALLATION REQUIREMENTS ACOUSTICAL CEILING PANELS: PROVIDE CEILINGS WITH A CLASS A RATING. 24" X 24" CAST OR MOLDED MINERAL BASED ACOUSTICAL PANELS, 9/16" EXPOSED TEE METAL SUSPENSION SYSTEM COMPLYING WITH ASTM C 635 REQUIREMENTS. PROVIDE GALVANIZED OR ALUMINUM SUSPENSION SYSTEMS IN WET AREAS. PROVIDE CONTINUOUS GRID AND MOLDING LENGTHS ALONG PERIMETERS AND MAIN RUNNERS AS NEEDED TO MINIMIZE INTERMEDIATE BUTT JOINTS. INSTALL SHADOW OR REVEAL MOLDS WHERE REQUIRED FLUSH WITH MAIN GRID SYSTEM – TRIM REGULAR PANELS TO PROVIDE RECESS EDGES THAT LAY FLUSH ON SHADOW MOLDS. PROVIDE TO THE DEPARTMENT 5% OF INSTALLED AREA FOR USEABLE OVERSTOCK OF EACH PANEL TYPE.					01 GENERAL REQUIREMENTS: 1. THESE PLANS ARE THE PROPERTY OF FLORIDA STATE UNIVERSITY. USE OR COPY IS PERMITTED BY CONTRACT ONLY. ANY UNAUTHORIZED USE OF, OR REVISIONS TO THESE PLANS, REGARDLESS OF SCOPE, WITHOUT WRITTEN PERMISSION OF THE ARCHITECTURAL DESIGN OFFICE, FACILITIES DESIGN AND CONSTRUCTION, FLORIDA STATE UNIVERSITY, IS PROHIBITED. 2. THE CONTRACTOR SHALL FIELD VERIFY ALL DIMENSIONS, CONDITIONS AND BUILDING SYSTEMS RELATED TO THE WORK INDICATED IN THE CONSTRUCTION DRAWINGS AS OPERATIONAL. IF THE CONTRACTOR FINDS ANY DISCREPANCIES IN THE STATUS OF THE BUILDING CONDITIONS OR SYSTEMS OR IS UNABLE TO INTERPRET THE CONSTRUCTION DOCUMENTS, THE CONTRACTOR IS RESPONSIBLE FOR REQUESTING CLARIFICATION IN WRITING TO THE ARCHITECT. IF THE CONTRACTOR PROCEEDS WITH ANY WORK BEFORE OBTAINING CLARIFICATION, THE CONTRACTOR SHALL BE HELD RESPONSIBLE FOR ALL ASSOCIATED DEFICIENCIES AND RELATED COSTS. 3. PRIOR TO COMMENCEMENT OF THE WORK, THE CONTRACTOR SHALL VISIT THE SITE TO EXAMINE THE PREMISES & BECOME FAMILIAR WITH EXIST. CONDITIONS UNDER WHICH HE WILL BE OBLIGED TO OPERATE AND COMPLETE THE WORK UNDER THIS CONTRACT. THE CONTRACTOR SHALL ALSO PREVIEW & COORDINATE THE WORK OF ALL SUBTRADES TO AVOID CONFLICTS IN BUILDING SYSTEMS CONSTRUCTION. NO ALLOWANCE WILL BE MADE SUBSEQUENTLY IN THIS CONNECTION ON BEHALF OF THE CONTRACTOR FOR ANY ERROR, NEGLIGENCE OR LACK OF COORDINATION ON HIS PART. 4. THE CONTRACTOR SHALL COORDINATE THE WORK WITH ALL SUBCONTRACTORS AND SEQUENCE DEMOLITION AND CONSTRUCTION TO MINIMIZE INTERRUPTIONS TO THE NORMAL OPERATIONS OF THE BUILDINGS. THIS COORDINATION SHALL ALSO BE REVIEWED AND APPROVED BY THE BUILDING FACILITY MANAGER AND THE OWNER'S USER REPRESENTATIVE. 5. THE CONTRACTOR SHALL MAINTAIN ALL EGRESS PATHS CLEAR. WHERE AN EGRESS PATH MUST BE TEMPORARILY BLOCKED, THE CONTRACTOR SHALL PROVIDE BARRICADES AND DIRECTIONAL SIGNS AS NEEDED TO MAINTAIN EXITING AND SAFETY. 6. THE CONTRACTOR SHALL ERECT AND MAINTAIN ALL REASONABLE SAFEGUARDS FOR SAFETY AND HEALTH INCLUDING POSTING DANGER SIGNS, AND OTHER WARNING AGAINST HAZARDS, AS WELL AS PROMULGATING SAFETY REGULATIONS. 7. THE CONTRACTOR SHALL BE RESTRICTED TO AREAS SPECIFIED BY OWNER FOR ON SITE STORAGE OF CONSTRUCTION MATERIALS. 8. THE CONTRACTOR SHALL MAINTAIN A CLEAN WORK PREMISE AT ALL TIMES AND SHALL CLEAN CONSTRUCTION SITE OF ALL DEBRIS DAILY. THE WORK PREMISE SHALL BE CLEAN AT COMPLETION OF THE JOB AND BEFORE FINAL PAYMENT IS MADE. 9. ALL WORK SHALL COMPLY WITH APPLICABLE OSHA AND E.P.A. REGULATIONS AND GUIDELINES. 10. ARCHITECTURAL LAYOUTS TAKE PRECEDENT OVER DIAGRAMMATIC DRAWINGS BY THE ENGINEER. ANY CONFLICTS BETWEEN ENGINEER'S AND ARCHITECT'S DRAWING SHOULD BE RESOLVED IN WRITING PRIOR TO CONSTRUCTION. 11. ALL NEW WORK TO BE IN ACCORDANCE WITH THE BUILDING CODES LISTED BELOW, BEING THE LATEST EDITION AS ADOPTED BY THE BUILDING AUTHORITIES HAVING JURISDICTION. WHERE CONFLICTS OCCUR BETWEEN CODES AND BETWEEN CONSTRUCTION DOCUMENTS AND CODES, THE MOST RESTRICTIVE REQUIREMENTS SHALL GOVERN. FLORIDA BUILDING CODE, BUILDING 2023, 8TH EDITION FLORIDA BUILDING CODE, MECHANICAL 2023, 8TH EDITION FLORIDA BUILDING CODE, FUEL GAS 2023, 8TH EDITION FLORIDA BUILDING CODE, PLUMBING 2023, 8TH EDITION FLORIDA BUILDING CODE, ACCESSIBILITY 2023, 8TH EDITION FLORIDA FIRE PREVENTION CODE 2023, 8TH EDITION NATIONAL ELECTRICAL CODE 2020 EDITION					12. CODE COMPLIANCE NOTES: OCCUPANCY TYPE: BUSINESS AREA MODIFIED: 10,475 SF ALL INTERIOR FINISHES: SHALL COMPLY WITH 2023 FBC-BUILDING SECTIONS 803 & 804 FOR TYPE IIB CONSTRUCTION CONSTRUCTION TYPE: TYPE IIB (ASSUMED) PER FBC COMPLIANCE METHOD: LEVEL I, FLORIDA EXISTING BUILDING CODE, 8TH EDITION, 2023, SECT. 701 FIRE ALARM SYSTEM STATUS: EXISTENT FIRE SPRINKLER SYSTEM STATUS: EXISTENT				
															J13 GRAPHIC SYMBOLS														
																													
															E13 MATERIAL LEGEND														
															</														

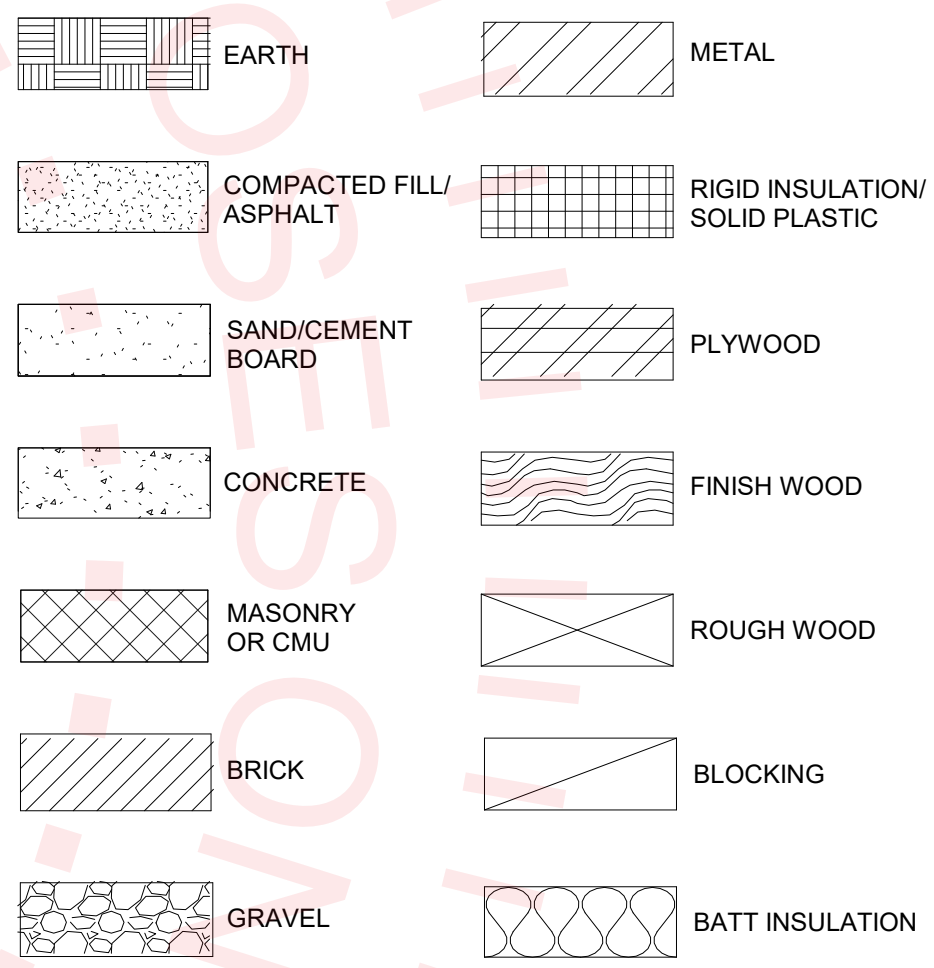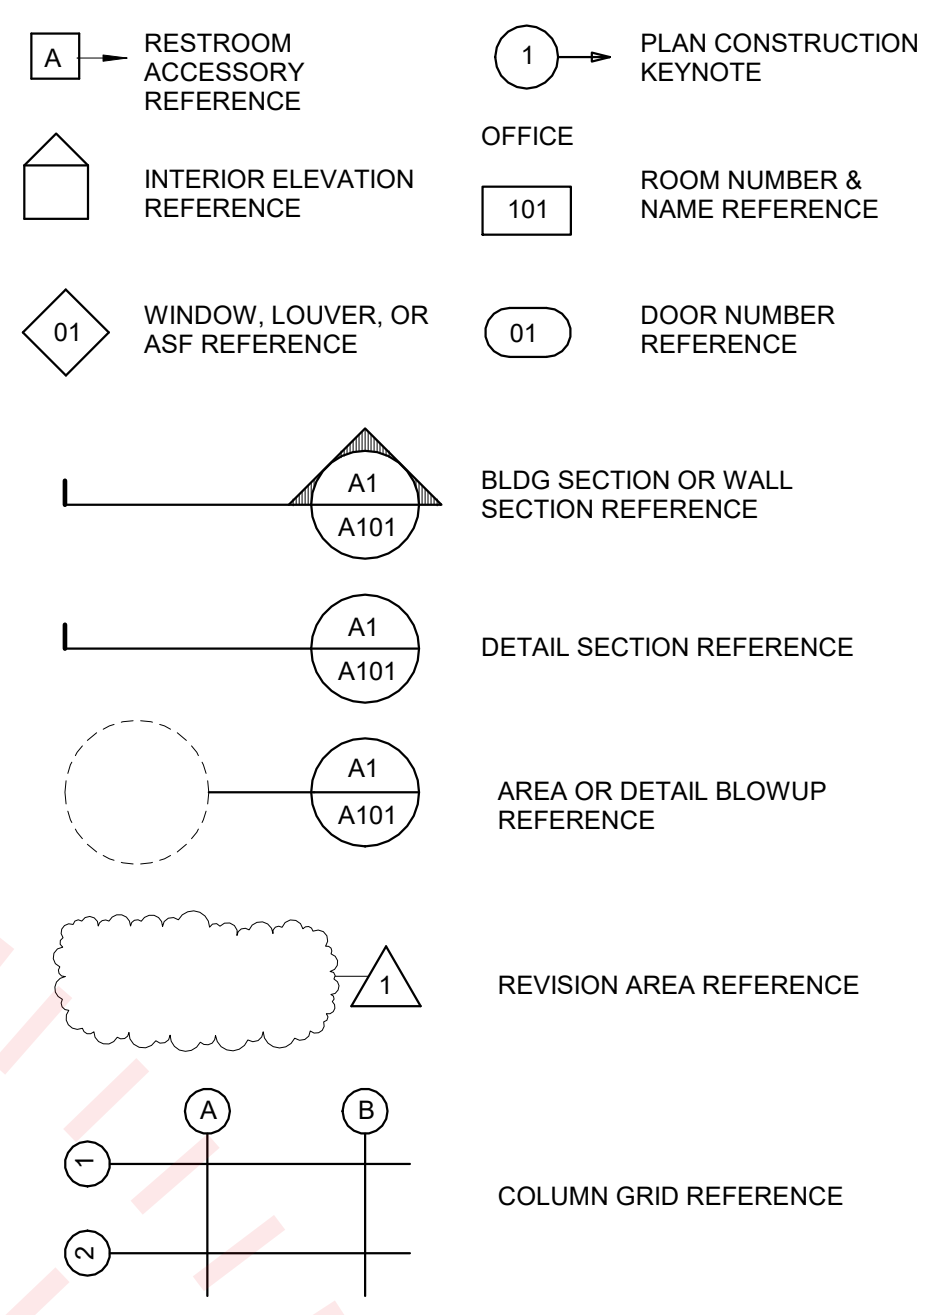

E13 MATERIAL LEGEND

DRAWING LIST	
Sheet No.	Sheet Name
G001	TITLE SHEET
G002	GENERAL INFORMATION
A101	FLOOR PLAN, SCHEDULES, KEYNOTES - 2ND FL.
A102	FLOOR PLAN, SCHEDULES, KEYNOTES - 3RD FL.
A103	RCP'S - DEMO., KEYNOTES, & LEGENDS
A104	RCP'S - PROPOSED, LIGHTING, KEYNOTES, & LEGENDS

A13 DRAWING LIST

FLORIDA BUILDING CODE, BUILDING	2023, 8TH EDITION
FLORIDA BUILDING CODE, MECHANICAL	2023, 8TH EDITION
FLORIDA BUILDING CODE, FUEL GAS	2023, 8TH EDITION
FLORIDA BUILDING CODE, PLUMBING	2023, 8TH EDITION
FLORIDA BUILDING CODE, ACCESSIBILITY	2023, 8TH EDITION
FLORIDA FIRE PREVENTION CODE	2023, 8TH EDITION
NATIONAL ELECTRICAL CODE	2020 EDITION

12. CODE COMPLIANCE NOTES:	
OCCUPANCY TYPE:	BUSINESS
AREA MODIFIED:	10,475 SF
ALL INTERIOR FINISHES:	SHALL COMPLY WITH 2023 FBC-BUILDING SECTIONS 803 & 804 FOR TYPE IIB CONSTRUCTION
CONSTRUCTION TYPE:	TYPE IIB (ASSUMED) PER FBC
COMPLIANCE METHOD:	LEVEL I, FLORIDA EXISTING BUILDING CODE, 8TH EDITION, 2023, SECT. 701
FIRE ALARM SYSTEM STATUS:	EXISTENT
FIRE SPRINKLER SYSTEM STATUS:	EXISTENT

F16 GENERAL INFORMATION

No.	Submissions:	Drawn:	Checked:	Date:
1	DESIGN DEVELOPMENT	SU	SM	04/01/24
2	95% CONSTRUCTION DOCUMENTS	SU	SM	04/19/24
3	100% CONSTRUCTION DOCUMENTS	SU	SM	04/22/24
No.	Revision Description	Drawn by/Checked by	Date	

FLORIDA STATE UNIVERSITY
FACILITIES PLANNING, DESIGN and CONSTRUCTION
FACILITIES DESIGN OFFICE

125 MENDENHALL BUILDING A
TALLAHASSEE, FLORIDA 32306-4153
(850)-644-6801




Project Name:
2nd & 3rd Floor Interior Improvements
College of Social Work

Sheet Title:
GENERAL INFORMATION

Subconsultant:

Seal:	Project Folder Name: 2400689_UCC_2nd_3rd_FI_Interior_Improvements\ 01_DesignUCCModel.rvt	Drawing No: G002
	FSU Project No: 2400689	
	Building Name & No.: University Center C, Bldg. No. 225	

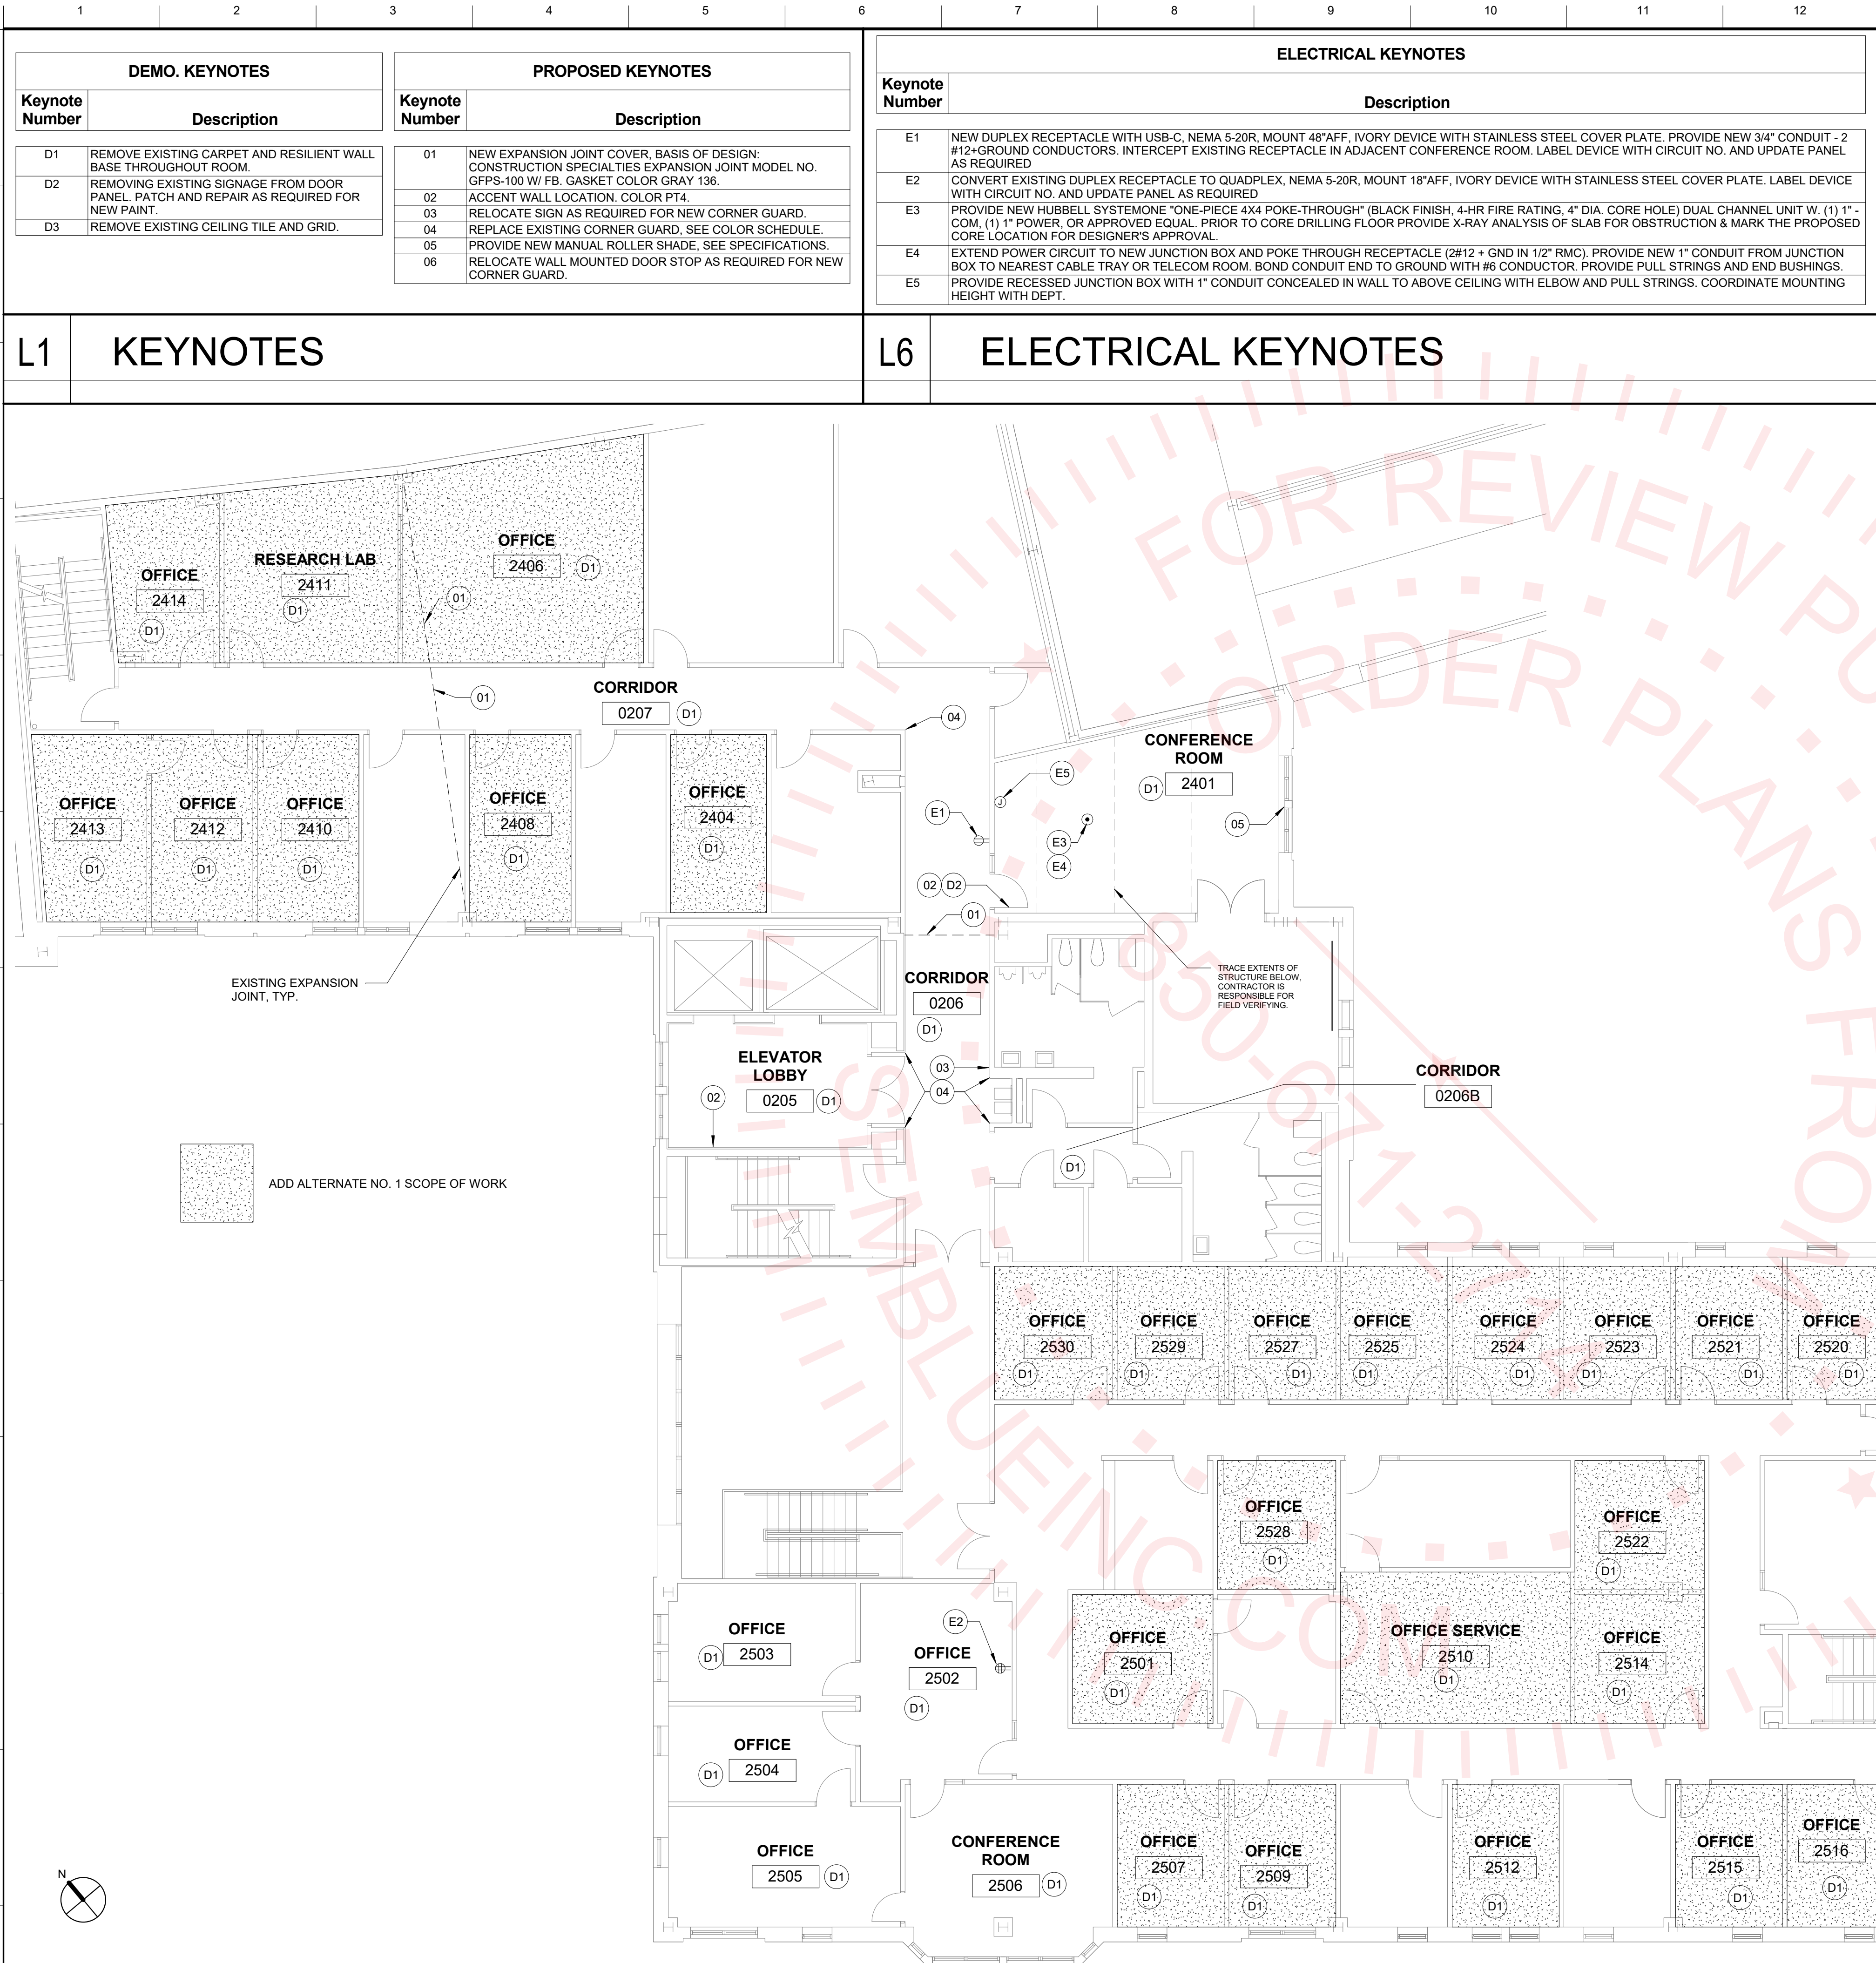2400689_UCC_2nd_3rd_FI_Interior_Improvements (01_Design)UCModel.rvt



DEMO. KEYNOTES		PROPOSED KEYNOTES	
Keynote Number	Description	Keynote Number	Description
D1	REMOVE EXISTING CARPET AND RESILIENT WALL BASE THROUGHOUT ROOM.	01	NEW EXPANSION JOINT COVER, BASIS OF DESIGN: CONSTRUCTION SPECIALTIES EXPANSION JOINT MODEL NO. GPPS-100 W/ FB. GASKET COLOR GRAY 136.
D2	REMOVING EXISTING SIGNAGE FROM DOOR PANEL. PATCH AND REPAIR AS REQUIRED FOR NEW PAINT.	02	ACCENT WALL LOCATION. COLOR PT4.
D3	REMOVE EXISTING CEILING TILE AND GRID.	03	RELOCATE SIGN AS REQUIRED FOR NEW CORNER GUARD.
		04	REPLACE EXISTING CORNER GUARD. SEE COLOR SCHEDULE.
		05	PROVIDE NEW MANUAL ROLLER SHADE. SEE SPECIFICATIONS.
		06	RELOCATE WALL MOUNTED DOOR STOP AS REQUIRED FOR NEW CORNER GUARD.

ELECTRICAL KEYNOTES	
Keynote Number	Description
E1	NEW DUPLEX RECEPTACLE WITH USB-C, NEMA 5-20R, MOUNT 48" AFF. IVORY DEVICE WITH STAINLESS STEEL COVER PLATE. PROVIDE NEW 3/4" CONDUIT - 2 #12+GROUND CONDUCTORS. INTERCEPT EXISTING RECEPTACLE IN ADJACENT CONFERENCE ROOM. LABEL DEVICE WITH CIRCUIT NO. AND UPDATE PANEL AS REQUIRED
E2	CONVERT EXISTING DUPLEX RECEPTACLE TO QUADPLEX, NEMA 5-20R, MOUNT 18" AFF. IVORY DEVICE WITH STAINLESS STEEL COVER PLATE. LABEL DEVICE WITH CIRCUIT NO. AND UPDATE PANEL AS REQUIRED
E3	PROVIDE NEW HUBBELL SYSTEMONE "ONE-PIECE 4X4 POKE-THROUGH" (BLACK FINISH, 4-HR FIRE RATING, 4" DIA. CORE HOLE) DUAL CHANNEL UNIT W. (1) 1"-COM. (1) 1" POWER, OR APPROVED EQUAL. PRIOR TO CORE DRILLING FLOOR PROVIDE X-RAY ANALYSIS OF SLAB FOR OBSTRUCTION & MARK THE PROPOSED CORE LOCATION FOR DESIGNER'S APPROVAL.
E4	EXTEND POWER CIRCUIT TO NEW JUNCTION BOX AND POKE THROUGH RECEPTACLE (2#12 + GND IN 1/2" RMC). PROVIDE NEW 1" CONDUIT FROM JUNCTION BOX TO NEAREST CABLE TRAY OR TELECOM ROOM. BOND CONDUIT END TO GROUND WITH #6 CONDUCTOR. PROVIDE PULL STRINGS AND END BUSHINGS.
E5	PROVIDE RECESSED JUNCTION BOX WITH 1" CONDUIT CONCEALED IN WALL TO ABOVE CEILING WITH ELBOW AND PULL STRINGS. COORDINATE MOUNTING HEIGHT WITH DEPT.

FLOOR PLAN - DEMO./PROPOSED - 2ND FL.	
1/8" = 1'-0"	

FINISH SCHEDULE - 2ND FL.								
Room Number	Room Name	Floor		Base Finish	Wall		Ceiling Finish	Comments
		Floor Substrate	Floor Finish		Wall Material	Wall Finish		
0205	ELEVATOR LOBBY	EXIST. CONCRETE	WALK-OFF CARPET	RESILIENT	EXIST. GYP. BD.	PAINT	EXISTING SAC	2, 3
0206	CORRIDOR	EXIST. CONCRETE	CARPET	RESILIENT	EXIST. GYP. BD.	PAINT	EXISTING SAC	1, 2, 4, 5
0206B	CORRIDOR	EXIST. CONCRETE	LVT	RESILIENT	EXIST. GYP. BD.	PAINT	EXISTING SAC	
0207	CORRIDOR	EXIST. CONCRETE	CARPET	RESILIENT	EXIST. GYP. BD.	PAINT	EXISTING SAC	1, 2, 4
2401	CONFERENCE ROOM	EXIST. CONCRETE	CARPET	RESILIENT	EXIST. GYP. BD.	PAINT	NEW SAC	2
2404	OFFICE	EXIST. CONCRETE	CARPET	RESILIENT	EXIST. GYP. BD.	PAINT	EXISTING SAC	2
2406	OFFICE	EXIST. CONCRETE	CARPET	RESILIENT	EXIST. GYP. BD.	PAINT	EXISTING SAC	2
2408	OFFICE	EXIST. CONCRETE	CARPET	RESILIENT	EXIST. GYP. BD.	PAINT	EXISTING SAC	2
2410	OFFICE	EXIST. CONCRETE	CARPET	RESILIENT	EXIST. GYP. BD.	PAINT	EXISTING SAC	2
2411	RESEARCH LAB	EXIST. CONCRETE	CARPET	RESILIENT	EXIST. GYP. BD.	PAINT	EXISTING SAC	2
2412	OFFICE	EXIST. CONCRETE	CARPET	RESILIENT	EXIST. GYP. BD.	PAINT	EXISTING SAC	2
2413	OFFICE	EXIST. CONCRETE	CARPET	RESILIENT	EXIST. GYP. BD.	PAINT	EXISTING SAC	2
2414	OFFICE	EXIST. CONCRETE	CARPET	RESILIENT	EXIST. GYP. BD.	PAINT	EXISTING SAC	2
2501	OFFICE	EXIST. CONCRETE	CARPET	RESILIENT	EXIST. GYP. BD.	PAINT	EXISTING SAC	2
2502	OFFICE	EXIST. CONCRETE	CARPET	RESILIENT	EXIST. GYP. BD.	PAINT	NEW SAC	2
2503	OFFICE	EXIST. CONCRETE	CARPET	RESILIENT	EXIST. GYP. BD.	PAINT	NEW SAC	2
2504	OFFICE	EXIST. CONCRETE	CARPET	RESILIENT	EXIST. GYP. BD.	PAINT	NEW SAC	2
2505	OFFICE	EXIST. CONCRETE	CARPET	RESILIENT	EXIST. GYP. BD.	PAINT	NEW SAC	2
2506	CONFERENCE ROOM	EXIST. CONCRETE	CARPET	RESILIENT	EXIST. GYP. BD.	PAINT	NEW SAC	2
2507	OFFICE	EXIST. CONCRETE	CARPET	RESILIENT	EXIST. GYP. BD.	PAINT	EXISTING SAC	2
2509	OFFICE	EXIST. CONCRETE	CARPET	RESILIENT	EXIST. GYP. BD.	PAINT	EXISTING SAC	2
2510	OFFICE SERVICE	EXIST. CONCRETE	CARPET	RESILIENT	EXIST. GYP. BD.	PAINT	EXISTING SAC	2
2512	OFFICE	EXIST. CONCRETE	CARPET	RESILIENT	EXIST. GYP. BD.	PAINT	EXISTING SAC	2
2514	OFFICE	EXIST. CONCRETE	CARPET	RESILIENT	EXIST. GYP. BD.	PAINT	EXISTING SAC	2
2515	OFFICE	EXIST. CONCRETE	CARPET	RESILIENT	EXIST. GYP. BD.	PAINT	EXISTING SAC	2
2516	OFFICE	EXIST. CONCRETE	CARPET	RESILIENT	EXIST. GYP. BD.	PAINT	EXISTING SAC	2
2517	OFFICE	EXIST. CONCRETE	CARPET	RESILIENT	EXIST. GYP. BD.	PAINT	EXISTING SAC	2
2520	OFFICE	EXIST. CONCRETE	CARPET	RESILIENT	EXIST. GYP. BD.	PAINT	EXISTING SAC	2
2521	OFFICE	EXIST. CONCRETE	CARPET	RESILIENT	EXIST. GYP. BD.	PAINT	EXISTING SAC	2
2522	OFFICE	EXIST. CONCRETE	CARPET	RESILIENT	EXIST. GYP. BD.	PAINT	EXISTING SAC	2
2523	OFFICE	EXIST. CONCRETE	CARPET	RESILIENT	EXIST. GYP. BD.	PAINT	EXISTING SAC	2
2524	OFFICE	EXIST. CONCRETE	CARPET	RESILIENT	EXIST. GYP. BD.	PAINT	EXISTING SAC	2
2525	OFFICE	EXIST. CONCRETE	CARPET	RESILIENT	EXIST. GYP. BD.	PAINT	EXISTING SAC	2
2527	OFFICE	EXIST. CONCRETE	CARPET	RESILIENT	EXIST. GYP. BD.	PAINT	EXISTING SAC	2
2528	OFFICE	EXIST. CONCRETE	CARPET	RESILIENT	EXIST. GYP. BD.	PAINT	EXISTING SAC	2
2529	OFFICE	EXIST. CONCRETE	CARPET	RESILIENT	EXIST. GYP. BD.	PAINT	EXISTING SAC	2
2530	OFFICE	EXIST. CONCRETE	CARPET	RESILIENT	EXIST. GYP. BD.	PAINT	EXISTING SAC	2

FINISH SCHEDULE - 2ND FL.	
---------------------------	--

CODE	PRODUCT	MANUFACTURER/COLOR
CPT1	CARPET	MANNINGTON, PRECISION, COLOR: CONCENTRIC
CPT2	WALK OFF CARPET	MANNINGTON, RUFFIAN II, COLOR: EBONY EARTH
WB1	WALL BASE	TARKETT/JOHNSONITE, 4"H BASEWORKS, COLOR: MOONROCK 29
PT1	TYPICAL WALL PAINT	SHERWIN WILLIAMS, INCREDIBLE WHITE SW7028
PT2	HM FRAME & DOOR PAINT	SHERWIN WILLIAMS, PORPOISE SW7047
PT3	CHAIR RAIL	SHERWIN WILLIAMS, BALANCED BEIGE SW7037
PT4	ACCENT WALL PAINT	SHERWIN WILLIAMS, FINE WINE SW6037
PT5	OFFICE PAINT	SHERWIN WILLIAMS, FIRST STAR SW7646
PT6	OFFICE PAINT	SHERWIN WILLIAMS, OLYMPUS WHITE SW6253
PT7	OFFICE PAINT	SHERWIN WILLIAMS, DRIFT OF MIST SW9166
SAC1	SUSPENDED CEILING TILE	ARMSTRONG, ULTIMA HIGH-NRC TEGULAR, 1942, WHITE
SAC2	SUSPENDED CEILING GRID	ARMSTRONG, SUPRAFINE 9/16", WHITE
CG1	CORNER GUARD	CONSTRUCTION SPECIALTIES, SM-20AN, COLOR: GALVESTON GRAY
LVT1	LUXURY VINYL TILE	MANNINGTON, ABSTRACT, COLOR GEMMA SPUN GOLD, NON-BEVEL

F16		COLOR SCHEDULE			
1/4" = 1'-0"					
No.	Submissions:	Drawn:	Checked:	Date:	
1	DESIGN DEVELOPMENT	SU	SM	04/01/24	
2	95% CONSTRUCTION DOCUMENTS	SU	SM	04/19/24	
3	100% CONSTRUCTION DOCUMENTS	SU	SM	04/22/24	

FLORIDA STATE UNIVERSITY

FACILITIES PLANNING, DESIGN and CONSTRUCTION

FACILITIES DESIGN OFFICE

125 MENDENHALL BUILDING A
TALLAHASSEE, FLORIDA 32306-4153
(850)-644-6801



Project Name:

2nd & 3rd Floor Interior Improvements

College of Social Work

Sheet Title:

FLOOR PLAN, SCHEDULES, KEYNOTES - 2ND FL.

Subconsultant:

Seal:

Project Folder Name:
2400689_UCC_2nd_3rd_FI_Interior_Improvements\01_Design\UCModel.rvt

FSU Project No:
2400689

Building Name & No.:
University Center C, Bldg. No. 225

Drawing No:
A101

- COMMENTS
1. PAINT WOOD CHAIR RAIL PT3
 2. PAINT DOOR PANELS AND FRAMES (PREVIOUSLY PAINTED) WITHIN ROOM PT2.
 3. PAINT GYP. BD. SOFFIT PT1.
 4. PAINT BELOW CHAIR RAIL TO BE PT2, PAINT ABOVE CHAIR RAIL TO PT1.
 5. PROVIDE LVT1 AT WATER COOLER ALCOVE.

2400689_UCC_2nd_3rd_Fl_Interior_Improvements\01_Design\UCCModel.rvt

FINISH SCHEDULE - 3RD FL.								
Room Number	Room Name	Floor		Base Finish	Wall		Ceiling	Comments
		Floor Substrate	Floor Finish		Wall Material	Wall Finish	Ceiling Finish	
0305	ELEVATOR LOBBY	EXIST. CONCRETE	WALK-OFF CARPET	RESILIENT	EXIST. GYP. BD.	PAINT	EXISTING SAC	2, 3
0306	CORRIDOR	EXIST. CONCRETE	LVT	RESILIENT	EXIST. GYP. BD.	PAINT	EXISTING SAC	2
0307	CORRIDOR	EXIST. CONCRETE	CARPET	RESILIENT	EXIST. GYP. BD.	PAINT	EXISTING SAC	2, 5
0307A	CORRIDOR	EXIST. CONCRETE	CARPET	RESILIENT	EXIST. GYP. BD.	PAINT	EXISTING SAC	2
3401	CONFERENCE ROOM	EXIST. CONCRETE	CARPET	RESILIENT	EXIST. GYP. BD.	PAINT	NEW SAC	2
3402	COLLABORATION LAB	EXIST. CONCRETE	CARPET	RESILIENT	EXIST. GYP. BD.	PAINT	EXISTING SAC	2
3404	OFFICE	EXIST. CONCRETE	CARPET	RESILIENT	EXIST. GYP. BD.	PAINT	EXISTING SAC	2
3405	OFFICE	EXIST. CONCRETE	CARPET	RESILIENT	EXIST. GYP. BD.	PAINT	EXISTING SAC	2
3407	OFFICE	EXIST. CONCRETE	CARPET	RESILIENT	EXIST. GYP. BD.	PAINT	EXISTING SAC	2
3409	OFFICE	EXIST. CONCRETE	CARPET	RESILIENT	EXIST. GYP. BD.	PAINT	EXISTING SAC	2
3410	OFFICE	EXIST. CONCRETE	CARPET	RESILIENT	EXIST. GYP. BD.	PAINT	EXISTING SAC	2
3411	OFFICE	EXIST. CONCRETE	CARPET	RESILIENT	EXIST. GYP. BD.	PAINT	EXISTING SAC	2
3412	OFFICE	EXIST. CONCRETE	CARPET	RESILIENT	EXIST. GYP. BD.	PAINT	EXISTING SAC	2
3413	OFFICE	EXIST. CONCRETE	CARPET	RESILIENT	EXIST. GYP. BD.	PAINT	EXISTING SAC	2


- COMMENTS:
1. PAINT WOOD CHAIR RAIL PT3.
 2. PAINT DOOR PANELS AND FRAMES (PREVIOUSLY PAINTED) WITHIN ROOM PT2.
 3. PAINT GYP. BD. SOFFIT PT1.
 4. PAINT BELOW CHAIR RAIL TO BE PT2, PAINT ABOVE CHAIR RAIL TO PT1.
 5. PROVIDE LVT1 AT WATER COOLER ALCOVE.

CODE	PRODUCT	MANUFACTURER/COLOR
CPT1	CARPET	MANNINGTON, PRECISION, COLOR: CONCENTRIC
CPT2	WALK OFF CARPET	MANNINGTON, RUFFIAN II, COLOR: EBONY EARTH
WB1	WALL BASE	TARKETT/JOHNSONITE, 4"H BASEWORKS, COLOR: MOONROCK 29
PT1	TYPICAL WALL PAINT	SHERWIN WILLIAMS, INCREDIBLE WHITE SW7028
PT2	HM FRAME & DOOR PAINT	SHERWIN WILLIAMS, PORPOISE SW7047
PT3	CHAIR RAIL	SHERWIN WILLIAMS, BALANCED BEIGE SW7037
PT4	ACCENT WALL PAINT	SHERWIN WILLIAMS, FINE WINE SW6037
PT5	OFFICE PAINT	SHERWIN WILLIAMS, FIRST STAR SW7646
PT6	OFFICE PAINT	SHERWIN WILLIAMS, OLYMPUS WHITE SW6253
PT7	OFFICE PAINT	SHERWIN WILLIAMS, DRIFT OF MIST SW9166
SAC1	SUSPENDED CEILING TILE	ARMSTRONG, ULTIMA HIGH-NRC REGULAR, 1942, WHITE
SAC2	SUSPENDED CEILING GRID	ARMSTRONG, SUPRAFINE 9/16", WHITE
CG1	CORNER GUARD	CONSTRUCTION SPECIALTIES, SM-20AN, COLOR: GALVESTON GRAY
LVT1	LUXURY VINYL TILE	MANNINGTON, ABSTRACT, COLOR GEMMA SPUN GOLD, NON-BEVEL

H1 FINISH SCHEDULE - 3RD FL.

H9 COLOR SCHEDULE

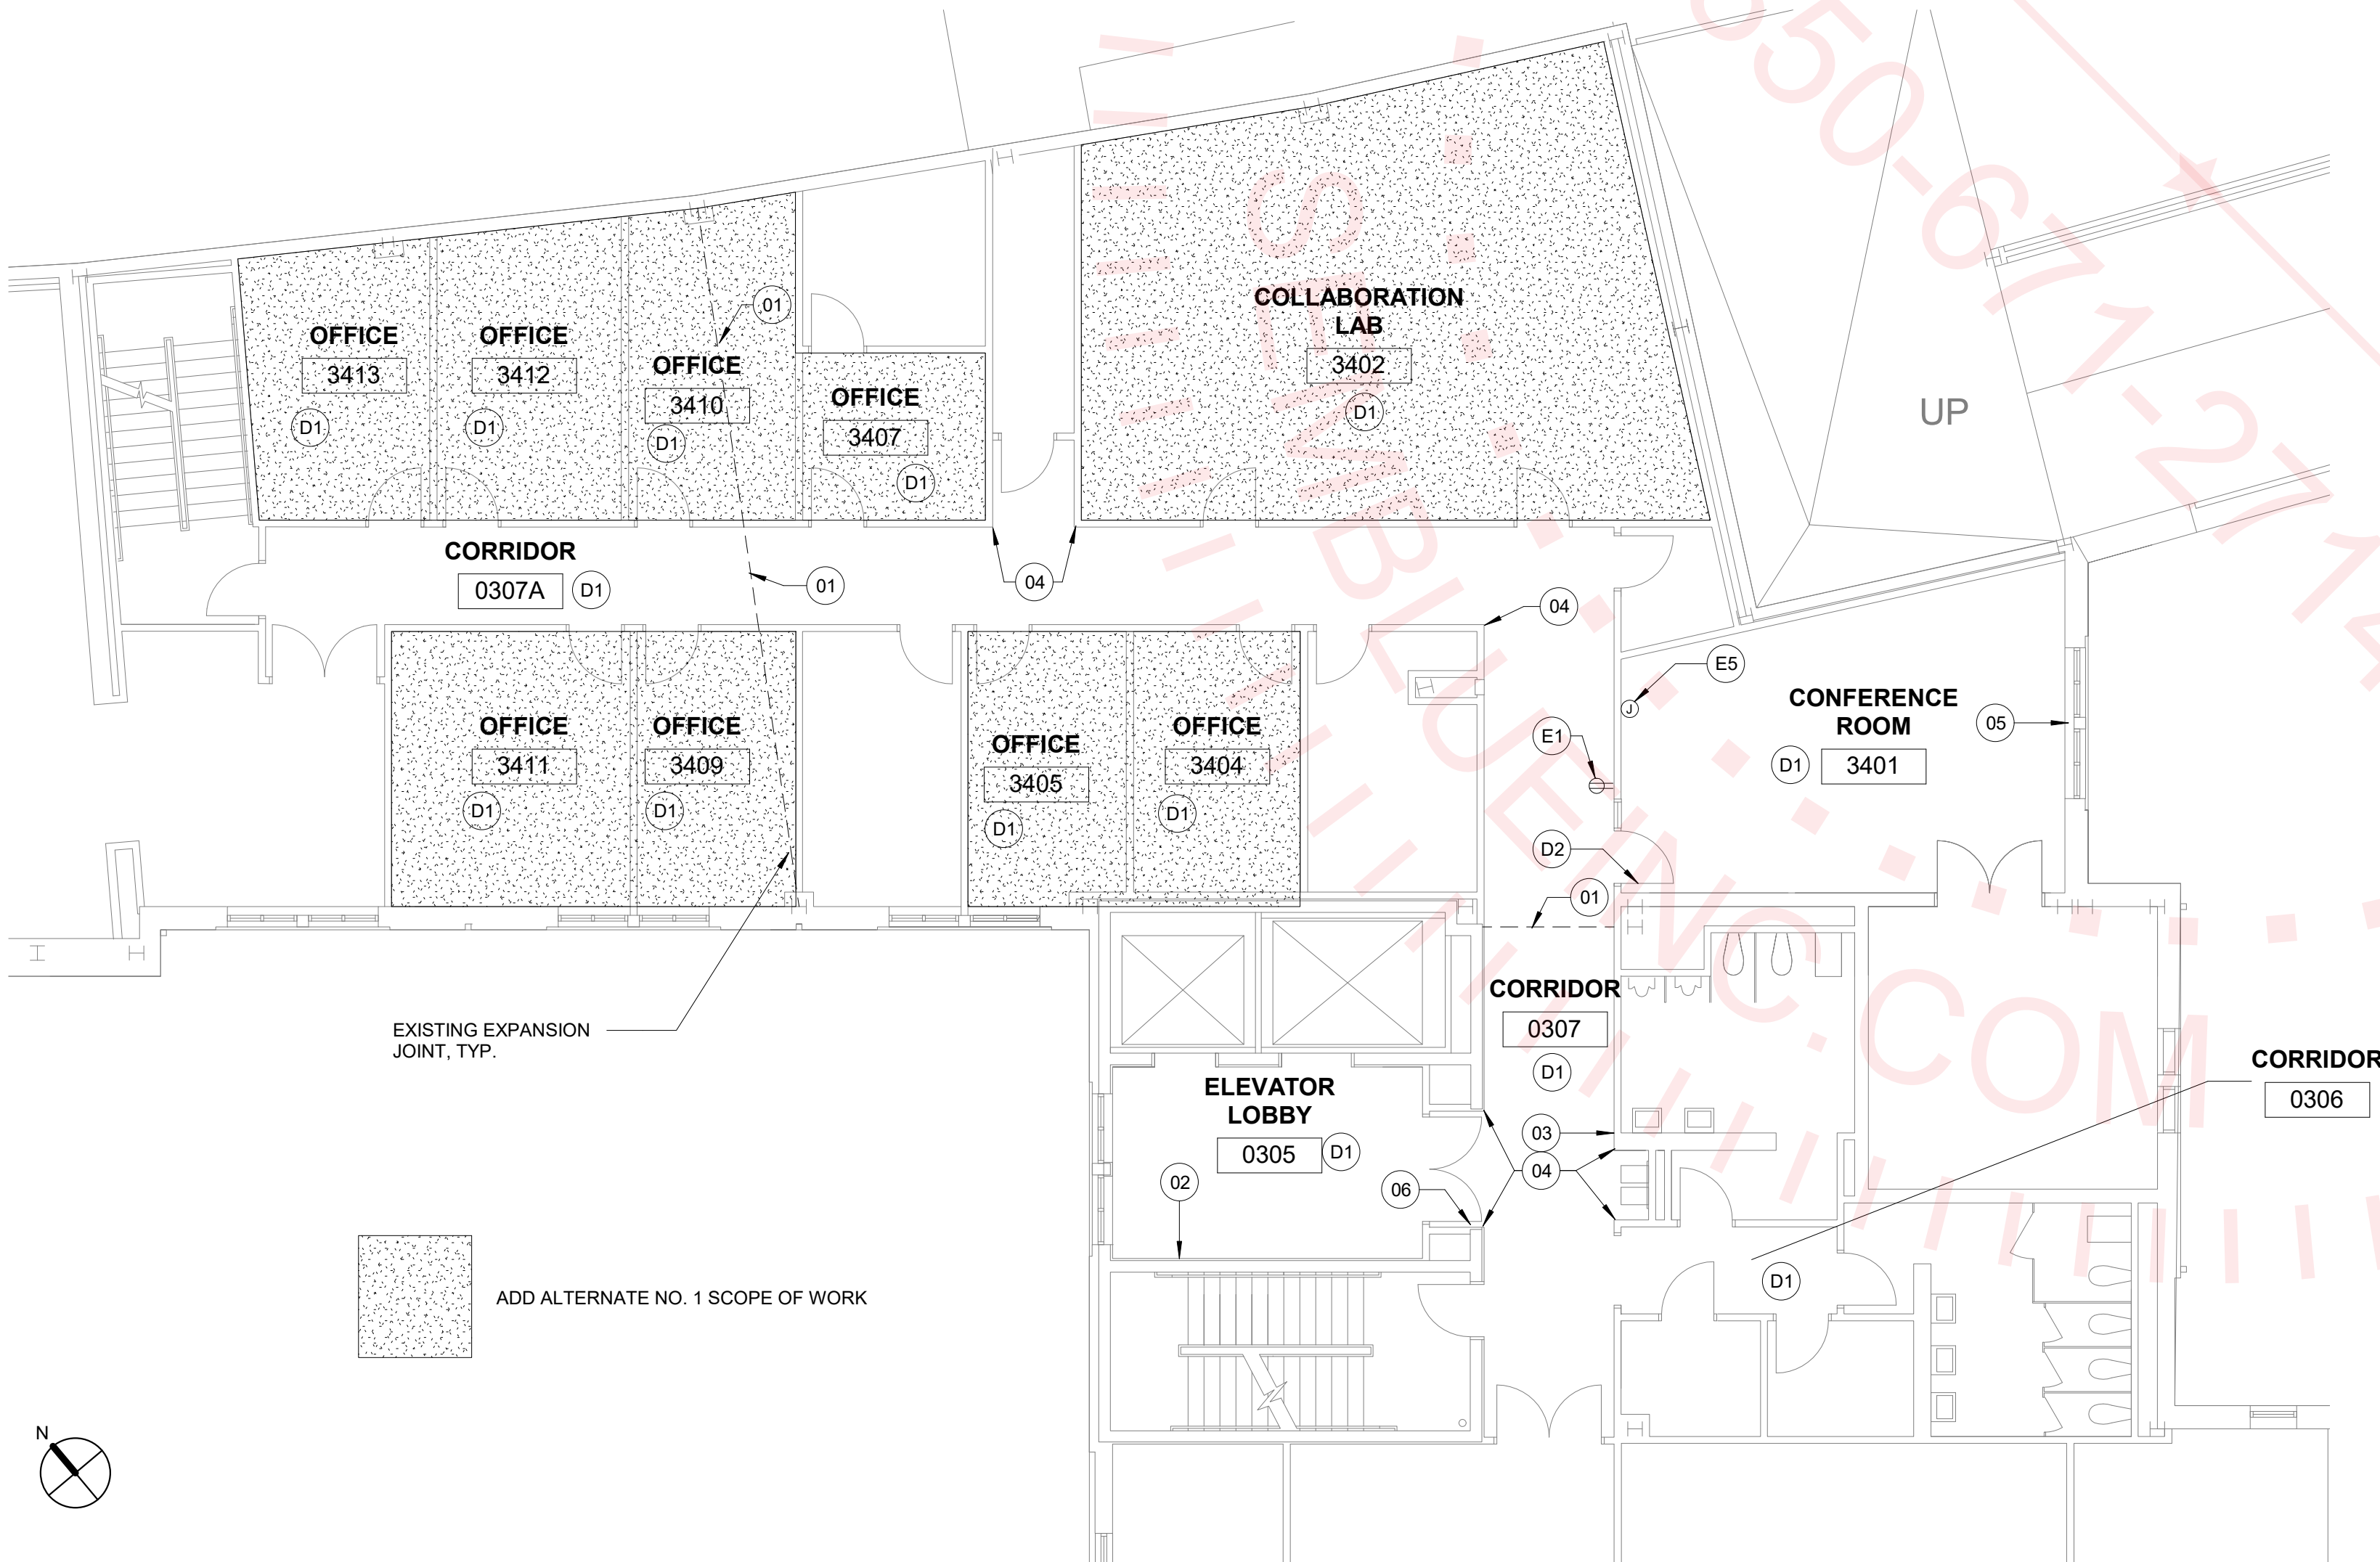1/4" = 1'-0"



A1 FLOOR PLAN - DEMO./PROPOSED - 3RD FL.

1/8" = 1'-0"

ELECTRICAL

Keynote Number	Description
E1	NEW DUPLEX RECEPTACLE WITH USB-C, NEMA 5-20R, MOUNT 48" AFF. IVORY DEVICE WITH STAINLESS STEEL COVER PLATE. PROVIDE NEW 3/4" CONDUIT - 2 #12+GROUND CONDUCTORS. INTERCEPT EXISTING RECEPTACLE IN ADJACENT CONFERENCE ROOM. LABEL DEVICE WITH CIRCUIT NO. AND UPDATE PANEL AS REQUIRED
E2	CONVERT EXISTING DUPLEX RECEPTACLE TO QUADPLEX, NEMA 5-20R, MOUNT 18" AFF. IVORY DEVICE WITH STAINLESS STEEL COVER PLATE. LABEL DEVICE WITH CIRCUIT NO. AND UPDATE PANEL AS REQUIRED
E3	PROVIDE NEW HUBBELL SYSTEMONE "ONE-PIECE 4X4 POKE-THROUGH" (BLACK FINISH, 4-HR FIRE RATING, 4" DIA. CORE HOLE) DUAL CHANNEL UNIT W. (1) 1" - COM. (1) 1" POWER, OR APPROVED EQUAL. PRIOR TO CORE DRILLING FLOOR PROVIDE X-RAY ANALYSIS OF SLAB FOR OBSTRUCTION & MARK THE PROPOSED CORE LOCATION FOR DESIGNER'S APPROVAL.
E4	EXTEND POWER CIRCUIT TO NEW JUNCTION BOX AND POKE THROUGH RECEPTACLE (2#12 + GND IN 1/2" RMC). PROVIDE NEW 1" CONDUIT FROM JUNCTION BOX TO NEAREST CABLE TRAY OR TELECOM ROOM. BOND CONDUIT END TO GROUND WITH #6 CONDUCTOR. PROVIDE PULL STRINGS AND END BUSHINGS.
E5	PROVIDE RECESSED JUNCTION BOX WITH 1" CONDUIT CONCEALED IN WALL TO ABOVE CEILING WITH ELBOW AND PULL STRINGS. COORDINATE MOUNTING HEIGHT WITH DEPT.

J16 ELECTRICAL KEYNOTES

DEMOLITION KEYNOTES

Keynote Number	Description
D1	REMOVE EXISTING CARPET AND RESILIENT WALL BASE THROUGHOUT ROOM.
D2	REMOVING EXISTING SIGNAGE FROM DOOR PANEL. PATCH AND REPAIR AS REQUIRED FOR NEW PAINT.
D3	REMOVE EXISTING CEILING TILE AND GRID.

PROP. KEYNOTES

Keynote Number	Description
01	NEW EXPANSION JOINT COVER, BASIS OF DESIGN: CONSTRUCTION SPECIALTIES EXPANSION JOINT MODEL NO. GFPS-100 W/ FB. GASKET COLOR GRAY 136.
02	ACCENT WALL LOCATION. COLOR PT4.
03	RELOCATE SIGN AS REQUIRED FOR NEW CORNER GUARD.
04	REPLACE EXISTING CORNER GUARD, SEE COLOR SCHEDULE.
05	PROVIDE NEW MANUAL ROLLER SHADE, SEE SPECIFICATIONS.
06	RELOCATE WALL MOUNTED DOOR STOP AS REQUIRED FOR NEW CORNER GUARD.

F16 KEYNOTES

No.	Submissions:	Drawn:	Checked:	Date:
1	DESIGN DEVELOPMENT	SU	SM	04/01/24
2	95% CONSTRUCTION DOCUMENTS	SU	SM	04/19/24
3	100% CONSTRUCTION DOCUMENTS	SU	SM	04/22/24

No.	Revision Description	Drawn by/Checked by	Date
-----	----------------------	---------------------	------

FLORIDA STATE UNIVERSITY

FACILITIES PLANNING, DESIGN and CONSTRUCTION
FACILITIES DESIGN OFFICE

125 MENDENHALL BUILDING A
TALLAHASSEE, FLORIDA 32306-4153
(850)-644-6801









Project Name:
2nd & 3rd Floor Interior Improvements
College of Social Work

Sheet Title:
FLOOR PLAN, SCHEDULES, KEYNOTES - 3RD FL.

Subconsultant:


Seal:	Project Folder Name: 2400689_UCC_2nd_3rd_Fl_Interior_Improvements\01_Design\UCCModel.rvt	Drawing No: A102
	FSU Project No: 2400689	
	Building Name & No.:	
	University Center C, Bldg. No. 225	

2400689_UCC_2nd_3rd_FI_Interior_Improvements\01_Design\UCCModel.rvt

1	2	3	4
	DEMOLISHED OCCUPANCY SENSOR SWITCH, TYP.		
	DEMOLISHED THREE WAY TOGGLE SWITCH, TYP.		SALVAGED WIRELESS ACCESS POINT, TYP.
	DEMOLISHED DOUBLE POLE TOGGLE SWITCH, TYP.		SALVAGED FIRE ALARM DEVICE, TYP.
	DEMOLISHED SINGLE POLE TOGGLE SWITCH, TYP.		SALVAGED FIRE SPRINKLER, TYP.
	SALVAGED SUPPLY AIR DIFFUSER, TYP.		SALVAGED RETURN AIR GRILLE, TYP.
	DEMOLISHED OCCUPANCY SENSOR, TYP.		SALVAGED 2 X 4 LIGHT FIXTURE, TYP.


K1 RCP LEGEND DEMO

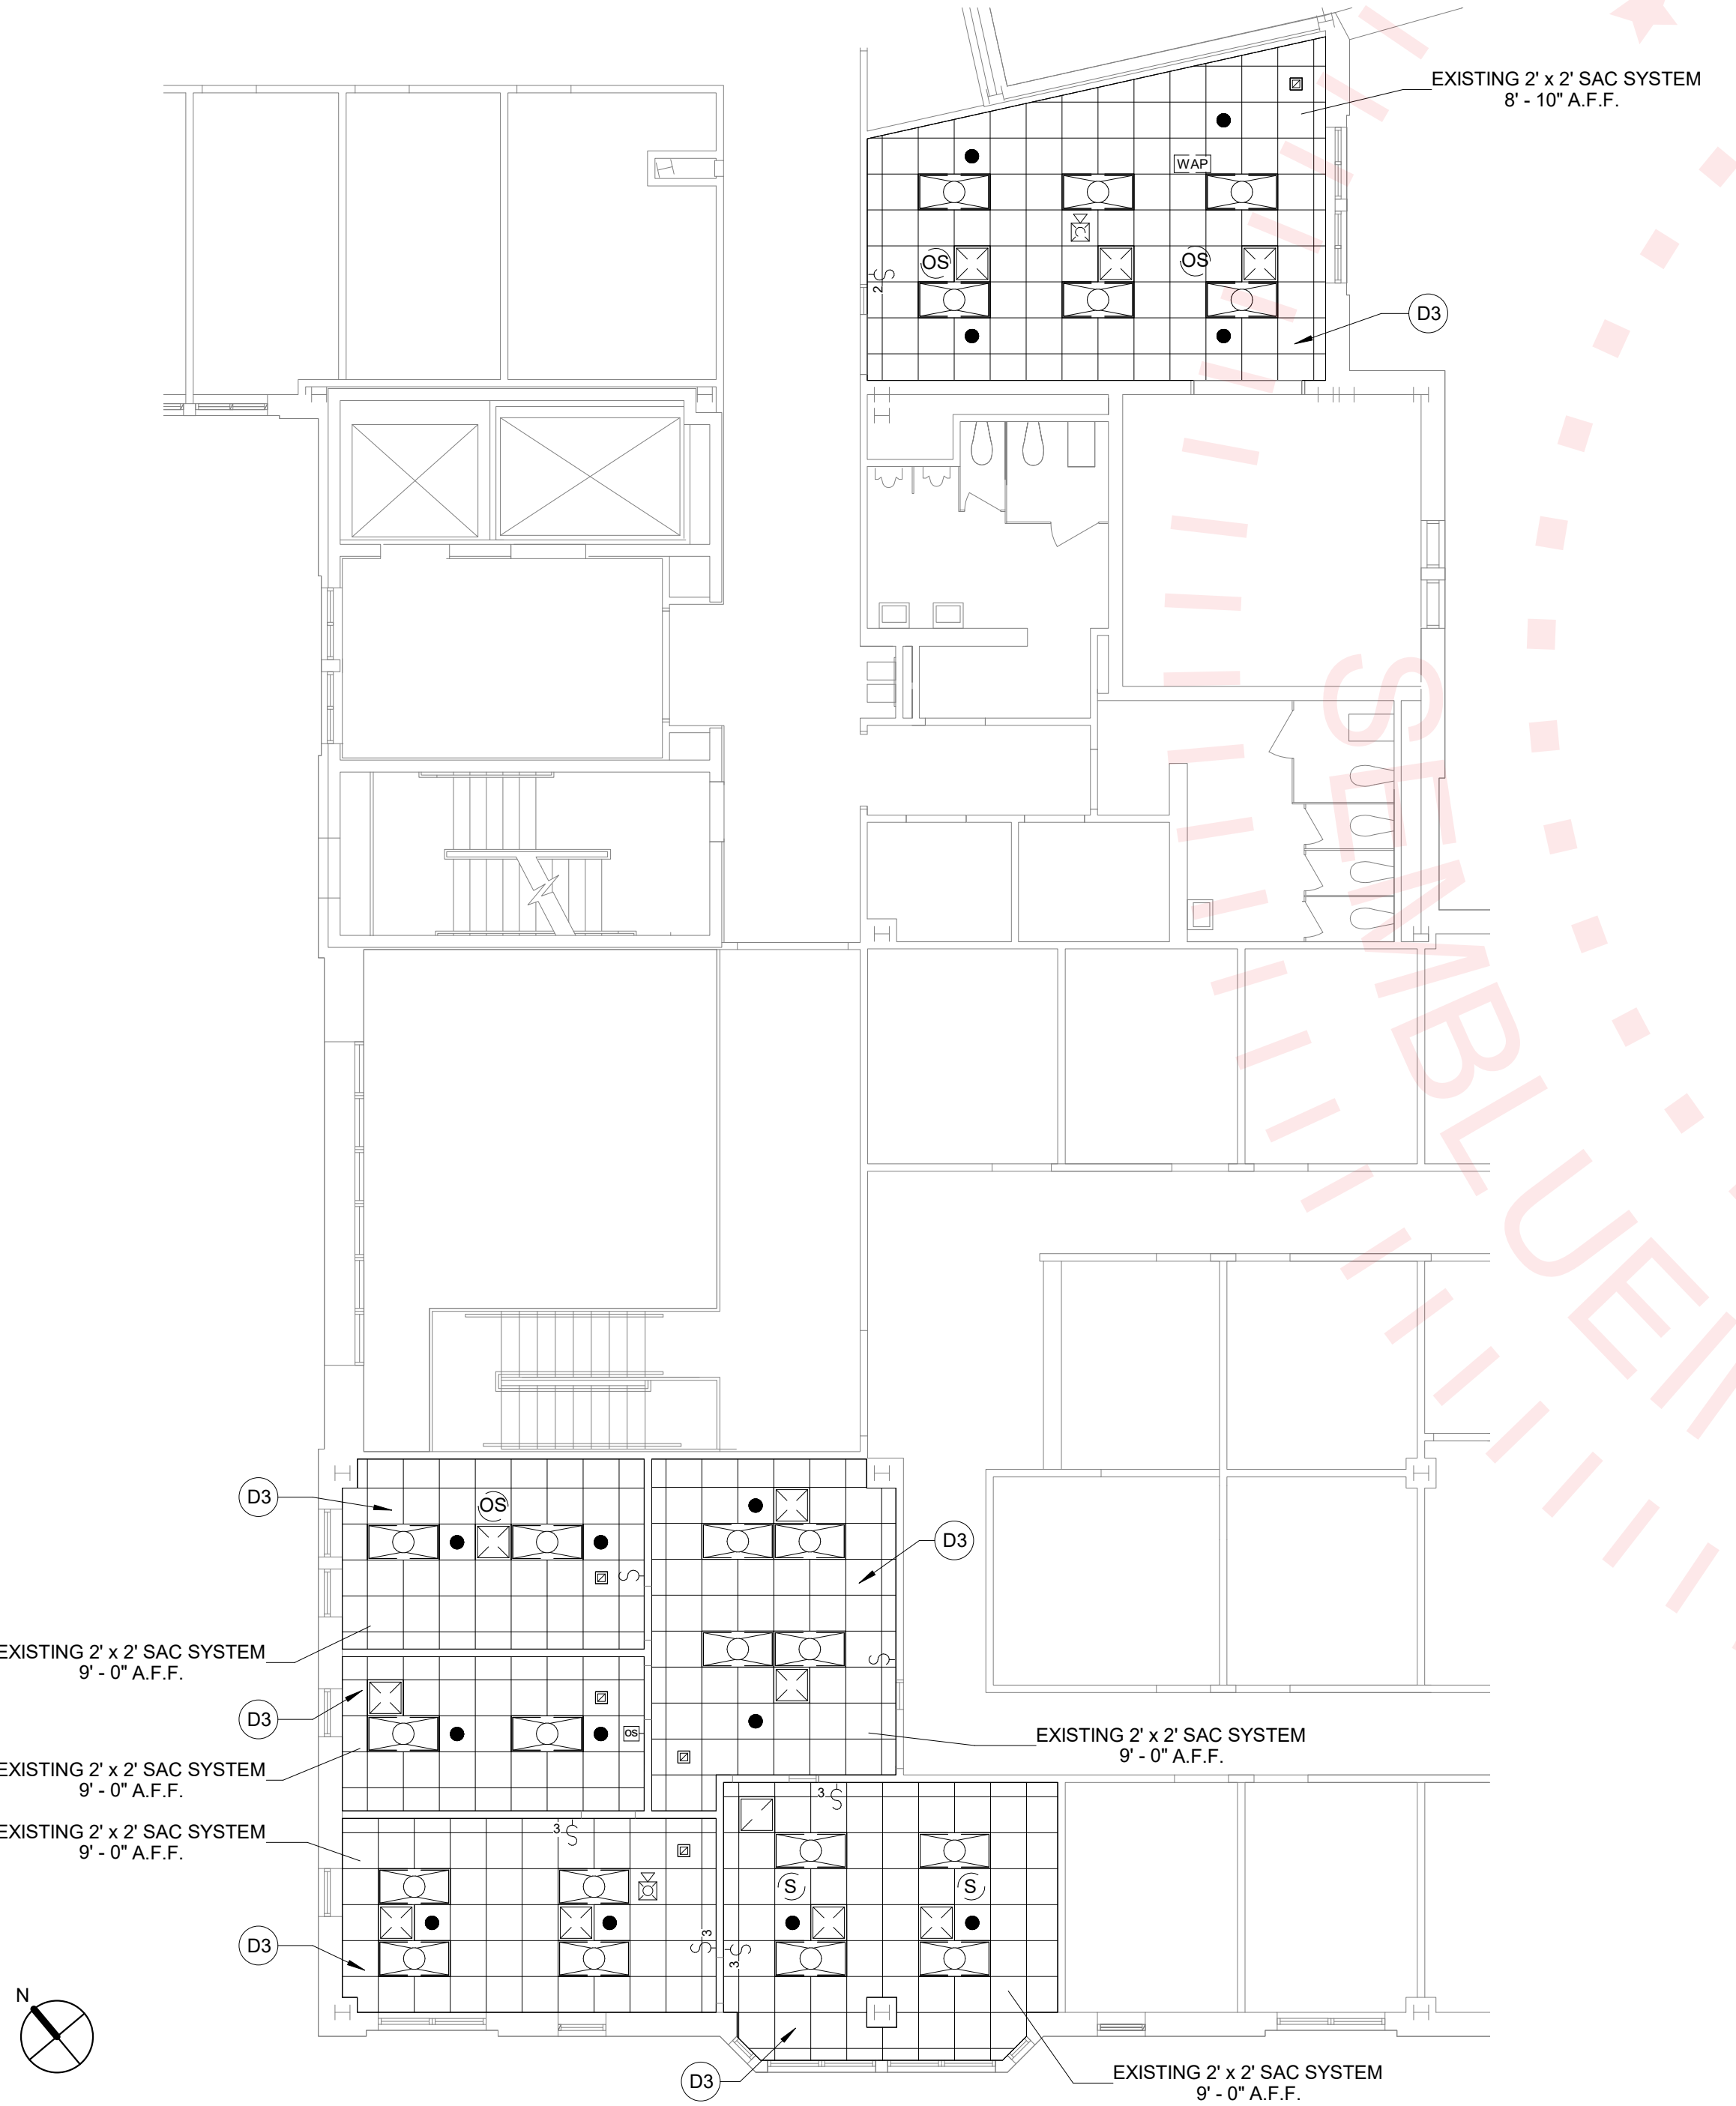1/4" = 1'-0"



A1 RCP/LIGHTING DEMOLITION - 2ND FLOOR

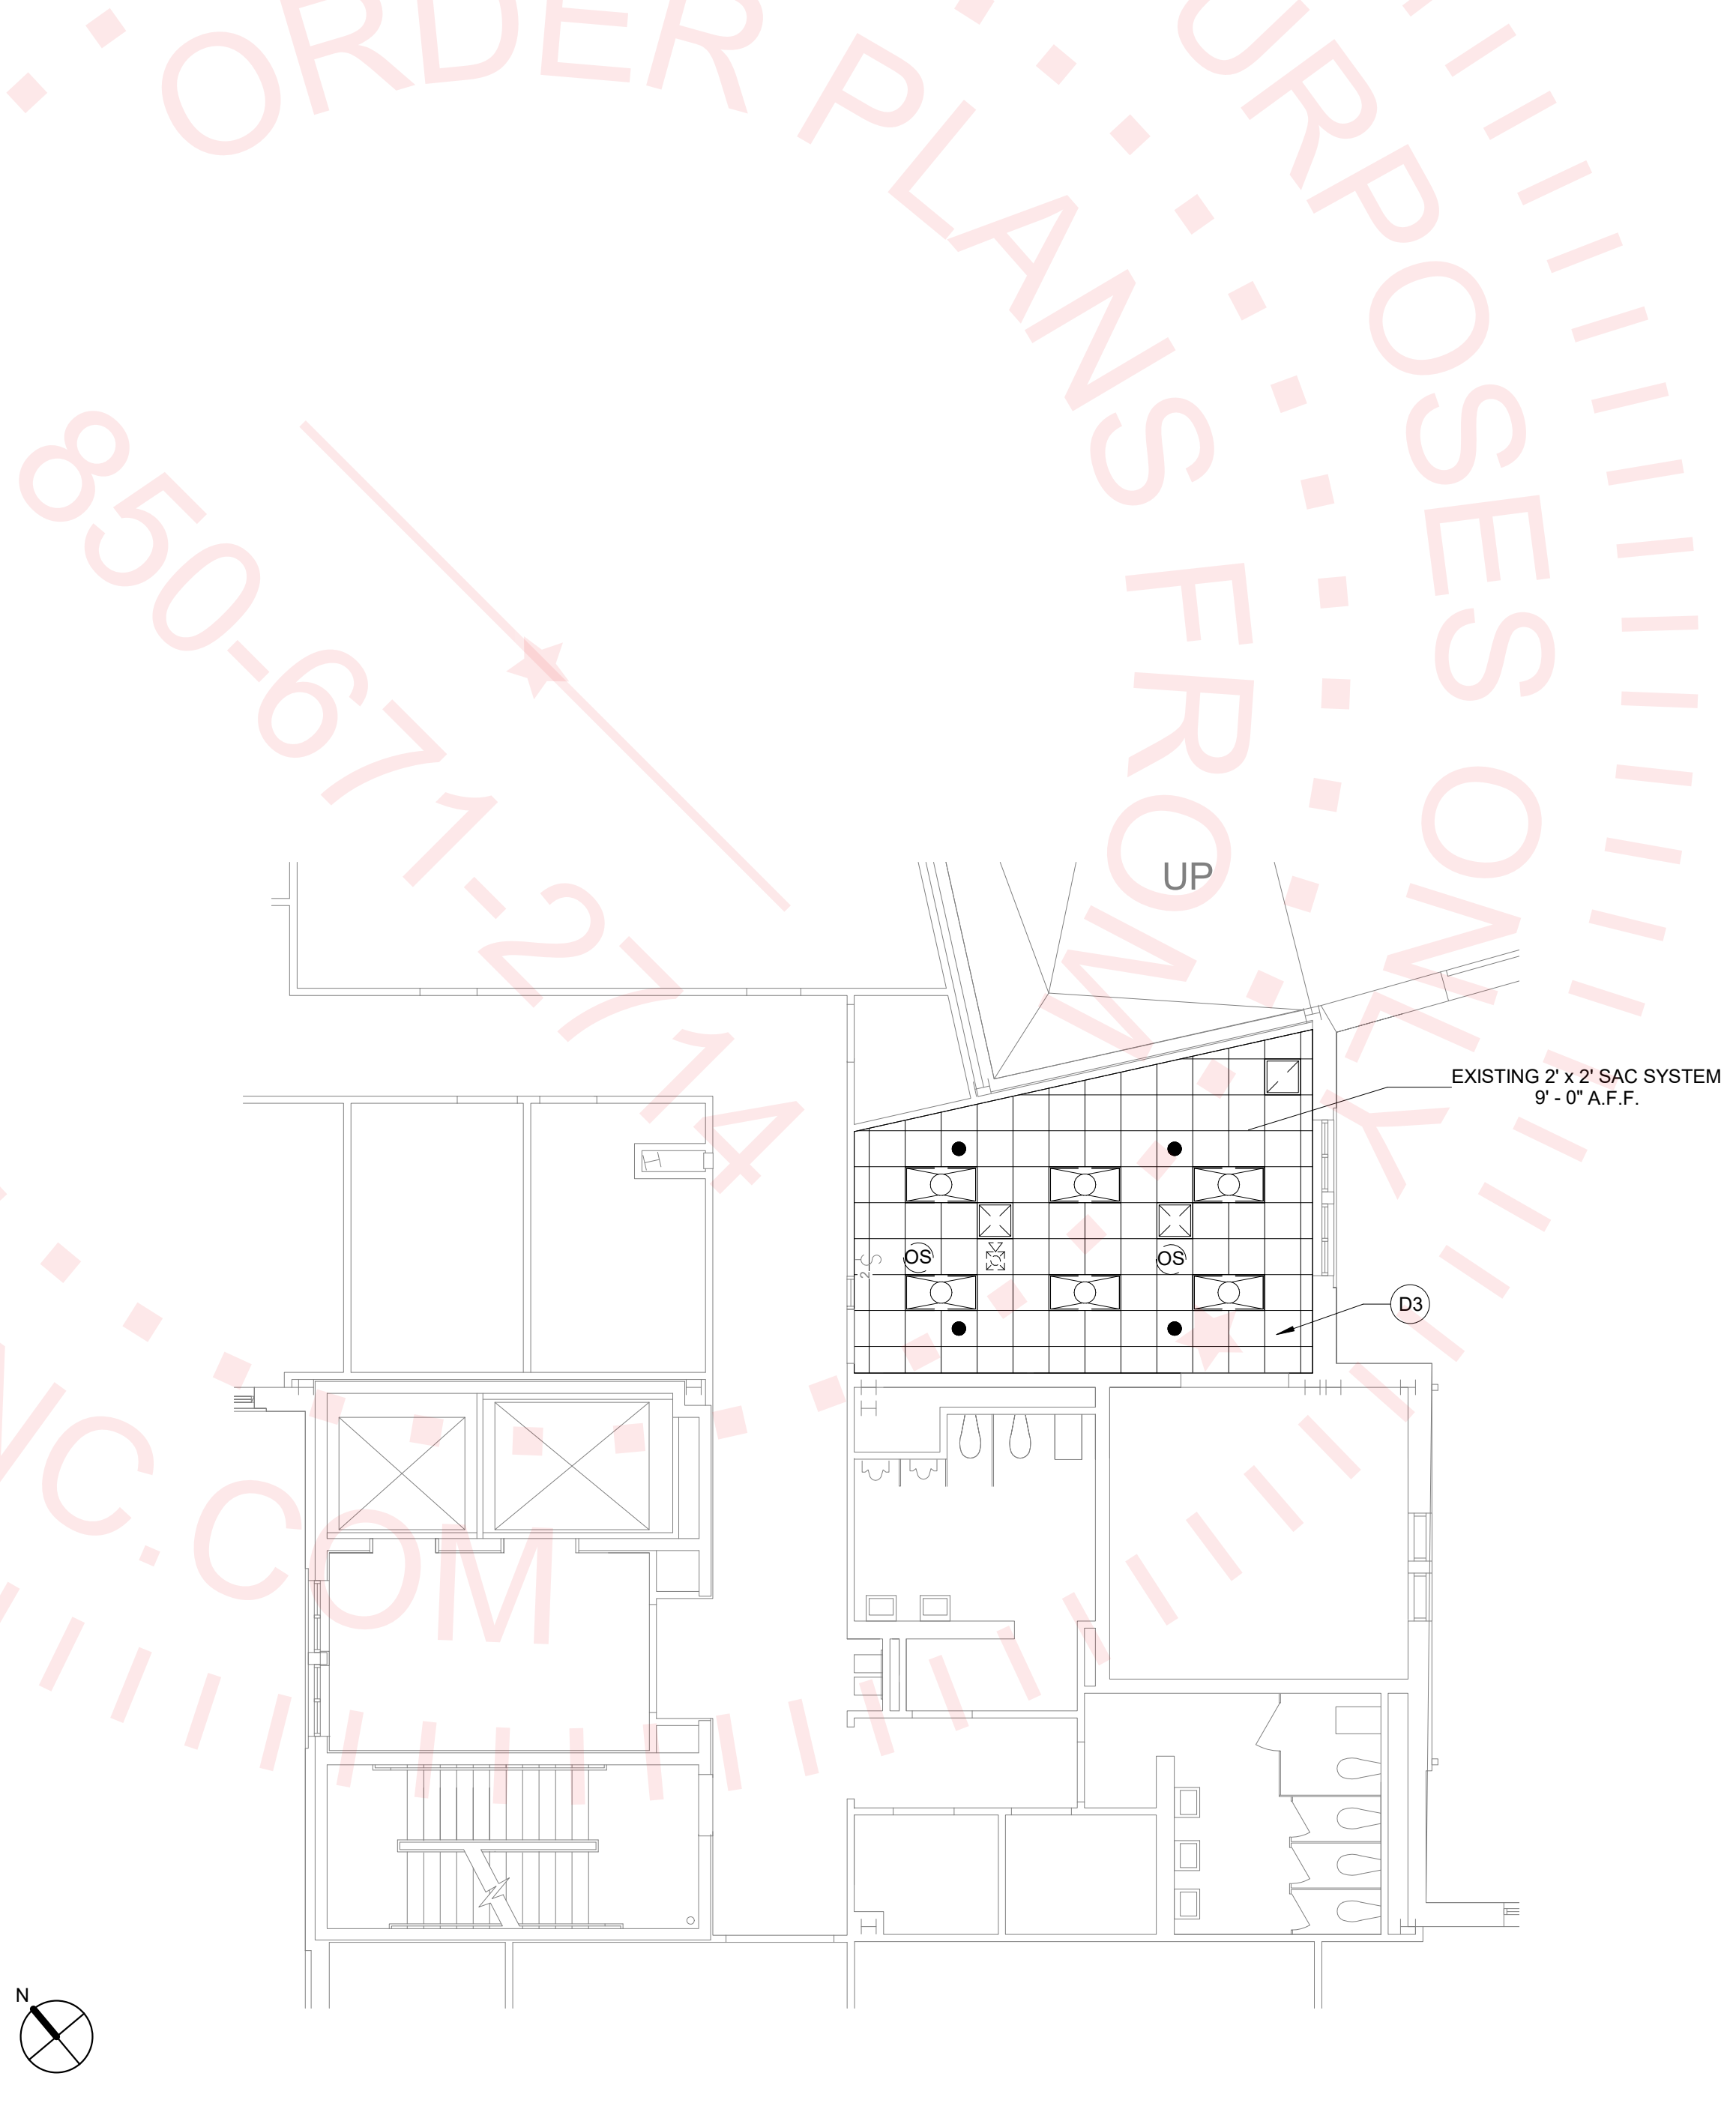1/8" = 1'-0"



A8 RCP/LIGHTING DEMOLITION - 3RD FLOOR

1/8" = 1'-0"

DEMOLITION KEYNOTES	
Keynote Number	Description
D1	REMOVE EXISTING CARPET AND RESILIENT WALL BASE THROUGHOUT ROOM.
D2	REMOVING EXISTING SIGNAGE FROM DOOR PANEL. PATCH AND REPAIR AS REQUIRED FOR NEW PAINT.
D3	REMOVE EXISTING CEILING TILE AND GRID.

F16 KEYNOTES

No.	Submissions:	Drawn:	Checked:	Date:
1	DESIGN DEVELOPMENT	SU	SM	04/01/24
2	95% CONSTRUCTION DOCUMENTS	SU	SM	04/19/24
3	100% CONSTRUCTION DOCUMENTS	SU	SM	04/22/24
No.	Revision Description	Drawn by/Checked by	Date	

FLORIDA STATE UNIVERSITY
FACILITIES PLANNING, DESIGN and CONSTRUCTION
FACILITIES DESIGN OFFICE

125 MENDENHALL BUILDING A
TALLAHASSEE, FLORIDA 32306-4153
(850)-644-6801








Project Name:
2nd & 3rd Floor Interior Improvements
College of Social Work

Sheet Title:
RCP'S - DEMO., KEYNOTES, & LEGENDS

Subconsultant:


Seal:	Project Folder Name: 2400689_UCC_2nd_3rd_FI_Interior_Improvements\01_Design\UCCModel.rvt	Drawing No: A103
	FSU Project No: 2400689	
	Building Name & No.: University Center C, Bldg. No. 225	

2400689_UCC_2nd_3rd_FI_Interior_Improvements\01_Design\UCCModel.rvt

N		NEW OCCUPANCY SENSOR DIMMER SWITCH, TYP. BASIS OF DESIGN: LEGRAND WATTSTOPPER, MODEL NO. DW-311-W		SALVAGED WIRELESS ACCESS POINT, TYP.
M		NEW THREE WAY DIMMER, TYP. BASIS OF DESIGN: LEGRAND WATTSTOPPER, MODEL NO. LLMDM-101-W		SALVAGED FIRE ALARM DEVICE, TYP.
		NEW DIMMER SWITCH, TYP. BASIS OF DESIGN: LEGRAND WATTSTOPPER, MODEL NO. LLMDM-101-W		SALVAGED FIRE SPRINKLER, TYP.
L		SALVAGED SUPPLY AIR DIFFUSER, TYP.		SALVAGED RETURN AIR GRILLE, TYP.
K		NEW OCCUPANCY SENSOR, TYP. WITH POWER PACK		SALVAGED 2 X 4 LIGHT FIXTURE, WITH LED RETRO FIT, TYP. GENERAL ELECTRIC MODEL# RPL24A04XMM840VQRMWHTE


K1 RCP LEGEND PROPOSED

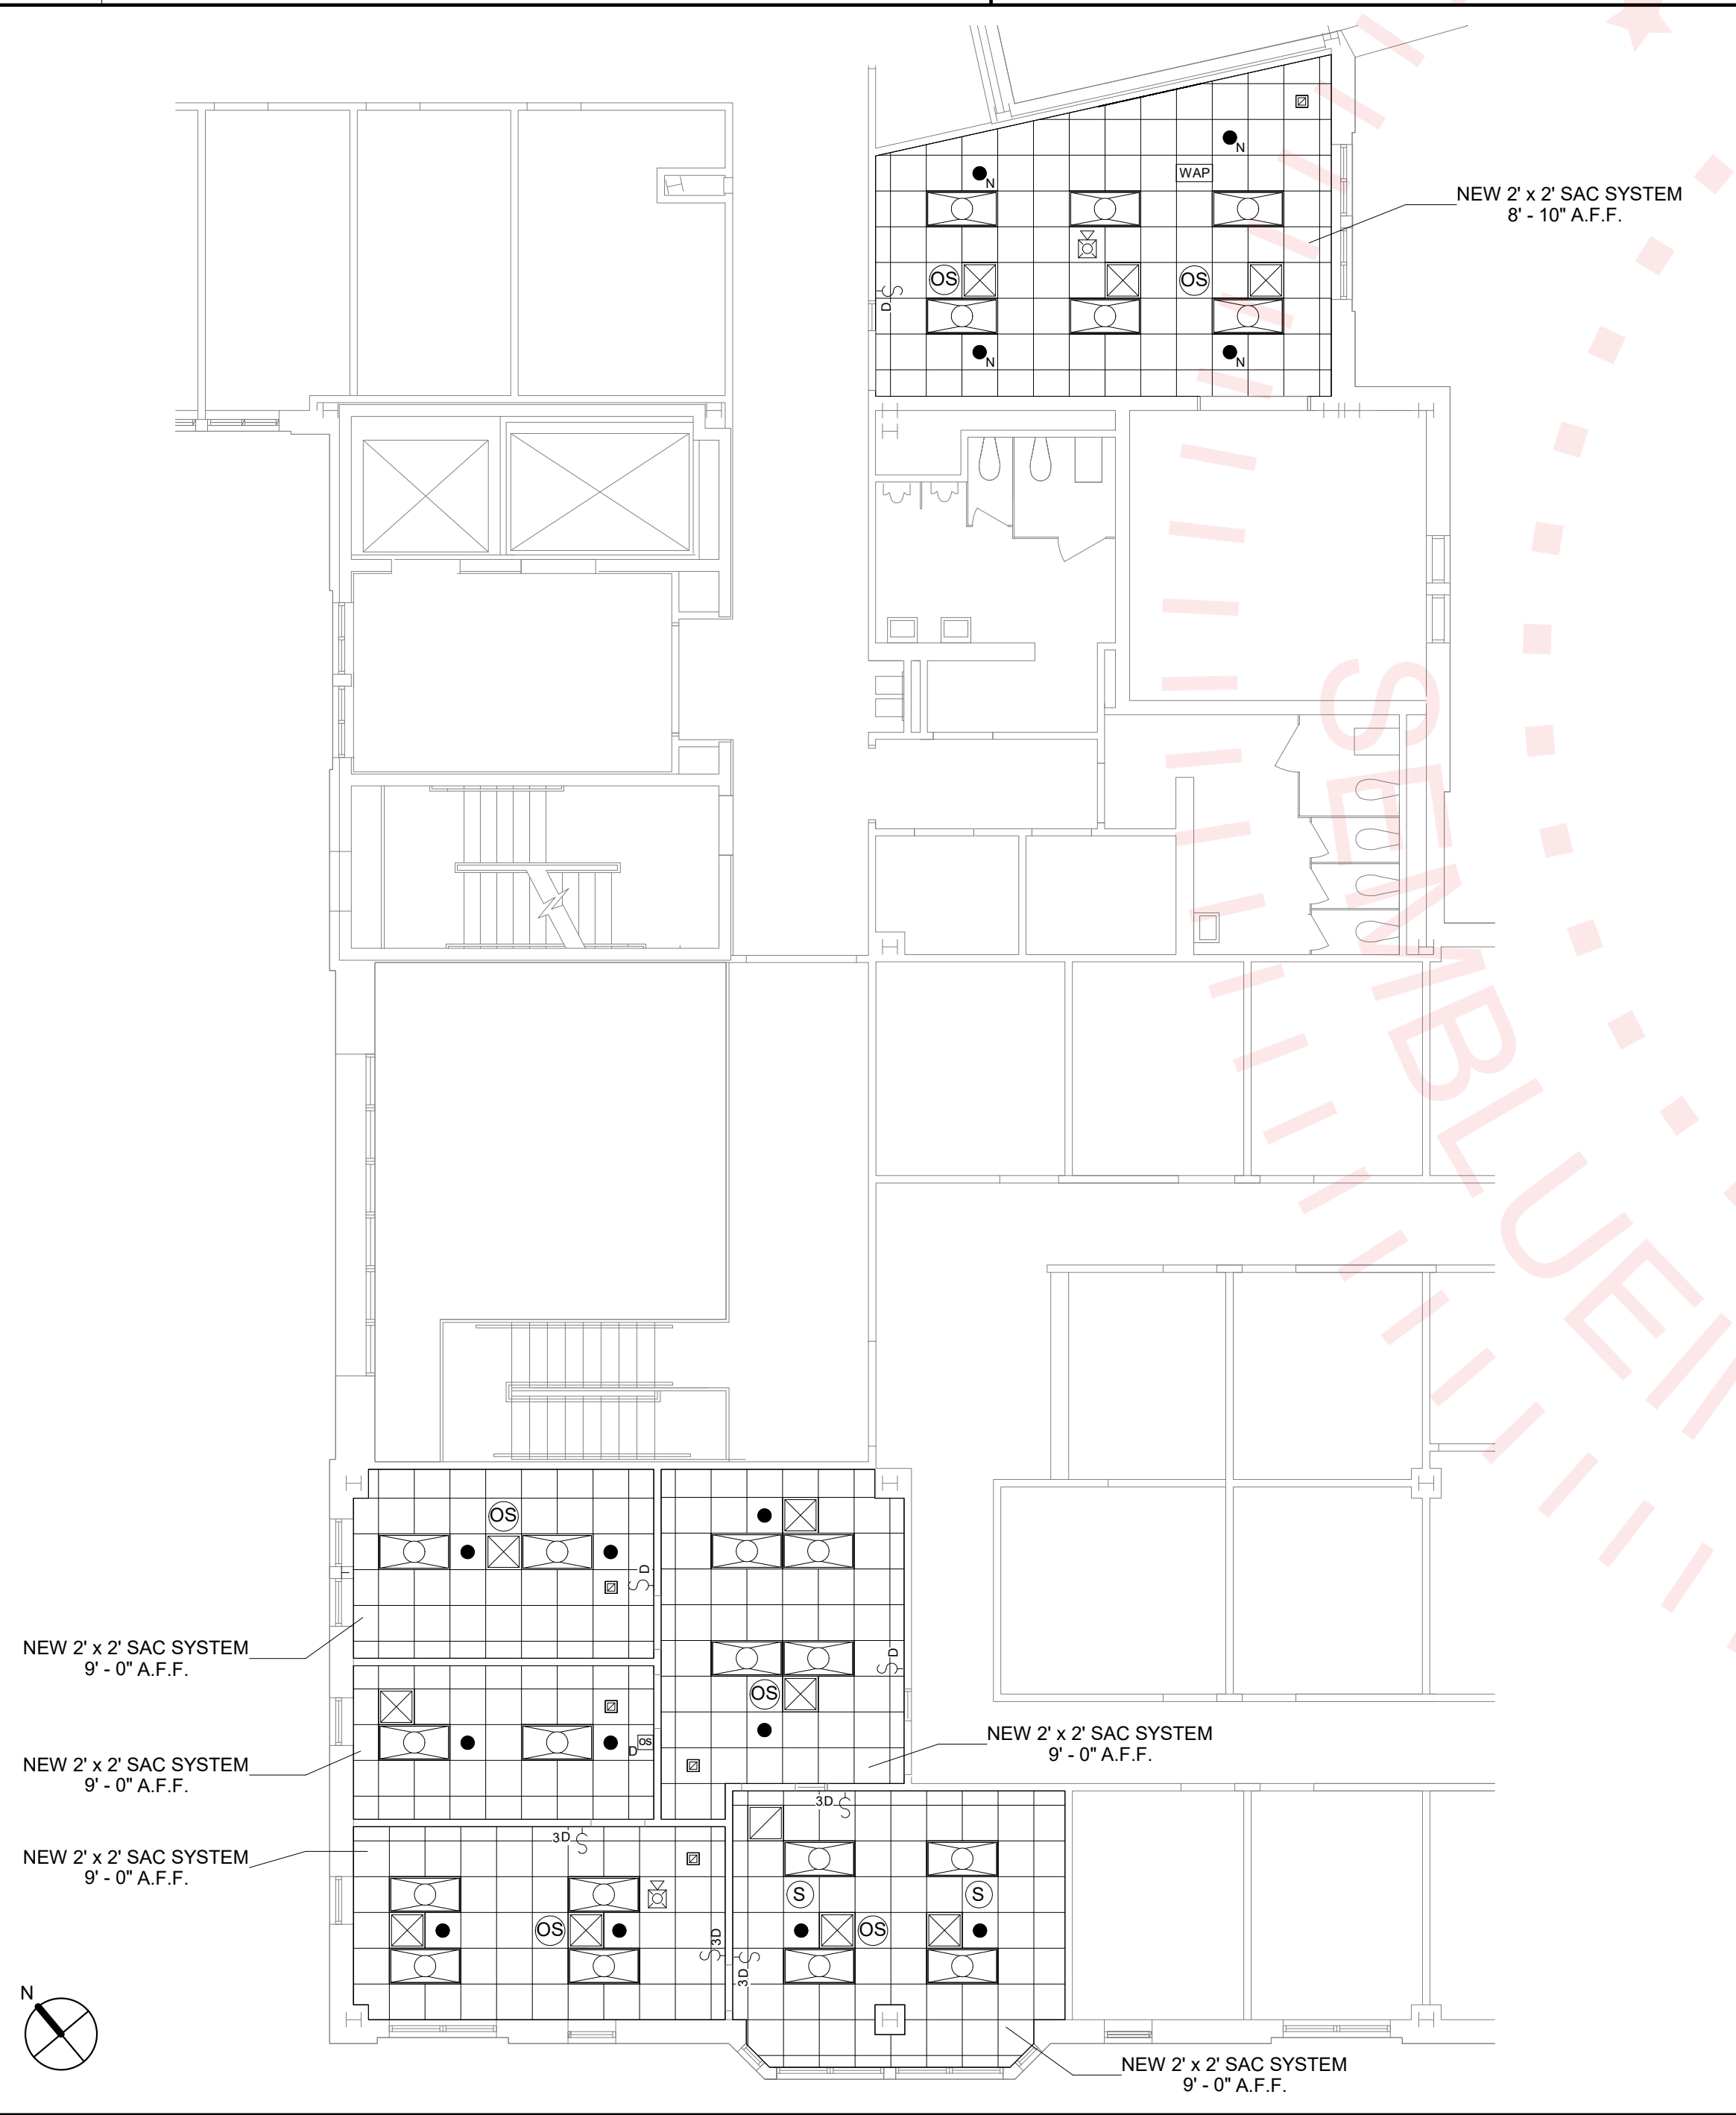1/4" = 1'-0"



A1 RCP/LIGHTING PROPOSED - 2ND FLOOR

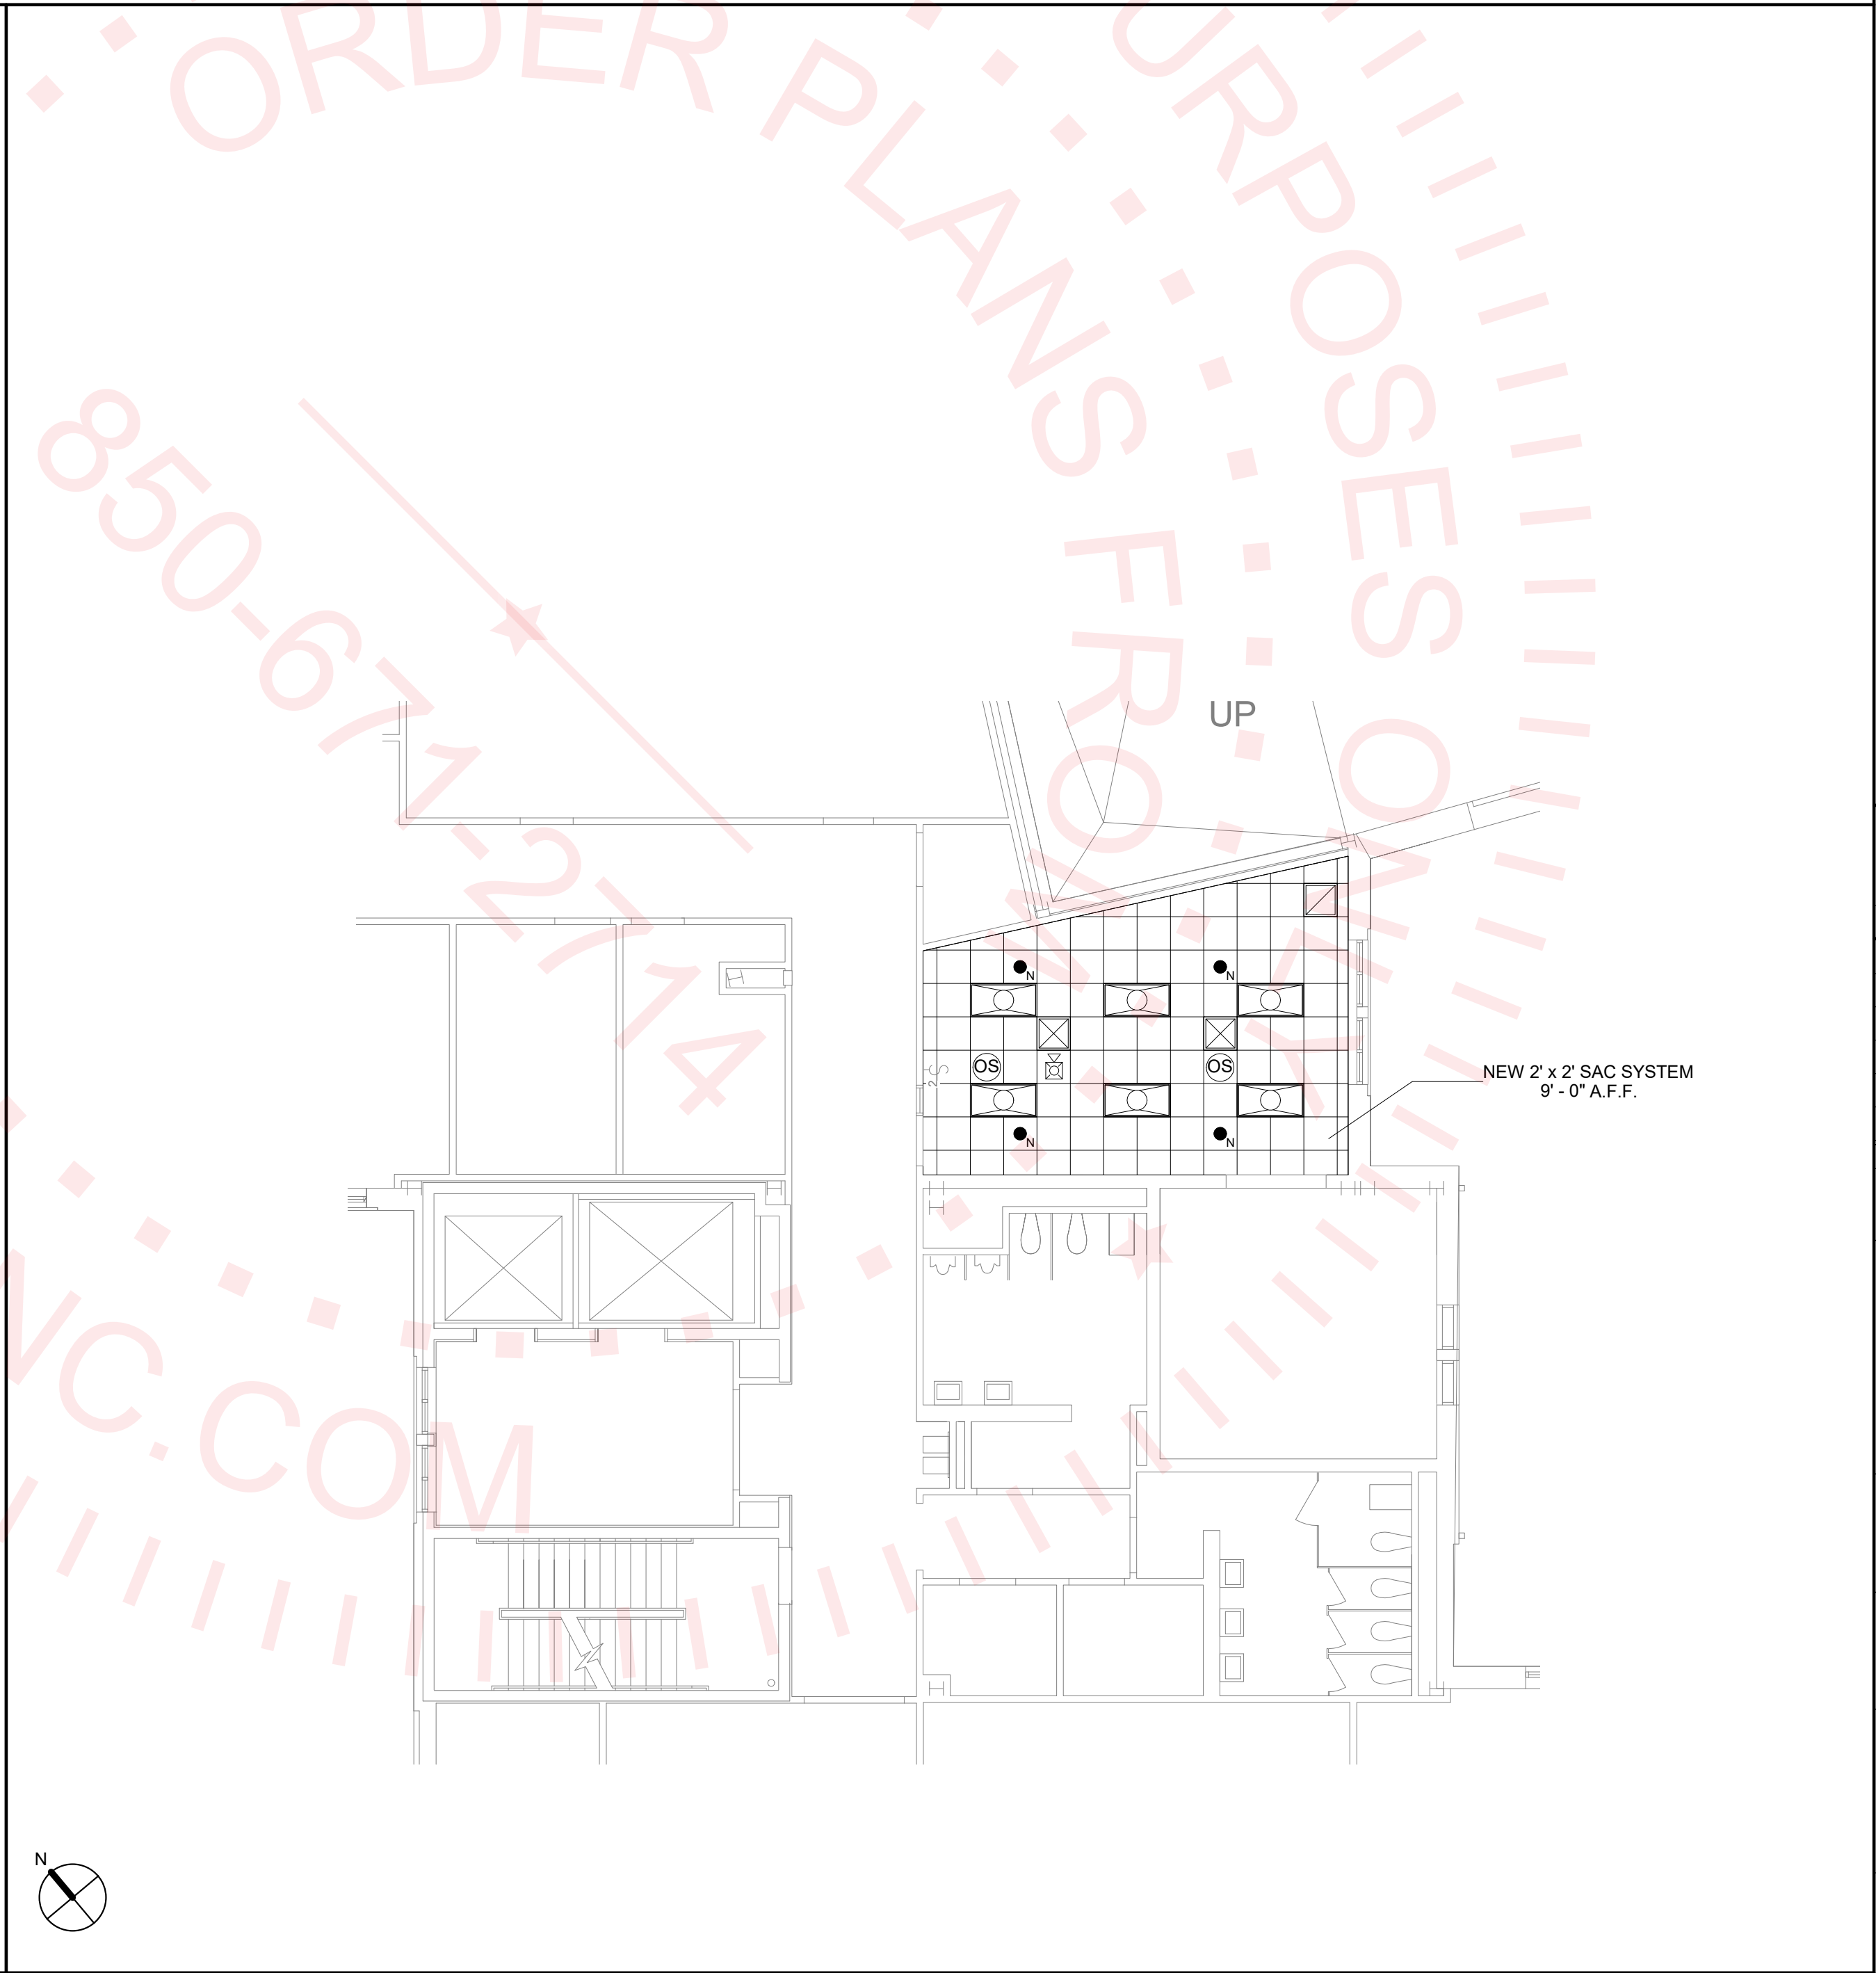1/8" = 1'-0"



A8 RCP/LIGHTING PROPOSED - 3RD FLOOR

1/8" = 1'-0"

PROPOSED KEYNOTES	
Keynote Number	Description
01	NEW EXPANSION JOINT COVER, BASIS OF DESIGN: CONSTRUCTION SPECIALTIES EXPANSION JOINT MODEL NO. GFPS-100 W/ FB. GASKET COLOR GRAY 136.
02	ACCENT WALL LOCATION, COLOR PT4.
03	RELOCATE SIGN AS REQUIRED FOR NEW CORNER GUARD.
04	REPLACE EXISTING CORNER GUARD. SEE COLOR SCHEDULE.
05	PROVIDE NEW MANUAL ROLLER SHADE. SEE SPECIFICATIONS.
06	RELOCATE WALL MOUNTED DOOR STOP AS REQUIRED FOR NEW CORNER GUARD.

F16 KEYNOTES

No.	Submissions:	Drawn:	Checked:	Date:
1	DESIGN DEVELOPMENT	SU	SM	04/01/24
2	95% CONSTRUCTION DOCUMENTS	SU	SM	04/19/24
3	100% CONSTRUCTION DOCUMENTS	SU	SM	04/22/24
No.	Revision Description	Drawn by/Checked by	Date	

FLORIDA STATE UNIVERSITY
FACILITIES PLANNING, DESIGN and CONSTRUCTION
FACILITIES DESIGN OFFICE

125 MENDENHALL BUILDING A
TALLAHASSEE, FLORIDA 32306-4153
(850)-644-6801



Project Name:
2nd & 3rd Floor Interior Improvements
College of Social Work

Sheet Title:
RCP'S - PROPOSED, LIGHTING, KEYNOTES, &
LEGENDS

Subconsultant:

Seal:	Project Folder Name: 2400689_UCC_2nd_3rd_FI_Interior_Improvements\01_Design\UCCModel.rvt	Drawing No: A104
	FSU Project No: 2400689	
	Building Name & No.: University Center C, Bldg. No. 225	